

IBM Cognos Report Studio
Version 10.2.1

User Guide



Note

Before using this information and the product it supports, read the information in "Notices" on page 983.

Product Information

This document applies to IBM Cognos Business Intelligence Version 10.2.1 and may also apply to subsequent releases.

Licensed Materials - Property of IBM

© **Copyright IBM Corporation 2005, 2013.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Introduction	xlvii
------------------------	-------

Chapter 1. What's New in Cognos Report Studio? 1

New features in version 10.2.1	1
Improved IBM Cognos Active Report performance	1
Extensible visualizations in IBM Cognos Active Report	1
Option to group or ungroup repeating cells in Excel 2007 reports.	2
Crosstab values as percentages	2
Share sets between reports.	2
Improved text-based relational filters	2
Improved data container and query naming support	3
Search parameter Ends with any of these keywords	3
Removed Features in Version 10.2.1	3
IBM Cognos Statistics	3
New features in version 10.2.0	4
Updated world and Africa maps.	4
Interactive repeater tables	4
Improved IBM Cognos Active Report integration with IBM Cognos Workspace	4
Improved support for bidirectional languages	5
Macro tab in expression editor	5
Inherited table styles in lists and crosstabs	5
Enhanced crosstab headers	6
Prompt API.	6
Excel 2007 Data report output format	6
Global classes for accessible reports.	6
Changed features in version 10.2.0	7
Support for inline prompts in reports viewed on mobile devices	7
Cognos Business Insight and Cognos Business Insight Advanced are renamed	7
Removed Features in Version 10.2.0	7
Saving and opening reports on your computer	7
New features in version 10.1.1	7
New active report controls.	8
Conversion of controls to other types of controls	8
Improved user experience when authoring active reports	8
Active report access code	8
New startup options.	8
Keyboard shortcuts for accessibility.	9
Updated maps.	9
Custom groups	9
Larger worksheet sizes for Microsoft Excel 2007 report outputs	10
Microsoft Excel 2007 supported as an external data source.	10
Changed features in version 10.1.1.	10
Specify how to show no data contents	10
What's new in version 10.1.0.	11
New Features in Version 10.1.0	11
Changed Features in Version 10.1.0	19
Removed Features in Version 10.1.0	19

Chapter 2. Getting started with Report Studio 21

Building IBM Cognos Business Intelligence Applications	21
Relational and dimensional reporting styles	22
The User Interface	25
Work in design or structure view	28
Report Layout and Queries	29
Layout	29

Queries	30
Report Objects	31
Find Objects in a Report	32
Options.	32
Web Browser Settings	36
The IBM Cognos Software Development Kit	37
Chapter 3. Creating a report	39
Specify the Data Package	39
Refresh the package	40
Choose a Basic Report Layout	40
Inserting a data container from the toolbox tab	41
Add Data	41
Data Source Icons	41
Insert a Single Data Item	42
Validate a Report	43
Save a Report.	44
Run a Report	45
Specify Not to Render a Page If It Does Not Contain Data.	47
Controlling the Rows Per Page for Multiple Containers in HTML and PDF	48
Producing a Report in CSV Format	48
Producing a Report in Microsoft Excel Format.	49
Producing a Report in XML Format	52
Set PDF Page Options	52
View Lineage Information for a Data Item	53
The IBM Cognos Business Intelligence Lineage Tool	54
Access the IBM WebSphere Business Glossary	55
Support for bidirectional languages	56
Reports for workspaces in Cognos Workspace	57
Prompts in workspaces in Cognos Workspace	58
Enable filters in workspaces in Cognos Workspace	59
Creating Reports for IBM Cognos for Microsoft Office	59
Creating Reports for Mobile Devices	61
Creating location-aware reports.	61
Chapter 4. Lists	63
Set List Properties	63
Hide Columns in List Reports	64
Using Repeaters	64
Convert a List into a Repeater	65
Example - Create Mailing Labels	65
Chapter 5. Crosstabs	67
Crosstab Nodes and Crosstab Node Members	67
Set Crosstab Properties	69
Create a Single-Edge Crosstab	70
Create a Nested Crosstab	71
Creating headers automatically for sets in crosstabs	72
Showing crosstab values as percentages	72
Specify the Default Measure.	73
Swap Columns and Rows	74
Indent Data	74
Change a List into a Crosstab	75
Example - Add Aggregate Data to a Crosstab	75
Example - Create a Discontinuous Crosstab.	76
Chapter 6. Charts	79
Current Default Charts and Legacy Charts	79
Creating Charts	79
Chart Objects.	80

Chart Types	83
Choosing a Chart Type and Configuration	83
Column Charts	84
Line Charts	85
Pie Charts	86
Bar Charts	87
Area Charts	88
Point Charts	89
Combination Charts	90
Scatter Charts	90
Bubble Charts	91
Quadrant Charts	92
Bullet Charts	93
Gauge Charts	94
Pareto Charts	95
Progressive Column Charts	96
Microcharts	96
Marimekko Charts	97
Radar Charts	98
Polar Charts	98
Range Indicator Charts	99
Chart Configurations	100
Convert Charts From One Type to Another	102
Convert Legacy Charts to Current Default Charts	103
Limitations When Converting Legacy Charts	103
Customizing Chart Properties	104
Resize a Current Default Chart	107
Resize a Legacy Chart	108
Customizing the Color Palette of a Chart	108
Creating a Conditional Color Palette in a Chart	111
Change a Chart Background in a Current Default Chart	115
Change a Chart Background in a Legacy Chart	115
Add Background Effects to a Chart Object in a Legacy Chart	116
Add Colored Regions in a Current Default Chart	117
Specify Custom Label Text	119
Customizing the Axes of a Chart	119
Showing Gridlines in a Chart	123
Customize the Legend in a Current Default Chart	124
Customize the Items in the Legend of a Legacy Chart	126
Adding a Note to a Chart	126
Adding a Baseline to a Chart	128
Adding Markers to Charts	131
Display Trendlines in Current Default Charts	134
Display Regression Lines in Legacy Scatter or Bubble Charts	135
Showing data values in current default charts	136
Showing data values in current default pie and donut charts	137
Showing data values in other current default charts	138
Define Query Context When Customizing Legend Entries, Legend Titles, or Axis Labels	138
Summarize Small Slices, Bars, or Columns in Current Default Charts	139
Customizing Lines and Data Points in a Line Chart	139
Customize a Current Default Combination Chart	141
Create a Matrix of Current Default Charts	142
Customize a Current Default Gauge Chart	144
Customize a Legacy Gauge Chart	145
Define Color by Value in Current Default Scatter and Bubble Charts	146
Specify the Bubble Size in a Current Default Bubble Chart	148
Set the Position of the First Slice in a Current Default Pie Chart	148
Create a Donut Chart from a Current Default Pie Chart	149
Pull Out Pie Slices in a Current Default Pie Chart	149
Define the Cumulation Line in a Current Default Pareto Chart	151
Define the Cumulation Line in a Legacy Pareto Chart	151

Insert a Microchart into a Crosstab	152
Customize a Current Default Bullet Chart	152
Changing the number of hotspots in a chart	153
Create a Drill-up and Drill-down Chart	153
Example - Creating Drill-through Access in a Legacy Chart	154
Create the target report	155
Create the Source Report	155
Define the Drill Behavior	156
Example - Creating and Customizing a Metrics Range Legacy Chart	156
Create a Metrics Range Chart	156
Customize the Chart	157
Customize the Chart Legend Labels	157
Adding a Metric Studio Diagram to a Report.	158
Add a Static Metric Studio Diagram to a Report.	159
Add a Data-driven Metric Studio Diagram to a Report	159
Chapter 7. Maps	161
The Report Studio Map Object	161
Example - Create a Map Report	162
Set Map Properties	163
Example - Define Data Values for the Region Layer	165
Match Data Values to Names in the Map File.	166
Define Data Values for the Point Layer	166
Add Colors to the Region or Point Layer	167
Add a Legend Title to a Map	168
Add a Note to a Map	168
Drill Through to Another Report From a Map	168
Edit a Map	169
Additional Maps	170
Location Intelligence	170
Chapter 8. Active Reports	171
Active Report Controls	171
Active Report Variables	172
Convert an Existing Report to an Active Report	172
Specify Active Report Properties	173
Extensible visualizations.	173
Adding a visualization to an active report.	174
Adding a treemap visualization	175
Adding a heatmap visualization	177
Creating a packed bubble visualization.	178
Adding a network diagram.	180
Resizing a visualization	181
Changing the nesting order.	181
Populating a visualization with data from the visualization definition	182
Specifying the range values that are displayed	182
Updating visualizations	183
Adding Interactivity to a Report	184
Create and Manage Active Report Variables	184
Adding Controls to a Report	185
Add Data to a Control	190
Define a Connection Between Controls	192
Specify the Selection Behavior of a Control	193
Specify the Reaction Behavior of a Control	194
Set the No Value List Item	196
Show or Hide a Column or Row	197
Sort Data in a List.	197
Recommendation - use master detail relationships when authoring decks	197
Summarizing Data in the Active Report Output	198
Run or Save an Active Report	198

Example - Create an Active Report Showing Revenue Data for Core Products	199
Create the active report	199
Add data to the data drop-down list controls.	200
Add data to the list	201
Add interactivity to the report.	202
Specifying default values for the data drop-down list controls	202
Revenue data for core products report output	202
Example - Sales analysis active report	203
Creating a new active report	203
Adding data to the check box group control	204
Adding a default card to the deck and data to the data discrete values slider	204
Defining a connection between the check box group and the deck.	205
Adding data to the list object	205
Defining a connection between the slider and the list object	206
Adding a title to the list.	206
Adding data to the data deck and chart	207
Defining a connection between the chart and the data deck	207
Adding a title to the chart	208
Sales analysis report output	208
Example - Network diagram visualization.	209
Adding a new visualization in IBM Cognos Active Report	209
Adding data to the nodes data container	210
Adding data to the links data container	210
Defining a connection between the data drop-down list and the visualization object.	210
Network diagram visualization output	211
Chapter 9. Relational Reporting Style	213
Add Relational Data to a Report	213
Group Relational Data	213
Perform Advanced Grouping	214
Creating relational custom groups	215
Set the Group Span for a Column	216
Divide Data into Sections	218
Summarizing Data Relationally	219
Add a Simple Summary.	220
Set the Auto Group & Summarize Property	221
Specify Detail or Summary Aggregation in the Model.	222
Specify Aggregation Properties for a Data Item	222
Use Summary Functions in Data Item Expressions	222
Summary Functions	224
Focusing Relational Data	228
Create a Detail or Summary Filter	229
Edit or remove a filter	233
Browse or Search the Values of a Data Item	233
Ignoring the Time Component in Date Columns.	234
Sorting Relational Data	235
Perform Advanced Layout Sorting	235
Working with Relational Queries	236
Specify a List of Data Items for an Object	237
Relate a Query to a Layout.	237
Connecting Queries Between Different Data Sources	237
Add a Query to a Relational Report	238
Create a Union Query	239
Create a Join Relationship	242
Reference a Package Item in a Child Query	243
Create a Master Detail Relationship	244
Working with Queries in SQL	246
Using Relational Calculations	248
Create a Simple Calculation	249
Insert a Query Calculation	250
Create a Layout Calculation	252

Chapter 10. Dimensional Reporting Style 253

- Add Dimensional Data to a Report 253
 - Customize the Source Tree 255
 - Insert a Member 255
 - Search for a Member 256
 - Nest Members 257
 - Insert a Hierarchy 257
 - Insert a Member Property 258
 - Create a Set of Members. 258
 - Sharing sets between reports 259
 - Edit a Set. 261
 - Extended Data Items 263
 - Tips for Working with Ragged or Unbalanced Hierarchies 264
- Creating dimensional custom groups 265
- Summarizing Data Dimensionally 266
 - Add a Simple Summary 268
 - Summarizing Values in Crosstabs 269
 - Summarizing Member Sets 271
 - Rolling and Moving Averages 272
 - Show Data for Specific Time Periods 273
 - Summary Functions 273
- Focusing Dimensional Data. 278
 - Create a Context Filter 279
- Sorting Dimensional Data 281
 - Sort Sets by Label 282
 - Sort Sets in the Opposite Axis by Value 282
 - Perform Advanced Set Sorting. 283
- Working with Dimensional Queries 283
 - Specify a List of Data Items for an Object 284
 - Relate a Query to a Layout 284
 - Using Dimensional Data Sources with Queries 284
 - Connecting Queries Between Different Data Sources 285
 - Multiple-fact Queries 285
 - Add a Query to a Dimensional Report 289
 - Add Dimension Information to a Query 290
 - Create a Master Detail Relationship 292
 - Working with Queries in SQL or MDX 295
 - Example - Create a Dynamic Report That Shows Period-to-date Data. 300
- Using Dimensional Calculations 302
 - Create a Simple Member Calculation 302
 - Insert a Query Calculation 303
 - Create a Layout Calculation 305
 - Create an Intersection (Tuple) 306
 - Assigning a Hierarchy or Dimension 306
- Drilling Up and Drilling Down in Dimensional Reports 307
 - Member Sets 307
 - Create a Drill-up and Drill-down Report 308
 - Example - Create a Dashboard Report 310

Chapter 11. Adding Prompts to Filter Data 313

- Use the Build Prompt Page Tool 314
- Build Your Own Prompt and Prompt Page 315
 - Example - Create a Report Showing Products Shipped for a Specific Time Interval 318
- Create a Parameter to Produce a Prompt 319
- Create a Prompt Directly in a Report Page 320
- Modifying Prompts 321
 - Change the Prompt Control Interface 321
 - Specify That a Prompt Requires User Input 322
 - Allow Users to Select Multiple Values in a Prompt 322
 - Show or Hide Prompt Status 323
 - Specify a Default Selection for a Prompt 323

Customize Prompt Text	323
Specify Prompt Values	324
Add a Prompt Button	324
Create a Cascading Prompt.	325
Control the Data That Appears in a Tree Prompt	326
Using in_range Filters with Character Data	326
Showing prompt values in generated SQL or MDX.	326

Chapter 12. Laying Out a Report 329

Report Layout Recommendations.	329
The Page Structure View	329
Copy Object Formatting	330
Add a Header or Footer to a Report or List	331
Add Borders to an Object	332
Add a Text Item to a Report	332
Specify the Font for a Report	333
Insert an Image in a Report	333
Insert a Background Image in an Object	334
Add Background Effects.	334
Add background effects to a chart	335
Add a background gradient to a page	335
Add a drop shadow to a container	336
Insert a Formatting Object in a Report	336
Elements Supported in Rich Text Items.	338
Example - Add a Multimedia File to a Report	338
Align an Object in a Report	339
Using a table to control where objects appear	339
Apply a Table Style	340
Apply Padding to an Object	341
Set Margins for an Object	342
Add Multiple Items to a Single Column	342
Example - Create a Report with Multiple Items in One Column	342
Reuse a Layout Object	344
Change a Reused Object.	345
Update Reused Objects	346
Specify text and container direction	346
Specify Line Spacing and Breaking	348
Specify the Height and Width of an Object	348
Control How Other Objects Flow Around an Object	349
Specify Report Properties	350
Create and Modify Report and Object Styles	350
Modify the report style	351
Modify object styles	351
(Don't Print) Class.	352
Modify Classes to Format Query Studio Reports	352
Modifying the Default Layout Style Sheet	353
Add Color to an Object	353

Chapter 13. Working With Your External Data 355

Preparing to Work with your External Data	357
Import Data	358
Map Data	359
Finish Importing Data	360
Publish the Package	361
Edit Your External Data	361
Delete Your External Data	362
Running a Report That Contains External Data	363
Making your Reports Public	363

Chapter 14. Using Conditions	365
Highlight Data Using a Conditional Style	365
Create a New Conditional Style	366
Reuse an Existing Conditional Style	367
Create an Advanced Conditional Style	368
Manage Conditional Styles	368
Example - Add a Conditional Style to an Existing Report	368
Highlight Data Using a Style Variable	369
Adding Conditional Rendering to a Report	370
Add a Variable from the Condition Explorer	370
Add a Variable from the Properties Pane	371
Hide or Show an Object	372
Add Conditional Rendering	373
Example - Create a Conditional Report	373
Add Multiple Layouts	375
Setting up a Multilingual Reporting Environment	376
Create a Multilingual Report in Report Studio	377
Chapter 15. Bursting Reports	379
Defining Burst Recipients	379
Create a Calculated Field	379
Creating the Burst Table in the Source Database	380
Importing the Table into a Package	381
Specify a Burst Group	381
Set Burst Options	382
Enable Bursting	383
Creating Burst Reports Using Dimensional Data Sources	383
Example - Burst a Report	384
Chapter 16. Format Data	387
Set the Default Data Formats	387
Specify the Data Format for an Object	388
Specifying the Number of Decimals in Numbers	388
Digit shaping in charts and maps	388
Locale-sensitive Properties	390
Suppress Empty Cells	391
Suppress Null Cells Using Filters	391
Example - Suppress Zeros in Rows and Columns in an Existing Report	392
Specify what appears for data containers that contain no data	392
Using Patterns to Format Data	393
Pattern Guidelines	394
Date and Time Symbols	394
Decimal Format Symbols	401
Chapter 17. Using Query Macros	403
Syntax	403
Add a Query Macro	405
Creating Prompts Using Query Macros	406
Examples - selecting country or region prompts	408
Examples - creating prompts that use parameter maps	410
Examples - creating a multiple value prompt	411
Chapter 18. Using Drill-through Access	415
Understanding Drill-through Concepts	416
Drill-through Paths	416
Selection Contexts	417
Drilling Through to Different Report Formats	417
Drilling Through Between Packages	418
Bookmark References	418
Members and Values	418

Member Unique Names	419
Conformed Dimensions	420
Business Keys	421
Scope	422
Mapped Parameters	422
Drilling Through on Dates Between PowerCubes and Relational Packages	423
Set Up Drill-through Access in a Report	423
Create a parameter in the target	424
Create a drill-through definition	425
Defining independent drill-through definitions for crosstabs.	427
Specify the Drill-through Text	428
Example - Drill Through to a Hidden Report from a Report Studio Report	429
Check the Target Report	429
Create and Test the Drill-Through Definition	429
Try it yourself - create a report with drill-through access to itself	431
Drilling Through from IBM Cognos Series 7 to IBM Cognos BI.	433
Setting Up Drill-through Access from IBM Cognos Series 7 Visualizer	434
Setting Up Drill-through Access from PowerPlay Web	434
Create and Test the Target for a Series 7 Report	434
Chapter 19. Working with Multiple Pages	437
Add a Page to a Report	437
Create a Page Break or Page Set	437
Create simple page breaks	438
Create advanced page sets	438
Join Nested Page Sets	439
Example - Preparing a Product List Report	440
Add a Bookmark	441
Create a Table of Contents	443
Example - Add a Table of Contents to a Report	444
Insert Page Numbers in a Report	446
Control Page Breaks and Page Numbering	447
Create Page Layers	449
Chapter 20. Creating Report Templates	451
Convert a Report to a Template	451
Create a New Template	451
Chapter 21. Managing Existing Reports	453
Copy a Report to the Clipboard	453
Copy a Report to the Clipboard in Internet Explorer	453
Copy a Report to the Clipboard in Firefox.	453
Open a Report from the Clipboard	453
Open a File from Another Studio	454
Analysis Studio Query Specification	454
Managing Changes in the Package	458
Update a Name Reference	459
Change the Package	459
Chapter 22. Upgrading Reports.	461
Upgrading Reports from IBM Cognos BI Version 8.4	461
Upgrading Report Styles	461
Upgrading Legacy Charts	462
New Default for Hidden or Deleted Axis Titles	462
Upgrading Reports with SAP BW Prompt Variables	462
Upgrading Reports from IBM Cognos BI Version 8.1 or 8.2	463
Members Containing No Data Are Not Suppressed for SAP BW	463
Thousands Separators Missing	463
RQP-DEF-0177 Error When Upgrading Reports	463
Upgrading Reports from IBM Cognos ReportNet	464

Undocumented and Unsupported Features	464
No Sort Order	464
Layout Errors	464
Report Format	464
Customized Style Sheets.	464
PDF Reports.	464
IF-THEN-ELSE Statements	464
Solve Order	465
Chart Behavior	465
Database Only Processing of Queries	465
Changes in the Behavior of Functions Between ReportNet 1.1 and IBM Cognos BI	465
Appendix A. Accessibility Features	467
Accessibility features in IBM Cognos Report Studio	467
Keyboard Shortcuts	467
Considerations to Improve Report Accessibility	468
Enable Accessible Report Outputs	469
Alternate text and summary text	469
Designate Cells Headers in Tables	471
Headings and emphasis	471
Prompt control labels.	472
Example - Conditionally Show a List Below a Chart for an Accessible Report	473
IBM and accessibility	475
Appendix B. Troubleshooting	477
Problems Creating Reports	477
Division by Zero Operation Appears Differently in Lists and Crosstabs	477
Application Error Appears When Upgrading a Report.	477
Nested List Report Containing a Data Item That is Grouped More Than Once Does Not Run After Upgrade	477
Background Color in Template Does not Appear	478
Subtotals in Grouped Lists	478
Chart Labels Overwrite One Another	478
Chart Shows Only Every Second Label.	478
Chart Gradient Backgrounds Appear Gray in Internet Explorer.	479
Metadata Change in Oracle Essbase Not Reflected in Reports and in the Studios.	479
Relationships Not Maintained in a Report With Overlapping Set Levels	479
Summaries in Query Calculations Include Nulls with SAP BW Data Sources	480
Creating Sections on Reports That Access SAP BW Data Sources	480
Error Characters (--) Appear in Reports.	480
Columns, Rows, or Data Disappear With SSAS 2005 Cubes	481
Function Unreliable with Sets	482
Searching for values might return unexpected results	482
Report Differences Between TM1 Executive Viewer and IBM Cognos Business Intelligence with TM1 Data Sources	482
Order of Metadata Tree Differs for TM1 Data Sources	483
MSR-PD-0012 error when importing external data	483
MSR-PD-0013 error when importing external data	483
Problems Calculating Data	483
Unexpected Summary Values in Nested Sets	483
Null Results for Calculations Using SAP BW Data Sources	484
Incorrect Results with IBM Cognos PowerCubes and Time Measures	484
Incorrect Results in Summaries When Using OLAP Data Sources	485
Problems Filtering Data	486
Unexplained Discrepancies in Number Calculations	486
HRESULT= DB_E_CANTCONVERTVALUE Error When Filtering on a _make_timestamp Column.	488
Problems Running Reports	488
Report Runs Slowly	488
Summaries in a report do not correspond to the visible members	490
Cannot Find the Database in the Content Store (Error QE-DEF-0288)	493
Parse Errors When Opening or Running an Upgraded Report	493

Overflow Error Occurs When a Value in a Crosstab Is More Than 19 Characters	493
The ORA-00907 Error Appears When Running a Report	493
A Report or Analysis Does Not Run Because of Missing Items	494
Cannot View Burst Report	494
A report upgraded from ReportNet does not retain its original look	495
Measure Format Disappears in SSAS 2005	495
Drill-through Links are Not Active in the Safari Browser	495
Data Does Not Appear in a Target Report or the Wrong Data Appears	496
A Running Total in Grouped Reports Gives Unexpected Results	496
PCA-ERR-0057 Recursive Evaluation Error	496
Arithmetic Overflow Error When Running a Report in PDF Format	497
RQP-DEF-0177 An error occurred while performing operation 'sqlPrepareWithOptions' status='-69'	
UDA-SQL-0043 Error	497
Unable to View Active Reports in Mozilla Firefox	498
Problems with viewing saved Active Report output in Mozilla Firefox 8 or later versions	498
Problems with large SAP BW queries	498
Master Detail or Burst Reports with Charts or Crosstabs May Result in Denial of Service	499
PCA-ERR-0087 error when you run a large report	499
Differences in the appearance of charts that are run in different formats or on different operating systems	499
Out-of-memory errors with reports that are run in interactive HTML format	500
Charts in PDF Output Show Unexpected Results	501
Result set of a multi-fact query contains blanks	501
Cognos Statistics object is not displayed in a report	501
Problems When Drilling Through	502
Cannot Drill Through Between PowerCubes Because MUNs Do Not Match	502
Unexpected or Empty Results When Drilling Through.	503
Cannot Drill Through From a Relational Source to a Cube	504
Calculations Do Not Appear in the Target Report	505
Nested Crosstab Only Filters on Some Items	505
Data is Not Filtered in the Target Report After Drill-Through	505
Drill-through links in active reports do not work	506
Appendix C. Sample Reports and Packages	507
The Sample Outdoors Company	507
The Sample Outdoors Group of Companies	507
Employees	509
Sales and marketing	509
Sample Outdoors database, models, and packages	510
Samples in the Sample Outdoors Sales (cube) package.	512
Consecutive Periods Comparison.	512
Samples in the Sales and Marketing (Cube) Package	512
Actual vs. Planned Revenue	512
Historical Revenue	513
Revenue by Date Range	513
Revenue by Product Brand (2011)	513
Same Month Prior Year	513
Selected Retailer Country or Region	514
Top Retailers by Country or Region	514
Samples in the GO Data Warehouse (analysis) Package	514
Budget vs. Actual	514
Core products results.	514
Customer Returns and Satisfaction	515
Employee Satisfaction 2012.	515
Employee Training by Year	515
Eyewear Revenue by Brand and Size	516
Global Bonus Report	516
GO Balance Sheet as at Dec 31 2012	516
Sample Outdoors Company Balance Sheet as at Dec 31 2012	517
Manager Profile	517
New order methods	517
Planned Headcount	517

Positions to Fill	517
Promotion Plan Revenue	518
Promotion Success.	518
Quantity Sold vs. Shipped and Inventory	518
Recruitment Report	518
Return Quantity by Order Method	519
Returned Items	519
Returns by Damage, Failed Orders and Complaints in 2012	519
Returns by Failed Orders in 2012.	519
Returns by Order Method	520
Returns by Order Method - Prompted Chart	520
Revenue by GO Subsidiary 2011	520
Sales Commissions for Central Europe	521
Sales Growth Year Over Year	521
Sales target by region.	521
Succession Report	521
Top 10 Retailers for 2011.	521
Samples in the GO Data Warehouse (query) Package	522
Advertising-cost vs revenue	522
Bursted Sales Performance Report	522
Employee Expenses (report)	522
Health Insurance	522
Pension Plan	523
Regular Salary	523
TOC Report	523
Total Revenue by Country or Region	523
Samples in the GO Sales (analysis) Package	523
2011 Quarterly Sales Forecast	523
2011 Sales Summary	524
Samples in the GO Sales (query) Package	524
Active Report Techniques	524
Briefing Book	524
Film strip.	524
Horizontal Pagination	525
Matrix-chart and graph	525
Order Invoices - Donald Chow, Sales Person	525
No Data	525
PDF Page Properties	525
Product details	526
Sales analysis	526
Sales Dashboard	526
Singletons on Page Body	526
Table of Contents	526
Interactive Samples	526
Bursted Sales Performance Report	526
Percentage Calculation (by year)	527
Recruitment Report	527
Revenue by GO Subsidiary 2011	527
Rolling and Moving Averages	528
Top 10 Retailers for 2011.	528
Prompt API samples	528
Clear prompt selections	528
Date prompt presets	528
Display all prompt values ignoring user selections	528
Display user selected prompt values.	528
Filter country by letter	529
Limit date prompt selection by database value	529
Limit numeric prompt selection by database value	529
Limit time between two dates	529
Limit user selection to two items	529
Pass parameter via hidden prompt	529

Personal default prompt selections - set selections	529
Personal default prompt selections - use selections	529
Validate prompt values when button pushed	529
Validate type-in postal code values	529
Validate type-in product line code	529
Appendix D. Limitations when using dimensional data sources.	531
Running a Report Against a Dimensional Data Source.	531
Limitations When Using Set Expressions in List Reports	532
Limitations When Using Clauses in Summary Functions	532
Limited Support for Relational Functions When Used with OLAP Data Sources	533
Limitations When Summarizing Measures in DMR Data Sources	534
Limitations When Filtering Dimensional Data Sources.	534
Error Characters (--) When Filtering	535
Limitations When Specifying the Scope of Summary Filters with Dimensional Data Sources	535
Limitations When Filtering Data Using an SAP BW Data Source	536
Considerations when Creating Calculations	537
Calculation Solve Order	537
Length of Expressions	537
Quality of Service Indicators	537
Using Quotation Marks in Literal Strings	538
Limitations of Calculations	538
Creating Expressions Using SAP BW Data Sources	538
Using Microsoft Excel Functions with SSAS 2005 Data Sources	539
Concatenating Strings	539
Intersecting Calculations in Crosstabs and Charts	539
Null (Missing) Values in Calculations and Summaries	542
Dimensional Coercion Rules	544
Recommendation - Use Member Unique Name (MUN) Aliases	547
Limitations When Formatting Empty Cells in SAP BW Data Sources	548
Appendix E. Limitations When Producing Reports in Microsoft Excel Format.	549
Unable to Load Images from the IBM Cognos Business Intelligence Content Store in a Report	549
Blank Worksheet Appears	549
Warning Message Appears When Excel Opens an IBM Cognos Business Intelligence Report	549
Spreadsheet Content Not Saved for Reports Saved in XLS Format	549
Unable to Load Excel Report in Netscape 7.01	550
Unable to Nest Labels in Charts	550
Data Series Are Truncated	550
Colors Different From Those in HTML or PDF	550
Repeating Pie Charts	550
Unable to Skip Discrete Axis Labels	550
Unsupported IBM Cognos BI Formatting	550
Cells Contain Series of #.	551
Table and Column Widths	551
Secure Socket Layer (SSL) Is Not Supported in Some Excel Formats and Versions	551
Number Formats Become Currency Formats in Japanese Excel	552
Reports Show Data in Wrong Columns	552
Unable to Access Reports on Remote Servers	552
Drill-through Reports Are Not Supported in Excel	552
Map Reports Are Not Supported in Excel	552
Unsupported Excel Formatting	552
Hyperlink Buttons Are Not Supported in Excel	553
Unable to View Reports in Excel Format Sent as Email Attachments	553
Unsupported Chart Properties in Excel	553
Unsupported Chart Types in Excel	553
Cell Height and Width Are Incorrect	554
Appendix F. Using the expression editor.	555
Operators	555

(555
)	555
*	555
^	555
/	555
	556
+	556
-	556
<	556
<=	556
<>	556
=	556
>	556
->	557
>=	557
and	557
auto	557
between	557
case	558
contains	558
currentMeasure	558
default	558
distinct	558
else	558
end	559
ends with	559
escape	559
for	559
for all	559
for any	559
for report	560
if	560
in	560
in_range	560
is missing	561
is null	561
is not missing	561
is not null	561
like	561
lookup	562
not	562
or	562
prefilter	562
rows	563
rows	563
starts with	563
then	563
when	563
Summaries	563
Statistical functions	563
aggregate	571
average	572
count	572
maximum	572
median	573
minimum	573
moving-average	573
moving-total	574
percentage	574
percentile	575
quantile	575

quartile	576
rank	576
running-average	577
running-count	578
running-difference	578
running-maximum	579
running-minimum	579
running-total	580
total	580
Member Summaries	581
aggregate	581
average	581
count	581
maximum	582
median	582
minimum	582
percentage	582
percentile	583
quartile	583
quartile	583
rank	583
standard-deviation	583
standard-deviation-pop	584
total	584
variance	584
variance-pop	584
Constants	584
date	584
date-time	584
time with time zone	584
timestamp with time zone	584
interval	585
interval year	585
interval month	585
interval year to month	585
interval day	585
interval hour	585
interval minute	585
interval second	585
interval day to hour	585
interval day to minute	585
interval day to second	585
interval hour to minute	585
interval hour to second	585
interval minute to second	585
null	585
number	585
string	586
time	586
Constructs	586
if then else	586
in_range	586
search case	587
simple case	587
Business Date/Time Functions	587
_add_days	587
_add_months	588
_add_years	588
_age	589
_day_of_week	589
_day_of_year	589

_days_between	589
_days_to_end_of_month	590
_first_of_month	590
_last_of_month	590
_make_timestamp	591
_months_between	591
_week_of_year	591
_years_between	592
_ymdint_between	592
Block Functions	592
_firstFromSet	592
_remainderSet	593
Aster Data	593
Aster Data String	593
Aster Data Data Type Formatting.	595
Aster Data Math	595
Aster Data Trigonometry	596
ascii	597
chr	597
current_schema	597
translate	598
date_trunc	598
version	598
DB2	598
DB2 Math	598
DB2 Trigonometry.	598
ascii	600
ceiling.	600
char	601
chr	601
concat	601
date	601
day.	602
dayname	602
dayofweek	602
dayofweek_iso	602
dayofyear	603
days	603
dec	603
decimal	603
difference.	604
digits	604
double.	604
event_mon_state	604
float	604
hex	605
hour	605
insert	605
integer	605
int	605
julian_day	606
lcase	606
left	606
length	606
locate	607
long_varchar	607
ltrim	607
microsecond.	607
midnight_seconds	608
minute	608
month	608

monthname	609
quarter	609
radians	609
repeat	609
replace	610
right	610
round	610
rtrim	610
second.	611
sign	611
smallint	611
soundex	611
space	611
substr	612
table_name	612
table_schema	612
time	612
timestamp	612
timestamp_iso	613
timestampdiff	613
to_char	613
translate	613
trunc	614
truncate	614
ucase	614
value	615
varchar	615
week	615
year	615
Greenplum	616
Greenplum String	616
Greenplum Data type formatting	617
Greenplum Math	618
Greenplum Trigonometry	618
ascii	620
chr	620
current_database	620
current_schema.	620
{current_user}	620
{session_user}	620
translate	620
date_trunc	620
version	621
Informix	621
Informix Math	621
Informix Trigonometry	621
cardinality	622
char_length	622
concat	622
date	623
day.	623
extend.	623
hex.	623
initcap.	623
length	624
lpad	624
mdy	624
month.	624
nvl	624
octet_length	624
replace	625

round	625
rpad	625
substr	625
to_char	626
to_date	626
trunc	626
weekday	626
year	626
MS Access	626
MS Access Cast	626
MS Access Math	627
MS Access Trigonometry	628
ascii	628
ceiling	628
chr	628
concat	629
curdate	629
curtime	629
dayname	629
dayofmonth	629
dayofweek	629
dayofyear	630
hour	630
instr	630
lcase	630
left	630
length	630
locate	631
ltrim	631
minute	631
month	631
monthname	631
now	631
position	632
quarter	632
right	632
round	632
rtrim	632
sign	633
space	633
substr	633
substring	633
truncate	633
ucase	634
week	634
year	634
MySQL	634
MySQL String	634
MySQL Math	635
MySQL Trigonometry	636
ascii	637
database	637
schema	637
session_user	637
system_user	638
version	638
Netezza	638
Netezza Math	638
Netezza Trigonometry	638
Netezza Fuzzy	639
Netezza Phonetic	640

ascii	640
chr	640
decode	641
initcap	641
instr	641
lpad	641
ltrim	641
months_between	641
next_day	642
nvl	642
round	642
rpad	642
rtrim	642
substr	643
{current_db}	643
{current_user}	643
{session_user}	643
to_char	643
to_date	643
to_number	643
translate	643
date_trunc	644
trunc	644
version	644
Oracle	644
Oracle Math	644
Oracle Trigonometry	644
add_months	646
ascii	646
ceil	646
char_length	646
chr	646
concat	646
decode	647
dump	647
greatest	647
initcap	647
instr	647
instrb	647
least	648
length	648
lengthb	648
lpad	648
ltrim	648
months_between	648
new_time	649
next_day	649
nls_initcap	649
nls_lower	649
nls_upper	649
nvl	649
replace	650
round	650
rpad	650
rtrim	650
sign	651
soundex	651
substr	651
substrb	651
{sysdate}	652
to_char	652

to_date	652
to_number	652
translate	652
trunc	652
trunc	653
{user}	653
vsize	653
Paracel	653
Paracel String	653
Paracel Data type formatting	654
Paracel Math	654
current_database	654
current_schema.	655
{current_user}	655
{session_user}	655
translate	655
version	655
Postgres	655
Postgres String	655
Postgres Data type formatting	657
Postgres Math	657
Postgres Trigonometry	658
ascii	659
chr	659
{current_db}	660
{current_catalog}	660
{current_schema}	660
{current_user}	660
{session_user}	660
translate	660
date_trunc	660
version	660
Red Brick.	660
ceil	660
concat	661
{current_user}	661
date	661
dateadd	661
datediff	661
datename.	661
dec	662
decimal	662
decode	662
float	662
ifnull	662
int	662
integer	662
length	663
lengthb	663
ltrim	663
nullif	663
positionb	663
real.	664
round	664
rtrim	664
sign	664
string	664
substr	665
substrb	665
time	665
timestamp	665

timestamp	665
to_char	665
SAP BW	666
SAP BW Trigonometry	666
SAP BW Math	667
Salesforce.com	667
Date Functions	667
convertCurrency	670
convertTimezone	671
SQL Server	671
SQL Server Math	671
SQL Server Trigonometry	671
ascii	672
char	673
charindex.	673
{current_user}	673
datalength	673
dateadd	673
datediff	674
datetime.	674
datepart	674
day.	674
difference.	675
getdate	675
isnull	675
left	675
ltrim	676
month.	676
patindex	676
replace	676
replicate	676
reverse	677
right	677
round	677
rtrim	677
sign	677
soundex	677
space	678
str	678
stuff	678
year	678
Sybase.	678
Sybase Math.	678
Sybase Trigonometry	679
ascii	680
char	680
charindex.	681
datalength	681
dateadd	681
datediff	681
datetime.	681
datepart	682
day.	682
difference.	682
getdate	683
left	683
ltrim	683
month.	683
patindex	683
rand	683
replicate	684

reverse	684
right	684
round	684
rtrim	684
soundex	684
space	685
str	685
stuff	685
substring	685
to_unichar	685
uhighsurr	686
ulowsurr	686
uscalar	686
year	686
Teradata	686
Teradata Trigonometry	686
account	688
add_months	688
bytes	688
case_n	689
char2hexint	689
characters	689
database	689
date	689
format	689
index	689
log	690
nullif	690
nullifzero	690
profile	690
random	690
role	690
session	690
soundex	691
substr	691
time	691
type	691
user	691
vargraphic	691
zeroifnull	692
Vectorwise	692
Vectorwise String	692
Vectorwise Math	693
Vectorwise Trigonometry	693
{initial_user}	694
{session_user}	694
numeric_trunc	694
Vertica	694
Vertica String	694
Vertica Data type formatting	696
Vertica Math	696
Vertica Trigonometry	697
ascii	698
chr	698
current_database	698
current_schema	698
{current_user}	699
{session_user}	699
translate	699
date_trunc	699
version	699

Macro Functions	699
+	699
_add_days	700
_add_months	700
_add_years	701
array	701
csv	702
dq	702
getConfigurationEntry	702
grep	702
_first_of_month	703
_last_of_month	703
join	704
lstrip	704
prompt	704
promptmany	705
rstrip	706
sb	706
sq	706
sort	706
split	707
strip	707
substitute	707
timestampMask	708
toLocal	709
tolower	709
toupper	710
toUTC	710
unique	711
urlencode	711
CSVIdentityName	711
CSVIdentityNameList	712
CAMPassport	712
CAMIDList	712
CAMIDListForType	712
simple case	713
Common Functions	713
abs	713
cast	713
ceil	714
ceiling	714
char_length	715
character_length	715
coalesce	715
current_date	715
current_time	716
current_timestamp	716
exp	716
extract	717
floor	717
ln	717
localtime	718
localtimestamp	718
lower	718
mod	718
nullif	719
octet_length	719
position	719
power	719
_round	720
row	720

sqrt	721
substring	721
trim	721
upper	722
width-bucket	722
Trigonometric functions	723
Dimensional Functions	725
ancestor	725
ancestors	725
bottomCount	726
bottomPercent	726
bottomSum	727
caption	727
children	728
closingPeriod	728
cousin	729
completeTuple	729
currentMember	730
defaultMember	730
descendants	731
except	732
filter	733
firstChild	733
firstSibling	733
_format	734
emptySet	734
generate	734
head	735
hierarchize	735
hierarchy	736
item	736
intersect	737
lag	737
lastChild	737
lastPeriods	738
lastSibling	738
lead	738
level	739
levels	739
linkMember	740
members	740
nextMember	741
openingPeriod	741
order	741
ordinal	742
parallelPeriod	743
parent	743
periodsToDate	744
prevMember	744
member	744
nestedSet	745
set	745
siblings	745
tail	746
topCount	746
topPercent	747
topSum	747
tuple	747
union	748
roleValue	748
rootMember	749

rootMembers	749
subset	749
unique	750
value	750
Report Functions	751
Today	751
Now	751
AsOfDate.	751
AsOfTime	751
ReportDate	751
ReportName.	751
ReportPath	751
ReportDescription	752
ReportLocale	752
GetLocale	752
Locale	752
ReportProductLocale	752
ReportAuthorLocale	752
ReportSaveDate	752
ReportCreateDate	752
ReportID	753
ReportOutput	753
ReportOption	753
ServerName	753
ServerLocale.	753
ModelPath	753
BurstKey	753
BurstRecipients.	754
IsBursting	754
ParamNames	754
ParamName	754
ParamDisplayValue	754
ParamValue	754
ParamCount.	754
RowNumber	754
PageNumber	755
PageCount	755
IsPageCountAvailable	755
HorizontalPageNumber	755
HorizontalPageCount.	755
PageName	755
URLEncode	755
TOCHeadingCount	755
IsAccessible	756
ColumnNumber	756
IsCrosstabRowNodeMember	756
IsCrosstabColumnNodeMember	756
IsInnerMostCrosstabRowNodeMember	756
IsInnerMostCrosstabColumnNodeMember.	756
IsOuterMostCrosstabRowNodeMember.	756
IsOuterMostCrosstabColumnNodeMember	756
IsFirstColumn	757
IsLastColumn	757
IsLastInnerMostCrosstabColumnNodeMember	757
IsLastInnerMostCrosstabRowNodeMember	757
CubeName	757
CubeDescription	757
CubeCreatedOn	757
CubeDataUpdatedOn.	758
CubeSchemaUpdatedOn.	758
CubeIsOptimized	758

CubeDefaultMeasure	758
CubeCurrentPeriod	758
CellValue	758
InScope	758
Data Type Casting Functions	759
_add_days	759
_add_months	759
_add_years	759
_age	759
_day_of_week	759
_day_of_year	760
_days_between	760
_days_to_end_of_month	760
_first_of_month	760
_last_of_month	761
_make_timestamp	761
_months_between	761
_week_of_year	761
_years_between	761
_ymdint_between	761
abs	762
ceiling	762
character_length	762
date2string	762
date2timestamp	762
date2timestampTZ	762
DTinterval2string	762
DTinterval2stringAsTime	763
exp	763
extract	763
floor	763
int2DTinterval	764
int2YMinterval	764
ln	764
lower	764
mapNumberToLetter	764
mod	765
nullif	765
number2string	765
octet_length	765
position	765
power	765
round	766
sqrt	766
status	766
string2date	766
string2double	766
string2DTinterval	766
string2int32	767
string2int64	767
string2time	767
string2timestamp	767
string2timestampTZ	767
string2YMinterval	767
substring	767
time2string	768
timestamp2date	768
timestamp2string	768
timestamp2timestampTZ	768
timestampTZ2date	768
timestampTZ2string	768

timestampTZ2timestamp	768
timeTZ2string	769
trim	769
upper	769
YMininterval2string	769

Appendix G. Report Studio Object and Property Reference 771

Report Studio Objects	771
3-D Area	771
3-D Bar	771
3-D Combination Chart	772
3-D Line	772
3-D Scatter Chart	772
Angular Axis	773
Angular Measure	773
Area	773
Area	773
As of Time Expression	773
Axis Labels	774
Axis Title.	774
Axis Title.	774
Bar	774
Bar	774
Baseline	775
Baseline	775
Baseline	775
Baseline	775
Block	776
Bookmark	776
Bubble Chart	776
Bubble Chart	777
Bubble Measure	777
Bubble Measure	777
Bullet Chart	777
Bullet Measure	778
Button.	778
Button.	778
Button Bar	778
Button Extra Item	779
Button Icon	779
Button Label	779
Calculated Measure	779
Calculated Member	779
Calculated Member	779
Caption	779
Card	780
Card Extra Item	780
Card Label	780
Category	780
Category Axis	780
Category axis	780
Category Baseline	781
Chart Body	781
Chart Body	781
Chart Footer.	781
Chart Footer.	781
Chart Measure	782
Chart Node Member	782
Chart Subtitle	782
Chart Subtitle	782
Chart Text Item.	782

Chart Text Item	783
Chart Title	783
Chart Title	783
Check Box	783
Check Box Extra Item	784
Check Box Group	784
Check Box Icon.	784
Check Box Label	784
Class	784
Color by Value Measure	785
Colored Region.	785
Colored Region.	785
Combination Chart	785
Combination Chart	786
Component Override	786
Conditional Block	787
Conditional Block	787
Context Item Text	787
Continuous Values Slider	787
Crosstab	788
Crosstab Columns	788
Crosstab Columns	788
Crosstab Corner	789
Crosstab Fact Cells	789
Crosstab Intersection	789
Crosstab Member Fact Cells	790
Crosstab Node Member	790
Crosstab Rows	790
Crosstab Rows	791
Crosstab Space	791
Crosstab Summary	791
Cumulation Label	792
Cumulation Line	792
Cumulation Line	792
Cumulation Line	792
Cumulation Line Axis	792
Cumulation Line Label	792
Custom Groups	793
Data Button Bar	793
Data Check Box Group	793
Data Container	793
Data Deck	794
Data Discrete Values Slider	794
Data Drop-Down List	794
Data Item	795
Data Iterator.	795
Data List Box	795
Data Radio Button Group	795
Data Tab Control	796
Data Toggle Button Bar	796
Date	796
Date & Time Prompt	796
Date Prompt.	797
Deck	797
Default Measure	797
Default Measure	797
Default Measure	797
Detail Filter	798
Dimension	798
Dimensional Edge Summary	798
Discrete Values Slider	798

Display Layer	798
Drop-Down List	799
Edge Summary	799
Equation Label	799
Equation Label	799
Explicit Member Set	799
Extra Category	799
Extra Value	800
Fact	800
Field Set	800
Gauge Axis	800
Gauge Chart	800
Gauge Chart	801
Gauge Labels	801
Gauge Numerical Axis	801
Generated Prompt	802
Hierarchy Set	802
HTML Item	802
Hyperlink	802
Hyperlink Button	803
Image	803
Intersection (Tuple)	804
Interval Prompt	804
Iterator	804
Iterator Extra Item	804
Iterator First	805
Iterator Label Area	805
Iterator Last	805
Iterator Next	805
Iterator Previous	805
Iterator Value Icon	805
Iterator Value Label	805
Join	806
Key	806
Label	806
Layout Component Reference	806
Legend	806
Legend	807
Legend Title	807
Legend Title	807
Level	807
Level Hierarchy	807
Level Set	808
Line	808
Line	808
List	808
List Box	809
List Cell	809
List Column	809
List Column Body	810
List Columns	810
List Columns	810
List Columns Body Style	811
List Columns Title Style	811
List Column Title	811
List Footer	811
List Header	812
List Item	812
List Item Extra Item	812
List Item Icon	812
List Item Label	812

List Page Footer	813
List Page Header	813
List Row	813
List Row Cells Style	813
List Summary	813
List Summary	814
Map	814
Map Location	814
Map Location	815
Map Refinement Location	815
Map Refinement Location	815
Marimekko Chart	815
Marker	816
Marker	816
Marker	816
MDX	817
Measure	817
Member	817
Member Children Set	817
Member Hierarchy	817
Member Property	817
Member Property	818
Member Set	818
Metrics Range Chart	818
Metric Studio Diagram	818
Named Set	819
Node	819
Note	819
Note	819
Note Content	819
No Value List Item	819
Numerical Axis.	820
Numerical Axis.	820
Numeric Axis	820
Numeric Baseline	820
Page	821
Page Body	821
Page Break Text	821
Page Footer	821
Page Header	821
Page Number	821
Page Set	822
Pareto Bars	822
Pareto Chart.	822
Pareto Chart.	823
Percentaged Measure.	823
Pie Chart	823
Pie Chart	824
Pie Labels	824
Point Color Legend Title	824
Point Layer	825
Point Measure	825
Point Size Legend Title	825
Point Size Measure	825
Polar Chart	825
Primary Axis	826
Primary Bottom Axis	826
Progressive Chart	826
Progressive Chart	827
Prompt Button	827
Query	828

Query Operation	828
Query Reference	828
Radar Chart	828
Radial Axis	829
Radial Measure.	829
Radio Button	829
Radio Button Extra Item.	829
Radio Button Group	829
Radio Button Icon	830
Radio Button Label	830
Region Color Legend Title	830
Region Layer	830
Region Measure	830
Regression Line	831
Regression Line Label	831
Repeater	831
Repeater Table	831
Repeater Table Cell	831
Repeater Table Cell	832
Rich Text Item	832
Row Number	832
Row Number	832
Scatter Chart	833
Scatter Chart	833
Scatter Marker	834
Secondary Axis.	834
Secondary Bottom Axis	834
Select & Search Prompt	834
Set Expression	835
Singleton	835
Slicer Member Set	835
SQL	835
Static Repeater Table	835
Summary Filter.	836
Tab	836
Tab Control	836
Tab Extra Item	836
Tab Icon	837
Tab Label.	837
Table	837
Table Cell	837
Table of Contents	837
Table of Contents Entry	838
Table Row	838
Target Measure.	838
Target Measure.	838
Text Box Prompt	838
Text Item	839
Time	839
Time Prompt	839
Toggle Button Bar	840
Tolerance Measure.	840
Total Column	840
Total Column Label	840
Tree Prompt	840
Trendline.	841
Trendline Label.	841
Value	841
Value	841
Value	841
Value Prompt	841

Variable	842
Variable Text Item	842
Visualization	842
Win-Loss Chart.	842
Win-Loss Measure.	843
X Axis.	843
X Axis.	843
X Axis.	843
X Axis Measure	844
Y1 Axis	844
Y2 Axis	844
Y Axis.	844
Y Axis.	844
Y Axis.	845
Y Axis Measure	845
Z Axis.	845
Z Axis.	845
Z Axis Measure	845
Report Studio Properties	846
3-D Viewing Angle	846
Absolute Position	846
Across.	846
Active Dot Color	846
Active Report Variable	846
Actual Measure.	846
Aggregate Data Item	847
Aggregate Function	847
Aggregation Method	847
Aggregation Method	847
Allow 45° Rotation	847
Allow 90° Rotation	848
Allow Skip	848
Allow Sorting	848
Allow Stagger	848
Allow Ties	848
Alternate Text	848
Angular Axis	849
Animate	849
Animation Effect	849
Application	849
Application Drill-Through	849
Apply Single Class	850
Area Shape	850
Auto Font Size	850
Auto Group & Summarize	850
Auto-Sort.	851
Auto-Submit	851
Auto Truncation	851
Avoid Division by Zero	851
Avoid Label Collision	851
Axis Angles	851
Axis Assignment	852
Axis Assignment	852
Axis Justification	852
Axis Labels	852
Axis Labels	852
Axis Line.	852
Axis Line.	853
Axis Line.	853
Axis Range	853
Axis Title.	853

Axis Title	853
Axis Title	854
Background Color	854
Background Effects	855
Background Image	855
Bar, Line, or Area Index	856
Bar Shape	856
Bar Width	856
Based on	856
Baselines	856
Bevel	857
Block Variable	857
Border	857
Border Color	858
Border Color	858
Borders	858
Borders	858
Borders	858
Bottom Position	859
Bottom Position (px)	859
Bottom Position (px)	859
Box Type	859
Box Type	860
Bubble Size	860
Bubble Size	860
Bullet Indicators	860
Button Definition	861
Button Gap	861
Buttons Definition	861
Button Width	861
Button Width	861
Calculation Intersection	861
Calendar Type	862
Caption	862
Caption	862
Cardinality	862
Cascade Source	862
Case Insensitive	862
Catalog	862
Category Axis	863
Category Baselines	863
Category Range	863
Chart Orientation	863
Chart Type	863
Chart Type	863
Chart Type	864
Check Boxes Definition	864
Choices Deselect All Text	864
Choices Select All Text	864
Choices Text	864
Classes	865
Clickable Region	865
Clickable Region	866
Clickable Regions	866
Clickable Regions	866
Clock Mode	866
Color by Value	866
Colored Regions	867
Color Legend Title	867
Color Legend Title	867
Column Coordinate	867

Column Titles	867
Column Visibility	867
Combinations	868
Component Reference	868
Component Reference	868
Conditional Palette	868
Conditional Palette	868
Conditional Styles	868
Connecting Lines	869
Connecting Lines	869
Contained Text Direction	870
Container Filter	870
Container Select	870
Contents Height	871
Control Data Item Value	871
Control Data Item Value	871
Control Data Item Value	871
Control Enable	872
Cross Product Allowed	872
Cumulation Axis	872
Cumulation Label	872
Cumulation Label	872
Cumulative Line	872
Cumulative Line	873
Current Block	873
Current Card	873
Current Tab	873
Custom Label	873
Custom Label	873
Data Format	874
Data Format	874
Data Item	874
Data Item	875
Data Item Label	875
Data Item Label	875
Data Item Label	875
Data Item Label	875
Data Item Value	875
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Item Value	876
Data Language	877
Data Points	877
Data Source	877
Days Text	877
Deck Cards Definition	877
Default Card	877
Default Card	877
Default Measure	878
Default Selections	878
Default Title	878
Default Title	878
Define Contents	878
Define Custom Grouping	878
Define Member Sets	878
Definition	879
Depth	879

Description	879
Deselect Text	879
Detail	879
Diagram Identifier.	880
Dial Face Fill	880
Dial Outline Color.	880
Dictionary	880
Dimension	880
Direction & Justification	880
Display After Overall Header	881
Display for Orientation	881
Display Frequency.	882
Display Milliseconds	882
Display Seconds	882
Display Value	882
Display Values	883
Dot Color	883
Down	883
Drill-Through Definitions	883
Drop-Down Width	884
Drop Shadow	884
Drop Shadow	884
Duplicates	884
Embed	884
End Position.	884
Execution Method	885
Execution Optimization	885
Expand Features	885
Exploded Slices.	885
Expression	885
Expression	886
Expression	886
Expression	886
Extend Width	886
Face Color	886
Fact Cell Data Format	886
Fact Cells Precedence.	887
Fill Effects	887
First Column Color	887
First Date.	887
First Label Index	887
First Slice Angle	887
Floating	888
Font	888
Font Auto-Sizing	889
Footer	889
Footer	889
Foreground Color	889
From Text	890
Gauge Axes	890
Gauge Axis Colors	890
Gauge Axis Inner Radius	890
Gauge Axis Outer Radius	890
Gauge Border	891
Gauge Labels	891
Gauge Needle	891
Gauge Palette	891
Gauge Pivot.	891
Generated SQL.	891
Gradient	891
Gridlines	892

Gridlines	892
Gridlines	892
Grouping & Sorting	892
Grouping Type	892
Group Span	892
Has Fact Cells	893
Header Text	893
Heading Level	893
Height.	893
Height (px)	893
Hide Adornments	893
Hide Text.	893
Hierarchy	894
Hierarchy Unique Name	894
Highest Value Text	894
Hole Size (%)	895
Horizontal Alignment	895
Hours Text	895
HTML.	895
HTML Source Variable	896
Icon	896
Ignore Data with No Features	896
Include Zero For Auto Scale	896
Insert Text	896
Iterator First.	896
Iterator Label Area	897
Iterator Last	897
Iterator Next	897
Iterator Previous	897
Iterator Values Definition	897
Join Relationships	897
Keywords Text	897
Label	898
Label	898
Label	898
Label	898
Label	898
Label	898
Label	898
Label	898
Label	899
Label	899
Label	899
Label Color	899
Label Control	899
Label For.	899
Label Location	900
Labels	900
Last Date.	900
Left Position.	900
Left Position (px)	900
Left Position (px)	900
Legend	900
Legend	901
Legend Label	901
Legend Separator	901
Legend Title.	901
Legend Title.	901
Legend Title.	901
Level	902
Level Indentation	902
Level Unique Name	902

Line and Markers	902
Line Shape	903
Line Style	903
Line Style	903
Line Style	903
Line Styles	903
Line Type	903
Line Weight (pt)	903
List Items Definition	904
Loss Color	904
Lowest Value Text	904
Map & Layers	904
Map Drills	904
Margin	904
Marimekko Totals	905
Marker Color	905
Marker Color	905
Marker Label	905
Markers	905
Markers	906
Marker Shape	906
Marker Shape	906
Marker Size (pt)	906
Marker Size (pt)	906
Marker Style	906
Marker Text Location	906
Master Detail Relationships	907
Material Effects	907
Material Effects	907
Matrix Rows and Columns	908
Maximum Characters	908
Maximum Execution Time	908
Maximum Hotspots	908
Maximum Rows Retrieved	909
Maximum Size (pt)	909
Maximum Tables	909
Maximum Text Blob Characters	909
Maximum Truncation Characters	909
Maximum Value	910
Maximum Value	910
MDX	910
Member	910
Member Offset (%)	910
Members	911
Members	911
Member Unique Name	911
Milliseconds Text	911
Minimum Size (pt)	911
Minimum Value	912
Minimum Value	912
Minor Gridlines	912
Minor Gridlines	912
Minor Gridlines	912
Minutes Text	913
Multi-Line	913
Multi-Select	913
Name	913
Name	913
Name	914
Name	914
Name	914

Name	915
Name	915
Name	915
Name	915
Name	915
Name	915
Name	915
Name	915
Name	915
Name	915
Name	916
Negative Column Color	916
Nested Label Display	916
Nesting Order	916
No Data Contents	916
No Data Features Size (pt)	917
Node Coordinate	917
Note Border	917
Notes	917
Notes	917
Note Text	918
No Value List Item	918
Number of Minor Intervals	918
Number of Minor Intervals	918
Number of Regression Lines	918
Numbers Only	918
Number Style	919
Number Style	919
Numerical Axis	919
Numerical Axis	919
Numeric Baselines	919
Numeric Value	919
Numeric Value	919
Numeric Value	920
Options Text	920
Orientation	920
Outer Join Allowed	920
Output Aggregation Method	920
Output Aggregation Method	920
Override Dimension Info	921
Overrides	921
Padding	921
Pagination	921
Palette	922
Palette	922
Palette	922
Parameter	922
Pareto Axis	923
PDF Page Setup	923
Percentage Based On	923
Percentile	923
Percentile	923
Percentile	923
Percent of Axis	923
Percent of Axis	924
Percent of Axis	924
Performance Pattern	924
Pie Labels	924
Plot Area Fill	924
Point Shape	924
Polynomial Exponent	925
Position	925
Position	925

Search Instructions Text	938
Search Text	938
Seconds Text	938
Select UI	938
Select UI	939
Select UI	939
Select UI	939
Select UI	939
Select UI	939
Separator	939
Series Color	939
Series Type	940
Set Definition	940
Set Operation	940
Set Sorting	940
Set Variable Values	941
Share Result Set	941
Sharing	941
Show Caption	941
Show Data Points	942
Show Data Range in Legend	942
Show Features with No Data	942
Show Feelers	942
Show Hover.	942
Show Icon	943
Show Icon	943
Show Labels.	943
Show Legend Values	943
Show line	943
Show Pointer Cursor	943
Show Tooltip	944
Show Values.	944
Show Values.	944
Show Values.	944
Show Values.	944
Show Values.	944
Show Values.	944
Show Values.	945
Size	945
Size & Overflow	945
Size & Overflow	945
Size Legend Title	946
Slice Direction	946
Slide Animation Direction	946
Slider Values Definition	946
Solve Order	946
Solve Order	947
Sorting	947
Source Type	947
Source Type	947
Source Type	947
Source Type	948
Spacing & Breaking	948
Spider Effects	948
SQL	948
SQL Join Syntax	948
SQL Syntax	949
Standard Deviations	949
Standard Deviations	949
Standard Deviations	949
Start Position	949

Static Choices	949
Step	950
Style Variable	950
Subtitle	950
Subtitle	951
Summarize Small Items	951
Summarize Small Slices	951
Summary Text	951
Suppress	951
Suppression	951
Table Header	952
Table of Contents	952
Table of Contents Name	952
Table Properties	952
Tab Orientation	952
Tabs Definition	953
Tab Width	953
Target Color	953
Target Marker	953
Target Marker Border Color	953
Target Marker Position	953
Target Range (%)	953
Text	954
Text Color	954
Text Color	954
Text Orientation	954
Text Source Variable	954
Text Truncation	954
Tick Interval	955
Tick Interval	955
Tick Label Skip Interval	955
Tick Type	955
Title	955
Title	955
Title	955
Tolerance Color	956
Tolerance Label	956
Tooltips	956
Tooltips	956
Tooltips	956
Tooltips	957
Tooltips	957
Top Position	957
Top Position (px)	957
Total Column	957
Total Column	957
Total Column Color	958
To Text	958
Track Length	958
Trendline Label	958
Trendlines	958
Truncation	958
Truncation Text	959
Type	959
Type	959
Type	959
Type	959
Update Variables Live	959
Upper Range Skew (%)	960
URL	960
URL	960

URL Source Variable	960
Usage	960
Use 1.x Behavior	960
Use Aggregate Cache	960
Use Detail Value on Page	961
Use Embedded Data	961
Use for Parameter Info	961
Use Local Cache	961
User SAP Member Cache	961
Use Same Range For All Instances	962
Use SAP MUN as Business Key	962
Use Set Aggregation	962
Use SQL Parameters	962
Use SQL With Clause	963
Use Thousands Separator	963
Use Value	963
Use Value	963
Value Location:	963
Value Markers	963
Value Range	964
Value Representation	964
Values	964
Values	964
Values	964
Values	964
Value Type	965
Variable	965
Variable for Maximum	965
Variable for Minimum	965
Vertical Alignment	965
Visible	965
Visible	966
Visual Angle	966
White Space	966
Width	967
Width (px)	967
Win Color	967
Win-Loss Threshold	967
X Axis	967
X Axis	968
X-Axis Data Item Value	968
Y1 Axis	968
Y2 Axis	968
Y2 Axis Position	968
Y Axis	968
Y Axis	968
Y-Axis Data Item Value	969
Data Formatting Properties	969
"Not Applicable" Characters	969
Any Error Characters	969
Calendar Type	969
Clock	969
Currency	969
Currency Display	969
Currency Symbol	969
Currency Symbol Position	970
Date Ordering	970
Date Separator	970
Date Style	970
Decimal Separator	970
Digit Shaping	970

Digit Shaping	970
Display AM / PM Symbols.	970
Display As Exponent	971
Display Days	971
Display Eras.	971
Display Hours	971
Display Milliseconds	971
Display Minutes	971
Display Months	971
Display Months	971
Display Seconds	971
Display Time Zone	971
Display Weekdays.	972
Display Years	972
Display Years	972
Divide By Zero Characters	972
Exponent Symbol	972
Group Size (digits)	972
International Currency Symbol	972
Mantissa (digits)	972
Maximum No. of Digits	972
Minimum No. of Digits	972
Missing Value Characters	973
Negative Pattern	973
Negative Sign Position	973
Negative Sign Symbol	973
No. of Decimal Places	973
Numeric Overflow Characters.	973
Padding Character.	973
Pattern	973
Percentage Symbol	973
Percent Scale (integer)	973
Scale	974
Secondary Group Size (digits)	974
Security Error Characters	974
Thousands Separator	974
Time Separator	974
Time Style	974
Time Unit	974
Use Thousands Separator	974
Zero Value Characters	974

Appendix H. Prompt API for IBM Cognos BI 975

cognos.Prompt object	975
cognos.Prompt.getControlByName method	975
cognos.Prompt.getControls method.	975
cognos.Prompt.Control object	976
cognos.Prompt.Control.addValue method	976
cognos.Prompt.Control.clearValues method.	977
cognos.Prompt.Control.getName method	977
cognos.Prompt.Control.getValues method	977
cognos.Prompt.Control.setValidator method	978
cognos.Prompt.Control.setValues method	979
cognos.Report object	980
cognos.Report.getReport method	980
cognos.Report.sendRequest method.	980
cognos.Report.Action object	981
cognos.Report.Action.BACK	981
cognos.Report.Action.CANCEL	981
cognos.Report.Action.FINISH	981
cognos.Report.Action.NEXT	981

cognos.Report.Action.REPROMPT	981
cognos.Value class.	982

Notices 983

Glossary 987

A	987
B	987
C	988
D	989
E	989
F	990
G	990
H	990
I	990
J	990
L	990
M	990
N	991
O	991
P	992
Q	992
R	992
S	993
T	993
U	994
W	994

Index 995

Introduction

This document is intended for use with IBM® Cognos® Report Studio. It provides step-by-step procedures and background information to help you create standard and complex reports. Report Studio is a Web product for creating reports that analyze corporate data according to specific information needs.

Finding information

To find IBM Cognos product documentation on the web, including all translated documentation, access one of the IBM Cognos Information Centers (<http://pic.dhe.ibm.com/infocenter/cogic/v1r0m0/index.jsp>). Release Notes are published directly to Information Centers, and include links to the latest technotes and APARs.

You can also read PDF versions of the product release notes and installation guides directly from IBM Cognos product disks.

Accessibility features

Accessibility features help users who have a physical disability, such as restricted mobility or limited vision, to use information technology products. Report Studio has accessibility features. For more information, see Appendix A, “Accessibility Features,” on page 467.

IBM Cognos HTML documentation has accessibility features. PDF documents are supplemental and, as such, include no added accessibility features.

Forward-looking statements

This documentation describes the current functionality of the product. References to items that are not currently available may be included. No implication of any future availability should be inferred. Any such references are not a commitment, promise, or legal obligation to deliver any material, code, or functionality. The development, release, and timing of features or functionality remain at the sole discretion of IBM.

Samples disclaimer

The Sample Outdoors Company, Great Outdoors Company, GO Sales, any variation of the Sample Outdoors or Great Outdoors names, and Planning Sample depict fictitious business operations with sample data used to develop sample applications for IBM and IBM customers. These fictitious records include sample data for sales transactions, product distribution, finance, and human resources. Any resemblance to actual names, addresses, contact numbers, or transaction values is coincidental. Other sample files may contain fictional data manually or machine generated, factual data compiled from academic or public sources, or data used with permission of the copyright holder, for use as sample data to develop sample applications. Product names referenced may be the trademarks of their respective owners. Unauthorized duplication is prohibited.

Chapter 1. What's New in Cognos Report Studio?

This section contains a list of new, changed, and removed features for this release. It will help you plan your upgrade and application deployment strategies and the training requirements for your users.

For information about upgrading, see the *IBM Cognos Business Intelligence Installation and Configuration Guide* for your product.

For information about other new features for this release, see the *IBM Cognos Business Intelligence New Features Guide*.

To view What's New information for past releases, including version 8.4, access one of the IBM Cognos Information Centers (<http://pic.dhe.ibm.com/infocenter/cogic/v1r0m0/index.jsp>).

To review an up-to-date list of the environments that are supported by IBM Cognos products, including information about operating systems, patches, browsers, web servers, directory servers, database servers, and application servers, visit the IBM Cognos Customer Center (<http://www.ibm.com/software/data/cognos/customercenter>).

New features in version 10.2.1

The following topics describe the new features in this release.

Improved IBM Cognos Active Report performance

Active Report performance is improved in this release.

You can now compress Active Report output. The compression feature compresses Active Report controls within the output and produces files that are smaller and open faster. The compression feature significantly improves the performance of Active Reports that include large amounts data versus graphical content. The option to compress Active Report output is set in the **Active Report Properties** window.

In addition, improvements to the Active Report engine streamline performance, and result in improved memory consumption characteristics. With these improvements, large active reports perform better, particularly when they are consumed within the IBM Cognos Business Intelligence Mobile application.

Related tasks:

“Specify Active Report Properties” on page 173

You can specify properties for active reports, such as the text that appears in the browser window title bar, the maximum number of rows that a report can contain, and an access code that users must enter to view a report.

Extensible visualizations in IBM Cognos Active Report

With extensible visualizations, you can use innovative new visualizations in active reports.

IBM Cognos Business Intelligence introduces new visualizations to Report Studio, such as treemaps and packed bubble visualizations. Your administrator can download sample visualizations to a gallery that is accessible from the Active Report authoring environment. Sample visualizations can be used or modified to meet your requirements.

Related concepts:

“Extensible visualizations” on page 173

You can use extensible client-side visualizations in IBM Cognos Active Report to visualize data.

Option to group or ungroup repeating cells in Excel 2007 reports

When you produce reports in Excel 2007 format, you can choose to group repeating cells into a single merged cell.

Grouped or ungrouped cells are produced by various report objects, such as grouped data items, headers and footers, and nested objects. The option to group or ungroup repeating cells is controlled by the **Group repeating cells when exporting to Excel** report property.

Related concepts:

“Option to group repeating cells in reports produced in Excel 2007 format” on page 50

When you produce reports in Excel 2007 format, you can specify whether repeating cells are grouped, or merged, into a single cell.

Crosstab values as percentages

In crosstabs, you can now show values as a percentage of a summary instead of the actual values. For example, you can show the revenue that was generated by each product line as a percentage of the total revenue.

Related tasks:

“Showing crosstab values as percentages” on page 72

When you work with dimensional data sources, you can show crosstab values as a percentage of a summary instead of the actual values. When you show values as a percentage, you can compare the contribution of an item to the whole.

Share sets between reports

When you work with dimensional data, you can now share a set. Shared sets appear in the model tree for inclusion in other reports.

When you include a shared set, you can designate it to be either **Run Time** or **Design Time**. If a set is designated as **Run Time**, the report always uses whatever is in the shared set as it is defined. If a set is designated as **Design Time**, the report caches the contents of the shared set at the time when it is initially included. The report uses this definition until you explicitly refresh it.

Related tasks:

“Sharing sets between reports” on page 259

When you are working with dimensional data, you can share a set to make it available for inclusion in multiple reports.

Improved text-based relational filters

You can now define relational filters that are based on a text pattern.

In previous releases, text-based relational filters were defined by selecting actual values, such as Camping Equipment. Performance is impacted when the number of strings in a filter condition increases. This feature automatically generates filters that contain strings or members that match a text pattern. The following text matching options are available:

- Starts with
- Ends with
- Contains
- Matches SQL pattern

Related tasks:

“Create a Detail or Summary Filter” on page 229

Add a filter expression to focus a report and minimize processing time by excluding unwanted data. For example, you can filter data to show only customers who placed purchase orders that were valued at over one thousand dollars during the past year. When you run the report, you see only the filtered data.

Improved data container and query naming support

In IBM Cognos Report Studio, when you insert a data container from the toolbox tab into a report, you can immediately specify a name for the container and a name for the query that you want to link to the container. You can also link an existing query to the container.

In previous releases, Cognos Report Studio automatically generated the names for data containers that are inserted in a report and the names of the queries that are linked to the containers. For example, when you insert a list, the generated name of the list is List1, and the name of the query that is linked to the list is Query1. To change either name, you must modify the **Name** property of the object in the **Properties** pane.

Related tasks:

“Inserting a data container from the toolbox tab” on page 41

In addition to choosing a basic report layout when you create a report, you can insert data containers from the toolbox tab into a report in IBM Cognos Report Studio.

Search parameter Ends with any of these keywords

A search parameter, **Ends with any of these keywords**, is now available when you perform searches, such as when you search for members when you create a filter expression.

Removed Features in Version 10.2.1

The following features were removed since the last release.

IBM Cognos Statistics

IBM Cognos Statistics was removed from this version of IBM Cognos Business Intelligence.

To ensure that reports that were created in previous releases, and that contain statistical objects, will run in this and future releases, statistical objects are removed when the reports are upgraded. Each removed statistical object is replaced with the following image:



Figure 1. Image that replaces statistical objects in upgraded reports

A warning also appears in the Upgrade Information window for each statistical object that is replaced with the image.

Tip: Queries and their data items that are associated to statistical objects are not removed from upgraded reports.

You can use IBM SPSS® Statistics to perform statistical reporting and analysis.

New features in version 10.2.0

This section describes new features in this release.

Updated world and Africa maps

The world and Africa maps were updated to include the region of South Sudan in IBM Cognos Report Studio version 10.2.0.

Related tasks:

“Use maps from previous versions” on page 9

The old versions of the World, Europe, Africa, and India maps that were included with IBM Cognos Business Intelligence prior to version 10.1.1 are still available. To continue using the previous maps, your IBM Cognos BI administrator must enable them.

Interactive repeater tables

You can now add interactive behavior to repeater tables in IBM Cognos Active Report.

Adding interactive behavior to repeater tables is useful for creating button bars and grids of custom content. For example, you can insert a data item in a repeater table that shows a different chart for each data value. You can customize the repeater table so that the data values appear as buttons in a two-column grid.

Related concepts:

“Adding Controls to a Report” on page 185

IBM Cognos Active Report offers several active report controls. For many controls, two different versions are available, a static version and a data-driven version.

Improved IBM Cognos Active Report integration with IBM Cognos Workspace

Check boxes and sliders in workspaces in IBM Cognos Workspace can now drive IBM Cognos Active Report.

You can define public variables and range variables in Cognos Active Report that allow Cognos Workspace check boxes and sliders to drive active reports in a workspace.

Related tasks:

“Create and Manage Active Report Variables” on page 184

Create active report variables to allow controls in a report to interact with each other. Active report variables pass information from one control to another control.

Improved support for bidirectional languages

IBM Cognos Report Studio offers improved support for bidirectional languages.

The improved support for bidirectional languages includes the following capabilities:

- Base text direction for text in more report objects, such as charts, maps, and prompts
- Control of object direction for charts, maps, and prompts
- Digit shaping

In addition, the improved support for bidirectional languages includes the report formats PDF, Microsoft Excel, and IBM Cognos Active Report.

Related concepts:

“Support for bidirectional languages” on page 56

You can author reports that support bidirectional languages. You can specify base text direction, digit shaping, and container direction.

Macro tab in expression editor

A macro tab is now available in the IBM Cognos Report Studio expression editor. With the macro tab, you can add parameter maps, session parameters, and macro functions to expressions.

Related tasks:

“Insert a Query Calculation” on page 250

Insert a query calculation into your report to add a new row or column with values that are based on a calculation.

“Insert a Query Calculation” on page 303

When working with dimensional data, insert a query calculation into your report to add a new row or column with values that are based on a calculation. For example, you create a query calculation named Euros that converts dollars to euros by multiplying an existing dollar measure by a conversion rate. Euros can then be displayed to end users in a separate row or column.

Inherited table styles in lists and crosstabs

When an item is inserted in a list or crosstab, the item inherits the table style of one of the items in the data container.

By default, items inherit the style of an item of the same type. For example, if you insert a measure in a list, the measure inherits the style of a measure that is in the list, if one exists. Inheritance rules control which style is inherited.

Related tasks:

“Apply a Table Style” on page 340

Apply a table style to quickly format tables. You can also apply a table style to lists, crosstabs, and repeater tables.

Enhanced crosstab headers

In crosstabs, you can display headers that indicate the parent categories of the data items in the columns and rows. The headers help users to understand where the data is located in the hierarchy.

Related tasks:

“Creating headers automatically for sets in crosstabs” on page 72

You can automatically add header labels on columns and rows when working with sets in a crosstab that uses a dimensional data source. The headers help consumers of the report to understand where the data is in the hierarchy.

Prompt API

A JavaScript Prompt API is available to provide report authors with a method of customizing prompt interaction in the reports that they author.

With the prompt API, JavaScript applications can interact with IBM Cognos Business Intelligence report prompts for the purposes of validation or custom interaction. The prompt API can query and set user selections, validate typed-in values using patterns, set default values using expressions or query data, and more. Sample reports exist to demonstrate various usage scenarios of the prompt API.

Related reference:

Appendix H, “Prompt API for IBM Cognos BI,” on page 975

The JavaScript Prompt API provides report authors with a method of customizing prompt interaction in the reports they author.

Excel 2007 Data report output format

A new Excel output format, Excel 2007 Data, is available in IBM Cognos Report Studio. The Excel 2007 Data report output format generates native Microsoft Excel 2007 spreadsheets containing list report data for further manipulation.

This format is similar to a comma-separated values file (.csv). It has no formatting such as headers, footers, styling, or data formatting.

Related concepts:

“Producing a Report in Microsoft Excel Format” on page 49

You can export your report output to several different Microsoft Excel spreadsheet software formats.

Global classes for accessible reports

New global classes that you can apply to text objects were added to IBM Cognos Report Studio. The new classes make text easier to read for visually impaired users.

The new global classes are as follows:

- Heading 1 to heading 6
- Emphasize text
- Strong text

Related concepts:

“Headings and emphasis” on page 471

You can apply certain global classes to text objects to make the text easier to read for visually impaired users.

Changed features in version 10.2.0

This section describes changed features since the last release.

Support for inline prompts in reports viewed on mobile devices

IBM Cognos Mobile now supports several inline prompt types. Previously, all inline prompts in reports viewed on a mobile device appeared in a prompt page.

The prompt types that Cognos Mobile supports as inline prompts are as follows:

- Text Box
- Value
- Date
- Time
- Date & Time
- Interval

Cognos Business Insight and Cognos Business Insight Advanced are renamed

Two product components are renamed in this release to avoid confusion with the names of other components. IBM Cognos Business Insight is now IBM Cognos Workspace. IBM Cognos Business Insight Advanced is now IBM Cognos Workspace Advanced.

Removed Features in Version 10.2.0

This section describes features that were removed since the last release.

Saving and opening reports on your computer

The ability to save and open reports locally on your computer by enabling the **Allow local file access** option was removed in this release.

To save and open reports on your computer, use the **Copy Report to Clipboard** and **Open Report from Clipboard** commands in the **Tools** menu instead.

Related concepts:

“Copy a Report to the Clipboard” on page 453

You can copy a report specification to the clipboard so you can open it from the clipboard later.

Related tasks:

“Open a Report from the Clipboard” on page 453

You can open a report specification that was previously copied to the clipboard.

New features in version 10.1.1

Listed below are new features since the last release.

New active report controls

IBM Cognos Active Report offers new controls, including iterators, sliders, and row numbers.

Related concepts:

“Adding Controls to a Report” on page 185

IBM Cognos Active Report offers several active report controls. For many controls, two different versions are available, a static version and a data-driven version.

Conversion of controls to other types of controls

You can now convert a control in an active report to another type of control that is compatible to the original control. For example, you can convert a radio button group control to a check box group control.

Related concepts:

“Adding Controls to a Report” on page 185

IBM Cognos Active Report offers several active report controls. For many controls, two different versions are available, a static version and a data-driven version.

Improved user experience when authoring active reports

Improvements were made to the IBM Cognos Report Studio user interface for authoring active reports. For example, there are two new tabs that respectively show the controls and variables defined in a report.

Controls are shown in a hierarchical structure, allowing you to see their relationships to one another as well as the variables that drive them. For each variable in a report, you can see the default values defined for each one, as well as the controls to which they are linked.

Related tasks:

“Create and Manage Active Report Variables” on page 184

Create active report variables to allow controls in a report to interact with each other. Active report variables pass information from one control to another control.

“Define a Connection Between Controls” on page 192

Define a connection between controls to link them together. When you link controls, an action performed on one control affects the behavior of the other control.

Active report access code

You can now specify an access code that users will have to enter before they can view an active report.

Related tasks:

“Specify Active Report Properties” on page 173

You can specify properties for active reports, such as the text that appears in the browser window title bar, the maximum number of rows that a report can contain, and an access code that users must enter to view a report.

New startup options

A new **Start page view** option allows you to specify whether IBM Cognos Report Studio opens in **Page Design** or **Page Structure** view (**Tools > Options > View**). By default, Report Studio opens in **Page Design** view.

Related concepts:

“Options” on page 32

You can set various options that control the appearance and behavior of IBM Cognos Report Studio (**Tools, Options**).

Keyboard shortcuts for accessibility

To make the report authoring experience more accessible to people who have a physical disability, such as restricted mobility or limited vision, IBM Cognos Report Studio now includes new keyboard shortcuts to allow navigating the user interface with a keyboard.

Related concepts:

“Keyboard Shortcuts” on page 467

This product uses some standard Microsoft Windows and accessibility shortcut keys.

Updated maps

Some maps included with IBM Cognos Report Studio version 10.1.1 were updated.

- The World and Europe maps were updated to include the countries and regions of Montenegro and Kosovo.
- The India map was updated to include the northern region of Kashmir.

Related concepts:

Chapter 7, “Maps,” on page 161

IBM Cognos Report Studio provides a set of maps that you can use to represent tabular data in a spatial context. For example, on a map of the world, countries and regions can be colored to represent the level of revenue.

Use maps from previous versions

The old versions of the World, Europe, Africa, and India maps that were included with IBM Cognos Business Intelligence prior to version 10.1.1 are still available. To continue using the previous maps, your IBM Cognos BI administrator must enable them.

Procedure

1. Go to the *c10_location*/maps directory.
2. Rename the files **world.cmf**, **europa.cmf**, **africa.cmf**, and **india.cmf** to remove the .cmf extension, as follows: **world_default_cmf**, **europa_default_cmf**, **africa_default_cmf**, and **india_default_cmf**.
3. Rename the files **world8_4.cmf**, **europa8_4.cmf**, **africa8_4.cmf**, and **indiaUN.cmf** to remove 8_4 and add the .cmf extension, as follows: **world.cmf**, **europa.cmf**, **africa.cmf**, and **india.cmf**.

Custom groups

You can create custom groups of existing data items based on elements that you define and that are meaningful to you.

For example, you can create custom groups for product names based on their alphabetical order. You might create groups for products that start with the letters A to C, D to F, G to H, and so on.

Related tasks:

“Creating relational custom groups” on page 215

Create custom groups to classify existing data items into groups that are meaningful to you.

“Creating dimensional custom groups” on page 265

Create custom groups to classify existing data items into groups that are meaningful to you.

Larger worksheet sizes for Microsoft Excel 2007 report outputs

IBM Cognos Business Intelligence now supports a larger worksheet size for report outputs exported in Microsoft Excel 2007 format.

In previous versions of IBM Cognos Business Intelligence, report output in Microsoft Excel format was limited to a maximum of 256 columns by 65,000 rows. Although this remains as the default worksheet size, administrators can now enable larger worksheets and change the maximum number of rows in a worksheet - up to a maximum of 16,384 columns by 1,048,576 rows - by using advanced server properties. This number matches the Microsoft Excel 2007 worksheet size limitations.

For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

For an up-to-date list of environments supported by IBM Cognos products, such as operating systems, patches, browsers, Web servers, directory servers, database servers, and application servers, visit <http://www.ibm.com/>.

Related concepts:

“Producing a Report in Microsoft Excel Format” on page 49

You can export your report output to several different Microsoft Excel spreadsheet software formats.

Microsoft Excel 2007 supported as an external data source

IBM Cognos Business Intelligence now supports external data sources from Microsoft Excel up to version Microsoft Excel 2007.

For an up-to-date list of environments supported by IBM Cognos products, such as operating systems, patches, browsers, Web servers, directory servers, database servers, and application servers, visit <http://www.ibm.com/>.

Related concepts:

“Use Your Own External Data” on page 11

You can now supplement your enterprise data with your own external data file.

Changed features in version 10.1.1

Listed below are changed features since the last release.

Specify how to show no data contents

The user interface for specifying what appears for data containers that contain no data was modified.

You can now select between showing an empty data container, alternate content that you specify, or text that you specify.

The new default for data containers that have no data available is to show the text **No Data Available** instead of showing an empty data container.

Related tasks:

“Specify what appears for data containers that contain no data” on page 392
You can specify what appears in a data container when no data is available from the database.

What's new in version 10.1.0

This section contains a list of new, changed, and removed features for past releases.

Knowing this information will help you plan your upgrade and application deployment strategies and the training requirements for your users.

To review an up-to-date list of environments supported by IBM Cognos products, such as operating systems, patches, browsers, Web servers, directory servers, database servers, and application servers, visit www.ibm.com.

For information about upgrading, see the IBM Cognos Business Intelligence *Installation and Configuration Guide* for your product.

For an overview of new features for this release, see the IBM Cognos Business Intelligence *New Features Guide*.

New Features in Version 10.1.0

Listed below are new features since the last release.

Use Your Own External Data

You can now supplement your enterprise data with your own external data file.

You can import an .xls, .txt, .csv, or .xml file into IBM Cognos and create reports that contain your own data. This allows you to leverage the IBM Cognos platform, including the security, data integrity, and full range of reporting functionality.

You can perform self-service reporting without the need to ask your IT department or administrator to set up a data source connection to your file. You import your own data file and start reporting on it right away.

After importing, your external data file is protected by the same IBM Cognos security as your enterprise data, thus allowing you to report on your data in a secure environment.

Active Reports

You can now use IBM Cognos Report Studio to create active reports.

IBM Cognos Active Report is a report output type that provides a highly interactive and easy-to-use managed report. Active reports are built for business users, allowing them to explore their data and derive additional insight.

Active reports make business intelligence easier for the casual user. Report authors build reports targeted at their users' needs, keeping the user experience simple and engaging. Active reports can be consumed by users who are offline, making them an ideal solution for remote users such as the sales force.

Related concepts:

Chapter 8, “Active Reports,” on page 171

You can use IBM Cognos Report Studio to create active reports. IBM Cognos Active Report is a report output type that provides a highly interactive and easy-to-use managed report. Active reports are built for business users, allowing them to explore their data and derive additional insight.

Statistical Analysis

IBM Cognos Report Studio now offers statistical functionality in an add-on package called IBM Cognos Statistics.

Report Studio integrates statistical analysis and reporting, providing you with the capability to distribute reports that now can include statistical information. Unlike specialized statistical tools, this functionality is easy to use within the IBM Cognos Business Intelligence authoring environment.

This functionality covers three main areas in statistical analysis:

- the distribution of data
- data analysis and testing
- statistical process control

Mozilla Firefox Support

Versions 3.5 and 3.6 of the Mozilla Firefox Web browser are now supported for IBM Cognos Report Studio.

For a full list of supported software environments, see <http://www.ibm.com/>.

Enhanced charts

Chart enhancements concentrate on improved effectiveness of communication. The new bullet chart and extensions to pie and gauge charts are especially beneficial in dashboard reports. Additional enhancements provide superior presentation through conditional notes and markers and improved legends.

Current Default Charts and Legacy Charts:

IBM Cognos Report Studio has a new default chart technology. Any new charts added to a report use the current default charts.

The current default charts use more properties that allow you to customize more aspects of the chart. In addition, the current default charts offer you a preview of the style changes that you make to your chart.

If you prefer to continue working with the legacy charts, you can select the **Use legacy chart authoring** option.

You can also convert legacy charts to the current default charts. When you convert a chart to a different chart type, Report Studio maps the chart properties that exist in the new chart type. For more information, see “Upgrading Legacy Charts” on page 462 and “Convert Charts From One Type to Another” on page 102.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Bullet Charts:

You can now create bullet charts to complement your dashboard reports and as an alternative to gauge charts.

A bullet chart features a single primary measure, such as current revenue, compares that measure to one or more other measures to enrich its meaning, such as the target or planned revenue, and displays it in the context of a qualitative range of performance, such as poor, satisfactory, or good.

Related concepts:

“Bullet Charts” on page 93
Bullet charts are a variation of bar charts. They compare a featured measure (the bullet) to a targeted measure (the target). They also relate the compared measures against colored regions in the background that provide additional qualitative measurements, such as good, satisfactory, and poor.

Chart Matrix:

You can now convert a complex nested chart into a matrix configuration that shows multiple small charts arranged in rows and columns.

The numeric scale of all the charts is the same so that you can easily compare and analyze values from each chart.

Related tasks:

“Create a Matrix of Current Default Charts” on page 142
You can view a complex chart that includes nested series or categories into a matrix, or crosstab, that shows multiple small charts arranged in rows and columns.

Customize the Legend:

You can hide or show the legend and change its position relative to the chart object, chart area, or using a specific report expression.

For more information, see “Customize the Legend in a Current Default Chart” on page 124.

If your legend includes items that are too long, you can truncate long legend items at a specific number of characters. You can also show the values of the data items in your legend. For more information, see “Customize the Items in the Legend of a Current Default Chart” on page 125.

Legends can display trend lines and conditional item entries.

Colored Regions:

You can now define colored regions in the body of a chart to make your chart more informative.

For example, you can divide the background of a scatter chart into quadrants and color each quadrant. For more information, see “Add Colored Regions in a Current Default Chart” on page 117.

Enhanced Pie Charts:

You can customize how data labels appear in a pie chart, including their format and placement.

For more information, see “Showing data values in current default pie and donut charts” on page 137.

To make your pie charts easier to read and analyze, you can now:

- pull out pie slices from the rest of the pie to highlight them. For more information, see “Pull Out Pie Slices in a Current Default Pie Chart” on page 149.
- set the position at which the first slice in a pie chart appears. For more information, see “Set the Position of the First Slice in a Current Default Pie Chart” on page 148.
- summarize the smaller slices in a pie chart to avoid having many tiny slices in your pie. For more information, see “Summarize Small Slices, Bars, or Columns in Current Default Charts” on page 139.

Enhanced Chart Styles:

You can customize the palette, drop shadows, gridlines, backgrounds, and bar shapes in charts.

You can create a new chart palette or edit an existing chart palette, including specifying colors, fill types, and patterns. For more information, see “Customizing the Color Palette of a Chart” on page 108.

You can add drop shadows to chart elements, such as lines in line charts. For more information, please see “Add Background Effects to a Chart Object in a Legacy Chart” on page 116.

You can customize the color, style, and weight of chart gridlines or set the background of your chart to display bands of color. For more information, see “Show Gridlines in a Current Default Chart” on page 123.

You can change the bar shape in a bar or column chart to one of the following two dimensional and three dimensional shapes: box, cylinder, cone, pyramid, rectangle, and triangle. You can also change the width of the bars or columns in a bar or column chart to a percentage of the chart body, such as 80% or 25%.

Chart Axes:

To make your charts easier to read, you can now customize the color, style, weight, and transparency of chart axis lines and specify where to display major and minor gridlines on the chart.

For more information, see “Customize the Axes of a Current Default Chart” on page 120.

Color by Value in Scatter and Bubble Charts:

In scatter and bubble charts, you can now specify data to appear in different colors based on the data values.

The color of the points or bubbles adds an additional aspect to the chart to assist you in finding relationships in large amounts of data. An entry appears in the legend to identify the color and its value. For more information, see “Define Color by Value in Current Default Scatter and Bubble Charts” on page 146.

Bubble Size:

In a bubble chart, you can now set the maximum and minimum bubble size and specify the smallest bubble to show in the chart.

For more information, see “Specify the Bubble Size in a Current Default Bubble Chart” on page 148.


Positioning and Formatting Notes:

When you add a note to a chart, you can now set the note's position relative to the sides of the chart area or chart body. You can also use a report expression to position the note next to a data item within the chart.

For example, in a bar chart showing revenue for each product line by country or region, you could type [Country or Region]='Canada' to position the note relative to the Canada bar. You can also customize the background of the note with color and background images. For more information, see “Add a Note to a Current Default Chart” on page 127.

Insert Charts With the Toolbar Button:




You can now insert a specific chart type from any report with the insert chart



button  on the toolbar. When you insert a chart into a report that already contains a list, the list data is added to the chart automatically.

Enhancements to the User Interface


IBM Cognos Report Studio includes enhancements to the user interface layout, buttons, tooltips, and visual aids.

These enhancements include the following:

- You can now position the content and **Properties** panes to the right of the work area, to match the user interface of IBM Cognos Business Insight and IBM Cognos Business Insight Advanced. For more information, see “Options” on page 32.
- When working with dimensional data sources, the insert individual members button  and the insert member with children button  have moved to the **Source** tab . These buttons have the same function as they did in the previous release. For more information, see “Insert a Member” on page 255.
- When working with dimensional and mixed model data sources, you can now switch between viewing the full data tree and the dimensional-only data tree by

clicking the view package tree button  and the view members tree button . For more information, see “Add Dimensional Data to a Report” on page 253.

These same buttons are available in the expression editor.

- You can now remove all of the filters at once from your report with new options in the filters button . For more information, see “Focusing Dimensional Data” on page 278 and “Focusing Relational Data” on page 228.
- Expanded tooltips for toolbar buttons now include a description of what the button does. To see a tooltip, pause the pointer over a button in the toolbar. You can turn off the expanded tooltips (**Tools, Options**).
- A new **Show Container Selectors** visual aid allows you to select list, crosstab, repeater table, table of contents, active report application objects, and table container objects with one click. When enabled, a small clickable region (three orange dots) appears in the top left corner of these report objects. This selector provides easier access to the container objects' properties and allows you to easily move containers with one mouse gesture. For more information, see “Visual Aids Button” on page 27.

Improved Set Operations

You can now perform more operations on a set of members when working with dimensional data sources.

You can do the following by right-clicking a set, and clicking **Edit Set**:

- Exclude members from the initial set or from the set as it is currently shown.
For more information, see “Exclude Members from a Set” on page 261.
- Move members to the top or bottom of the set.
For more information, see “Move Members Within a Set” on page 261.
- Show only the members with the top or bottom values.
For more information, see “Limit Data to Top or Bottom Values” on page 262.
- Filter the members in a set.
For more information, see “Filter the Members Within a Set” on page 262.
- Expand and collapse members to add its child members below it as new rows.
For more information, see “Expand and Collapse a Member Within a Set” on page 263.

Preview Reports when Opening and Saving

You can now see a preview of the report when you open or save it (**Tools, Options, Display report preview**).

For more information, see “Options” on page 32.

Report Name Used for the Exported Output File Name

When you run a report in an export format such as PDF, delimited text (CSV), Microsoft Excel (XLS), the IBM Cognos report name is now used as the exported file name.

This allows you to save the report output using the same name as the original report. For more information, see “Run a Report” on page 45.

Enhancements for SAP BW Data Sources

IBM Cognos Business Intelligence includes prompting for SAP BW variables and time-dependent hierarchies when creating reports with SAP BW data sources.

Prompting for SAP BW Variables

SAP BW variables are parameters in a SAP BW query that your business warehouse administrator sets up. When the queries run, the SAP BW variables are filled with values. SAP BW variables are automatically exposed as prompts when you run a report or when you add data to a report.

Prompting for SAP BW variables in IBM Cognos BI has improved. You are prompted for optional variables when you initially drag and drop data items.

Time-dependent Hierarchies

Time-dependant hierarchies now automatically reflect hierarchy or structure changes. When a structure is imported into IBM Cognos Framework Manager, each SAP BW time hierarchy is depicted as an individual level. IBM Cognos Report Studio users can use these structures to report on and compare levels that are valid for a specific time period.

Column Titles When Drilling up or Down

When you drill down or up, you can now specify whether the column title shows the member caption value or the level label value.

For more information, see “Create a Drill-up and Drill-down Report” on page 308.

Custom Properties for Prompts

You can now customize the text that instructs your report users how to use report prompts.

For example, you can now change the default text that appears above a search text box from **Keywords** to the text of your choice. For more information, see “Customize Prompt Text” on page 323.

Simplified Calculations

To add a calculation, you now choose to add either a **Query Calculation** or **Layout Calculation** object from the toolbox tab.

For more information, see “Using Relational Calculations” on page 248 and “Using Dimensional Calculations” on page 302.

Function Description Improvements:

The functions that you can use to create calculations now include improved descriptions and more examples.

The descriptions and examples appear in the Report Studio user interface and in this user guide. For more information about functions, see Appendix F, “Using the expression editor,” on page 555.

New Vendor-specific Functions:

Functions that are specific to Postgres, Vertica, Netezza, Paracel, MySQL, and Greenplum now appear in the expression editor in the **Vendor Specific Functions** folder.

For more information, see Appendix F, “Using the expression editor,” on page 555.

New Report Style

IBM Cognos Business Intelligence includes a new default report style with updated colors and gradients.

If your report uses a custom report template, your report will appear the same in this version of IBM Cognos Report Studio as it did in previous versions. By default, new reports appear in the new report style. For more information, see “Create and Modify Report and Object Styles” on page 350.

If you want to create new reports with the custom template style, you can edit the default template for new reports to match your custom template. For more information about custom templates, see Chapter 20, “Creating Report Templates,” on page 451.

List Enhancements

Report Studio includes enhancements to aggregate summaries, grouping, and hiding columns in lists.

You can now specify whether to automatically include an overall aggregate summary in the list footer. For more information, see Chapter 4, “Lists,” on page 63.

You can also specify whether grouping a column automatically makes it the first column in the list. For more information, see “Group Relational Data” on page 213.

You enable these behaviors in the IBM Cognos Report Studio options, by selecting the **Group and automatic summary behavior for lists** check box.

A new **Render** property allows you to hide columns from the output of list reports. For more information, see “Hide Columns in List Reports” on page 64.

Accessible Report Output

IBM Cognos Report Studio now includes features that allow you to create reports that are more accessible to people who have a physical disability, such as restricted mobility or limited vision.

Accessible reports contain features that allow users with disabilities to access report content using assistive technologies, such as screen readers. You can

- add alternative text for non-text objects, such as images, charts, and maps.
- add summary text for crosstabs, lists, repeater tables, and tables.
- specify whether table cells are table headers.
- use command keys, or shortcut keys, to navigate through IBM Cognos Business Insight Advanced.
- use a screen-reader software with a digital speech synthesizer to listen to what is displayed on the screen.
- set your system's display settings for high-contrast displays.

In addition, the documentation now includes alternate text for all graphics so that screen readers can interpret graphics.

Braces and Parentheses are Breakable

When you run a report in PDF format, braces {} and parentheses () no longer stay on the same line as the text before them.

For example, **Products(2012)** may now break to a new line between **Products** and **(2012)**.

Changed Features in Version 10.1.0

Listed below are changes to features since the last release.

Report Studio Express Authoring Mode Replaced by Business Insight Advanced

The two authoring modes in IBM Cognos Report Studio, Professional and Express, no longer exist.

Report Studio is still the tool that professional report authors use to create advanced and managed reports. The Express authoring mode is now replaced by IBM Cognos Business Insight Advanced. Business Insight Advanced is part of a new report consumption experience that provides an integrated business intelligence experience for business users. It offers much greater capability, such as full support for list reports, charts, and relational data sources. It offers an entirely different user experience that is designed for data exploration.

For more information, see the Business Insight Advanced *User Guide*.

Order of Drawing Bars in Bar Charts

In a horizontal bar chart, the new default chart type draws bars from bottom to top. Legacy charts draw the bars or columns in the reverse order.

To control the order of the bars, use the property for the category axis.

Line break rules in PDFs have changed

Line break rules for word wrapping in PDFs have changed slightly from the last release. Brackets and parenthesis such as {} and () are now treated as breakable. For example, in past releases, the following string would be treated as a single non-breaking string.

Boilers(Steam)

In this release, "Boilers" and "(Steam)" are treated as separate strings which might result in the following when the string occurs at the end of a line.

Boilers

(Steam)

Removed Features in Version 10.1.0

Listed below are features that are removed since the last release.

Analyze with Analysis Studio

The ability to open a report with IBM Cognos Analysis Studio from within IBM Cognos Report Studio (**Tools** or right-click, **Analyze**) was removed in this release.

Conformed Dimensions on SAP BW Data Sources

Support for conformed dimensions generated by IBM Cognos Framework Manager for SAP BW data sources was removed in this release.

Excel 2000 and Excel 2000 Single Sheet Report Outputs

The Microsoft Excel 2000 spreadsheet software and Excel 2000 Single Sheet spreadsheet software report outputs are no longer supported in this release.

Chapter 2. Getting started with Report Studio

IBM Cognos Report Studio is a Web-based report authoring tool that professional report authors and developers use to build sophisticated, multiple-page, multiple-query reports against multiple databases. With Report Studio, you can create any reports that your organization requires, such as invoices, statements, and weekly sales and inventory reports.

Use Report Studio for reports that

- are intended for a wide audience
- exist long enough to require maintenance for changing requirements and data
- require detailed control over the appearance

Your reports can contain any number of report objects, such as charts, crosstabs, and lists, as well as non-BI components such as images, logos, and live embedded applications that you can link to other information.


Building IBM Cognos Business Intelligence Applications

You use the IBM Cognos Business Intelligence components to build reporting and analysis applications.

The lifetime of an IBM Cognos Business Intelligence application can be months, or even years. During that time, data may change and new requirements appear. As the underlying data changes, authors must modify existing content and develop new content. Administrators must also update models and data sources over time. For more information about using data sources, see the *IBM Cognos Business Intelligence Administration and Security Guide* and the *IBM Cognos Framework Manager User Guide*.

In a working application, the technical and security infrastructure and the portal are in place, as well as processes for change management, data control, and so on. For information about the workflow associated with creating IBM Cognos BI content, see the *IBM Cognos Architecture and Deployment Guide*. For additional information, see the IBM Cognos Solutions Implementation Methodology toolkit, which includes implementation roadmaps and supporting documents. Information about the toolkit is available on the IBM Cognos Customer Center (<http://www.ibm.com/software/data/cognos/customercenter/>).

The following graphic provides an overview for how to use IBM Cognos BI to build applications across all of your IBM Cognos BI components.

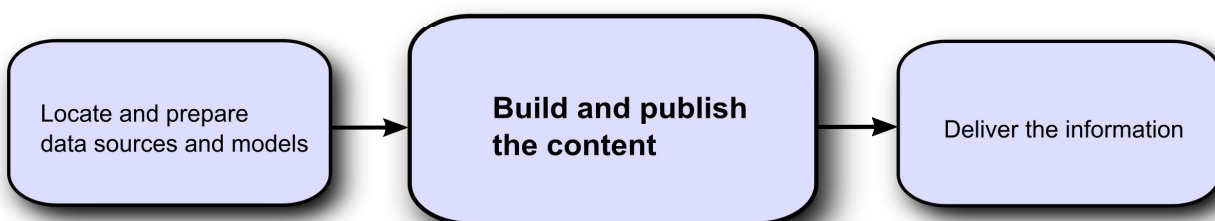

1. Locate and prepare data sources and models
IBM Cognos BI can report from a wide variety of data sources, both relational and dimensional. Database connections are created in the Web administration interface, and are used for modeling, for authoring, and for running the application.
To use data for authoring and viewing, the business intelligence studios need a subset of a model of the metadata (called a package). The metadata may need extensive modeling in Framework Manager.
2. Build and publish the content
Reports, scorecards, analyses, workspaces, and more are created in the business intelligence studios of IBM Cognos BI. Which studio you use depends on the content, lifespan, and audience of the report, and whether the data is modeled dimensionally or relationally. For example, self-service reporting and analysis are done through IBM Cognos Workspace Advanced, IBM Cognos Query Studio, and IBM Cognos Analysis Studio, and scheduled reports are created in IBM Cognos Report Studio. Report Studio reports and scorecards are usually prepared for a wider audience, published to IBM Cognos Connection or another portal, and scheduled there for bursting, distribution, and so on. You can also use Report Studio to prepare templates for self-service reporting.
3. Deliver and view the information
You deliver content from the IBM Cognos portal or other supported portals, and view information that has been saved to portals, or delivered by other mechanisms. You can also run reports, analyses, scorecards, and more from within the business intelligence studio in which they were created.
For information about tuning and performance, see the *IBM Cognos Business Intelligence Administration and Security Guide* and <http://www.ibm.com>.

Relational and dimensional reporting styles

You can create reports in IBM Cognos Report Studio using either a relational reporting style or a dimensional reporting style.

The Report Studio tools and query language are the same for both styles. However, it is important to choose a reporting style to ensure that you are making the most of your data and to avoid mixing dimensional and relational concepts.


How to choose a reporting style


When authoring a report, first choose your preferred reporting style for working with data: relational or dimensional. You can choose a reporting style from your viewpoint:

- If you think about your data as tables and columns, you have a relational viewpoint and should use a relational reporting style.
- If you think about your data as a number of dimensions intersecting at cells, you have a dimensional viewpoint and should use a dimensional reporting style.

Relational reporting style

The relational reporting style consists of lists. You focus the data with filters and summarize with header and footer summaries.

- If your data is purely relational, then only query subjects and query items appear in the **Source** tab , and you must use the relational reporting style.

- If your data is dimensional, then dimensions appear in the **Source** tab , and you can still use a relational reporting style, but instead of query items (columns) and query subjects (tables), you use measures, levels, and level properties.

To see an example of relational style reporting with dimensional data, see the Manager Profile sample report in the GO Data Warehouse (analysis) package.

The relational reporting style is similar to report authoring in IBM Cognos Query Studio.

Dimensional reporting style

The dimensional reporting style consists of measures and members from different hierarchies arranged in a crosstab with cell values at the intersections. You focus the data with set expressions that navigate from specific members in the hierarchy and summarize with set summaries.



To see an example of dimensional style reporting with dimensional data, see the GO Balance Sheet as at Dec 31, 2012 sample report in the GO Data Warehouse (analysis) package.

The dimensional reporting style is similar to report authoring in IBM Cognos Analysis Studio.

Guidelines for each reporting style

This user guide is divided into relational and dimensional reporting sections so that you can follow the best practices for using this product with the reporting style that you have chosen. The following table outlines the best practices for both reporting styles.


Item	Relational reporting	Dimensional reporting
Report type	<ul style="list-style-type: none"> Lists Crosstabs pivoted from lists Charts created from lists Maps created from scratch or from lists 	<ul style="list-style-type: none"> Crosstabs Charts created from scratch or from crosstabs Maps created from scratch or from crosstabs

Item	Relational reporting	Dimensional reporting
Package tree	<p>In the Source tab , click the view members tree button.</p> <p>If you are using dimensional data, hide members in the source tree by right-clicking the tree, clicking Package Tree Settings, and clearing the check boxes for Members and Members for each level.</p> <p>The view will include the following:</p> <ul style="list-style-type: none"> package folder namespace query subject query item measure level 	<p>In the Source tab , click the view members tree button.</p> <p>Ensure that the source tree tool bar is set to Create sets for members:</p> <p>The view will include the following:</p> <ul style="list-style-type: none"> package folder measure member named set
Inserting data	<p>From the package tree, add query items or levels to the report.</p> <p>Avoid using hierarchies directly in the report.</p> <p>Avoid using named sets.</p>	<p>From the package tree, add sets of members to the report.</p> <p>You can also choose to insert just the member, just the children of the member, or the member and its children.</p>
Calculating data	<p>Add query calculations using only relational and common constructs.</p> <p>Choose only Other expression.</p>	<p>Add query calculations using only dimensional and common constructs.</p> <p>Use Other expression only for value calculations.</p> <p>Avoid Common functions that are marked with an exclamation mark (!) because they have limited support.</p>
Summarizing data	<p>Headers and footers in lists</p> <p>Crosstab member summaries; for example, aggregate within detail</p>	<p>Member set summaries; for example, aggregate within set</p>
Focusing data	<p>Add detail or summary filters to view only the data you want to see. For example, add the Quarter query item to a list and filter by Q3.</p>	<p>Add only the relevant members to an edge of the crosstab or to the context filter. For example, only add the Q3 member to your report.</p> <p>Use a set expression such as Topcount or Filter.</p>

Item	Relational reporting	Dimensional reporting
Drilling	Drilling through by value	Drilling through by member Drilling up and down
Page and section breaks	Simple page breaks Page sets Sections Master detail relationships using parameterized filters	Simple page breaks Page sets Page layers Master detail relationships using parameterized edge or slicer expressions

The User Interface



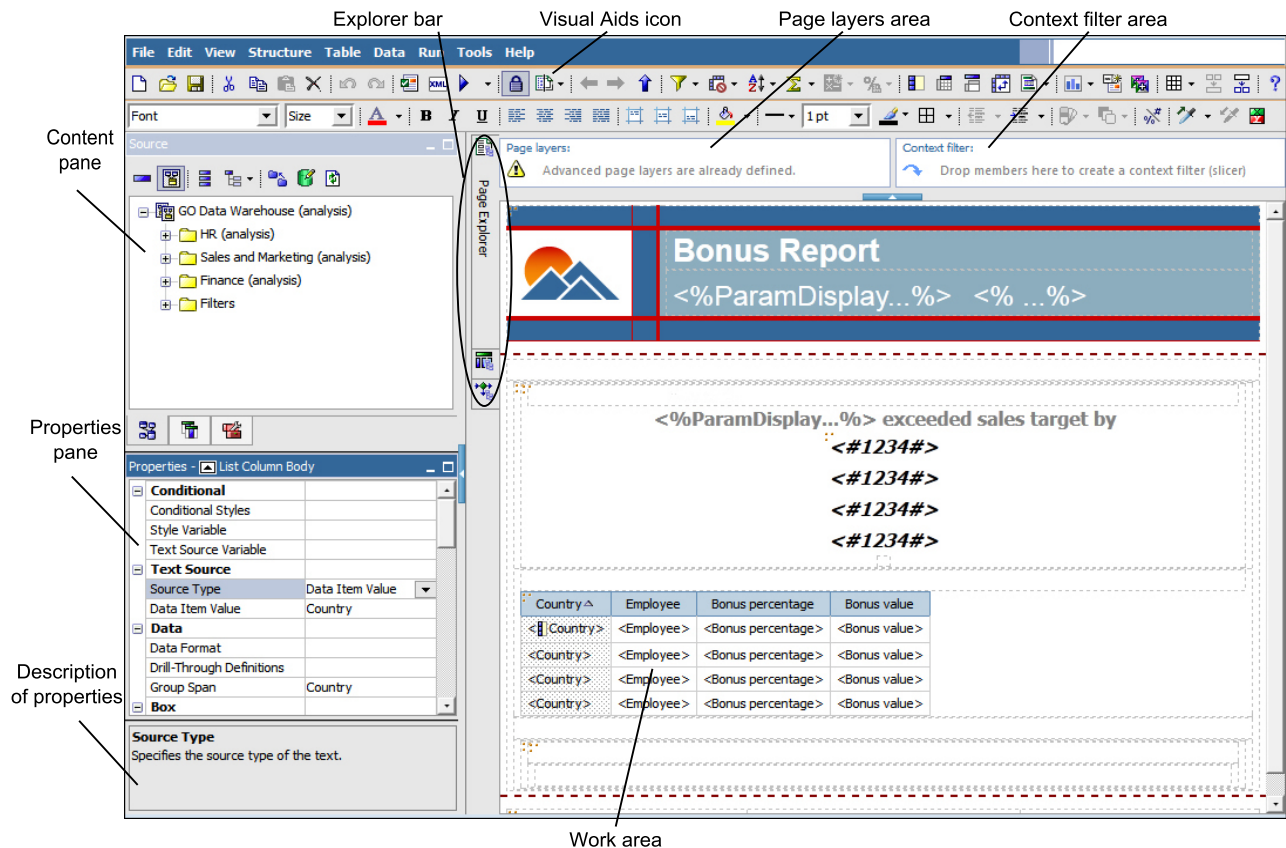



The IBM Cognos Report Studio user interface has two panes, an explorer bar, and a work area to help you create reports.



We recommend that you use a screen resolution of at least 1024 by 768 pixels.

Content Pane

The content pane contains objects that you can add to a report. You add objects to a report by dragging them to the work area. The content pane contains these tabs:

- The **Source** tab  contains items from the package selected for the report, such as data items and calculations.
- The **Data Items** tab  describes the queries created in the report.
- The **Toolbox** tab  contains a variety of objects that you can add to the report, such as text and graphics.
- The **Search** tab  contains the results when you perform a search for members. You can insert the members found in a search directly into a report.
- If you are authoring an active report, the **Active Report Controls** tab  shows the controls and active report variables inserted in a report and their relationships to one another. You can click a control in this tab to quickly locate the control in the report as well as set default values for variables.
- If you are authoring an active report, the **Active Report Variables** tab  shows the active report variables defined in a report. Use this tab to create new variables and set default values.

Properties Pane

The **Properties** pane lists the properties that you can set for an object in a report.


You can obtain additional information about a property by selecting it and pressing F1. For example, you can view the list of objects that use each property.


When you specify a value for a property, press Enter, click another property, or save the report to ensure that the value is saved.


Tip: To view a description of the currently selected property at the bottom of the pane, from the **View** menu, click **Property Descriptions**.

Explorer Bar

Pause the pointer over the following buttons on the Explorer bar to work with different parts of a report:

- the page explorer button 


You use Page Explorer to view or create new report pages and prompt pages or to create and modify classes.
- the query explorer button 

You use Query Explorer to create or modify queries in relational reporting or dimensional reporting and to perform complex tasks, such as defining union joins and writing SQL statements.
- the condition explorer button 

You use Condition Explorer to work with variables to define conditions in a report.

Page Layers Area


Use the **Page layers** area to create sections, or page breaks, in a report to show values for each member on a separate page. For example, you can drag **Northern**

Europe sales territory from the **Source** tab  to the **Page layers** area. The report is broken into a separate page for each territory within northern Europe. Each page's context appears in the report header.

For more information, see “Create Page Layers” on page 449.

Context Filter Area

When working with dimensional data, use the **Context filter** area to filter your report to show values, or context, for only a specific data item. This technique is also known as a slicer filter. For example, you can drag **Sales Territory** from the

Source tab  to the **Context filter** area. When you click a specific territory from the list, the values in the crosstab change to represent data for that territory.

For more information, see “Create a Context Filter” on page 279.

Visual Aids Button

The visual aids button  provides the following options to help you when you are designing reports in the layout.

Option	Description
Show Boundary Lines	Shows all boundary lines around objects.
Show Repeating	Repeats objects when you insert them. For example, when you insert a data item in a crosstab, the data item appears in each row or in each column of the crosstab.
Show Page Header & Footer	Shows the page header and page footer.
Show Drag & Drop Padding	Shows drag-and-drop zone when the Padding property for an object is set to 0. If the Padding property is set to a value that is greater than the minimum padding that IBM Cognos Report Studio uses to show drag-and-drop zones, only the minimum padding is shown.
Show Hidden Objects	Shows objects for which the Box Type property was set to None or for which the Visible property was set to No .
Show Sorting	Shows the sorting icon for data items for which a sort order was specified. For more information about sorting data, see “Sorting Relational Data” on page 235 or “Sorting Dimensional Data” on page 281.
Show Grouping	Shows the grouping icon for grouped data items.
Show Source Type	Shows the icon for the source type of objects, such as layout calculation.

Option	Description
Show Data Item Type	Shows the icon for the type of data item, such as query item, member, or measure.
Show Drill-through Definitions	Shows data items for which the drill-through definition was defined as a hyperlink.
Show Table of Contents Entries	Shows table of contents entries inserted in the report.
Show Bookmarks	Shows bookmarks inserted in the report.
Show Master Detail Relationships	Shows master detail relationships defined in the report. Tip: Pausing the pointer over the master detail relationship icon shows the relationship.
Show No Data Contents Tab Control	Shows tabs if the data container's No Data Contents property is set to Yes .
Show Repeater and Singleton Containers	Shows repeater and singleton containers inserted in the report.
Show Interactive Object Controls	Shows controls in the top right corner of active report application objects. For more information about active reports, see Chapter 8, "Active Reports," on page 171.
Show Container Selectors	Shows a small selector (three orange dots) in the top left corner of the following container objects and allows you to select all the objects within them: list, crosstab, repeater table, table of contents, table, and active report application objects.
Show Empty Extra Item Drop Zones	When you are creating a visualization, this visual aid shows empty drop zones for extra items that you can insert. The extra drop zones are displayed only when data items are inserted in all required drop zones.

Work in design or structure view

IBM Cognos Report Studio has two views in which you can author reports: **Page Design** view and **Page Structure** view. You can choose a report authoring view on the **View** menu.

Different options are available in each view, so you often need to use both views. For example, you must use both views to remove sections in relational reporting.

Page design view

Page Design view is the default view in IBM Cognos Report Studio. In this view, you can see what your report will look like after you run it.

Page structure view

Page Structure view displays an overview of all of the report objects in your report in a tree structure, which is organized by page.

Related concepts:

“The Page Structure View” on page 329

When you add objects to a report, you usually work in the layout. An alternative view of the report is available.

Report Layout and Queries

All reports have two components: a layout component that defines the report appearance and a query component that defines report data. Understanding these components will help you design effective reports.

Layout

A layout is a set of pages that defines the appearance and formatting of a report.

When you design the layout of a report, you


- present the data in a meaningful way by using lists, crosstabs, charts, and maps
- add formatting, such as borders, color, images, and page numbers
- specify how the data flows from one page to the next

Pages

Pages are containers for the layout objects that you use to build a report. A page is made up of the following mandatory and optional components:

- page header (optional)
- page body (mandatory)
- page footer (optional)

When you run a report, the amount of data queried often exceeds one page. As a result, a page will repeat until all the data is shown. You have control over how data flows from one page to the next. For example, here are alternative representations of a report that contains a chart and a lengthy list.

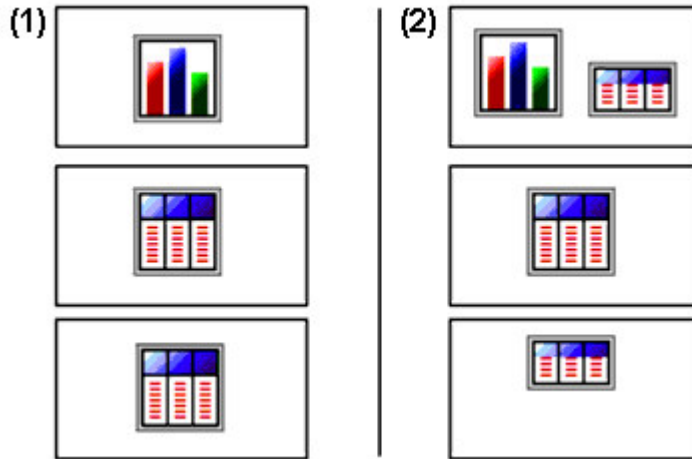

1 The chart appears on its own page. The list begins on the next page and fills subsequent pages until all rows appear.

2 The chart and the first few rows of the list appear on the first page. The rest of the data in the list appears on the subsequent pages.

Objects

You add layout objects to a page when you create a report. Below are objects that you will use often when building reports in IBM Cognos Report Studio:

- list
Add a list to show data in rows and columns.
- crosstab
Add a crosstab to show data in a grid with dimensions along the rows and columns and measures in the cells or intersection points.
- chart
- map
- repeater
Add a repeater to show each instance of a certain column or data item in a separate frame.
- text
- block
Add a block to hold text or other information. Blocks are often used to lay out horizontal bands of information.
- table

Related tasks:

“Insert a Formatting Object in a Report” on page 336

In addition to text and images, the **Toolbox** tab  contains other objects that you can add to the report layout.

Queries

Queries determine what data items appear in the report. Sometimes you want detailed rows of data, which you obtain by using a simple SELECT statement. Other times you must calculate totals or averages using summary functions and grouped columns or must apply filters to show only the data you want.

IBM Cognos Report Studio automatically creates the queries you need as you build reports. However, you can modify these queries or create your own custom queries to get the results you want.

Related concepts:

“Working with Relational Queries” on page 236

Queries specify what data appears in the report. In IBM Cognos Report Studio, you create and modify queries using **Query Explorer**.

“Working with Dimensional Queries” on page 283

Queries specify what data appears in the report. In IBM Cognos Report Studio, you create and modify queries using Query Explorer.

Report Objects

You build reports by adding objects and manipulating them to obtain the results you want. To understand how to work with objects in IBM Cognos Report Studio, you must be familiar with the following concepts:

- object types
- objects as containers
- locking and unlocking objects
- hierarchy of objects

Object Types

In IBM Cognos Report Studio, layout objects are either inline or block. You can insert other objects on the same line as an inline object, but not on the same line as a block object. When you insert an object to the left or to the right of a block object, the object appears on the line above or below the block object, respectively. Examples of inline objects include graphics and text items. Examples of block objects include any report type (list, crosstab, chart, map, or repeater) and tables.

You can also use an object's floating property to define how other objects flow around the object. For example, you can specify how text flows around an image.

Objects as Containers

Objects, such as tables, blocks, and any report frame, are containers in which you can insert other objects. For example, you can insert a list in one cell of a table and a chart in another.

You can also nest objects to create a sophisticated layout. For example, you can insert a table in a cell of another table.

Locking and Unlocking Objects

To manipulate the contents of some objects, you must first unlock the object. For example, you have a list that contains the column Product Name. You want to insert a graphic inside the Product Name column to show an image of each product. Unlocking the list allows you to insert the image object inside a list column.

Tip: From the **Structure** menu, click **Lock Page Objects**. Toggling this menu item locks and unlocks all layout objects in a report. However, this setting is not saved with the report.

Hierarchy of Objects

In IBM Cognos Report Studio, objects are organized hierarchically. For example, a list contains list columns, and each list column contains a text item, which is the name of the inserted data item.

The hierarchy of objects is useful to remember when you apply formatting because formatting is applied to the child objects of the object. For example, you can specify that all list column titles in a list have red as the background color. The formatting is automatically applied to any new columns you add to the list because the formatting is applied to the list and is therefore applied to the objects in the list. If you apply formatting to a specific object, it will override the same formatting specified for the parent object.

Related concepts:

Appendix G, “Report Studio Object and Property Reference,” on page 771
This appendix contains definitions of the objects and properties found in IBM Cognos Report Studio. They are available contextually, by pressing F1 when an object or property is active in the Report Studio authoring environment.

Find Objects in a Report

You can quickly locate specific objects in a report by using **Find**.

Procedure

1. From the **Edit** menu, click **Find**.
2. Click **Find what** and choose the type of object to find.
3. In the **Options** box, specify the search criteria.
For example, if you want to find the objects that reference a specific data item, you must specify the query that contains the data item and the data item name.
4. To search for objects that are hidden in the report, in the **View** box, select the **Show Hidden Objects** check box.
5. In the **View** box, under **Page view**, select whether you want to do the search in the Page Design or Page Structure view.
6. Click **Find Next**.

Results

The first object that meets the search criteria is selected in the report. Continue clicking **Find Next** to show all other objects that meet the search criteria.

Note: In some cases, such as searching for a data item that is used to define a conditional style, IBM Cognos Report Studio cannot directly select the object in the report. Instead, Report Studio selects the object that uses the object for which you are searching.

Related concepts:

“Work in design or structure view” on page 28

IBM Cognos Report Studio has two views in which you can author reports: **Page Design** view and **Page Structure** view. You can choose a report authoring view on the **View** menu.

Options

You can set various options that control the appearance and behavior of IBM Cognos Report Studio (**Tools, Options**).

View Options

Option	Description
Use Windows skin	Replaces the current appearance of the interface with the display scheme specified by the Windows settings.
Show startup dialog	Shows the Welcome dialog box at startup.
Reuse IBM Cognos Viewer window	Reuses the same IBM Cognos Viewer window when you rerun a report without first closing the window.
Resize IBM Cognos Viewer window	Maximizes the IBM Cognos Viewer window when you run a report.
Enable animation	Animates the appearance of dialog boxes, menus, and panes.
Show object and query name dialog on insert	<p>Specifies whether to show the Object and Query Name dialog box when you add a list, crosstab, repeater table, repeater, or singleton from the Toolbox tab.</p> <p>Use this dialog box to quickly specify a name for the data container and a name for the query that is associated with the data container. Or you can link an existing query to the data container.</p> <p>Tip: The Insert Chart and Choose Map dialog boxes also contain fields to specify a name and query when you add a chart or map to a report.</p>
Window startup size	Specifies the size of the Report Studio window at startup.
Position pane on the right (requires restart)	Moves the content and Properties panes to the right of the work area. This check box is cleared by default. For the change to take effect, you must close and then restart Report Studio.
Show rich tooltips (requires restart)	Specifies whether to show descriptive tooltips when you hover over a button in the toolbar. This check box is selected by default. For the change to take effect, you must close and then restart Report Studio.
Display report preview	Shows a preview of the report when you open or save a report, within the Open , Save , and Save As dialog boxes.
Start page view	Enables you to start Report Studio in Page Design or Page Structure view. For the change to take effect, you must close and then restart Report Studio.

Edit Options

Option	Description
Wrap text in editors	Automatically wraps text in all editors where you can define expressions.

Option	Description
Automatically populate values list	When building expressions in the expression editor, automatically shows values when you browse the data of a data item.
Automatically validate expressions	Automatically validates calculations, such as filters, created in the expression editor. For more information, see "Using Relational Calculations" on page 248 or "Using Dimensional Calculations" on page 302.
In-place edit	Enables the editing of text in place when double-clicking.
Use chart flyouts in Design View	When in Page Design view, shows the chart drop zones as flyouts that appear only when you hover your mouse over the chart. When cleared, the chart drop zones are always displayed. By default, this option is not enabled.
Drop replace on crosstab and chart nodes	Specifies what the existing members are replaced with when you drag a new member onto a report.
Double-click on member action	When working with dimensional data, specifies what happens when you double-click a member data item. By default, you drill down or up on the item that you double-click.
Layout dimensions	Specifies the width and height of the area where you will create reports.


Report Options

Option	Description
Alias member unique names	When working with a dimensional data source, creates an alias when you add a member to the report or to an expression.
Delete unreferenced query objects	Automatically deletes query objects linked to another object. For example, if you delete a list, the query linked to the list is deleted as well.
Delete unreferenced conditional styles and palettes	Automatically deletes conditional styles or palettes when the last data item that refers to the conditional style or palette is also deleted.

Option	Description
<p>Always create extended data items for new reports</p>	<p>When working with dimensional data sources, determines whether Report Studio creates extended data items or expression-based data items for new reports.</p> <p>Expression-based data items allow you to view or edit the expression by double-clicking the Expression property for the item.</p> <p>If you are working with a dimensional data source and this option is not selected, the appropriate dimensional data item is added when you insert items such as members, levels, or calculated members. For example, if you insert a level, a level set is created. This makes it easier to work with dimensional data items because Report Studio knows the data item type of the items that are in the report.</p>
<p>Table Style inheritance</p>	<p>When a table style is applied to a list or crosstab, specifies whether new objects inserted in the list or crosstab should inherit the style. For more information, see “Apply a Table Style” on page 340.</p>
<p>Automatic group and summary behavior for lists</p>	<p>When working with lists, automatically adds an overall aggregate summary in the list footer and a summary for any groups in the list. When grouping a column, automatically makes it the first column in the list.</p>
<p>Automatically create crosstab headers for sets</p>	<p>When adding sets in a crosstab that uses a dimensional data source, automatically adds header labels on new columns and rows. The headers help consumers of the report to understand where the data is in the hierarchy.</p>
<p>Limit on inserted individual members</p>	<p>When working with a dimensional data source, limits the number of child members that are inserted. For example, you specify 3 for this option and, in the toolbar, you specify the option to insert children when you drag a member to a data container. You then drag the Camping Equipment member to the rows of a crosstab. What you see as rows are the child members Cooking Gear, Tents, and Sleeping Bags and a row named Others (Camping Equipment) for the remaining child members of Camping Equipment.</p>

Advanced Options

Option	Description
<p>Use operating system clipboard</p>	<p>Uses the Microsoft Windows (or other operating system) clipboard instead of the internal Report Studio clipboard.</p>

Option	Description
Use legacy chart authoring	Enables you to create new reports using the legacy charts instead of the default charts and disables the automatic upgrade of charts in existing reports to the current default charts. Select this check box if you do not want to upgrade the charts in your existing reports.
Disable previews	When editing properties such as date and number formatting, does not display a sample of the formatting that is applied to data. When this option is not enabled, either sample data or data from your data source is displayed with formatting options applied. Additionally, when in Page Design view, displays a static image for a chart instead of updating the chart with a preview of your chart, using simulated data.
Override 10.x styles with 8.x styles on new reports	Specifies whether to use the Version 8.x report styles by default when creating new reports. For more information about report styles, see “Create and Modify Report and Object Styles” on page 350.
Active Report validation of visualizations	Specifies whether to validate visualizations in an active report when the report is run from Report Studio.
Map feature display limit	When working with maps, specifies the maximum number of features that can appear in a map.
Member display count limit (in source tree)	When working with dimensional data, specifies the maximum number of members that can appear in the Source tab  before you must perform a search.

Related concepts:

“Recommendation - Use Member Unique Name (MUN) Aliases” on page 547
If you are working with a dimensional data source, use MUN aliases to simplify building reports and expressions. In addition, you can tie the MUN back to the member in the package.

Web Browser Settings

IBM Cognos Report Studio can be used in the Microsoft Internet Explorer and Mozilla Firefox Web browsers.

To review an up-to-date list of the environments that are supported by IBM Cognos products, including information about operating systems, patches, browsers, web servers, directory servers, database servers, and application servers, visit the IBM Cognos Customer Center (<http://www.ibm.com/software/data/cognos/customercenter/>).

IBM Cognos Business Intelligence uses the default browser configurations provided by Internet Explorer and Firefox. Additional required settings are specific to the browser.

For Internet Explorer, the following settings are required:

- Allow Cookies
- Active Scripting
- Allow META REFRESH
- Run ActiveX controls and plug-ins
- Script ActiveX controls marked safe for scripting
- Binary and script behaviors
- Allow programmatic clipboard access
- Userdata persistence
- Enable pop-ups for the IBM Cognos BI server

For Firefox, the following settings are required:


- Allow Cookies
- Enable Java™
- Enable JavaScript
- Load Images
- Enable pop-ups for the IBM Cognos BI server

Report Studio uses the native Microsoft Internet Explorer XML support, which is a component of the browser. ActiveX support must be enabled because Microsoft implements XML using ActiveX. IBM Cognos BI does not provide or download ActiveX controls. Only the ActiveX controls that are installed as part of Internet Explorer are enabled through this configuration.

For more information about the Web browser configuration and cookies used by IBM Cognos BI, see the IBM Cognos Business Intelligence *Installation and Configuration Guide*.

The IBM Cognos Software Development Kit

When you create a report, you are creating a report specification.

A report specification is an XML file that you can view (**Tools, Show Specification** ). In addition, you can view the specification for a selected object with the **Show Specification (Selection)** menu option.

You can also programmatically create or modify reports by using an editing tool to work with report specifications. You then use the IBM Cognos Software Development Kit to implement the reports in your IBM Cognos Business Intelligence environment. This is useful if, for example, you must make the same modification in many reports. Rather than opening each report and making the change, you can automate the process using the Software Development Kit, thereby saving you time. For more information about the Software Development Kit, contact your local sales office.

Tips

- When you are viewing the report specification, you cannot modify or copy parts of it.
- You can also modify the XML code in a report specification by saving the report specification on your computer.

Chapter 3. Creating a report

When you create a report, you are actually creating a report specification. The report specification defines the queries and prompts that are used to retrieve data and the layouts and styles used to present the data. For simplicity, the report specification is named by the same name as the report.

Specify the Data Package

Specify the package that will provide items for the report.

The packages that you use to generate reports are based on models that are created in the modeling tool, IBM Cognos Framework Manager. A model is a set of related objects, such as query subjects, dimensions, filters, and calculations. When you open a package in IBM Cognos Business Intelligence, these model objects are visible in the left frame.

Before you begin

The package must be previously created and published to the IBM Cognos Connection portal. For more information, see the *IBM Cognos Framework Manager User Guide*.

Important: If the package version changed since you opened IBM Cognos Report Studio, close and restart Report Studio to ensure that you are working with the latest version of the package.

Procedure

1. Open IBM Cognos Report Studio with the package you want to use.
2. In the **Welcome** dialog box, choose whether to open a new or existing report or template:
 - To create a new report or template, click **Create a new report or template** and choose a basic report layout.

Tip: You can specify a language other than the default language for your package by clicking on the ellipsis (...) button to the right of the **Package** field, clicking the **Language** ellipsis button in the **Report Package** dialog box, highlighting the desired language, and then clicking OK. As stated on the language selection dialog box, items such as separators and decimals may need to be manually updated for language-specific syntax rules as a result of your selection.

- To open an existing report or template, click **Open an existing report or template** and select a report.

Results

Objects from the selected package, such as query items, appear on the **Source** tab



Tip: You can later change packages.

Refresh the package



If the package that a report is using changed, refresh it to ensure that you are working with the latest content.

About this task

The contents of a package can change without the package version changing. For example, your modeler makes changes to a model and republishes the package with model versioning disabled.

Procedure

Refresh the package.


- To get the latest contents of the current package version being used, in the **Source** tab , click the refresh icon .
- To get the latest package version, close and restart your component.

Choose a Basic Report Layout

IBM Cognos Report Studio includes several basic report layouts that include report objects, such as lists, crosstabs, maps, repeaters, and headers and footers. You can also choose to start with a blank report or open an existing report.

Tip: The Budget vs. Actual sample report in the GO Data Warehouse (analysis) package is based on a basic report layout. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. From the **File** menu, click **New** .
2. If you want to change the package, click the ellipsis (...) button and click a different package.
3. Choose a basic report layout:
 - To create a report from a blank layout, double-click **Blank**.
 - To create a report using one of Report Studio's predefined report layouts, double-click the layout.
 - To create a new report template that can be applied to reports created in IBM Cognos Query Studio or IBM Cognos Analysis Studio, double-click **Report Template**.
For more information about creating report templates, see Chapter 20, “Creating Report Templates,” on page 451.
 - To create a financial report using the basic financial report layout, double-click **Financial**.
 - To create a new report using another report, double-click **Existing**, locate the report, and click **Open**.

Results

The basic report layout appears in the report page.


Inserting a data container from the toolbox tab

In addition to choosing a basic report layout when you create a report, you can insert data containers from the toolbox tab into a report in IBM Cognos Report Studio.

About this task

When you insert a data container from the **Toolbox** tab, you can specify a name for the data container and the query that you want to link to the container instead of accepting the default names that are generated by Report Studio.

Procedure

1. From the **Toolbox** tab , drag the data container that you want to insert in the report.

For lists, crosstabs, repeaters, repeater tables, and singletons, the **Object and Query Name** window opens. For charts, the **Insert Chart** dialog box opens, and for maps, the **Choose Map** window opens.

Tip: The **Object and Query Name** window opens when the **Show object and query name dialog on insert** option in the **Tools** menu, **View Options** tab, is selected.

2. Type a name for the data container and a name for the query to be created for the container.



Tip: You can link the container to an existing query by clicking the query menu and choosing from the list of available queries.

Add Data

Select the data items you want to appear in your report.



For more information about adding data to a relational style report, see “Add Relational Data to a Report” on page 213. For more information about adding data to a dimensional style report, see “Add Dimensional Data to a Report” on page 253.












Procedure

From the **Source** tab , drag data items to the report object. A flashing black bar indicates where you can drop a data item. Data items in the report appear on the **Data Items** tab .

Data Source Icons

Each object in the data source has a representative icon. You can insert all of the following objects in a report, except for packages and dimensions.

Icon	Object
	Package, which contains the objects you can insert in a report.
	Namespace, used to organize objects.

Icon	Object
	Query subject, which represents a table in the database.
	In relational data sources, query item, which represents a column of qualitative data in the database, such as product name or country or region. In dimensional data sources, level attribute, which represents a property of a level.
	A member is a unique item within a hierarchy. For example, Camping Equipment and 4 Man tent are members of the Products Hierarchy.
	Dimension, which represents a broad grouping of descriptive data about a major aspect of a business, such as products, dates, or markets.
	Hierarchy, which represents a collection of dimensional members organized into a tree structure.
	Level, which is a set of members that have common attributes. For example, a geographical dimension might contain levels for country or region or city. Multiple levels can exist within a level hierarchy, beginning with the root level. The root level is the parent and rollup of all members in the first level. It is used to obtain a rollup of all values across the hierarchy and to provide a convenient point to start drilling. For example, a Years level hierarchy may contain the following levels: <ul style="list-style-type: none"> • Root level Years • First level Year • Second level Quarter • Third level Month
	Measure or fact, a query item that represents a column of quantitative data in the database, such as revenue or quantity.
	Measures folder, which contains hierarchical measures.
	Model filter.
	Model calculation.
	Folder, used to organize data items. You cannot import a folder into your report.

Insert a Single Data Item

You can insert a single data item anywhere in your report using the singleton object. The singleton object retrieves only the first row value for that query. Inserting a single data item is useful when you want to show a value that is independent from the rest of the values in the report or when you want to insert some boilerplate text, such as a company name and address. For example, you can add the total revenue value in the header of each page in a report.

You can associate multiple singleton objects with a single query in relational reporting and dimensional reporting to optimize performance, such as when all the data items in the singleton are from the same database table. In addition, two or



more singletons can reference data items from the same query. This is useful when using a single query is more efficient to display a set of single values than using multiple queries.

You can also filter the data item in the singleton. For example, you can show the total revenue for only the year 2012.

Queries that are associated to a singleton object are not supported when producing report output in delimited text (CSV) format.

Tip: The Returns by Damage, Failed Orders and Complaints in 2012 sample report in the GO Data Warehouse (analysis) package includes a singleton. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. From the **Toolbox** tab , drag **Singleton** to the report.
An empty data container is created.
2. From the **Source** tab , drag a data item into the **Singleton** container.

Tip: To create a singleton, you can also drag a data item anywhere in your report layout.

3. To change the query associated to the singleton object, in the **Properties** pane, double-click the **Query** property and make changes.

Results


When the report is run, the first row value for the data item is retrieved.

Validate a Report

Validate your report to ensure that it contains no errors.

When you open a report created in a previous version of IBM Cognos Business Intelligence, it is automatically upgraded and validated. For more information, see Chapter 22, “Upgrading Reports,” on page 461.

Procedure

1. From the **Tools** menu, click **Validate Report** .
A message box appears indicating whether any errors were found in the report.
2. If you require more detail from the validation process, from the **Tools** menu, click **Validate Options** and do the following:
 - Click one of the following validation levels.

Validation level	Description
Error	Retrieves all errors returned from the query.
Warning	Retrieves all errors and warnings returned from the query. This is the default validation level.

Validation level	Description
Key Transformation	In addition to errors and warnings, retrieves informational messages describing important transformation steps from the report specification to the native query sent to the data source. These messages can show the cause of errors and warnings returned from the query.
Information	Retrieves errors, warnings, key transformations, and other information related to query planning and execution.

Tip: Your administrator can change the default validation level. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

- Select the **Interactive data** check box to specify that no query optimization is to be used.

The **Interactive data** check box controls how queries will be processed during validation.

Clear the **Interactive data** check box to set the **Execution Optimization** property to **All Rows**.

Tip: For more information about the **Execution Optimization** property, see Execution Optimization in Appendix G, “Report Studio Object and Property Reference,” on page 771.

A message box appears indicating whether any errors were found in the report.

- To view messages that result from the conversion of your report to use the dynamic query mode instead of the compatible query mode, select the **Dynamic Query Migration** check box.

For more information about using the dynamic query mode, see the *IBM Cognos Business Intelligence Dynamic Query Guide*. For more information about managing the migration from the compatible query mode to the dynamic query mode, see the *IBM Cognos Lifecycle Manager Installation and User Guide*.

- Revalidate your report.

3. If you encounter validation errors and want IBM Cognos Report Studio to identify incorrect objects in your report, from the **Tools** menu, click **Auto Correct**.

Report Studio provides a list of such objects that you can remove individually to successfully run your report.


In some cases, the information or error message is linked to the location of the issue in your report. To go to the location of the issue, click the message, and then click **Select**. If only warnings and information appear in the dialog box, these will disappear when you click **OK**.

Save a Report

Save your report to preserve the modifications you made.

Reports are saved to the IBM Cognos Business Intelligence server. You can also save your report on your computer.

Procedure

1. From the **File** menu, click **Save**  or click **Save As** to save a copy of the report under a different name.
2. If you are saving the report for the first time, specify where to save the report and type a file name.
For information about setting up folders in IBM Cognos Connection for your reports, see the IBM Cognos Connection *User Guide*.
3. Click **Save**.

Run a Report

Run your report to see the data that is retrieved. Save time by validating it first to check for errors.

You can also run a report or a group of reports in IBM Cognos Connection. Furthermore, you can save report outputs to a file system. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

You can specify not to render a report page if it does not contain any data.

When you run a report in an export format such as PDF, delimited text (CSV), Microsoft Excel spreadsheet software (XLS), the IBM Cognos report name is used as the exported file name.

If you run a report that uses functions or features not supported by the data source, an error message appears. We recommend that you periodically test your reports while you author them in IBM Cognos Report Studio to ensure that you do not encounter multiple error messages when you run the report.

Procedure

1. Open a report.
2. If you want to clear parameter values stored on the IBM Cognos Business Intelligence server, from the **File** menu, click **Clear Parameter Values**.
Parameter values stored by the IBM Cognos BI server include signon, validation, and prompt information. For example, if you define two data source connections in IBM Cognos Connection that point to the same data source, you are prompted to choose one when you run a report. This information is stored so that you are not prompted each time you run the report.
3. If you want to view only the tabular data, from the **Run** menu, click **View**

Tabular Data

If the report contains multiple queries, you must first click an object, such as a list or crosstab, that uses the query for which you want to view the tabular data.

Use this command to ensure that the right results appear. For example, you create a calculation and you want to ensure it is giving you the results you want.

Tip: You can also view tabular data in Query Explorer, which is useful when you are building queries.

4. If you want to set run options, from the **Run** menu, click **Run Options**.

The default value is the value of the selected corresponding run option in IBM Cognos Connection.

Note: The run options that you set apply only to the current session. When you close Report Studio, the options return to the default settings.

5. Change any values for the current session.

Option	Description
Format	Specify to change the default format from HTML.
Paper size	Specify only if the output format is PDF.
Paper orientation	Specify only if the output format is PDF.
Data mode	<p>Specify how much data is returned:</p> <ul style="list-style-type: none"> • All Data returns all data. • Limited Data limits the amount of data returned based on design mode filters defined in the package. • No Data returns artificial data instead of actual data from the data source. <p>For more information about design mode filters, see the Framework Manager <i>User Guide</i>.</p>
Language	The content language sets the preferred language for the data, IBM Cognos Viewer, dates, and so on.
Rows per page	<p>Specifies the number of rows to appear on each page.</p> <p>A Rows Per Page property exists in the Properties pane for lists and crosstabs. If you set this property, the setting overrides the same-named run option. This property applies to both HTML and PDF outputs. For more information about this property, see “Controlling the Rows Per Page for Multiple Containers in HTML and PDF” on page 48.</p>
Prompt	<p>Select to be prompted for each prompt defined unless the prompt is defined in a report page.</p> <p>If you clear the Prompt check box, you are prompted only if the report cannot run without user intervention. For example, if a report has a single parameterized filter that is optional, you are not prompted when you run the report.</p>

Option	Description
Include accessibility features	<p>Specifies whether accessibility features, such as alternate text on images and charts and summary text in tables, are included in the report output.</p> <p>This option is also used for conditional layouts in Report Studio. When the option is selected, you can specify that a crosstab is rendered as an accessible alternate to a chart.</p> <p>For more information about how to create accessible reports, see “Considerations to Improve Report Accessibility” on page 468.</p>
Enable bidirectional support	<p>Specifies whether to enable bidirectional support in the report output.</p> <p>Tip: You can also enable bidirectional support in Cognos Connection by modifying your user preferences (My Preferences link). If you enable bidirectional support in Cognos Connection, this run option will be automatically selected.</p>

- From the **Run** menu, click one of the options to produce the report in the format you want.

You can produce a report in HTML, PDF, CSV, various Microsoft Excel formats, and XML. You cannot produce a report in CSV format if you have more than one query defined in the report unless the additional queries are used for prompts.

Results

The report runs in IBM Cognos Viewer. Once the report has finished running, you can run the report again in the same format or in a different format. If you run the report again in CSV or XLS format, the report will appear in a new browser window.

The options available in IBM Cognos Viewer depend on the capabilities set by the administrator for each user. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Related concepts:


“Running a Report Against a Dimensional Data Source” on page 531

You can cancel a report that is running against Microsoft SQL Server Analysis Services only during the initial portion of its execution. After this time, the report runs to completion.

Specify Not to Render a Page If It Does Not Contain Data

You can specify not to render a report page if the page does not contain any data when the report is run.

Procedure

- In the report page, click a data container.
- In the **Properties** pane, click the select ancestor button  and click the data container type.

For example, if the data container is a list, click **List**.

Tip: You can also click the container selector (three orange dots) of the container to select it.

3. Set the **Render Page when Empty** property to **No**.
4. Repeat steps 1 to 3 for all other data containers in the page and any table of contents objects.

Results

When you run the report, if no data is produced in all data containers and table of contents objects in a page, the page is not rendered. The page is not rendered even if the page contains other objects, such as text items or images.

Controlling the Rows Per Page for Multiple Containers in HTML and PDF

If you have more than one data container in a report, such as a list and a crosstab, you can control how the report is rendered in HTML and PDF by setting the **Rows Per Page** property for each container.

For HTML output, the report property option **Page break by data container for interactive HTML** controls whether the default number of rows is rendered for each data container on each page.

IBM Cognos Business Intelligence uses the following rules when rendering reports in HTML and PDF:

- If the **Rows Per Page** property is not set for any of the data containers, 20 rows per page are rendered in HTML and each page is completely filled in PDF. The first data container is rendered until there is no more data, followed by the next container, and so on.

Tip: The number of rows that appear on a PDF page depends on the font size set in the report.

- If the **Rows Per Page** property is set for each data container, the specified numbers of rows are rendered in HTML and PDF on each page until there is no more data.
- If the property is set for only some of the containers, the specified numbers of rows are rendered in HTML and PDF on each page until there is no more data. For the remaining containers, 20 rows per page are rendered on each page in HTML and each page is completely filled in PDF.

For example, you have two lists, List1 and List2. You set the **Rows Per Page** property to 5 for List1. When you run the report in HTML, the first page contains the first 5 rows from List1 followed by the first 15 rows of List2.

- If no data is returned for a data container, an empty container is rendered.

Producing a Report in CSV Format

IBM Cognos Business Intelligence can produce reports in CSV format so you can open them in other applications, such as Microsoft Excel spreadsheet software.

Reports saved in CSV format

- support Unicode data across many client operating systems
- are UTF-16 Little Endian data encoded

- include a BOM (Byte Order Mark) at the beginning of the file
- are tab-delimited
- do not enclose strings in quotation marks
- use a new line character to delimit rows

You can open reports saved in CSV format using a variety of spreadsheet software applications. By default, reports produced in CSV format will appear in the application associated with the .csv file type.

You cannot produce the following in CSV format:

- maps
- charts that do not have at least one category or series
- reports that have more than one query defined in the report, unless the additional queries are used for prompts

In IBM Cognos Connection, you can configure the CSV output to suit your environment. For example, you can specify the character used to delimit fields. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Producing a Report in Microsoft Excel Format

You can export your report output to several different Microsoft Excel spreadsheet software formats.

Excel 2007 and **Excel 2007 Data** formats render report output in native Excel XML format, also known as XLSX. This format provides a fast way to deliver native Excel spreadsheets to Microsoft Excel 2002, Microsoft Excel 2003, and Microsoft Excel 2007. Users of Microsoft Excel 2002 and Microsoft Excel 2003 must install the Microsoft Office Compatibility Pack, which provides file open and save capabilities for the new format.

Excel 2007 provides fully formatted reports for use in Microsoft Excel version 2007.

The output is similar to other Excel formats, with the following exceptions:

- Charts are rendered as static images.
- Row height can change in the rendered report to achieve greater fidelity.
- Column widths that are explicitly specified in reports are ignored in Microsoft Excel 2007.
- Merged cells are used to improve the appearance of reports.
- The default size of worksheets is 65 536 rows by 256 columns.

Your IBM Cognos administrator can enable larger worksheets and change the maximum number of rows in a worksheet, up to a maximum of 16,384 columns by 1,048,576 rows, by using advanced server properties. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

Excel 2007 Data provides data for use in Microsoft Excel version 2007. These reports only contain minimal formatting. Default data formatting is applied to the data based on data type and assumes that each column has a single data type.

The output is similar to other Excel formats, with the following exceptions:

- The generated output includes only the first list query in the report. If a report contains multiple queries and the first query is a multi-dimensional query for a crosstab or for a chart, an error message is displayed when the report runs.
- Nested frames and master-detail links are not supported.
- Cells in the Microsoft Excel file have a default width and height. You must adjust the column width and height if the data is larger than the default size.
- Style specifications are not rendered, including color, background color, and fonts.
- Borders are not rendered.
- User-specified data formatting in the report specification are not applied, including exception highlighting and color rules for negative numbers.

Excel 2002 provides fully formatted reports for use in Microsoft Excel versions earlier than 2007. Excel 2002 format also offers the following benefits:

- Spreadsheets are contained in a single file for reliable spreadsheet navigation.
- The maximum size of worksheets is 65,536 rows by 256 columns.

Related concepts:

“Larger worksheet sizes for Microsoft Excel 2007 report outputs” on page 10
 IBM Cognos Business Intelligence now supports a larger worksheet size for report outputs exported in Microsoft Excel 2007 format.

Appendix E, “Limitations When Producing Reports in Microsoft Excel Format,” on page 549

There are limitations when producing reports in Microsoft Excel format.

Option to group repeating cells in reports produced in Excel 2007 format

When you produce reports in Excel 2007 format, you can specify whether repeating cells are grouped, or merged, into a single cell.

Report outputs to Excel 2007 format are easier to read and look more like other output formats when repeating values are grouped. If further analysis of the data is required within Excel or if the outputs are used to provide data to another tool, it is often preferable for repeating values to be populated in each row or column to which they apply.

By default, repeating cells are merged in Excel 2007 output. For example, Product line is a grouped column in a list. The values for Product line, such as Camping Equipment and Golf Equipment, appear once in a merged cell in Excel output. When repeating cells are not grouped, the values for Product line appear in each repeating cell. The option to merge repeating cells in Excel output is controlled by selecting or clearing the **Group repeating cells when exporting to Excel** check box in the **Report Properties** dialog box.

Crosstabs

In general, grouped data item values appear in each repeating cell. For example, a crosstab contains Product line and Product type as rows. When repeating cells are ungrouped, the label for each product line value is rendered in each repeating row cell.

If a cell on a column edge spans multiple worksheet rows, the cell label is not repeated in all rows. If a cell on a row edge spans multiple columns, the cell label value is not repeated in multiple worksheet columns. For example, a crosstab contains Product line, Product type, and Product as rows. A summary is added for

Product line. The product line summary cell spans Product line, Product type, and Product. In Excel, repeating cells are produced for the summary row, but the label for the summary appears only in the first cell.

Repeating cells that are produced from crosstab headers follow this behavior. For example, Product line and Product type are inserted as rows in a crosstab. Headers named Product line and Product type are created, and each header spans two columns. In Excel, the header labels appear only in the first cell. The repeating cells are empty.

If a layout object, such as a table or image, is inserted in the crosstab corner, the size of the object might cause the crosstab corner column edge to span multiple rows and row edges to span multiple columns. When this situation occurs, column labels repeat only in the column span and row labels repeat only in the row span.

The following figure shows a crosstab that contains Year as columns and Order method type as rows. A three by three table is inserted in the crosstab corner. In Excel output, the size of the table produces repeating cells in the columns and in the rows. Year labels, such as 2010, repeat only in the columns and not in the rows. Order method labels, such as E-mail, repeat only in the rows.

	A	B	C	D	E	F	G
2	Quantity			2010	2010	2010	2010
3	Year	-	Product				
4	-	-	-				
5	Order method	-	Country or region				
6				Camping Equipment	Personal Accessories	Outdoor Protection	Golf Equipment
7	E-mail		United States	16,840	7,121	20,166	9,203
8	E-mail		Canada	214,504	232,681	184,676	41,047
9	E-mail		Japan	137,774	21,936	88,931	44,691
10	E-mail		Singapore				1,159
11	E-mail		Korea	25,565	9,625	19,919	6,875
12	E-mail		Netherlands	10,672	23,700	36,471	3,311
13	E-mail		Sweden	30,551	9,451	36,231	19,114
14	E-mail		Denmark		143		
15	E-mail		France	255			608
16	E-mail		Germany	204,002	101,389	158,959	52,189
17	E-mail		Italy	67,801	19,476	66,848	24,921
18	E-mail		Spain	25,347	1,100	7,475	3,668

Figure 2. Excel 2007 output of a crosstab with a table inserted in the crosstab corner

Lists

In lists, grouped data values are repeated in ungrouped cells. For example, a list contains Product line and Product type, and Product line is grouped. When repeating cells are ungrouped in Excel, the label for each product line value is rendered in the repeating cells.

Group header and list page header labels are not repeated. These labels appear only in the first cell, and repeating cells are empty.

Nested data containers, images, and charts

Nested data containers, images, and charts in a report can produce merged cells. For example, when a crosstab is inserted in a list, other columns in the list appear as merged cells in Excel 2007 output. The following rules are applied when merged cells are split.

1. If a cell is merged as a result of a data item grouping, then data values are repeated in the split cells.
2. If a cell is merged as a result of a nested data container, image, or chart, then data values are not repeated in split cells.

For example, a list contains Product line, Product type, Quantity, and an image as columns. The Product line column is grouped. The image produces merged cells in Excel output because its size spans more than one row. When the report is run with the option to ungroup repeating cells, Product line values are repeated, but Product type and Quantity values are not.

Bookmarks

When you produce Excel 2007 output with ungrouped repeating cells, clicking an entry in a table of contents brings you to the first row that contains that entry. For example, a report contains a list with a table of contents. Product line values are repeated in the list in Excel output. When you click Camping Equipment in the table of contents, you are brought to the first cell in the list that contains Camping Equipment.

Related tasks:

“Specify Report Properties” on page 350

You can change the default report property settings.

Producing a Report in XML Format

XML report outputs save the report data in a format that conforms to an internal schema, `xmldata.xsd`.

You can find this schema file in `c10_location/bin`.

This format consists of a dataset element, which contains a metadata element and a data element. The metadata element contains the data item information in item elements. The data element contains all the row and value elements.

You can create models from reports and other data that conform to the `xmldata.xsd` schema. This is useful if you want to use a report as a data source for another report, or if you use a database that cannot be read by IBM Cognos Framework Manager. In this case, export the data from the data source to an XML file, in conformance with the `xmldata` schema, and then open the XML file in Framework Manager.

For more information, see the Framework Manager *User Guide*.

You cannot produce the following in XML format:

- maps
- charts that do not have at least one category or series
- reports that have more than one query defined in the report, unless the additional queries are used for prompts

If a report contains more than one data container, such as a crosstab and a list, and both containers use the same query, only the output for the list is produced. If a report contains multiple lists, only the output for the first list is produced. If a report contains multiple crosstabs and multiple lists, only the output for the first list is produced.

Set PDF Page Options



Set PDF page options, such as page orientation and paper size, to control how report pages appear in PDF. You can set PDF page options for individual report pages or for all report pages in a layout.

Tip: The PDF Page Properties sample report in the GO Sales (analysis) package includes PDF page options. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

You can also set PDF page options in IBM Cognos Connection. For more information, see the *IBM Cognos Connection User Guide*.

The paper size for PDF output can be a maximum of 200 x 200 inches or 500 x 500 centimeters. A larger paper size produces a blank page.

Procedure

1. To set PDF page options for all report pages in a layout, do the following:
 - From the **File** menu, click **PDF Page Setup** and set the page options.
2. To set PDF page options for an individual page, do the following:
 - Pause the pointer over the page explorer button  and click the page.
 - In the work area, click anywhere on the page.
 - In the **Properties** pane, click the select ancestor button  and click **Page**.
 - Double-click the **PDF Page Setup** property, select the **Override the page setup for this page** check box, and set the page options.

View Lineage Information for a Data Item

View lineage information of a data item to see what the item represents before you add it to a report.

Lineage information traces the metadata of an item back through the package and the data sources used by the package. Lineage also displays any data item filters that were added by the report author or that were defined in the data model. Viewing lineage information ensures that you add the correct data items to a report. For example, you can view the lineage information of a model calculation to see how it was created.

Note: Lineage is available only after your administrator has configured it. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*. In addition, lineage is not supported in reports that are not linked to packages.

You can use the lineage tool that comes with IBM Cognos Business Intelligence, or you can use another lineage tool by specifying the URL to the tool in IBM Cognos Administration. Note that if the URL source is secured, the source must be able to prompt users for a password because IBM Cognos BI does not pass security information. IBM Cognos BI also supports the IBM Metadata Workbench as a lineage tool. For more information about configuring other lineage tools, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

Tip: The Customer Returns and Satisfaction sample report “Customer Returns and Satisfaction” on page 515 in the GO Data Warehouse (analysis) package includes lineage information. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

You cannot use lineage information to troubleshoot queries. For example, lineage information will not explain why a data item is double counted. Also, you cannot view lineage information when running a report from a mobile device.

Before you begin

Before you can access lineage information for a report, your administrator must configure lineage in IBM Cognos Administration. Also, the administrator must enable the lineage capability and grant read permission for you on the report.

Note: The IBM Cognos BI lineage tool shows lineage on a report at its highest level. The lineage does not change after you drill down on a report. Because the selection context used to launch lineage can be affected by drill-down operations, we recommend that you always launch lineage at the highest report level before drilling down on the report. Otherwise, the lineage may not start properly.

Procedure

From the **Source** tab , right-click the data item and click **Lineage**.

Tip: You can view lineage information for multiple data items at the same time by first Ctrl+clicking the items. The IBM Metadata Workbench does not support viewing lineage for multiple data items at once.

Results

The lineage tool opens showing the lineage information of the selected data item.


The IBM Cognos Business Intelligence Lineage Tool

The IBM Cognos Business Intelligence lineage tool includes two views: the business view and the technical view.

The business view displays high-level textual information that describes the data item and the package from which it comes. This information is taken from IBM Cognos Connection and the IBM Cognos Framework Manager model.

The technical view is a graphical representation of the lineage of the selected data item. The lineage traces the data item from the package to the data sources used by the package.

When you click an item, its properties appear below it. If you click an item in the **Package** area, you see the model properties of the item. If you click an item in the **Data Sources** area, you see the data source properties of the item.

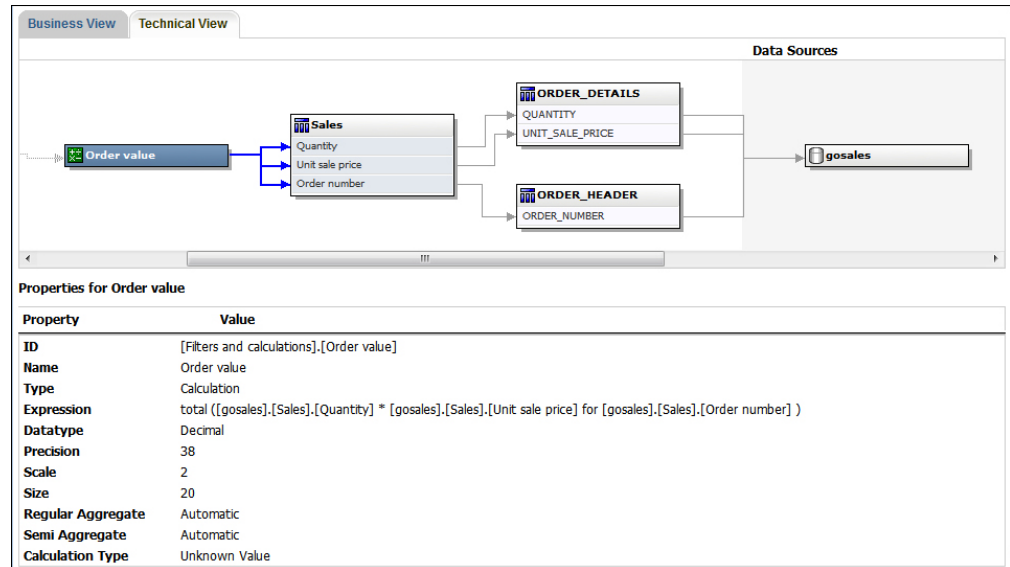

You can also view lineage information in IBM Cognos Viewer after you run a report. For example, you can click a cell in a crosstab to see how the cell value was calculated. To view lineage information in IBM Cognos Viewer, right-click an item in the report and then click **Lineage**. If you or an administrator runs a saved report with the IBM Cognos BI lineage tool, both the business view and the technical view are visible. Report consumers can see only the business view. In addition to the **Package** and **Data Sources** areas, a **Report** area exists when looking at the technical view.

Access the IBM WebSphere Business Glossary

Business glossaries help you manage and share an enterprise vocabulary and classification system.

If you use the IBM WebSphere® Business Glossary, you can access the glossary from any of the following data objects:

- Query subject
- Query item
- Measure
- Dimension
- Hierarchy
- Level
- Property or attribute
- Top node member
- Member
- Level item

Procedure

Right-click the data item and click **Glossary**.
The IBM WebSphere Business Glossary appears.

Support for bidirectional languages

You can author reports that support bidirectional languages. You can specify base text direction, digit shaping, and container direction.

Arabic, Hebrew, Urdu, and Farsi are languages written from right to left, using the Arabic or Hebrew scripts. However, numbers in those languages, as well as embedded segments of Latin, Cyrillic, or Greek text, are written from left to right. Using the bidirectional settings in IBM Cognos Report Studio, you can control the direction in this type of text in reports.

Report formats

Bidirectional languages are supported for reports produced in HTML, PDF, and Microsoft Excel. IBM Cognos Active Report also supports bidirectional languages.

Enabling bidirectional support

To enable support for bidirectional languages when a report is run, in IBM Cognos Connection, users must open their **My Preferences** page and select the **Enable bidirectional support** check box.

To enable support for bidirectional languages when a report is run from Report Studio, select the **Enable bidirectional support** check box in the **Run Options** window.

Tip: If you enable bidirectional support in Cognos Connection and you then start Report Studio, the bidirectional support run option in Report Studio is selected. If you disable bidirectional support in Cognos Connection and you then start Report Studio, the run option in Report Studio is cleared.

Base text direction

Base text direction sets the text direction as left-to-right or right-to-left. You can specify the base text direction for any text object in a report. You specify the base text direction for text by clicking the **Direction & Justification** property for the text or for the object that contains the text, such as a list column.

A contextual option also exists in the **Direction & Justification** property that sets the text direction based on the first letter in the text.

For compound objects that contain text, you specify the base text direction of the text contained in the object by clicking the **Contained Text Direction** property for the object. Examples of compound objects are charts, prompts, and active reports.

Digit shaping

Digit shaping allows users to consume reports with numbers that they can read after they select the content language in IBM Cognos Connection. You can specify digit shaping at the following levels:

- Report
- Container (except for charts and maps)
- Text
- Number

You specify digit shaping for an object by clicking the **Data Format** property for the object. To specify digit shaping at the report level, click the **Default Data Formats** option in the **Data** menu.

Tip: Digit shaping has no impact on reports produced in Excel format, since the shaping of digits in Excel depends on Windows regional settings.

Container direction

Container direction sets the direction of container objects in a report as left to right or right to left. You specify container direction for an object by clicking the **Direction & Justification** property for the object.

Tip: Container direction is not supported in reports produced in Excel format. Excel spreadsheets do not natively support mirroring at the container level.

Related concepts:

“Digit shaping in charts and maps” on page 388

When working with bidirectional content, you cannot specify digit shaping at the chart or map level. You can specify digit shaping for the objects in charts and maps.

Related tasks:

“Run a Report” on page 45

Run your report to see the data that is retrieved. Save time by validating it first to check for errors.

“Specify text and container direction” on page 346

You can specify text and container direction by choosing any of these options.

“Set the Default Data Formats” on page 387

Set the default data properties for each type of data, including text, number, currency, percent, date, time, date/time, and time interval.

“Specify the Data Format for an Object” on page 388

Specify the format for a particular object if you are not getting the results you want.

Reports for workspaces in Cognos Workspace

When building a workspace in IBM Cognos Workspace, business users can insert an entire IBM Cognos Report Studio report or insert only individual objects from within a report.

To create effective reports for use in workspaces in Cognos Workspace:

- Ensure that all the objects and pages within the report have meaningful names.

For some objects, such as data containers, Report Studio gives the object in a report a default name such as List 1, List2, and so on. In Cognos Workspace, these names appear in the **Content** tree. To help business users recognize the report objects, rename them to something more meaningful (**Properties** pane, **Name** property).

If you do not want an object to be added in a workspace, clear the **Name** property for that object. The object will not appear in the **Content** tree. However, you cannot clear the name of data containers. Report Studio requires that data containers have names.

Note: Cognos Workspace does not support tables and blocks. Unsupported objects do not appear in the **Content** tree in Cognos Workspace, even if you specify a name for the object.

- Create a container report that includes all the report objects that workspace users might want to add in a report. Such a report is not meant to be run and does not need to show report objects in a proper layout. It is only used as a container for the various report parts. Each page of a report appears as a folder within the Cognos Workspace **Content** pane.

For example, on one page named Prompts you can insert all the possible prompts that users might want to add to a workspace, and give each prompt a useful business name, such as Value Prompt for Region. On a second page named Charts, you can insert a number of charts useful for workspaces.

- Ensure that the titles and labels used in your report are understandable by business users.
- Ensure that you use report objects that are well suited for dashboards. They convey the most information in as little space as possible. For example, if you include a chart, use bullet charts, microcharts, line charts, or column and bar charts. Use conditional blocks to show business indicators.
- If your report includes charts, customize the font sizes so that the charts appear correctly in a dashboard. You may need to reduce the font sizes.
- If your report includes embedded objects, such as a list with an embedded chart and crosstab, the embedded objects do not appear in the Cognos Workspace **Content** pane, unless the embedded objects are in a table object. When you insert an object that contains embedded objects, the embedded objects will be inserted in the workspace.

When embedded objects are in a table object, the embedded objects appear in the **Content** pane. Table objects do not appear in the **Content** pane because Cognos Workspace does not support Report Studio table objects. Consequently, you can insert the embedded objects in a workspace, but not the table.

- If your report includes a map, customize the colors of the map in Report Studio so that they match the color palette of the dashboard. You cannot edit the color palette of a map from within a workspace in Cognos Workspace.
- If your report is using a dimensional data source and you enable drill-up and drill-down, in the Drill Behavior window, specify that the column title uses member caption values.

Cognos Workspace does not support drill up and drill down with level label values as the column titles. Cognos Workspace always uses member captions.

Related tasks:

“Create a Drill-up and Drill-down Report” on page 308

You can link groups of data items from different queries so that when you drill up or drill down in one query, the data item also drills up or drills down in the linked queries.

Prompts in workspaces in Cognos Workspace

A prompt control, when assigned a **Name** property in IBM Cognos Report Studio, appears as an object that you can insert from the **Content** pane in a workspace in IBM Cognos Workspace.

If a workspace includes reports and report parts from the same model, prompts automatically filter the appropriate data item in all the widgets in the dashboard. For example, a prompt filters on Product Line. Any widget in the dashboard that includes the Product Line data item is filtered when you select a value from this

prompt control. If you do not want a prompt to control a widget in the dashboard, you can disable communication between the two widgets.



If a dashboard includes prompted reports or report parts from different models, ensure that the prompts use the same parameter names. For example, a year prompt should use the same parameter **p_Years** in reports from both models. Otherwise, the prompt control is unable to control reports from another package.

Enable filters in workspaces in Cognos Workspace

You can include a data item in the query of the report, but not show that data item in the actual report. This is useful for creating calculations and filters. If you want IBM Cognos Workspace users to filter content in a workspace based on a data item that is not visible in the report, you must include this data item in its own query and name it **_BusinessInsight_** within the IBM Cognos Report Studio report. Therefore, the data item must exist in both the query used for the data container (such as the list, crosstab, or chart) and in this separate query.

For example, a chart shows the revenue for the product lines for each region. You want to filter the chart to show only data for the year 2012. When you author the report, in addition to including Year in the Query1 used for the chart data container, you create a new query named **_BusinessInsight_** that includes Year.

Procedure

1. Pause your pointer over the **Query Explorer** and click **Queries**.
2. From the **Toolbox** tab , drag a **Query** object to the work area.
3. Click the **Query** object, and in the **Properties** pane, in the **Name** box, type **_BusinessInsight_**.
4. Double-click the **Query** object, and from the **Source** tab , add the data item to use as a filter.

Ensure that the same data item also exists in the query used for the data container.

Creating Reports for IBM Cognos for Microsoft Office

IBM Cognos for Microsoft Office provides an integrated environment for IBM Cognos products and Microsoft Office. You can use IBM Cognos for Microsoft Office to select pieces of reports to embed in Microsoft Excel workbooks, Microsoft Word documents, or Microsoft PowerPoint presentations, including data, metadata, headers, footers, and charts. You can use predefined reports or you can create new content using IBM Cognos PowerPlay® Web, IBM Cognos Query Studio, IBM Cognos Workspace Advanced, or IBM Cognos Report Studio.

Note: Note that to access PowerPlay content, your administrator must configure PowerPlay to work with IBM Cognos Business Intelligence. PowerPlay content that is published only to Upfront is not available to IBM Cognos for Microsoft Office.

Because IBM Cognos for Microsoft Office cannot fully convert highly formatted reports into Excel or other Microsoft document output types, you may not get the results that you want.

To create effective reports for IBM Cognos for Microsoft Office, follow these recommendations:

- Create content to meet specific Microsoft Office integration needs.
For example, in IBM Cognos BI, many options are available to format data. Use less formatting to make data more accessible to Office applications.
- Organize reports.
You can publish workbooks to IBM Cognos Connection and organize them with your reports in **Public Folders** or **My Folders**. For more information, see the IBM Cognos Connection *User Guide*. By organizing your content, you can quickly retrieve the information that you want.

Tip: Workbooks, documents, and presentations that are enabled for IBM Cognos for Microsoft Office are identified by their own unique icons, helping you to distinguish them from other types of files.
- Optimize report templates for Microsoft Office.
If you rely on IT personnel or other report authors to create content, request report templates that are optimized for your Microsoft Office integration needs. You may want to request only the data elements or queries that you need and request minimal formatting so that you can more easily use Microsoft Office formatting capabilities with the IBM Cognos content. For example, reports authored in Report Studio can contain list objects embedded within list objects with specific formatting applied. When converted to the tabular representation available in Excel, these reports may not be rendered in the same way in which they appear in IBM Cognos BI.
- Format elements in the Office application.
Instead of formatting objects in IBM Cognos BI, add the formatting in the Office application. By applying less formatting in IBM Cognos BI, you can import more data into the desired locations.
- Label report elements using descriptive names.
This practice makes them more easier to find after you import them. Examples of report elements include lists, crosstabs, and charts.
- Do not nest report objects.
If you nested report objects, some objects may not appear in the correct location, or they may not appear at all. In addition, nesting report objects may cause the following error message to appear:
RDS-ERR-1000 Report Data Service could not process from the content provider.
For example, this error occurs if a repeater or repeater table is inside a block or table. It also appears when layout objects, such as lists, crosstabs, and charts, are in a conditional block that is inside another block or table.
- Keep table sizes small.
For example, because of the size of slides, the maximum number of rows and columns that you can have in Microsoft PowerPoint tables is 25. Although Word and Excel permit larger tables, it takes more time to download and render them.
- Use images with transparent backgrounds.
The background will show through the image in the Office application, making the image look like part of the presentation. If you want, you can then supply your own background color.
- Specify the height and width of images in a list.
This practice ensures that the image appears in the correct size in the Office application.
- Remember that graphs and charts are imported as images.

Images in IBM Cognos BI have image maps associated with them to enable tooltips and hotspots. IBM Cognos BI for Microsoft Office cannot import tooltips and hotspots into Office applications.

- Consider the additional limitations that exist when producing reports in Excel format.

Creating Reports for Mobile Devices

You can send IBM Cognos Report Studio reports to mobile devices that have IBM Cognos Mobile installed, or that are using the IBM Cognos Mobile Web portal.

Creating location-aware reports

A location-aware report filters report data based on the user's current location as determined by the GPS coordinates of the mobile device. For example, a Vice President of Sales travels frequently to visit his Regional Sales Managers. When he arrives at an airport, he wants to filter his sales report to show information about the region that he is visiting.

You can create location-aware reports in IBM Cognos Report Studio if your IBM Cognos Mobile administrator has set up location-aware parameters. For more information, check with your IBM Cognos Mobile administrator or see the IBM Cognos Mobile *Installation and Administration Guide*.

Location-aware reports must include at least one prompt that requests the location information. This location information, as defined by your IBM Cognos Mobile administrator, could use either coordinates or defined regions, such as states, provinces, cities, or voter regions. Your administrator also defines the parameter names for the prompts, which you must provide when adding the location prompt.

Chapter 4. Lists

Use lists to show detailed information from your database, such as product lists and customer lists.

A list shows data in rows and columns. Each column shows all the values for a data item in the database or a calculation based on data items in the database.

Product line	Quantity
Camping Equipment	27,301,149
Golf Equipment	5,113,701
Mountaineering Equipment	9,900,091
Outdoor Protection	12,014,445
Personal Accessories	34,907,705
Overall - Summary	89,237,091

You can specify whether to automatically add an overall aggregate summary in the list footer and a summary for any groups in the list by selecting **Automatic group and summary behavior for lists** in the IBM Cognos Report Studio options. The default aggregation as specified in your enterprise data source is used.

Tip: The Order Invoices - Donald Chow, Sales Person sample report in the GO Sales (query) package includes a list. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Related concepts:

“Limitations When Using Set Expressions in List Reports” on page 532

In list reports, we recommend that you avoid using set expressions. When in a list, set expressions, such as TopCount, may produce fewer rows than in the corresponding crosstab.

Related tasks:

“Change a List into a Crosstab” on page 75

Change a list into a crosstab to view your data from a different perspective.



Set List Properties

Format lists to give them the appearance you want. You can specify formatting for individual column titles or bodies or for all columns in a list. When you specify formatting for all columns in a list, the formatting is automatically applied to new columns you subsequently add.

You can also quickly format lists by applying table styles.

Formatting for specific columns overrides formatting for entire columns. For example, you specify red as the background color for a specific column body and green as the background color for all columns. When you run the report, the specific column body is red and the remaining columns in the list are green. New columns added to the list will be green.

Procedure

1. To format an individual column, do the following:
 - a. Click the column title or column body.
 - b. To format the text in the column title or the data in the column body, click the unlock button  in the toolbar and then click the title or body.
 - c. To format the whole column, click the select ancestor button  in the title bar of the **Properties** pane and click **List Column**.
 - d. In the **Properties** pane, set the property value.
For example, to specify a background color, click **Background Color** and choose the color.
2. To format all columns, do the following:
 - a. Click a column in the list.
 - b. To format list column bodies, click the select ancestor button in the title bar of the **Properties** pane and click **List Columns Body Style**.
 - c. To format list column titles, click the select ancestor button in the title bar of the **Properties** pane and click **List Columns Title Style**.
 - d. To format entire columns, click the select ancestor button in the title bar of the **Properties** pane and click **List Columns**.
 - e. To format the entire list, click the select ancestor button in the title bar of the **Properties** pane and click **List**.

Tip: You can also click the container selector (three orange dots) of the list to select it.
 - f. In the **Properties** pane, set the property value.
For example, to specify a background color, click **Background Color** and choose the color.

Related concepts:


Chapter 12, "Laying Out a Report," on page 329

When creating a report, a good layout is essential to ensure that the information in the report is presented in a clear and effective manner.

Hide Columns in List Reports

You can hide columns from the output of list reports. If you select to hide a column, the query for that column is still executed.

Procedure

1. Select the column that you want to hide.
2. Click the select ancestor button  in the title bar of the **Properties** pane and click **List Column**.
3. Set the **Render** property to **No**.

Results

When you run your report, the column is hidden in the report output.

Using Repeaters

Use repeaters to repeat items when you run the report. For example, you can use repeaters to create mailing labels, including customer names and addresses.

To build a repeater, drag the **Repeater** or **Repeater Table** object from the **Toolbox** tab to the work area. Use repeaters to repeat items across a single row without a particular structure. For example, you want to create a list that contains Year, and Product line. For each year, you want all product lines to appear in a single row. To do this, create a list with Year as a column and with a repeater as a second column. Then insert Product line into the repeater. Use repeater tables to repeat items in a table structure. Drop the items in the repeater, and modify the properties of the repeater to obtain the results you want. For example, you can specify how many frames appear per page in a repeater table by typing values in the **Across** and **Down** properties.

Horizontal pagination is not supported for data containers, such as lists or crosstabs, that are nested in repeater tables.

Convert a List into a Repeater

You can convert a list into a repeater table to take advantage of an existing list.


Procedure

1. Click any part of the list.
2. From the **Structure** menu, click **Convert List to Repeater**.


Example - Create Mailing Labels





You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create mailing labels for all of the company's retailers.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Repeater Table** and click **OK**.
4. Click the repeater, click the select ancestor button  in the **Properties** pane title bar, and click **Repeater Table**.

Tip: You can also click the container selector (three orange dots) of the repeater table to select it.

5. In the **Properties** pane, set the following properties:
 - Set the **Across** property to 2.
 - Set the **Down** property to 5.
 - Double-click the **Table Properties** property, select the **Fixed size** check box, and click **OK**.
6. From the **Toolbox** tab , drag the **Table** object to the repeater. The **Insert Table** dialog box appears.
7. In the **Number of columns** box, type 1 and click **OK**.
8. Click the table, ensure that you see **Table Cell** in the **Properties** pane title bar, and modify the following properties:
 - Double-click **Background Image**, click **Specified** and click **Browse**.
 - Click **logo.jpg** and click **OK**.
 - In the **Background Image** dialog box, under **Position**, click the align top right button.

- Under **Tiling**, click **Do not tile** and click **OK**.
 - Double-click **Size & Overflow**, and in the **Height** box, type **175**, and click **OK**.
9. Click the table, click the select ancestor button in the **Properties** pane title bar, and click **Table**.
- Tip:** You can also click the container selector (three orange dots) of the table to select it.
10. In the **Properties** pane, specify properties for the table:
- Double-click **Border**.
 - In the **Style** box, click **Solid line**.
 - In the **Width** box, click **1 pt**.
 - In the **Color** box, click **Black**.
 - Under **Preview**, click the apply all borders button  and click **OK**.
 - Double-click **Font**, and under the **Size** box, click **8pt**, and click **OK**.
11. From the **Toolbox** tab , drag the **Block** object to the repeater 8 times to create 8 blocks.
12. Drag the **Text Item** object  to the first block:
- In the **Text** dialog box, type **To:** and click **OK**.
 - Select the text item.
 - Double-click the **Font** property, set the weight to **Bold**, and click **OK**.
13. Click the first block, and, in the **Properties** pane, specify properties for the first block:
- Double-click the **Padding** property, type **35** in the box on the right, click **mm** as the unit, and click **OK**.
 - Set the **Horizontal Alignment** property to **Center**.
14. From the **Source** tab , expand **Sales and Marketing (query)**, **Sales (query)**, and **Retailer site** and drag seven data items to the remaining seven blocks.
15. Ctrl+click the seven blocks to select them, and in the **Properties** pane, specify properties for the seven blocks:
- Double-click the **Padding** property, type **25** in the box on the left, click **mm** as the unit, and click **OK**.
 - Set the **Horizontal Alignment** property to **Left**.

Results

When you run the report, each page contains 10 mailing labels in two columns.

Chapter 5. Crosstabs

Use crosstab reports, also known as matrix reports, to show the relationships between three or more query items. Crosstab reports show data in rows and columns with information summarized at the intersection points.

For example, the crosstab below shows the gross profit and revenue by product line for each year.

		2013			2012
		Gross profit	Revenue	Cost of Goods Sold	Gross profit
Mountaineering Equipment	Climbing Accessories	\$15,110,667.58	\$29,483,205.87	\$14,372,538.29	\$15,286,177.75
	Tools	\$18,683,965.74	\$44,578,458.74	\$25,894,493.00	\$21,981,831.82
	Rope	\$12,487,333.44	\$39,444,903.89	\$26,957,570.45	\$14,677,667.24
	Safety	\$10,436,847.43	\$28,014,081.20	\$17,577,233.77	\$12,287,850.59
Outdoor Protection	First Aid	\$450,357.59	\$846,984.93	\$396,627.34	\$923,995.66
	Sunscreen	\$930,913.91	\$1,561,978.22	\$631,064.31	\$2,006,172.66

Tip: The Same Month Prior Year sample report in the Sales and Marketing (cube) package includes a crosstab. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Related tasks:

“Insert a Microchart into a Crosstab” on page 152

You can use microcharts to improve the visualization of data in crosstabs.

Crosstab Nodes and Crosstab Node Members

When you add data items to crosstabs, you create crosstab nodes and crosstab node members. These objects allow you to easily create crosstabs, by dragging data items to crosstabs.

Crosstabs are dimensional objects that have row edges and column edges. Each edge is composed of a set of crosstab nodes. Each crosstab node contains the following:

- One or more crosstab node members.
- Zero or one nested crosstab node, which contains one or more crosstab node members or nested crosstab nodes.

Each crosstab node member refers to a data item that contains an expression to define the members in the crosstab.

The following crosstab contains four crosstab nodes.

(4)

Revenue		<#Year#>	<#Year#>		
		<#Month#>	Total	<#Month#>	Total
(1)	Total	<#1234#>	<#1234#>	<#1234#>	<#1234#>
(2)	<#Product line#>	<#Product type#>	<#1234#>	<#1234#>	<#1234#>
		<#Product type#>	<#1234#>	<#1234#>	<#1234#>
(3)	Average	<#1234#>	<#1234#>	<#1234#>	<#1234#>

1 Crosstab node 1 contains a single node member for the total. This node refers to the data item Total(Product line).

2 Crosstab node 2 contains a crosstab node member that refers to the data item Product line. This member has a nested crosstab node containing a crosstab node member that refers to the data item Product type.


3 Crosstab node 3 contains a single node member for the average. This node refers to the data item Average(Product line).

4 Crosstab node 4 contains a crosstab node member that refers to the data item Order year. This member has two nested crosstab nodes. The first node contains a crosstab node member that refers to the data item Order month. The second node contains a crosstab node member for the total. This node refers to the data item Total(Order month).

Tip: Nodes are also created when you add data items to charts.

Moving Crosstab Nodes


Crosstab nodes can be placed anywhere in the crosstab. For example, in the previous diagram, you can drag **Order month** under **Average** to create a row edge.

To move nested items from one edge to another, ensure that you select the crosstab node and not the crosstab node member. For example, in the previous diagram, you want to move **Product line** and **Product type** to the column edge. To do this, click **Product line** and, in the **Properties** pane, click the select ancestor button  and click **Crosstab Node**. Both **Product line** and **Product type** are selected.

Crosstab Node Creation Option

In the **Structure** menu, the **Create Crosstab Nodes** option affects the drag-and-drop behavior in crosstabs. When the option is turned on and you add a data item to a crosstab, the item is created as a crosstab node. If the option is turned off, the item is created as a crosstab node member to an existing crosstab node.

For example, in the previous diagram, if the option is turned on and you drag

Country or Region from the **Source** tab  to beneath **Product line**, **Country or Region** becomes a new peer node to **Product line**. If the option is turned off, **Country or Region** becomes a new peer node to **Product line** and has **Product type** as a nested crosstab node. This happens because instead of adding a new node, you are adding a new member to the existing node that already contains **Product line**.

Tip: To create discontinuous crosstabs, turn the **Create Crosstab Nodes** option on. If you want the items on the edges of crosstabs to be related (contain the same nested items), turn the **Create Crosstab Nodes** option off.

Set Crosstab Properties

Format crosstabs to give them the appearance you want. You can specify formatting for rows, columns, and fact cells in a crosstab or for the entire crosstab. When you specify formatting for all rows, columns, fact cells, or the crosstab, the formatting is automatically applied to any new items you add.

If you apply the same styles, such as font color, to crosstab rows, columns, and crosstab intersections, the styles are applied in the following order:


1. crosstab fact cells
2. fact cells in the outermost rows
3. fact cells in the innermost rows
4. fact cells in the outermost columns
5. fact cells in the innermost columns
6. crosstab intersections

The style applied to the last object in the list overrides styles applied to previous objects. In addition, class styles are applied before styles that you apply manually.

You can also quickly format crosstabs by applying table styles and add white space to a crosstab by inserting crosstab space objects.

Tip: In cases where fact cell formatting applied to rows conflicts with fact cell formatting applied to columns, you can set the **Fact Cells Precedence** property in the **Properties** pane to determine whether the row formatting or the column formatting has precedence. To set this property, click anywhere in the crosstab, click the select ancestor button in the title bar of the **Properties** pane, and click **Crosstab**. Or you can click the container selector (three orange dots) of the crosstab to select it.


Procedure

1. To format the entire crosstab, do the following:
 - a. Click anywhere in the crosstab.
 - b. Click the select ancestor button  in the title bar of the **Properties** pane and click **Crosstab**.
 - c. In the **Properties** pane, set the property value. For example, to specify a background color, click **Background Color** and choose a color.
2. To format all rows, columns, or fact cells, click a row, column, or fact cell in the crosstab and then do the following:
 - a. If you clicked a row, click the select ancestor button in the title bar of the **Properties** pane and click **Crosstab Rows**.
 - b. If you clicked a column, click the select ancestor button in the title bar of the **Properties** pane and click **Crosstab Columns**.
 - c. If you clicked a fact cell, click the select ancestor button in the title bar of the **Properties** pane and click **Crosstab Fact Cells**.
 - d. In the **Properties** pane, set the property value. For example, to specify a background color, click **Background Color** and choose the color.

- Tip:** You can also right-click the row or column and click **Select Fact Cells**.
3. To format all crosstab cells for a specific row or column, do the following:
 - a. Click the row or column.
 - b. Click the select ancestor button in the title bar of the **Properties** pane and click **Crosstab Member Fact Cells**.

Tip: You can also right-click the row or column and click **Select Member Fact Cells**.

- c. In the **Properties** pane, set the property value. For example, to specify a background color, click **Background Color** and choose the color.
 4. To format all row or column titles, do the following:
 - a. Click a row or column title.
 - b. Click the select ancestor button in the title bar of the **Properties** pane and click **Crosstab Rows** or **Crosstab Columns**.
 - c. In the **Properties** pane, set the property value. For example, to specify a background color, click **Background Color** and choose the color.
 5. To format an individual row, column, or intersection, do the following:
 - a. Click the row, column, or intersection.

Tip: To format the data in a row, column, or intersection, click the unlock button  in the toolbar and then click the text item to format.

- b. In the **Properties** pane, set the property value. For example, to specify a background color, click **Background Color** and choose the color.

Related concepts:



Chapter 12, “Laying Out a Report,” on page 329

When creating a report, a good layout is essential to ensure that the information in the report is presented in a clear and effective manner.

Create a Single-Edge Crosstab

Create a single-edge crosstab report to show data in a list-like form. For example, to show the quantity of products sold for each year and for each order method, you could create a crosstab with **Order Year** and **Order Method** as rows and **Quantity** as the measure.

Procedure

1. From the **Toolbox** tab , insert a crosstab object to the work area.
2. From the **Source** tab , drag data items to the **Rows** or **Columns** drop zone. A black bar indicates where you can drop the data item.
3. Repeat step 2 to insert additional data items:
 - If you dragged the data item in step 2 to the **Rows** drop zone, drag the additional items above or below the first item.
 - If you dragged the data item in step 2 to the **Columns** drop zone, drag the additional items to the left or right of the first item.
4. To add measures to the crosstab, drag the measures to the **Measures** drop zone.

Results

When you run the report, a crosstab is produced that has only one edge.

Create a Nested Crosstab

Nest data in a crosstab report to compare information by using more than one data item in a column or row. For example, a report shows the number of sales by product line for the past fiscal year. You decide to add a data item to further break down the number of sales by quarter.

When nesting columns in a crosstab report, there are four distinct drop zones where you can insert a new data item. The drop zone you choose will define the relationship between the data item and the column.

The following relationships are created when you insert a data item as a row:

- Inserting a data item to the left or right of a column creates a parent-child relationship between them.

When you insert a data item to the left of a column, the data item becomes a parent to the column. When you insert a data item to the right of a column, the data item becomes a child of the column.

- Inserting a data item above or below a column creates a union relationship between them.

The following relationships are created when you insert a data item as a column:


- Inserting a data item to the left or right of a column creates a union relationship between them.
- Inserting a data item above or below a column creates a parent-child relationship between them.

When you insert a data item above a column, the data item becomes a parent to the column. When you insert a data item below a column, the data item becomes a child of the column.

For example, you have a crosstab with Product line as rows and Quantity and Revenue as nested rows. For columns, you have Order method with Country or Region as a nested column. In this crosstab,

- Product line is a parent to Quantity and Revenue.
- Quantity and Revenue are peers.
- Order method is a parent to Country or Region.

Procedure

1. From the **Source** tab , click the data item to add.
2. Drag the data item to the report as a nested column or nested row.
A black bar indicates where you can drop the data item.
3. Repeat steps 1 to 2 to add other nested columns or rows.

Tip: If you add more than one measure to a crosstab, all measures appear as columns. You cannot have one measure appear as a row and another as a column. To make all measures appear as rows, swap columns and rows.

Creating headers automatically for sets in crosstabs

You can automatically add header labels on columns and rows when working with sets in a crosstab that uses a dimensional data source. The headers help consumers of the report to understand where the data is in the hierarchy.

Header labels are added only when you add new sets to your crosstab. The labels are not added to existing sets. After you enable this option, it remains on until you disable it, and applies to any new crosstabs that you create.

Procedure

1. From the **Tools** menu, click **Options**, then click the **Report** tab.
2. Select **Automatically create crosstab headers for sets**.
3. Click **OK**.

Results

Header labels are created in the rows and columns in a crosstab.

Showing crosstab values as percentages

When you work with dimensional data sources, you can show crosstab values as a percentage of a summary instead of the actual values. When you show values as a percentage, you can compare the contribution of an item to the whole.

About this task

You can show crosstab values as a percentage of a summary on the rows, the columns, or the rows and columns. For example, a crosstab has Product line as rows, Year as columns, and Revenue as the measure. You can show the following crosstab values:

- The actual values of Revenue
- A percentage of a summary on Product line
- A percentage of a summary on Year
- A percentage of a summary on Product line, Year

By default, the summary type that is used to calculate the percentages is Automatic summary.

When you show values as a percentage, a percentage measure data item is created.

You can also create a custom percentage calculation. For example, you can show values as a percentage of an intersection (tuple). Or you can show values as a percentage of a different summary type, such as Maximum.

When you show values as a percentage, the fact cells are formatted with the percent data format. When you show the actual values, the fact cells are formatted with the number format. If you modify the data format of the actual values, the change is lost when you switch between showing the actual values and percentage values.

You can show values as a percentage only in crosstabs. If you insert a chart, you cannot fill the chart with data from a crosstab that shows values as a percentage. If

you create a chart from a crosstab that shows values as percentages, an empty chart is created in the report.

Procedure

1. Select the measure for which you want to show values as a percentage.
If there is only one measure in the crosstab, click the crosstab corner.
2. From the **Data** menu, click **Show Value As**, and click the percentage values that you want to show.
3. If you click **Custom**, provide the information that is required to calculate the percentage values.
 - a. To change the default name of the percentage data item that you are creating, type the new name in the **Name** field.
 - b. In the **Percentage based on** box, choose to build the percentage data item based on a summary of sets in the crosstab or based on an intersection (tuple).
 - c. If you choose to build the percentage data item based on a summary of sets, in the **Choose sets** box, click the sets that you want to use. Then, click the **Summary type** menu and select the summary that you want to use to calculate the percentage values.
If there is more than one data item on the crosstab edge that you chose for the sets, select which data item that you want to use.
 - d. If you choose to build the percentage data item based on an intersection (tuple), click the ellipsis and select the items that you want to use to create the intersection.
 - e. Click **OK**.
4. To edit a measure percentage data item, follow these steps.
 - a. Select the measure.
 - b. From the **Data** menu, click **Show Value As > Edit**.
 - c. Modify the information for the data item as described in step 3.
 - d. If you replaced a set in the crosstab with a different set, in the **Choose sets** box, click **Existing sets** when you want to base the percentage values on the set that you replaced.

Related tasks:

“Create an Intersection (Tuple)” on page 306


When working with dimensional data, an intersection, also known as a tuple, is useful for obtaining a value from the combination of two or more members that you specify. Each member must be from a different hierarchy. The intersection can include only one measure.

Specify the Default Measure

You can specify the default measure for crosstabs and certain chart types. Specify the default measure to be used when the measures cannot be determined by what is on the edges. For example, you create a crosstab with Order method as rows and Product line as columns. You add Quantity and Revenue as nested rows, making Order method their parent. You then add Country or Region under Order method. Since there is no measure specified for Country or Region, you specify the default measure so that data is returned for each country or region.

Note: In crosstabs, IBM Cognos Report Studio automatically sets the default measure when you insert a measure into the crosstab cells.

Procedure

1. To specify the default measure for a crosstab, do the following:
 - Click any part of the crosstab, and then click the select ancestor button  in the title bar of the **Properties** pane.
 - Click **Crosstab**.

Tip: You can also click the container selector (three orange dots) of the crosstab to select it.
 - Set the **Default Measure** property to the default measure.
2. To specify the default measure for a chart, drag the measure to the **Default measure** box in the chart.

Swap Columns and Rows

Swap columns and rows to look at information from a different perspective. This may help you discover high and low points in the data that you hadn't previously noted.

You can only swap columns and rows in a crosstab or chart. In a chart, you swap the x- and y-axes.

Procedure

From the toolbar, click the swap rows and columns button .

Results

In the report, the rows become the columns and the columns become the rows.

Indent Data

You can indent crosstab node members to set them apart from surrounding data.

When you insert a hierarchy in rows, all members are automatically indented according to their level. By default, the first member in a set is not indented. If you insert a hierarchy in columns, the members are not automatically indented. You can change the indentation properties of members in the report.

Relative indentation means that the member will shift by one tab when the member's level increases relative to the previous member in the hierarchy.

Indenting based on the level in the hierarchy means that the member will shift the number of tabs equivalent to the level in the hierarchy.

You can also indent objects by applying padding.

Procedure

1. Click the crosstab node member to indent.
2. In the **Properties** pane, set the **Level Indentation** property to your indentation type, length, and direction.

Change a List into a Crosstab

Change a list into a crosstab to view your data from a different perspective.

Procedure

1. Click the columns to appear as columns or nested columns in the crosstab.
2. From the **Structure** menu, click **Pivot List to Crosstab**.

Results


The list becomes a crosstab with the columns you selected in step 2 appearing as columns and nested columns. The unselected columns, except for measures, appear as rows and nested rows. If you have one measure, it becomes the cells of the crosstab. If you have more than one measure, they appear as columns.

Tip: To make all measures appear as rows, swap columns and rows.


Example - Add Aggregate Data to a Crosstab

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report showing sales by order method to determine which methods are generating the most revenue and the highest sales volume.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Crosstab** and click **OK**.
4. From the **Source** tab :
 - Expand **Sales and Marketing (query)** and **Sales (query)**.
 - Expand **Product** and double-click **Product line** to add it as rows.
 - Expand **Order method** and double-click **Order method** to add it as columns.
 - Click **Product type** and drag it just to the right of **Product line**.
Product type is now nested in **Product line**.
 - Expand **Sales fact** and drag **Quantity** to the **Measures** drop zone to add it as a measure.
 - Drag **Revenue** to the right of **Quantity** to add it as a second measure.

Tip: Drop **Revenue** into the crosstab when you see a vertical bar between the **Product type** column and the **Order method** column.

5. Click any part of the crosstab, and then click the select ancestor button  in the title bar of the **Properties** pane.
6. Click **Crosstab**.

Tip: You can also click the container selector (three orange dots) of the crosstab to select it.

7. In the **Properties** pane, double-click the **Font** property.
8. In the **Size** box, click **8pt** and click **OK**.

9. Click one of the measures.

10. Click the summarize button  and click **Maximum**.

Results

When you run the report, you can see that for camping equipment, **Cooking Gear** generated the highest sales volume for the **Special** order method and **Tents** generated the most revenue. Tents ordered by the **Web** order method generated the largest revenue.

		E-mail		Fax		Mail		Sales visit		Special	
		Quantity	Revenue	Quantity	Revenue	Quantity	Revenue	Quantity	Revenue	Quantity	Revenue
Personal Accessories	Binoculars	37,637	4,284,108.12	15,530	1,826,685.29	10,281	1,098,108.29	76,412	8,285,309.35	4,499	501,383.29
	Eyewear	350,203	14,640,359.21	142,334	5,625,130.49	14,189	1,263,524.31	80,122	6,941,087.7	18,492	830,547.24
	Knives	217,439	4,930,481.24	127,848	2,943,473.65	60,329	1,376,954.66	630,593	14,138,765.34	70,325	1,525,039.64
	Navigation	91,639	7,978,990.89	36,726	3,434,569.89	16,901	1,734,352.52	159,215	13,914,997.1	16,964	1,591,269.23
	Watches	94,987	10,817,147.08	36,976	4,133,126.14	13,508	946,417.25	60,765	4,415,282.96	7,478	738,389.1
	Maximum	350,203	14,640,359.21	142,334	5,625,130.49	60,329	1,734,352.52	630,593	14,138,765.34	70,325	1,591,269.23
Mountaineering Equipment	Climbing Accessories	138,242	2,038,855.77	172,803	2,390,328.78	46,488	679,297.57	598,362	8,432,511.02	63,772	802,217.59
	Rope	8,118	2,237,177.54	10,804	3,006,587.53	4,209	1,133,910	45,383	12,623,472.19	5,350	1,395,807.43
	Safety	17,881	1,283,131.17	36,195	2,658,809.76	8,065	592,500.66	125,179	9,265,767.61	8,386	625,119.3
	Tools	34,973	1,917,287.48	72,606	3,792,644.01	22,497	1,125,950.43	272,313	14,294,875.82	16,348	850,863.79
	Maximum	138,242	2,237,177.54	172,803	3,792,644.01	46,488	1,133,910	598,362	14,294,875.82	63,772	1,395,807.43
Camping Equipment	Cooking Gear	667,254	12,660,160.31	222,711	4,375,855.61	171,358	3,349,528.79	1,435,032	29,955,819.16	115,031	2,344,882
	Lanterns	263,370	6,786,981.1	61,991	1,724,287.33	56,107	1,486,107.02	535,633	14,243,626.26	30,150	835,346.38
	Packs	151,719	18,578,756.65	38,840	5,737,253.88	34,452	4,260,591.65	276,738	35,504,440.57	14,940	2,659,194.73
	Sleeping Bags	174,310	14,711,086.99	48,580	5,894,604.37	39,916	3,997,819.92	325,265	35,363,204.56	20,638	2,806,666.82
	Tents	156,431	23,162,109.58	41,836	5,322,397.49	46,225	8,254,596.71	327,086	53,544,871.32	22,769	3,742,899.51
	Maximum	667,254	23,162,109.58	222,711	5,894,604.37	171,358	8,254,596.71	1,435,032	53,544,871.32	115,031	3,742,899.51
Outdoor Protection	First Aid	69,710	1,172,104.41	20,051	290,765.82	19,719	321,745.23	108,442	1,512,056.66	12,455	172,402.16
	Insect Repellents	394,117	2,517,273.14	169,275	1,072,328.08	172,800	1,097,464.84	836,274	5,266,401.35	101,333	627,243.75
	Sunscreen	441,329	2,193,100.32	122,257	603,390.82	135,579	679,181.64	656,810	3,251,426.3	69,287	337,285.32

Figure 3. Crosstab showing quantity and revenue by order method by product line and product type

Example - Create a Discontinuous Crosstab

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report showing sales for each product line by quarter and by order method. Since the report will have columns with data from different dimensions, you create a discontinuous crosstab report.

Discontinuous crosstabs are also known as disconnected or disjoint crosstabs or crosstabs with unrelated columns.

Procedure


1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Crosstab** and click **OK**.

4. From the **Source** tab  :

- Expand **Sales and Marketing (query)** and **Sales (query)**.
- Expand **Product** and drag **Product line** to the **Rows** area.
- Expand **Order method** and drag **Order method** to the **Columns** area.
- Expand **Sales fact** and drag **Revenue** to the **Measures** area.

- On the **Source** tab, expand **Retailer site** and drag **Region** to the left of **Order method**.

Tip: Drop **Region** into the crosstab when a flashing vertical bar appears between the **Product line** column and the **Order method** column. Otherwise, **Region** may appear as a nested row instead of a column.

- Click **Region**.
- In the **Properties** pane, double-click the **Sorting** property.
- From the **Data Items** pane, drag **Region** to the **Sort List** pane.
- Click the sort order button  to sort in ascending order and click **OK**.
- Run the report.

Results

Revenue	Americas	Asia Pacific	Central Europe	Northern Europe	Southern Europe	E-mail	Fax	Mail
Camping Equipment	481,445,781.04	421,639,391.62	343,645,848.36	180,851,396.88	161,454,246.13	75,899,094.63	23,054,398.48	21,348,644.09
Golf Equipment	217,262,995.22	193,677,873.68	153,632,833.39	84,424,300.9	77,413,364.7	47,933,933.16	15,241,303.27	12,693,287.48
Mountaineering Equipment	123,127,397.88	107,505,775.01	88,051,532.89	46,091,108.04	44,884,319.08	7,476,451.96	11,848,370.08	3,531,658.68
Personal Accessories	593,696,783.38	439,800,120.35	437,336,485.23	210,608,208.82	204,231,710	42,651,086.54	17,962,985.46	6,419,357.03
Outdoor Protection	23,002,647.68	19,716,018.32	17,488,870.77	8,346,431.17	7,440,328.31	5,882,477.87	1,966,484.72	2,098,391.71

Figure 4. Crosstab showing revenue by product line by region

Chapter 6. Charts

You can use IBM Cognos Report Studio to create many chart types, such as column, bar, area, and line charts.

Current Default Charts and Legacy Charts

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

You will find procedures in this chapter for using both the legacy charts and the current default charts. To use the legacy chart type, set the **Use legacy chart authoring** option (**Tools > Options > Advanced** tab).

Related concepts:

“Limitations When Converting Legacy Charts” on page 103

When you convert a legacy chart to the current default chart, some chart types or chart properties might not be migrated properly. For example, clustered area charts and 100% stacked line charts are not available in the current default charts. If your exact chart configuration is not available, select the closest matching template.


Related tasks:

“Convert Legacy Charts to Current Default Charts” on page 103

You can convert charts from the legacy charts to the current default charts. When you convert a legacy chart, select the template that most closely matches your legacy chart in order to preserve as many settings as possible.

Creating Charts

Before creating charts, review the available chart types to select the best chart for your needs. Also review the chart objects that make up charts.

Tip: To view the available chart types, from the **File** menu, click **New**, and then double-click the chart icon . You can also view the available chart types by adding a **Chart** object from the **Toolbox** tab in the **Insertable Objects** pane to an existing report.

To create charts, drag data items from the **Source** tab  to the measures, data series and categories drop zones.

To help you when creating charts, you can do the following:

- Preview your chart style changes.


As you author your chart and edit the chart properties, IBM Cognos Report Studio provides you with a preview of your chart, using simulated data. This allows you to view your style changes without running your report. You need to run your report to see the chart with your actual data. You can disable the chart preview in the options.

- Resize your charts.
- Move the chart drop zones into flyouts so that they appear only when you pause your pointer over the chart.


After you create a basic chart, modify the various chart objects to customize your chart.

Chart Objects

The following shows the most common chart objects as they appear in your report output in IBM Cognos Viewer.

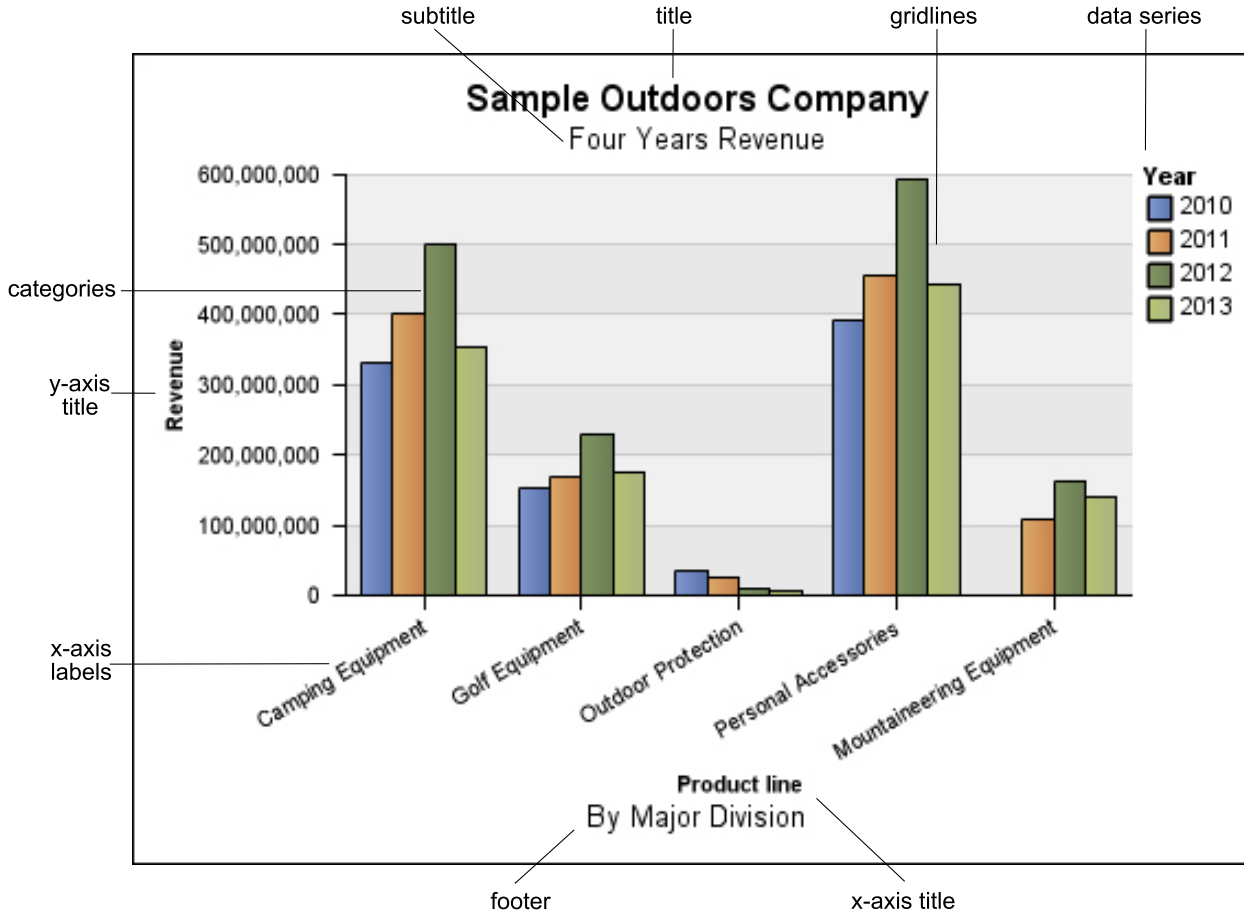


The following shows the same chart as it appears in the IBM Cognos Report Studio user interface. The Y-axis is selected, and the axis titles are displayed.

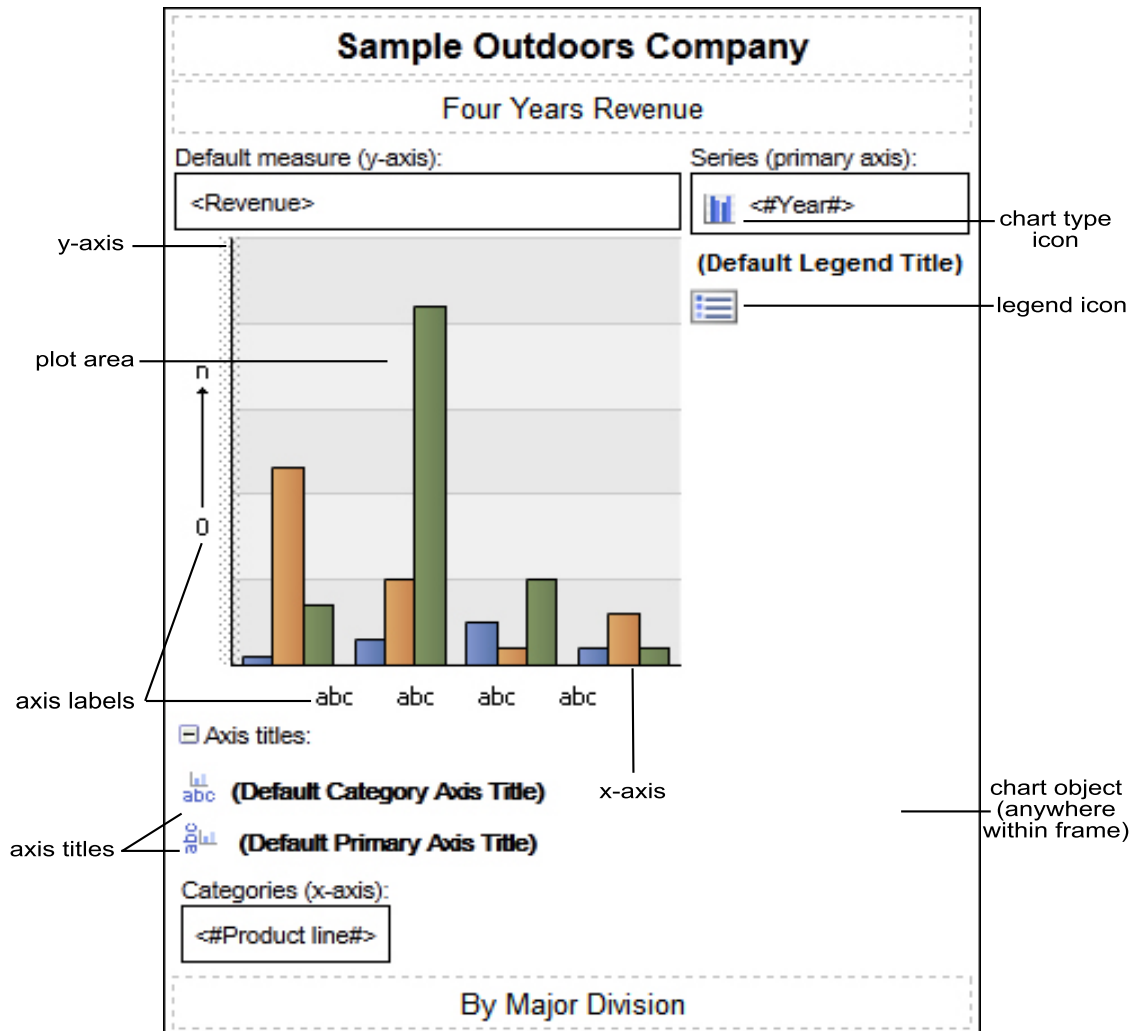

Click chart objects to specify properties

The default charts have more properties that allow you to customize more aspects of the chart than in earlier versions. You can click in different areas of the chart to get access to different properties.

For example, by clicking the axis, you can customize the color, style, weight, and transparency of chart axis lines and specify where to display major and minor gridlines on the chart.

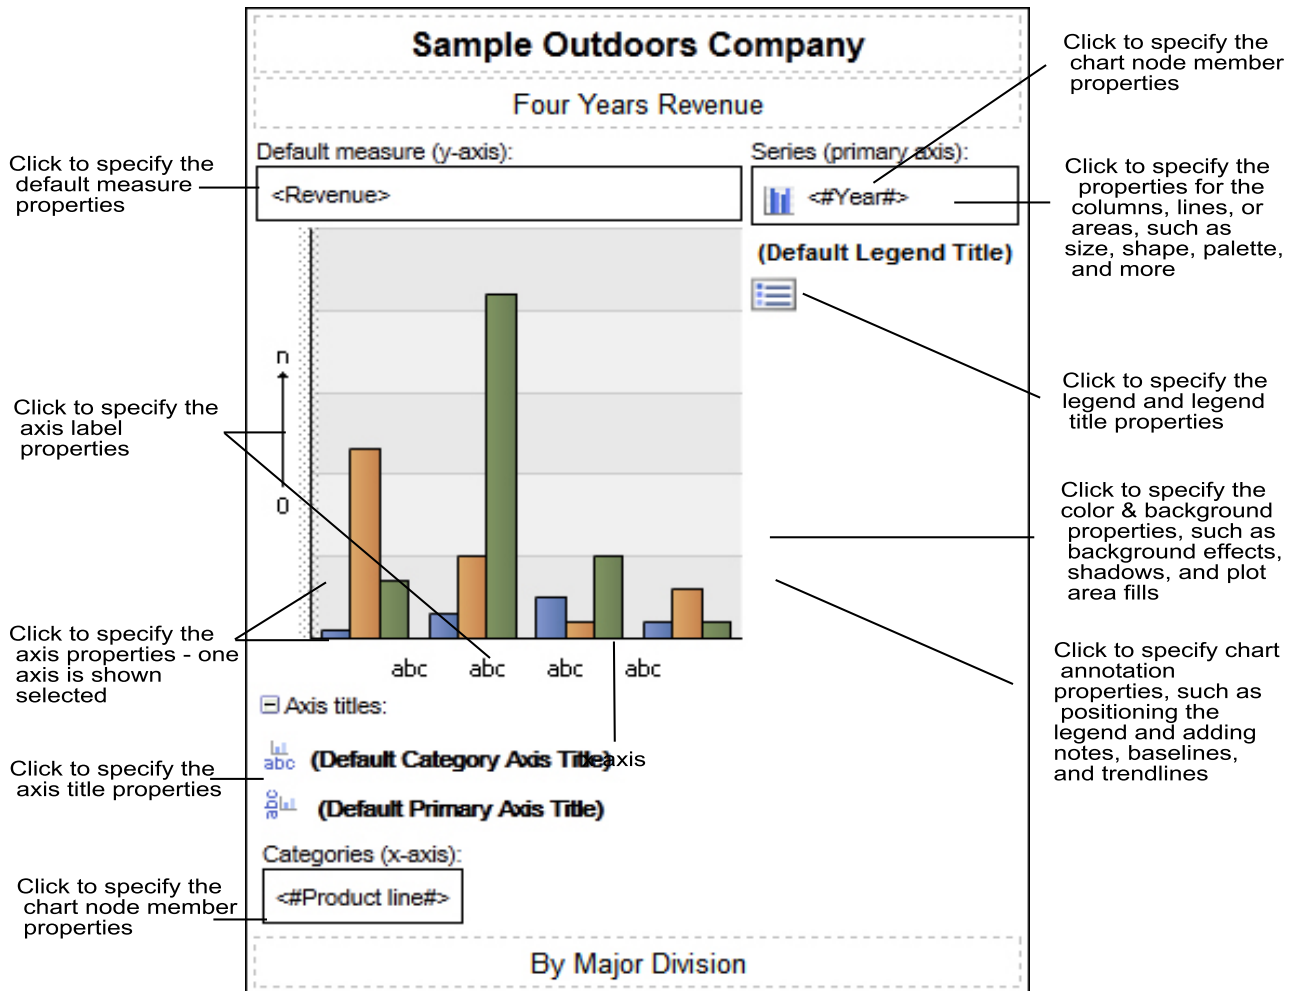

Data Series

A data series is a group of related data points that are plotted in a chart. Each series has a unique color or pattern and is described in the legend. You can plot one or more data series in a chart; pie charts have only one data series.

In the example chart, the data series are order years 2010, 2011, 2012, and 2013.

Categories

Categories are groups of related data from the data series that are plotted on the X-axis. Categories of multiple data series are shown together using clustered and stacked data markers.

In the example chart, the categories are the product lines of The Sample Outdoors Company in clustered columns.

Axes

Axes are lines that provide references for measurement or comparison.

The primary axis (or Y-axis) refers to measures of quantitative data, such as sales figures or quantities. Charts can have more than one primary axis.

The category axis (X-axis or ordinal axis) plots qualitative data, such as products or regions. It runs horizontally, except in bar charts.

The z-axis is the vertical axis in a 3-D chart.

Major gridlines extend from the tick marks on an axis and run behind the data markers.

Related concepts:

“Customizing the Axes of a Chart” on page 119

Chart axes are lines that border the chart area and provide a reference for measurements. They act as a vehicle for tick marks and scales and form a frame around the chart. The Y-axis is usually the vertical axis and contains data. The X-axis is usually the horizontal axis and contains categories.

Legend

A legend is a key to the patterns or colors assigned to the data series or categories in a chart.

Columns, Lines, and Areas

Charts use graphical elements such as columns, horizontal bars, points, bubbles, lines, and areas as visual representations of data points.

Chart Types

IBM Cognos Report Studio provides many types of charts for presenting your data in a way that is meaningful for your users.

You can select from a variety of chart types (such as pie, bar, line, gauge, scatter, and so on) and you can select from a variety of chart configurations (such as stacked columns, 3-D pies). Combination charts allow you to use more than one chart type within your chart.

Some chart types are not supported for Microsoft Excel output or appear differently in Excel. For more information, see Appendix E, “Limitations When Producing Reports in Microsoft Excel Format,” on page 549.

Choosing a Chart Type and Configuration

To choose a chart type, consider what you want the chart to illustrate. Different chart types and configurations emphasize different things.

Purpose	Chart type or configuration
Show contributions of parts to a whole	Bar Charts Pie Charts Stacked Charts, when you want to display measures of the whole, as well as the parts 100 Percent Stacked Charts

Purpose	Chart type or configuration
Show trends in time or contrast values across different categories	Line Charts Area Charts Bar Charts Column Charts Always place time in the horizontal axis.
Compare groups of related information against actual values	Bar Charts Radar Charts
Compare different kinds of quantitative information	Combination Charts
Rank values in descending or ascending order	Bar Charts Column Charts
Show correlation between two sets of measures	Point Charts
Show key performance indicators in an executive dashboard report	Gauge Charts Bullet Charts


Column Charts

Column charts are useful for comparing discrete data or showing trends over time.

Column charts use vertical data markers to compare individual values.

Note: The Sales Growth Year Over Year sample report “Sales Growth Year Over Year” on page 521 in the GO Data Warehouse (analysis) package includes a column chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

The following example shows the revenue for each product line.

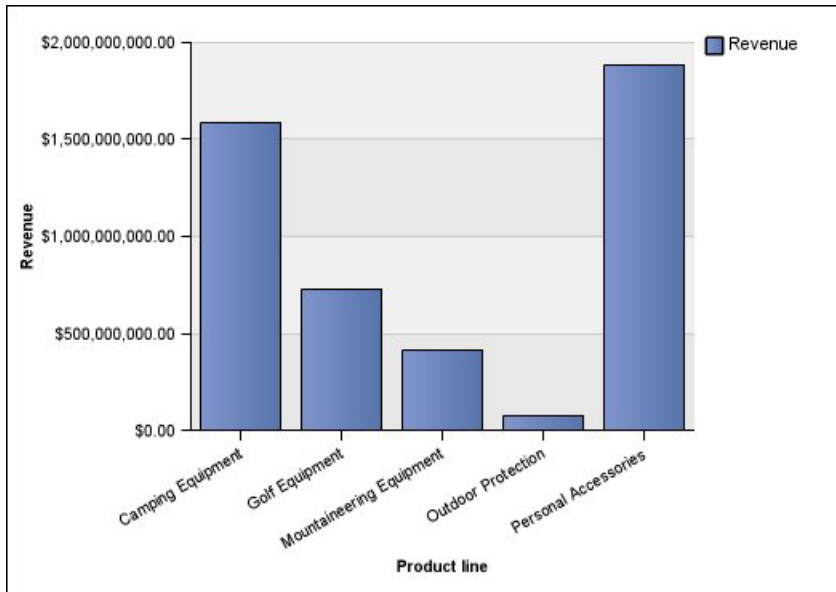

Column charts can plot data using standard, stacked, 100 percent stacked, and three-dimensional configurations.


Line Charts

Line charts are useful for showing trends over time and comparing many data series.

Line charts plot data at regular points connected by lines.

Line charts can plot data using standard, stacked, 100 percent stacked, and three-dimensional configurations. It is best not to use stacked line charts because they are difficult to distinguish from unstacked line charts with multiple data series.

The following example shows a revenue trend that peaked in 2012 in every territory.

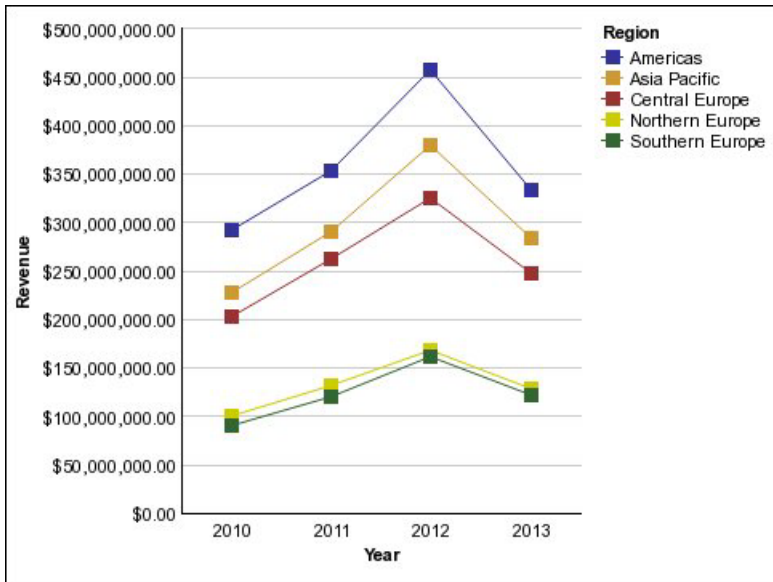

Note: The Top Retailers by Country or Region sample report “Top Retailers by Country or Region” on page 514 in the Sales and Marketing (cube) package includes a line chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Pie Charts

Pie charts are useful for highlighting proportions.


They use segments of a circle to show the relationship of parts to the whole. To highlight actual values, use another chart type, such as a stacked chart.

Pie charts plot a single data series. If you need to plot multiple data series, use a 100 percent stacked chart.

Reports in PDF or HTML format show a maximum of 16 pies or gauges per chart.

Note: The Returns by Failed Orders in 2012 sample report “Returns by Failed Orders in 2012” on page 519 in the GO Data Warehouse (analysis) package includes a pie chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

The following example shows that the largest proportion of revenue comes from the Americas, followed by the Asia Pacific region.

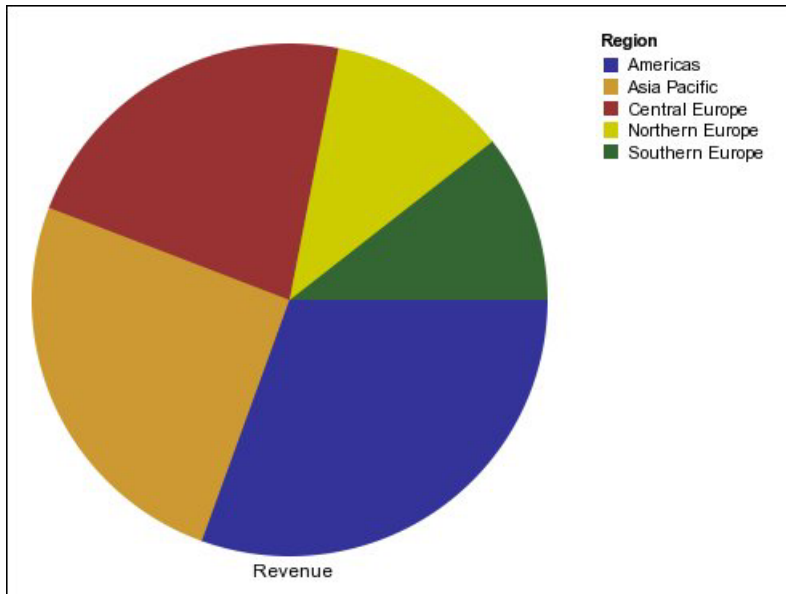

Pie charts can plot data using standard, 100 percent, and three-dimensional configurations.

Related tasks:

“Set the Position of the First Slice in a Current Default Pie Chart” on page 148

You can specify the angle in a pie chart where the first pie slice starts. You can also change the direction of the slices so they appear clockwise or counter-clockwise.

“Create a Donut Chart from a Current Default Pie Chart” on page 149

You can add a hole to the middle of your pie chart to create a donut chart. You can then display something in the hole, such as a company logo, a calculation, or the legend.

“Pull Out Pie Slices in a Current Default Pie Chart” on page 149

You can highlight pie slices by pulling them out from the rest of the pie. For example, the following chart shows revenue by product line with slices of less than 1,000,000,000 in revenue pulled out by 25%.

Bar Charts

Bar charts are useful for showing trends over time and plotting many data series.

Bar charts use horizontal data markers to compare individual values.

Note: The Manager Profile sample report “Manager Profile” on page 517 in the GO Data Warehouse (analysis) package includes a bar chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

The following example shows revenue for every country or region.

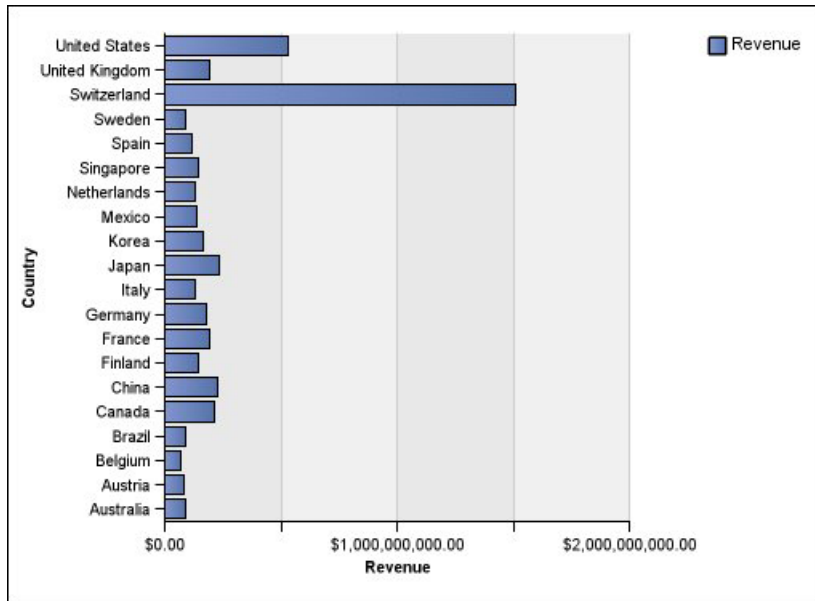


Figure 5. Bar chart

Bar charts can plot data using standard, stacked, and 100 percent stacked configurations.


Area Charts

Area charts are useful for emphasizing the magnitude of change over time. Stacked area charts are also used to show the relationship of parts to the whole.

Area charts are like line charts, but the areas below the lines are filled with colors or patterns.

Do not use standard area charts to show multiple data series because it is possible for areas with lower values to be covered by others. For multiple data series, use a stacked area chart.

The following example is a stacked area chart showing the quantity of products sold over a four-year period in multiple territories.

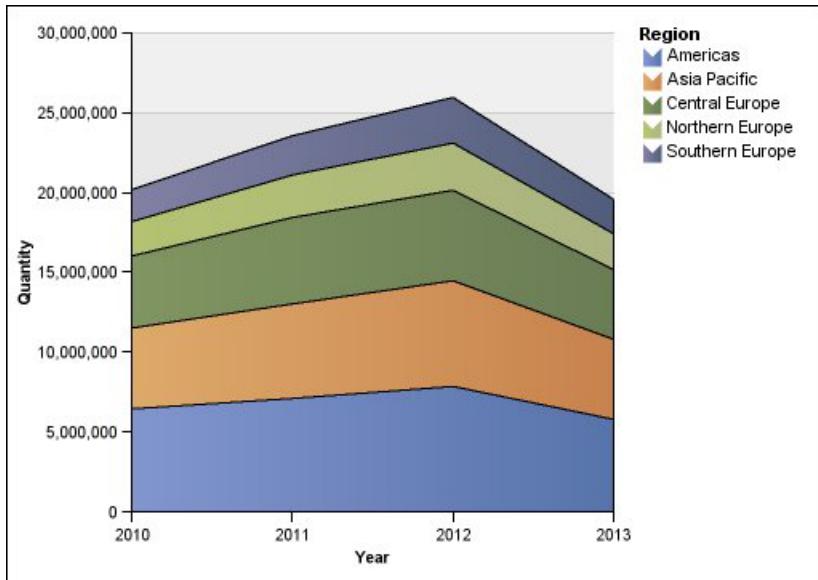

Area charts can plot data using standard, stacked, 100 percent stacked, and three-dimensional configurations.

Point Charts

Point charts are useful for showing quantitative data in an uncluttered fashion.

Point charts use multiple points to plot data along an ordinal axis. A point chart the same as a line chart without the lines. Only the data points are shown.

The following example shows the revenue for each product line.

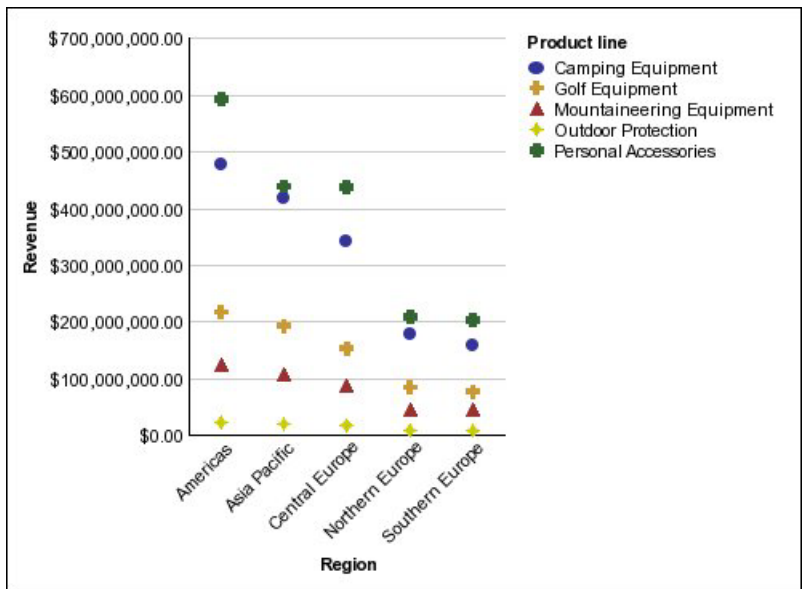



Figure 6. Point chart

Combination Charts

Combination charts plot multiple data series by using combinations of columns, areas, and lines within one chart. They are useful for highlighting relationships between the various data series.

Note: The Quantity Sold vs. Shipped and Inventory sample report in the GO Data Warehouse (analysis) package includes a combination chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

The following example shows a combination chart that includes planned revenue as a line chart and actual revenue as a column chart.

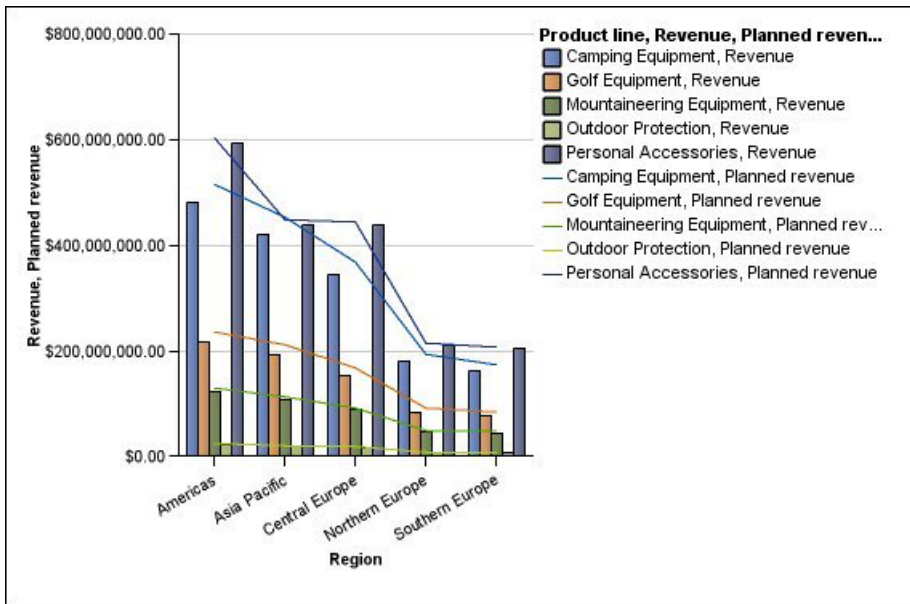

Combination charts can plot data using standard, stacked, 100 percent stacked, and three-dimensional configurations.

Scatter Charts


Scatter charts use data points to plot two measures anywhere along a scale, not only at regular tick marks.

You can also specify a default measure. For example, you might need to specify a default measure to give context to a calculated measure in the chart. For more information about the default measure, see “Specify the Default Measure” on page 73.

Scatter charts are useful for exploring correlations between different sets of data.

Note: The Employee Satisfaction 2012 sample report in the GO Data Warehouse (analysis) package includes a scatter chart. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

The following example shows the correlation between production cost and gross profit for each product line.

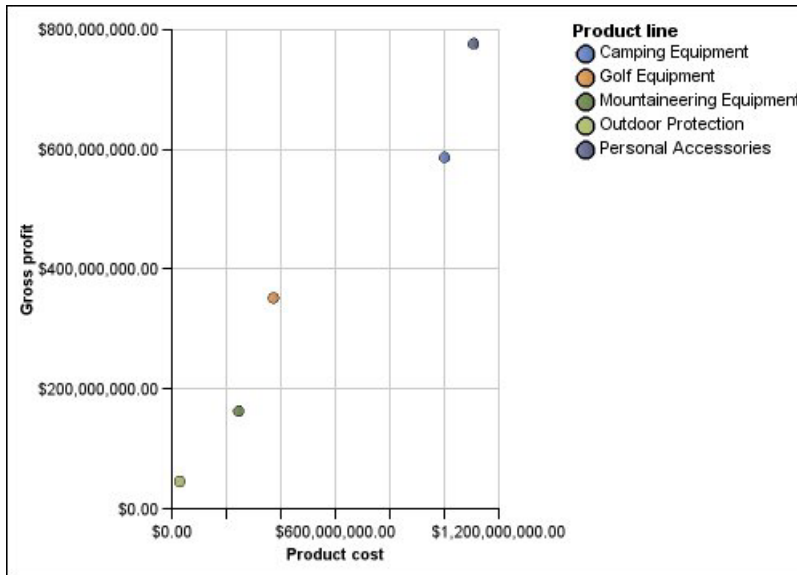

Related tasks:

“Define Color by Value in Current Default Scatter and Bubble Charts” on page 146
In a scatter or bubble chart you can specify that data points or bubbles appear in different colors based on an additional measure or fact. The color of the points or bubbles adds an additional aspect to the chart to assist you in finding relationships in large amounts of data.

Bubble Charts

Bubble charts, like scatter charts, use data points and bubbles to plot measures anywhere along a scale. The size of the bubble represents a third measure.

You can also specify a default measure. For example, you might need to specify a default measure to give context to a calculated measure in the chart. For more information about the default measure, see “Specify the Default Measure” on page 73.

Bubble charts are useful for representing financial data. These charts are not supported for Microsoft Excel output.

The following example plots quantity and revenue by product line. The size of the bubble represents the amount of gross profit.

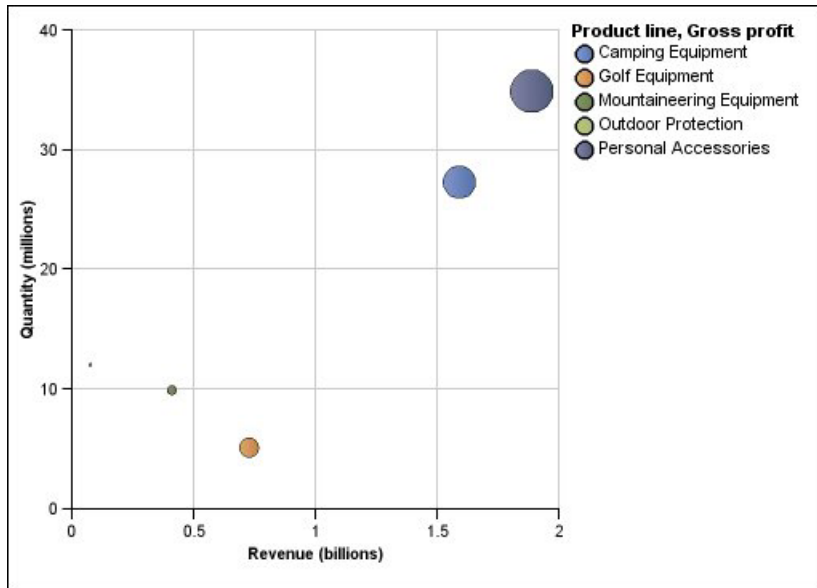


Figure 7. Bubble chart

Related tasks:

“Define Color by Value in Current Default Scatter and Bubble Charts” on page 146
 In a scatter or bubble chart you can specify that data points or bubbles appear in different colors based on an additional measure or fact. The color of the points or bubbles adds an additional aspect to the chart to assist you in finding relationships in large amounts of data.

“Specify the Bubble Size in a Current Default Bubble Chart” on page 148
 In a bubble chart, you use a measure or fact to determine the size of the bubbles.

Quadrant Charts


Quadrant charts are bubble charts with a background that is divided into four equal sections. Quadrant charts are useful for plotting data that contains three measures using an X-axis, a Y-axis, and a bubble size that represents the value of the third measure.

You can also specify a default measure. For example, you might need to specify a default measure to give context to a calculated measure in the chart. For more information about the default measure, see “Specify the Default Measure” on page 73.

Legacy quadrant charts use baselines to create the quadrants. Current default charts use colored regions.

Use a quadrant chart to present data that can be categorized into quadrants, such as a SWOT (strengths, weaknesses, opportunities, and threats) analysis.

The following example shows the relationship between production cost and gross profit. The size of the bubble represents the quantity of units sold.

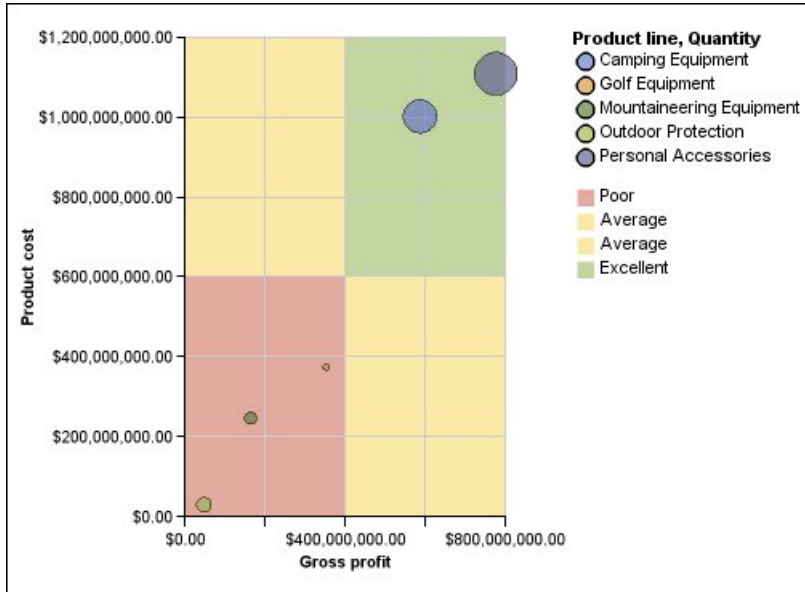

Bullet Charts

Bullet charts are a variation of bar charts. They compare a featured measure (the bullet) to a targeted measure (the target). They also relate the compared measures against colored regions in the background that provide additional qualitative measurements, such as good, satisfactory, and poor.

Bullet charts are often used instead of gauge charts in executive dashboards. Bullet charts can be horizontal or vertical.

Note: This chart type applies only to the current default charts, and does not apply to the legacy charts.

A bullet chart contains the following components:

- A bullet measure.
The bullet measure, Revenue, appears as the blue bar in the chart below.
- A target measure.
The target measure, Planned revenue, appears as the black indicator in the chart below.
- From zero to five colored regions along the numeric scale to provide information about the featured measures' qualitative state.
The chart below includes three colored regions: 0-50%, 50-75%, and 75-100%.
- A label that identifies the measures.
- A numeric scale.

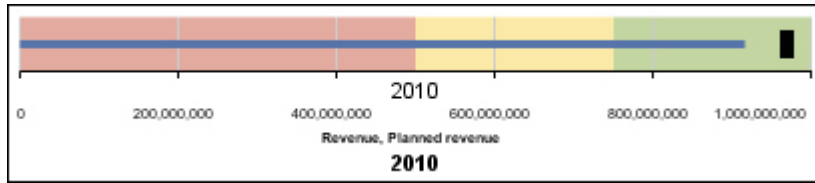


Figure 8. Bullet chart

Related tasks:

“Customize a Current Default Bullet Chart” on page 152

After you create a bullet chart, you can customize the shape, color, and size of the bullet and target indicators.

Gauge Charts


Gauge charts, also known as dial charts or speedometer charts, use needles to show information as a reading on a dial.

On a gauge chart, the value for each needle is read against the colored data range or chart axis. This chart type is often used in executive dashboard reports to show key business indicators.

Gauge charts are useful for comparing values between a small number of variables either by using multiple needles on the same gauge or by using multiple gauges.

Reports in PDF or HTML format are limited to show a maximum of 16 pies or gauges per chart. These charts are not supported for Microsoft Excel output.

A gauge chart consists of a gauge axis (which contains the data range, color ranges, and intervals markers), needles, and a center pivot point. The following example shows a basic gauge chart with default attributes. It is a degree dial chart with two axes.

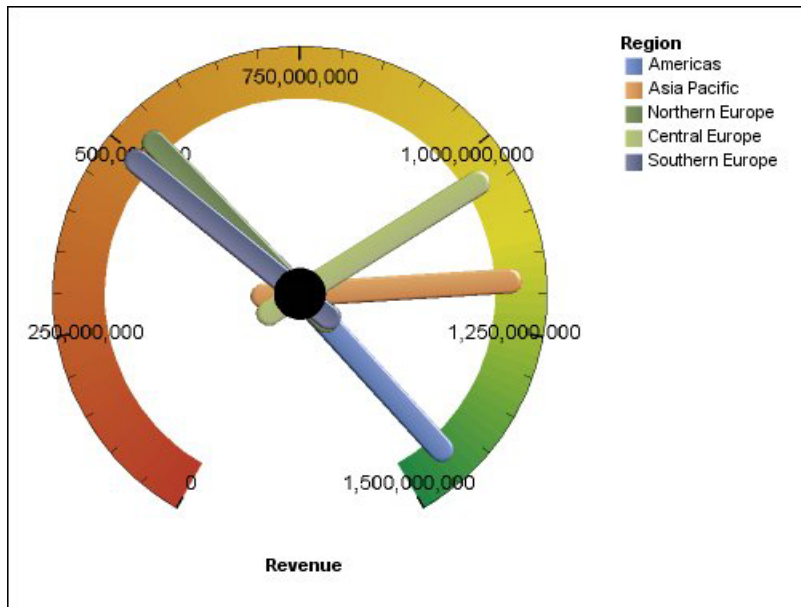

Related tasks:

“Customize a Current Default Gauge Chart” on page 144

When you create a gauge chart, you can choose from a variety of chart templates, which offer different shape, axis, and border options.

“Customize a Legacy Gauge Chart” on page 145

You can customize the colors and threshold boundaries of the gauge axis areas and whether they use numbers instead of percentages. You can also change the colors of the gauge face and outline and hide gauge labels. By default, the legacy gauge chart uses a band divided into thirds that runs from green to red.


Pareto Charts

Pareto charts help you to improve processes by identifying the primary causes of an event. They rank categories from the most frequent to the least frequent. These charts are frequently used for quality control data, so that you can identify and reduce the primary cause of problems.

Pareto charts include a cumulation line, which shows the percentage of the accumulated total of all the columns or bars.

You can create before and after comparisons of Pareto charts to show the impact of corrective actions. These charts are not supported for Microsoft Excel output.

The following example shows that the most frequent reason for product returns is unsatisfactory product.

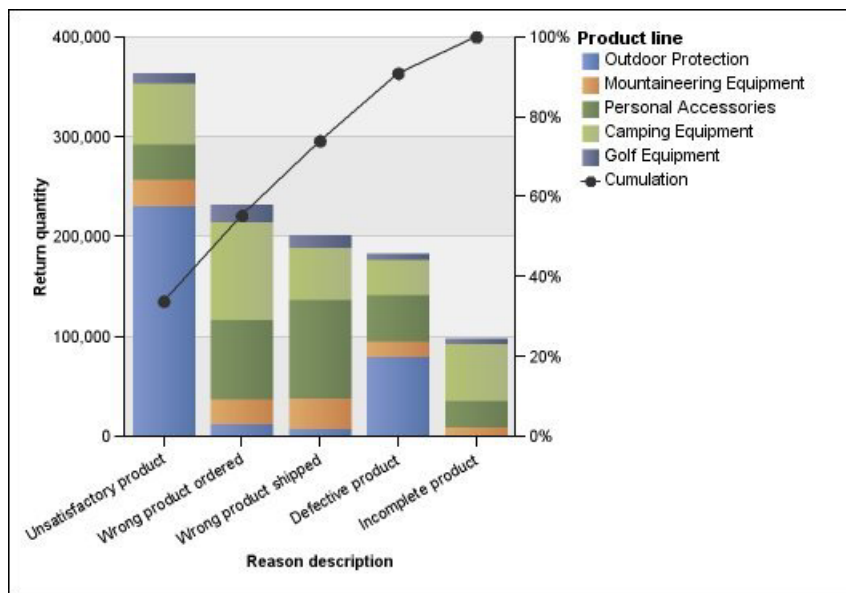

You can also create Pareto charts using horizontal bars.

Related tasks:

“Define the Cumulation Line in a Current Default Pareto Chart” on page 151
The cumulation line on a Pareto chart displays the percentage of the accumulated total of all the columns or bars. For example, if your chart displays revenue by product line by year, the cumulation line at the second year’s column would be the total revenue of the first and second years.

“Define the Cumulation Line in a Legacy Pareto Chart” on page 151
The cumulation line on a Pareto chart displays the percentage of the accumulated total of all the columns or bars. For example, if your chart displays revenue by product line by year, the cumulation line at the second year’s column would be the total revenue of the first and second years.


Progressive Column Charts

Progressive column charts, also known as waterfall charts, are like stacked charts with each segment of a single stack displaced vertically from the next segment.

Progressive column charts are useful for emphasizing the contribution of the individual segments to the whole.

These charts are not supported for Microsoft Excel output.

The following example analyzes the contribution of each product line to revenue.

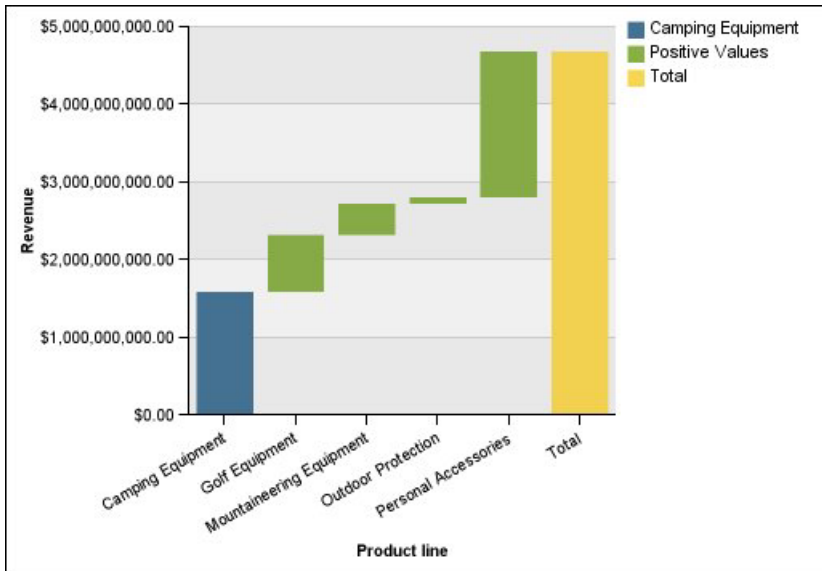

Progressive column charts can plot data using standard and three-dimensional configurations. You can also create progressive charts using horizontal bars.


Microcharts

Microcharts are smaller versions of column charts, bar charts, and line charts that you can use in crosstabs and dashboards. Microcharts include column microcharts and bar microcharts, which are available in stacked and 100 percent stacked configurations, and win-loss charts and modified line charts that contain the following:

- A closing value marker.
- Opening, closing, high, and low value markers.

- A reference line.


Note: If you specify custom labels for a microchart, the custom labels appear in the tooltips, not on the chart itself. For more information about custom labels, see “Specify Custom Label Text” on page 119.

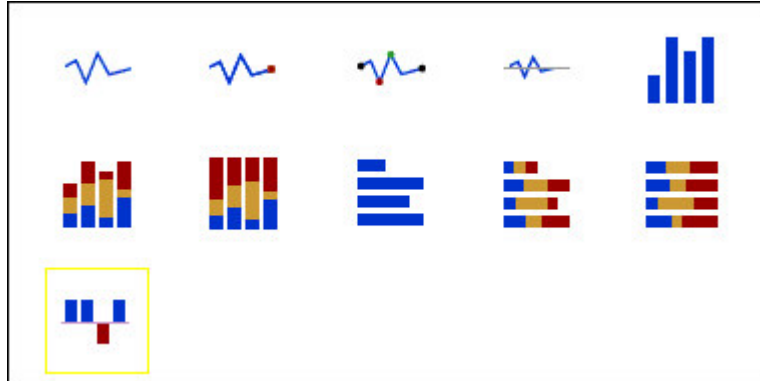

Win-loss charts are microcharts in which the value of each column is either 1 or -1, often denoting a win or loss.

Win-loss charts use two measures (the default and the win-loss measure) and no series. The win-loss measure is the measure or calculation that you define. You can also specify a default measure. For example, you might need to specify a default measure to give context to a calculated measure in the chart. For more information about the default measure, see “Specify the Default Measure” on page 73.

The following example shows the quarters that have a margin of less than 10,000 in red.



Marimekko Charts

Marimekko charts are 100 percent stacked charts in which the width of a column is proportional to the total of the column's values. Individual segment height is a percentage of the respective column total value.

The following example shows the contribution of revenues for product lines in different regions.


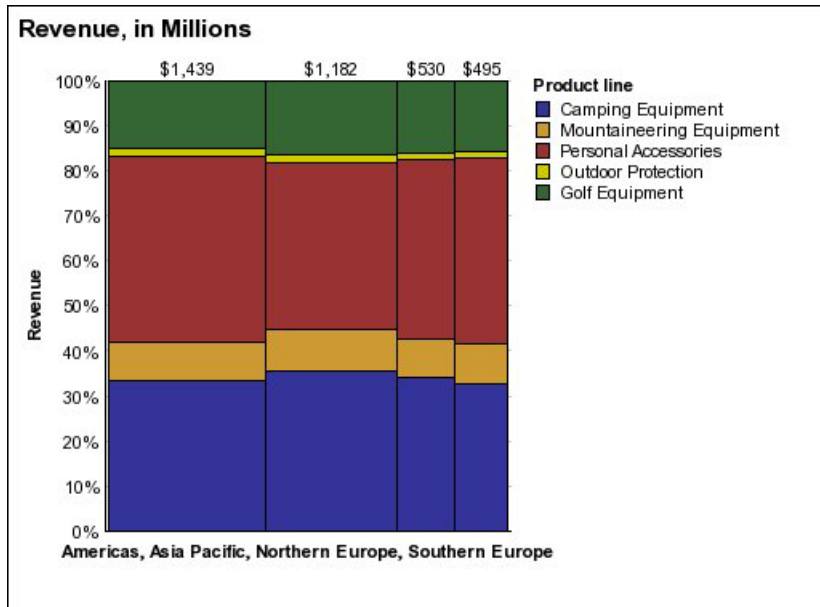


Figure 9. Marimekko chart

Radar Charts

Radar charts integrate multiple axes into a single radial figure. For each figure, data is plotted along a separate axis that starts at the center of the chart.

The following example shows the revenue from multiple retailer types in multiple territories.

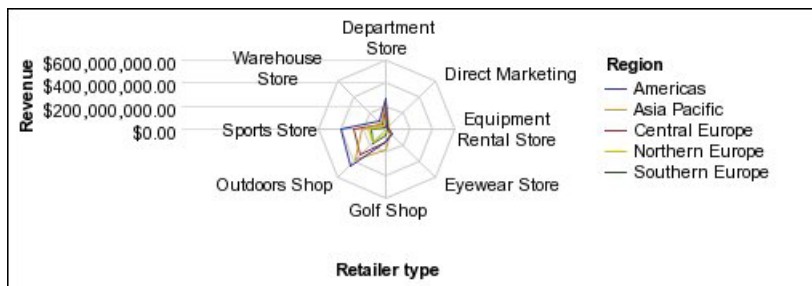

Radar charts can plot data using standard and stacked configurations.


Polar Charts

Polar charts are useful for showing scientific data.

They are circular charts that use values and angles to show information as polar coordinates.

You can specify a default measure. For example, you might need to specify a default measure to give context to a calculated measure in the chart. For more information about the default measure, see “Specify the Default Measure” on page 73.

The following example shows the revenue and quantity for each product line. The distance along the radial axis represents quantity, and the angle around the polar axis represents revenue.

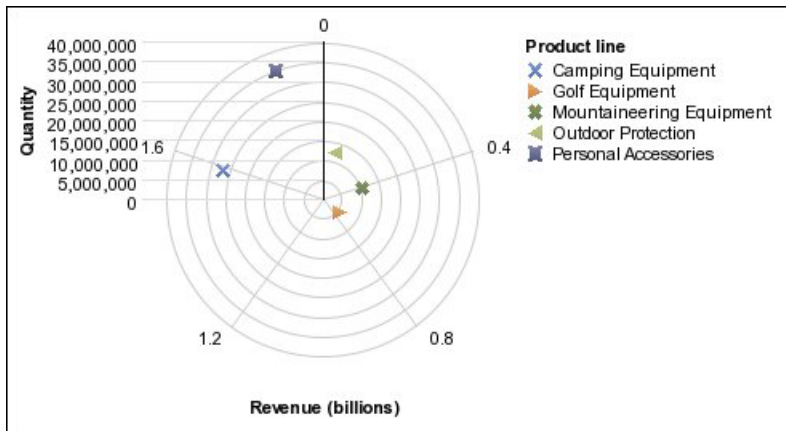


Range Indicator Charts

Range indicator, or metrics range, charts are useful for showing a target range and a tolerance range.

A range indicator chart adds a target and range marker to a column, line, or area chart.

The following example shows actual revenue versus planned revenue. The markers indicate the planned revenue, and the range and tolerance lines are defined by the chart author.

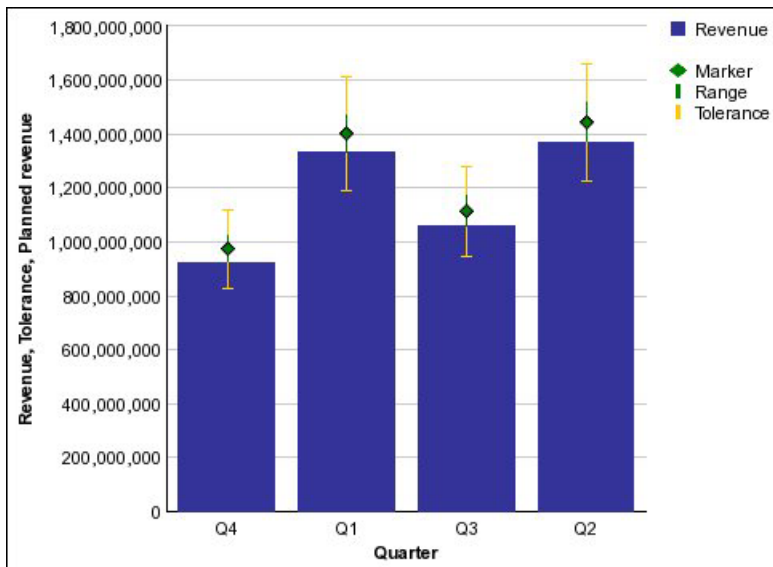

You can also insert IBM Cognos Metric Studio diagrams in your report to show the relationship between metrics. For more information, see “Add a Static Metric Studio Diagram to a Report” on page 159 and “Add a Data-driven Metric Studio Diagram to a Report” on page 159.

Chart Configurations

Chart configurations specify the grouping type of the columns, bars, lines, and areas in a chart. Some examples are standard, stacked, and 100 percent stacked charts.

Standard Charts


Standard or absolute charts are useful for comparing specific values and for representing discrete data, such as data for different regions or individual employees. For example, a standard column chart that plots regional sales emphasizes the actual value that each region achieves in sales.

Standard charts plot the actual value of each data series from a common axis.

When you create charts using multiple data series, you can distinguish each series by the color or pattern of its data marker. Related data series are shown together in clusters for easy comparison.

In standard area and radar charts that have multiple data series, the colored areas that represent lower values might be covered by the larger colored areas that represent higher values. Use the stacked configuration for area and radar charts with multiple data series.

The following example shows the revenue values for each product line within each territory.

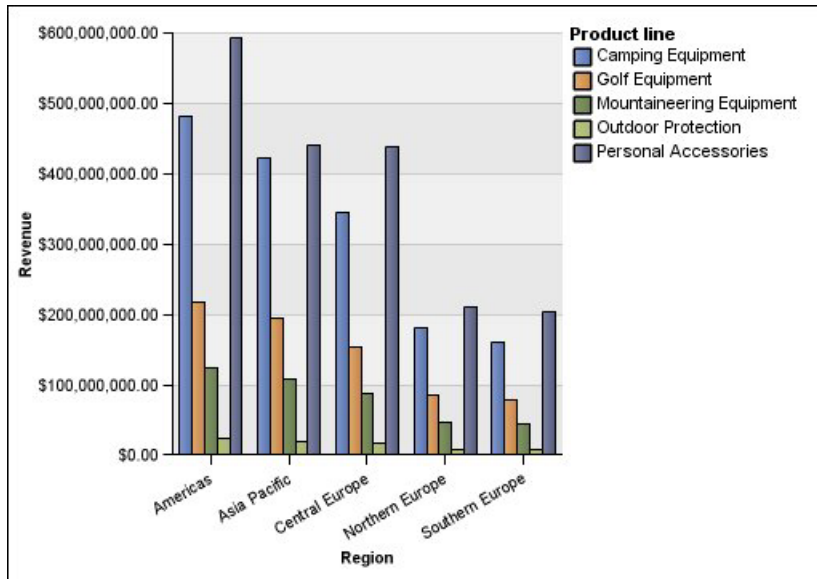


Stacked Charts

Stacked charts are useful for comparing proportional contributions within a category. They plot the relative value that each data series contributes to the total. For example, a stacked column chart that plots product line sales will emphasize the proportion that each product line contributes to the total in each territory.

You can distinguish each data series by the color or pattern of its section in the stack. The top of each stack represents the accumulated totals for each category.

Do not use the stacked configuration in line charts that have multiple data series because it is difficult to distinguish between unstacked and stacked configurations, and your chart consumers might misunderstand your data.

The following example shows that camping equipment contributed a large proportion of the actual revenue in most sales territories.

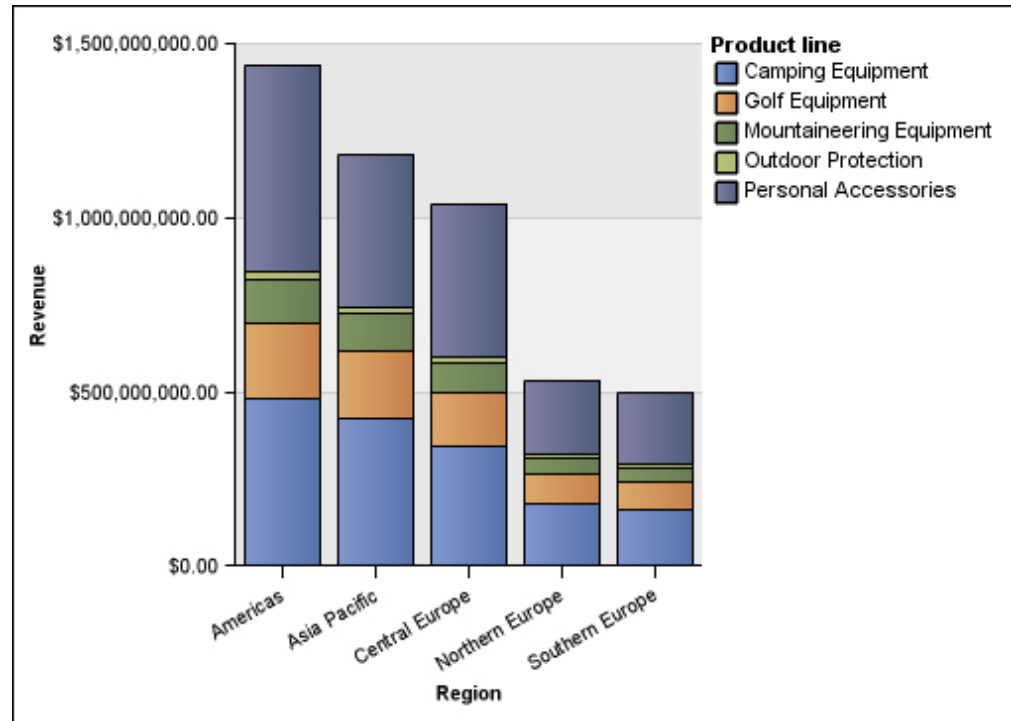


100 Percent Stacked Charts

100 percent stacked charts are useful for comparing proportional contributions across all categories. They plot the relative contribution of each data series to the total as a percentage. For example, a 100 percent stacked column chart that plots product line sales emphasizes the percentage within each region without referring to actual values.

You can distinguish each data series by the color or pattern of its section in the stack. Each stack represents 100 percent.

100 percent stacked charts highlight proportions. When actual values are important, use another chart configuration.

The following example shows the percentage of sales for each product line in each region.

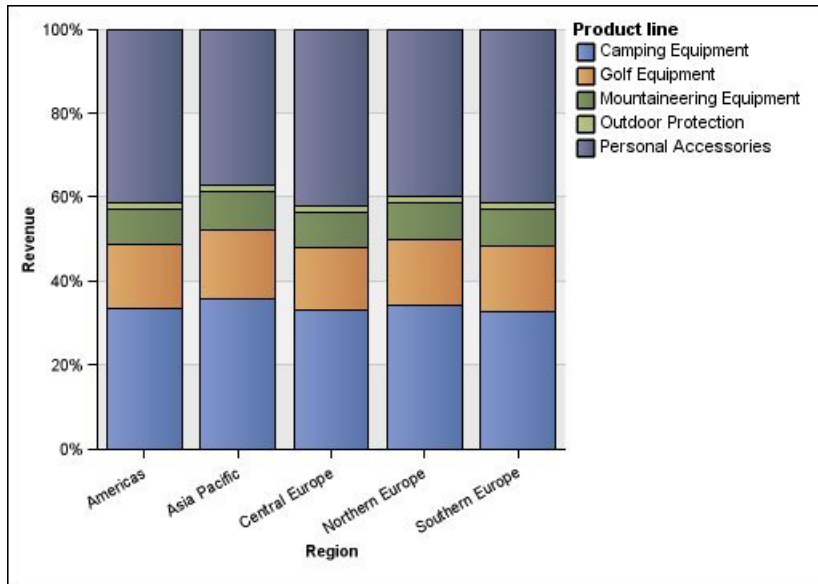


Three-dimensional Charts

Three-dimensional charts provide a visually effective display that is suitable for presentations.

Three-dimensional column, bar, line, and area charts plot data by using three axes.

Three-dimensional pie charts have a three-dimensional visual effect.

Do not use three-dimensional charts when you need to show exact values, such as for control or monitoring purposes. The distortion in three-dimensional charts can make them difficult to read accurately. For example, the following chart shows actual revenue for each product line in each territory, but some data labels are omitted because there is not enough room to display them all.

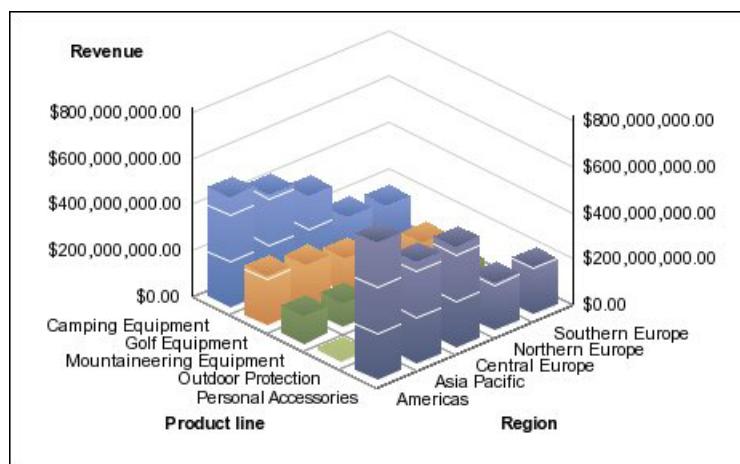

Convert Charts From One Type to Another

You can convert a chart from one type (for example, a bar chart) to another type (for example, a line chart).

When you convert an existing chart to a new chart type, IBM Cognos Report Studio keeps the properties from the existing chart if those properties exist in the new chart type. For example, if you convert a pie chart to a bar chart, Report Studio maps your chart palette to the new chart, but does not map the exploding slices, because the exploding slices property does not exist in a bar chart.

Note: Report Studio converts legacy charts to the current default chart types automatically if you change the chart type unless you select the **Use legacy chart authoring** option. You can convert legacy charts to current default charts, but you cannot convert current default charts back to legacy charts.

Procedure

1. Right-click a chart and click **Convert Chart**.
2. Select a new chart type, and click **OK**.

If some chart properties cannot be converted, the **Chart Property Changes** dialog box appears notifying you of the properties that cannot be converted.

Convert Legacy Charts to Current Default Charts

You can convert charts from the legacy charts to the current default charts. When you convert a legacy chart, select the template that most closely matches your legacy chart in order to preserve as many settings as possible.

Note: You can convert legacy charts to current default charts, but you cannot convert current default charts back to legacy charts.

Procedure

1. From the **Tools** menu, click **Options**.
2. From the **Advanced** tab, clear the **Use legacy chart authoring** check box.
3. Right-click the legacy chart and click **Convert Chart**.
4. Select a new chart type, and click **OK**.

If some chart properties cannot be converted, the **Chart Property Changes** dialog box appears notifying you of the properties that cannot be converted.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Limitations When Converting Legacy Charts

When you convert a legacy chart to the current default chart, some chart types or chart properties might not be migrated properly. For example, clustered area charts and 100% stacked line charts are not available in the current default charts. If your exact chart configuration is not available, select the closest matching template.

The following legacy chart properties are not migrated to the current default charts:

- **Conditional Palette**
- **Style Variable**
- **Display Frequency** and **First Label Index** on the category axis
- **Visual Angle**
- **Rotate Values**

- **Conditional Style, Style Variable, and Drill-Through Definitions** on pie labels and gauge labels
- **Connecting Lines** on combination charts
- line styles; only four line styles are supported in the current default charts

The following table outlines some behavior differences between legacy charts and the current default charts.

Legacy Charts	Current Default Charts
Combination charts are always ordered from back to front - area, bar, and line.	Combination charts support any order.
In bar charts, multiple bar definitions for the Y1-axis are placed side-by-side.	In bar charts, multiple bars are placed on top of one another and you can control the width of the bars.
In combination charts, the color palette is continued over multiple bars, lines, and areas.	In combination charts, color palettes are restarted for each bar, line, and area.
The legend order respects the order in which bars, lines, and areas are specified. For example, bars can appear before areas in the legend.	The legend order is the same as the order specified in the chart.

The following chart types continue to use the legacy chart technology and therefore cannot be upgraded to the current default chart technology. If you want to convert these chart types to the current default charts, upgrade them to a different chart type, such as a column or line chart.

- Win loss
- Radar
- Polar
- 3-D Bar, 3-D Line, 3-D Area, and 3-D Combination
- 3-D Scatter
- Metrics range
- Marimekko

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customizing Chart Properties

After you create a chart, you can customize it by changing its properties.

You select the chart object in IBM Cognos Report Studio to view its properties. Some properties are dependent on the existence of other properties.


If you are familiar with using conditional variables, you can customize the chart to change its appearance or provide information in response to expressions or conditions.

As you edit the chart properties, Report Studio provides you with a preview of your chart, using simulated data. This allows you to view your style changes without running the report. You can disable the chart preview in the options.

The following table shows some of the properties you can change in charts. These properties are available when you select the chart object unless specified otherwise in the **Action to perform in the Properties pane** column.

Goal	Action to perform in the Properties pane
Hide or show the title, subtitle, or footer	Select the chart. Under Chart Titles , set the Title , Subtitle , or Footer property.
Hide or show the legend	Select the chart. Under Chart Annotations , set the Legend property. For more information, see “Customize the Legend in a Current Default Chart” on page 124.
Hide or show baselines	Select the chart. Under Chart Annotations , set the Baselines property. For more information, see “Add a Baseline to a Current Default Chart” on page 130.
Hide or show trendlines or regression lines	Select the chart. Under Chart Annotations , set the Trendlines or Regression Line property. For more information, see “Display Trendlines in Current Default Charts” on page 134 or “Display Regression Lines in Legacy Scatter or Bubble Charts” on page 135.
Hide or show markers	Select the chart. Under Chart Annotations , set the Markers property. For more information, see “Add a Marker to a Current Default Chart” on page 132.
Hide or show notes	Select the chart. Under Chart Annotations , set the Notes property. For more information, see “Add a Note to a Current Default Chart” on page 127.
Hide or show the axes	Select the chart. Under Axes , set the Y1 Axis , Y2 Axis , or Category Axis property. For more information, see “Customize the Axes of a Current Default Chart” on page 120.
Hide or show the axis title or axis line	Select the axis. Under General , set the Axis Line or Axis Title property. For more information, see “Customize the Axes of a Current Default Chart” on page 120.


Goal	Action to perform in the Properties pane
Change an axis title	<p>Select the axis title. Under General, set the Default Title property to No, and then double-click the axis title and type a new title.</p> <p>Tip: You can use the Properties pane to change the axis title properties, such as font, positioning, color, and so on.</p> <p>For more information, see “Customize the Axes of a Current Default Chart” on page 120.</p>
Change axis properties, such as range, scale interval, and so on	<p>Select the numeric axis. Under General, set the Minimum Value, Maximum Value, Scale Interval, or Scale property.</p> <p>For more information, see “Change the Axis Scale of a Current Default Chart” on page 120.</p>
Hide or show the tooltips	<p>Select the chart. Under Chart Labels, set the Tooltips property.</p> <p>When you pause your pointer over a data marker in the report output, the corresponding absolute or cumulative value appears in a tooltip.</p> <p>Tooltips are not supported in PDF output.</p>
Change the data format	<p>Select the numeric axis. Under Data, set the Data Format property.</p>
Change the white space around the chart	<p>Select the chart. Under Box, set the Padding or Margin property.</p> <p>For more information, see “Apply Padding to an Object” on page 341 and “Set Margins for an Object” on page 342.</p>
Change the color or pattern in the palette for columns, lines, and areas	<p>Select the chart object. Under Color & Background, set the Palette or Conditional Palette property.</p> <p>For more information, see “Customizing the Color Palette of a Chart” on page 108 and “Create a Simple Conditional Palette for a Current Default Chart” on page 111.</p>
Change the chart orientation	<p>Select the chart. In the Properties pane, under Chart Orientation, select Vertical or Horizontal.</p>

Goal	Action to perform in the Properties pane
Change the default color or font for all chart objects	<p>Select the chart. Under Color & Background, set the Background Color, Foreground Color, or Fill Effects property.</p> <p>For more information, see “Change a Chart Background in a Legacy Chart” on page 115.</p> <p>Under Font & Text, set the Font or Relative Alignment property.</p> <p>Tip: The 2011 Quarterly Sales Forecast sample report in the GO Sales (analysis) package includes text alignment. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.</p>
Override the default font or color for axes and chart values	<p>Click the unlock button  in the toolbar to unlock the chart object, select the chart body by clicking between the axes, and set the Font, Background Color, Foreground Color, or Fill Effects property.</p>
Change the three-dimensional appearance of a chart	<p>Select the chart. Under General, set the Depth or Visual Angle property.</p> <p>For example, for a pie chart, a Depth value of 0 (zero) leaves the pie flat, or two-dimensional. A value of 100 raises the pie almost to a round ball shape.</p> <p>Tip: You can select a value from the Depth list or type a value that is not listed.</p>
Insert a background image or watermark in the chart body.	<p>Click the lock button in the toolbar to unlock the chart object, select the chart body by clicking between the axes.</p> <p>Under Color & Background, set the Background Image property.</p> <p>For more information, see “Change a Chart Background in a Legacy Chart” on page 115.</p>
Go to another report	<p>Select the chart. Under Data, set the Drill-Through Definitions property.</p> <p>For more information, see Chapter 18, “Using Drill-through Access,” on page 415.</p>
Specify which labels and values to use when generating the text shown on the chart	<p>Select the chart. Under Chart Labels, set the Values property.</p> <p>Note: When you show all the labels and values on some chart types, such as scatter charts, bubble charts, and polar charts, the text shown might be too long.</p>

Resize a Current Default Chart

You can change the size of a current default chart by dragging the resize handle in the lower right corner of the chart.

Procedure

1. Select the chart object.
2. Click the resize handle in the lower right corner of the chart .
Use Shift+drag to maintain the aspect ratio of the chart.
3. To see the actual size of the chart as it will appear in the report output, collapse the chart objects with the minus (-) button in the upper left corner of the chart.

Results

The new chart size appears in the **Size & Overflow** property. You can also edit the chart size with this property.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Resize a Legacy Chart

You can resize a legacy chart by defining the height and width in the **Size & Overflow** property.

The options available with this property are detailed in “Specify the Height and Width of an Object” on page 348.

Procedure

1. Select the chart object.
2. In the **Properties** pane, double-click the **Size & Overflow** property and specify the height and width.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customizing the Color Palette of a Chart

You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart. For example, if "Telephone" is the first in a data series of order methods, and you want it to appear in blue, use the palette to make the first item in the series blue.

You can customize the color palette for area, bar, bubble, gauge, Pareto, pie, and scatter charts.

You can also apply background effects to chart objects or change the colors of specific chart elements.

Related tasks:

“Add Background Effects to a Chart Object in a Legacy Chart” on page 116
You can change the look of certain charts and chart objects by applying visual effects such as drop shadows, borders, fills, texture effects, and bevel effects.

Customize the Color Palette of a Current Default Chart


You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart.

Progressive charts and legacy charts have different steps.

If specified, the default color is used for outputs that do not support the palette definition. For example, if the palette is defined to use a radial rectangle gradient and you run the report as PDF output, the default color is used because radial rectangle gradients are not supported in PDF output.

Procedure

1. Select the chart object. For combination charts, select the bar, line, or area objects.

2. To choose a preset color palette, click the chart palette presets button  on the style toolbar, and then click a palette.

3. To change the existing color palette:
 - In the **Properties** pane, under **Color & Background**, double-click the **Palette** property.
 - On the **Entries** tab, click the palette entry that you want to change.
 - Under **Fill**, select fill type, color, transparency, and other fill settings. The options in the **Fill type** list depend on the chart type you are using.

Linear Gradient displays a gradient that changes color horizontally. You can specify the position of each color in the gradient and add or remove colors from the gradient.

Radial Line Gradient displays a gradient that changes color outwards from a central point, or focus. You can specify the position of each color in the gradient and the size and position of the focus. You can also add or remove colors from the gradient.


Radial Rectangle Gradient displays a gradient that changes color outwards from a rectangle. You can specify the position of each color in the gradient and the size of the rectangle. You can also add or remove colors from the gradient.

Pattern displays a colored pattern that you choose from a preset list. You can specify the foreground and background colors.

Color displays a solid color. You can specify the transparency.

Image displays an image. You can specify the image to use.

- To change the color of this palette definition, click the color in the **Colors** list, click **Color**, specify the color properties, and click **OK**.
4. Under **Style**, depending on the chart type you are customizing and the fill type you chose in step 2, you can change the marker shape, line style, default color, and line weight.

5. To add a new palette entry, click the new button  and specify the new palette settings.

6. To change the order in which the colors, gradients, or patterns appear in the chart, use the arrow buttons under the **Palette** box to change their position.

7. To copy and paste a palette, open the palette dialog box and press Ctrl+C to copy the palette to the clipboard. Close the palette dialog box. Select another chart, open the palette dialog box, and press Ctrl+V to paste the palette from the clipboard.

8. To customize the data markers, on the **Properties** tab, depending on the chart type you are customizing and the fill type you chose in step 2, you can specify whether data markers are shown and change their color and size.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize the Color Palette of a Current Default Progressive Chart

You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart.

Legacy charts and other types of current default charts have different steps.

If specified, the default color is used for outputs that do not support the palette definition. For example, if the palette is defined to use a radial rectangle gradient and you run the report as PDF output, the default color is used because radial rectangle gradients are not supported in PDF output.

Procedure

1. Select the progressive chart object.
2. In the **Properties** pane, double-click the **Progressive Palette** property.
You can specify the following:
 - **Positive value fill** defines the appearance of the positive bars or columns on the chart.
 - **Negative value fill** defines the appearance of the negative bars or columns on the chart.
 - **First value fill** defines the appearance of the first bar or column on the chart.
 - **Total value fill** defines the appearance of the total bar or column on the chart, if a total bar or column is present.
3. To change the appearance of a fill:
 - Click the colored box beside the fill name.
 - Click a fill type from the **Fill type** list.
 - Linear Gradient** displays a gradient that changes color horizontally. You can specify the position of each color in the gradient and add or remove colors from the gradient.
 - Radial Line Gradient** displays a gradient that changes color outwards from a central point, or focus. You can specify the position of each color in the gradient and the size and position of the focus. You can also add or remove colors from the gradient.
 - Radial Rectangle Gradient** displays a gradient that changes color outwards from a rectangle. You can specify the position of each color in the gradient and the size of the rectangle. You can also add or remove colors from the gradient.
 - Pattern** displays a colored pattern that you choose from a preset list. You can specify the foreground and background colors.
 - Color** displays a solid color. You can specify the transparency.
 - Image** displays an image. You can specify the image to use.
 - To change the color of this fill, click the color in the **Colors** list, click **Color**, specify the color properties, and click **OK**.
4. To change the text of the label that appears next to a bar, double-click the text box beside the fill name and specify the text.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize the Color Palette of a Legacy Chart

You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart.

Current default charts have different steps.

Procedure

1. Select the chart object.
2. In the **Color & Background** section of the **Properties** pane, double-click the **Palette** property.
3. In the **Palette** dialog box, click the new palette entry button to define a new palette entry:
 - To apply color, click **Color**, specify the color properties, and click **OK**.
 - To apply a gradient, click **Gradient**, specify the **Direction**, **From color**, and **To color** properties, and click **OK**.
 - To apply a pattern, click **Pattern**, specify the **Pattern**, **Foreground color**, and **Background color** properties, and click **OK**.

Tip: You can also select a predefined palette from the **Palettes** box.

4. To change the order in which the colors, gradients, or patterns appear in the chart, use the arrow buttons under the **Palette** box to change their position.
5. To copy and paste a palette, open the palette dialog box and press Ctrl+C to copy the palette to the clipboard. Close the palette dialog box. Select another chart, open the palette dialog box, and press Ctrl+V to paste the palette from the clipboard.
6. Repeat step 3 for each chart series.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Creating a Conditional Color Palette in a Chart

You can create a conditional palette to color data items in your chart in different ways depending on a condition. For example, in a column chart that shows revenue per month, you want to make the columns for the months that have a revenue greater than \$1000000 green.

You can also use conditional styles to highlight exceptional data and use conditions to control the layout of your report.

Related concepts:

Chapter 14, “Using Conditions,” on page 365





You can define conditions to control what users see when they run a report. Conditions can apply to specific items in a report. For example, you can define a conditional style to highlight exceptional data, such as product revenue that exceeds your target.


Create a Simple Conditional Palette for a Current Default Chart


You can create a simple conditional palette based on a string data item or a numeric data item. For example, if you want to create a condition to display only


Revenues over one million dollars, you can create a numeric condition; whereas, if you want to create a condition to display only product codes with the letter A in them, you can create a string condition.

Procedure

1. Select the chart series to which you want to apply the conditional palette.
2. In the **Properties** pane, under **Color & Background**, double-click the **Conditional Palette** property.
3. Click the new button  and click **New Condition**.
4. If you want to create a conditional palette based on a string, do the following:
 - a. Select the string data item to determine the condition.
 - b. In the **Type of conditional style** list, click **String**, and click **OK**.
 - c. Click the new button and select how to define the condition:
 - To select more than one individual value, click **Select Multiple Values** and click the values.
 - To type specific values, click **Enter Values** and type the values.
 - To specify your own criteria, such as values that begin with the letter A, click **Enter String Criteria** and specify the condition.
 - d. Under **Palette Entry**, beside the new condition, click the edit button .
 - e. Define the palette entry fill type, colors, and angle, and click **OK**.
5. If you want to create a conditional palette based on a numeric range, date/time range, interval range, date range, or time range, do the following:
 - a. Select a numeric data item to determine the condition.
 - b. In the **Type of conditional style** list, click the type of condition you want to create, and click **OK**.
 - c. Click the new button  and type a value to define a threshold.
The value appears in the **Range** column, and two ranges are created.
 - d. For each range, under **Style**, click the edit button  to define the palette entry fill type, colors, and angle, and then click **OK**.
 - e. Repeat the steps above to add other conditions.

Tip: Under **Style**, pause the pointer over each range  to see the condition produced for that range.

 - f. If you want to use the default palette for the lowest range instead of specifying a conditional palette select the **Use default palette for lowest range** check box.
 - g. To move a value above or below a threshold, click the arrow button  next to the value.
For example, you insert a threshold value of five million. By default, the ranges are less than or equal to five million and greater than five million. Moving the five million value above the threshold changes the ranges to less than five million and greater than or equal to five million.
6. To customize the label for a conditional palette, do the following:
 - a. Click **Label** beside the palette entry.

- b. In the **Conditional Palette Entry Label** dialog box, click **Specified text** and click the ellipsis (...) button.
 - c. Type the default label text in the **Label** text box.
 - d. To add customized labels for other languages, click the add button , select the other languages, and click the language to define the customized label for that language.
7. Specify the order in which to evaluate the conditions by clicking a condition and then clicking the move up or move down arrow.
- Conditions are evaluated from top to bottom, and the first condition that is met is applied.




Related concepts:

“Current Default Charts and Legacy Charts” on page 79
 IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Create an Advanced Conditional Palette for Current Default Charts

Advanced conditions allow you to use a calculations or expression to evaluate the condition. If multiple advanced conditions are met, only the first conditional style is applied.

Procedure

1. Select the chart series to which you want to apply the conditional palette.
 2. In the **Properties** pane, under **Color & Background**, double-click the **Conditional Palette** property.
 3. Click the add button  and click **Advanced Condition**.
 4. Click the new advanced condition button  and specify the expression that defines the condition.
- The new advanced condition appears in the **Conditional Palette - Advanced** dialog box.
5. Under **Palette Entry**, beside the new advanced condition, click the edit button .
 6. Define the palette entry fill type, colors, and angle, and click **OK**.
 7. Specify the order in which to evaluate the conditions by clicking a condition and then clicking the move up or move down arrow.
- Conditions are evaluated from top to bottom, and the first condition that is met is applied.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
 IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Create a Conditional Color Palette for a Legacy Chart

You can create a color palette that appears differently depending on a yes or no answer, an expression or calculation, or the report language.

Procedure


1. Click the chart object.
2. In the **Properties** pane, under **Color & Background**, double-click the **Conditional Palette** property.


3. If you want to create a variable that has only two possible values, **Yes** and **No**, do the following:
 - a. Under **Variable**, click **New boolean variable**.
 - b. In the **New Variable** dialog box, type a name for the variable.
 - c. In the **Expression Definition** box, define the condition and click **OK**.
 For example, the following expression returns the value **Yes** if revenue is less than one million and the value **No** if revenue is greater than or equal to one million:

```
[Revenue]<1000000
```

 For information about creating expressions, see “Using Relational Calculations” on page 248 or “Using Dimensional Calculations” on page 302 and Appendix F, “Using the expression editor,” on page 555.
 - d. In the **Value** box, select whether the expression evaluates to **Yes** or **No**.
 - e. Under **Effects**, specify the color palette to use for the condition.
4. If you want to create a variable whose values are string-based, do the following:
 - a. Under **Variable**, select **New string variable**.
 - b. In the **Expression Definition** box, define the condition and click **OK**.
 For example, the following expression returns the value **high** if revenue is greater than one million and the value **low** if revenue is less than or equal to one million:

```
if ([Revenue]>1000000) then ('high') else ('low')
```

 For information about creating expressions, see “Using Relational Calculations” on page 248 or “Using Dimensional Calculations” on page 302 and Appendix F, “Using the expression editor,” on page 555.
 - c. Click the add button  in the **Values** pane.
 - d. For each value that the variable can assume, type the name of the value that corresponds with the possible outcomes defined in the expression.
 For example, in the previous expression, you must create two values for the variable, high and low.

Tip: You can create a group by clicking two or more values and then clicking the group values button . For example, you can create a group that includes the available French languages.
5. If you want to create a variable whose values are different languages, do the following:
 - a. Under **Variable**, select **Report Language Variable**.
 - b. In the **Languages** dialog box, select the languages to support.
6. Click **OK** to close the expression editor and leave the **Conditional Palette** dialog box open.
7. Under **Effect**, click **Pattern**.
8. Under **Pattern**, select a pattern and click **OK**.
9. In the **Box** section of the **Properties** pane, set the **Borders** property to **Show**.

Related concepts:


“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Change a Chart Background in a Current Default Chart

You can use a gradient, pattern, color, or image to customize the chart background.

Procedure

1. Click the chart object.
2. Click the unlock button , select the chart body by clicking between the axes, and, in the **Properties** pane, under **Color & Background**, double-click the **Plot Area Fill** property.
3. Click a fill type from the **Fill type** list.
 - **Linear Gradient** displays a gradient that changes color horizontally. You can specify the position of each color in the gradient and add or remove colors from the gradient.
 - **Radial Line Gradient** displays a gradient that changes color outwards from a central point, or focus. You can specify the position of each color in the gradient and the size and position of the focus. You can also add or remove colors from the gradient.
 - **Radial Rectangle Gradient** displays a gradient that changes color outwards from a rectangle. You can specify the position of each color in the gradient and the size of the rectangle. You can also add or remove colors from the gradient.
 - **Pattern** displays a colored pattern that you choose from a preset list. You can specify the foreground and background colors.
 - **Color** displays a solid color. You can specify the transparency.
 - **Image** displays an image. You can specify the image to use.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79


IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Change a Chart Background in a Legacy Chart

You can use a solid color, a pattern, or a gradient fill effect to customize the chart background.

You can also use an image as a background for a chart.

Procedure

1. Click the chart object.
2. Click the unlock button , select the chart body by clicking between the axes, and, in the **Properties** pane, under **Color & Background**, double-click the **Fill Effects** property.
3. In the **Effect** box, choose a color, a gradient fill effect, or a pattern:
 - To apply a color, click **Color** and specify the color properties.
 - To apply a gradient fill effect, click **Gradient** and then specify the **Direction**, **From color**, and **To color** properties.
 - To apply a pattern effect, click **Pattern** and specify the **Pattern**, **Foreground Color**, and **Background Color** properties.

The foreground color is the color of the selected pattern. The background color is the color of the area behind the pattern.

4. To remove a background fill effect, click **None**.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Related tasks:


“Insert a Background Image in an Object” on page 334

You can insert a background image for objects in a report. For example, use a background image to add a watermark to a page.

Add Background Effects to a Chart Object in a Legacy Chart

You can change the look of certain charts and chart objects by applying visual effects such as drop shadows, borders, fills, texture effects, and bevel effects.

Procedure

1. Select the chart object.
2. To apply a preset background fill effect, from the toolbar, click the background effects presets  button.
3. To add a custom fill effect and border do the following:
 - a. In the **Properties** pane, under **Color & Background**, double-click the **Background Effects** property.
 - b. Click **Border** and specify settings for border style, width, color, corner radius for rounded rectangles, and transparency.
If the object also includes a fill with a transparency setting, select the **Allow transparent bleed** check box to apply the same transparency to the border.
 - c. Click **Fill** and specify the settings.
The fill effect can either be a solid color, a gradient, or a pattern.
4. To add a texture effect, in the **Properties** pane, under **Color & Background**, select an option under **Material Effects**.
5. To add a drop shadow, do the following:
 - a. In the **Properties** pane, under **Color & Background**, double-click the **Drop Shadow** property.
 - b. Select the **Drop shadow** check box.
 - c. From the **Shadow color** list, click a color.
 - d. Under **Blur**, click an intensity to set the drop shadow's blur.
 - e. Under **Offset**, enter a value and a unit to define the width and height of the drop shadow.
 - f. Under **Transparency**, type a percentage to determine the transparency of the shadow.
6. To add a bevel, in the **Properties** pane, under **Color & Background**, double-click the **Bevel** property and click a bevel effect.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Customizing the Color Palette of a Chart” on page 108

You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart. For example, if "Telephone" is the first in a data series of order methods, and you want it to appear in blue, use the palette to make the first item in the series blue.

Related tasks:

“Add Color to an Object” on page 353

You can add background and foreground color to objects in the report. The foreground color applies to the text within objects.

Add Colored Regions in a Current Default Chart

You can define colored regions in the body of a chart. For example, you can divide the background of a scatter chart into quadrants and color each quadrant.

You can add colored regions to bubble, bullet, combination, Pareto, progressive column, and scatter charts.

In bullet charts, colored regions are automatically added.


You can use the following criteria to position the colored regions.

Option	Position
Percent on Axis (%)	Uses a percentage of the full range of the axis. For example, if the axis range is -500 to 1100, a Percent on Axis value of 25% puts the baseline at -100 (25% of the range, 1600).
Numeric Value	Uses a static numeric value.
Mean	Uses the statistical mean plus or minus a number of standard deviations based on all charted data values on the specified axis.
Percentile (%)	Uses a specified percentile.
Statistical Maximum	Uses the following expression: <i>25th percentile value - 1.5 * (75th percentile value - 25th percentile value)</i> For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical minimum is -5 [2.5 -1.5(5) = -5].
Statistical Minimum	Uses the following expression: <i>75th percentile value + 1.5 * (75th percentile value - 25th percentile value)</i> For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical maximum is 15 [7.5 +1.5(5) = 15].


Option	Position
Query Calculation	Uses a query calculation from the same query or from a different query. For more information, see “Using Relational Calculations” on page 248.
Layout Calculation	Uses a layout calculation. For more information, see “Using Relational Calculations” on page 248.
Category Index	Specifies a position based on the index value of the data item in the categories axis. The value must be between 0 and 100. For example, a Category index value of 1 indicates that the position is located at the first data item. This is the default.

You can also combine colored regions with gridlines.

Procedure

1. Click the chart object.
2. In the **Properties** pane, under **Color & Background**, double-click the **Colored Regions** property.
3. Click the new button .
4. Under **Region label**, type a name for the region.
5. Under **Label location**, specify whether the label should appear in the legend or in the chart.
6. If your chart includes multiple charts, such as in a combination chart, under **Based on**, select the chart to which the colored regions apply.
7. Under **Region fill**, click the color box to specify the color and fill effects.
8. Specify the start and end of the category and numeric positions.
9. If you want to add more colored regions, repeat steps 3 to 5.
10. If you add more than one colored region, specify their order using the up and down arrows.

The regions are drawn in the same order that they appear in this list. The first region is drawn first, on the bottom, and the last region is drawn on top of the other regions.

Tip: To delete a colored region, click the colored region icon and text and click the delete button .

Results

The new region appears in the **Colored regions** box.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Specify Custom Label Text

By default, chart labels use the name of the underlying data item label. You can change the label text to make it more meaningful. For example, you can rename a chart item labeled **ISO_3_Letter_Code** to **Country or Region**.

If you specify custom labels for a microchart or win-loss charts, the custom labels appear in the tooltips, not on the chart itself.

Procedure

1. Click the chart node member or measure.
2. In the **Properties** pane, under the **Chart Labels**, set the **Custom Label** property to **Show**.

A new chart text item appears above the default measure or below the chart node member.

3. Do one of the following:
 - To change the text of the label, double-click the chart text item and type the text.
 - To change the source of the label text, select the new chart text item. In the **Text Source** section of the **Properties** pane, set the **Source Type** property.

If nothing is specified in the new chart text item, the label appears blank.

Tip: To remove a custom label, set the **Custom Label** property to **Hide**.

Customizing the Axes of a Chart

Chart axes are lines that border the chart area and provide a reference for measurements. They act as a vehicle for tick marks and scales and form a frame around the chart. The Y-axis is usually the vertical axis and contains data. The X-axis is usually the horizontal axis and contains categories.

To make your chart data easier to understand, you can do the following to customize each axis:

- show or hide the axis labels (data values)
- show or hide the axis line
- change the color, style, and weight of the axis line
- show or hide major and minor tick marks and specify where to display them

In HTML/PDF, if you have a report with a line chart, you can use the **Include Zero For Auto Scale** property to adjust the scale of the Y-axis of the chart. If the difference between your measure's maximum/minimum values is much less than the difference between your measure's minimum value and zero, using this property will make the chart Y-axis begin at something closer to your measure's minimum value, making the line utilize all of the chart's vertical space. In some cases this is significant in improving the readability of the chart.

Related concepts:

“Axes” on page 82

Axes are lines that provide references for measurement or comparison.

Customize the Axes of a Current Default Chart

You can customize the axis labels, axis lines, and minor and major tick marks.

You can change the scale for the major and minor tick mark using the **Axis Range** property.

Procedure

1. Select the Y-axis or the X-axis of the chart.
2. To show or hide the axis labels, in the **Properties** pane, set the **Axis Label** property.
3. If your chart includes nested categories, to change how the category axis labels are displayed, set the **Nested Label Display** property.
4. To show or hide axis lines, in the **Properties** pane, double-click the **Axis Line** property, and select or clear the **Axis line** check box.
5. To change the color, style, and weight of the axis line, in the **Properties** pane, set the **Axis Line** property.
6. To show or hide minor and major tick marks and specify their location, in the **Properties** pane, set the **Axis Line** property.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Related tasks:

“Change the Axis Scale of a Current Default Chart”

By default, IBM Cognos Report Studio automatically determines the minimum and maximum scale values for the axes in a chart. For example, a Y-axis showing revenue values might have an axis range of zero dollars to one million dollars. You can customize the axis scale, or range, to make your chart easier to understand.

Customize the Axes of a Legacy Chart

You can customize the axis labels and axis line.

Procedure

1. Select the Y-axis or the X-axis of the chart.
2. To show or hide the axis labels, in the **Properties** pane, set the **Axis Label** property.
3. Select the **Axis line** check box.
4. Click **Line color** and choose a color for this axis line.
5. To show or hide axis lines, in the **Properties** pane, double-click the **Axis Line** property, and select or clear the **Axis line** check box.
6. To change the color, style, and weight of the axis line, in the **Properties** pane, double-click the **Axis Line** property.

Change the Axis Scale of a Current Default Chart

By default, IBM Cognos Report Studio automatically determines the minimum and maximum scale values for the axes in a chart. For example, a Y-axis showing revenue values might have an axis range of zero dollars to one million dollars. You can customize the axis scale, or range, to make your chart easier to understand.

You can specify the following for each axis:

- the maximum and minimum values of the range
- whether to include zero in an automatic axis range
- whether to use a logarithmic scale, if the values in the chart cover a very large range
- how often major and minor gridlines appear

Logarithmic scales can be useful when some of the data you are displaying is much less or much more than the rest of the data or when the percentage or ratio differences between values are important.

A logarithmic scale in Report Studio shows the base value of 10 raised to the power of a value. For example, 10 has a logarithm of 1 because 10 raised to the power of 1 is 10, 100 has a logarithm of 2 because 10 raised to the power of 2 is 100, and so on.

For example, the chart below is using a normal scale:

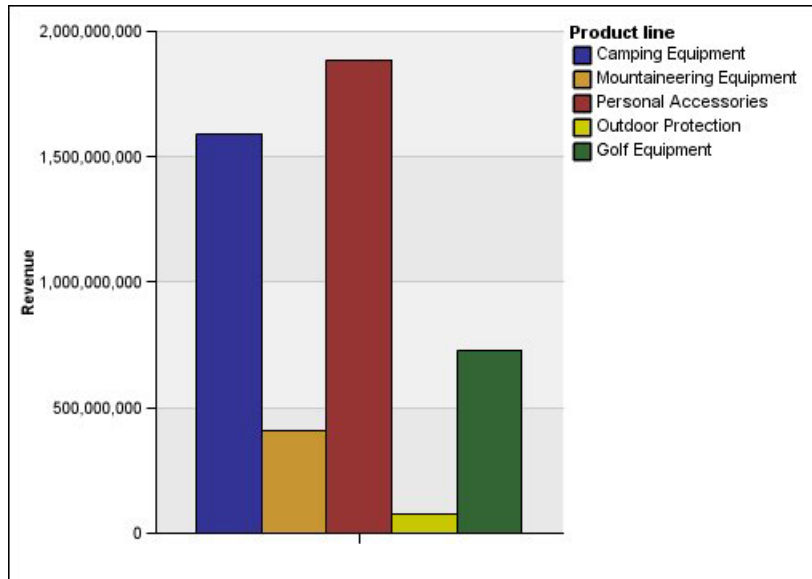


Figure 10. Chart with a normal axis range

In this chart, the Y-axis shows values up to 2,000,000,000 with evenly spaced intervals of 400,000,000. However, the Outdoor Protection column is so much less than the other columns that it is difficult to compare them.

The following is the same chart using a logarithmic scale:

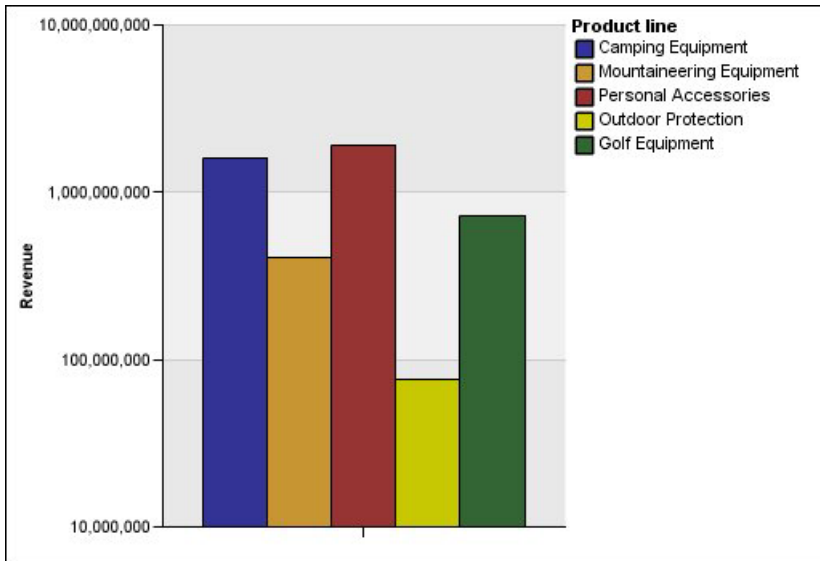


Figure 11. Chart with a logarithmic axis range

In this chart, the Y-axis still shows the same revenue values, but the intervals reflect a logarithmic scale, which increases exponentially. You can now compare all the product lines because none of the product lines have much higher or much lower values than the others.

Logarithmic scales can also be useful when the percentage or ratio differences between values are important. For example, if the logarithmic scale chart above represents data from 2011, and you add data from 2012 as a second set of colored bars, you could see the differences between the 2011 revenue and 2012 revenue. In a logarithmic scale, differences between values on the Y-axis represent the same percentage for each bar. So if the 2011 and 2012 data differs by the same distance for each product line, you could deduce that your revenue went up by the same percentage for each product line. This would not be clear on a normal scale.

Procedure

1. Select the Y-axis or the X-axis of the chart.
2. In the **Properties** pane, under **General**, double-click the **Axis Range** property.
3. To set a maximum value for this axis, under **Maximum**, click **Manual**, and then type a maximum value in the **Manual** box.

Note: You can use either a positive or negative value as the maximum value.

4. To set a minimum value for this axis, under **Minimum**, click **Manual**, and then type a minimum value in the **Manual** box.

Note: You can use either a positive or negative value as the minimum value.

5. To include zero on this axis, select the **Include zero** check box.
6. To use a logarithmic scale for this axis, select the **Logarithmic scale** check box.

Note: If you choose to use a logarithmic scale, ensure that your chart consumers know that the scale is logarithmic by including that information in the axis title or in a note on the chart.

7. To set the position of major gridlines and tick marks, under **Major interval**, click **Manual**, and then type the distance between major gridlines and tick marks in the **Manual** box.

The distance between major gridlines and tick marks is measured in the units of that axis. For example, if the axis is revenue in dollars, type the dollar value in the **Manual** box.

8. To add minor gridlines, type the number of minor gridlines that you want to see between each major gridline in the **Number of minor intervals** box.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Related tasks:

“Customize the Axes of a Current Default Chart” on page 120

You can customize the axis labels, axis lines, and minor and major tick marks.

“Show Gridlines in a Current Default Chart”

You can also show alternating bands of color in the chart background that correspond to your axis gridlines.

Showing Gridlines in a Chart

To make the data in a chart that includes axes easier to read, you can show horizontal and vertical gridlines. You can show gridlines for the major or minor intervals on the axes.

You cannot show gridlines for chart types that do not display axes, such as pie and donut charts.

Show Gridlines in a Current Default Chart

You can also show alternating bands of color in the chart background that correspond to your axis gridlines.

You can change the scale for the major and minor gridlines using the **Axis Range** property.

Procedure

1. Select the Y-axis or the X-axis of the chart.
2. To show alternating bands of color as your chart background, do the following:
 - a. In the **Properties** pane, double-click the **Gridlines** property.
 - b. Select the **Show alternating color bands** check box.
 - c. Set the color and transparency of the first and second colors.
3. To show major gridlines as your chart background, do the following:
 - a. In the **Properties** pane, double-click the **Gridlines** property.
 - b. Select the **Show major gridlines** check box.
 - c. Set the color, style, and weight of the major gridlines.
 - d. If you are working with a gauge chart, specify the length of the gridline.
4. To show minor gridlines as your chart background, do the following:
 - a. In the **Properties** pane, double-click the **Minor gridlines** property.
 - b. Select the **Show minor gridlines** check box.
 - c. Set the color, style, and weight of the minor gridlines.
 - d. If you are working with a gauge chart, specify the length of the gridline.
 - e. To specify by how many minor intervals to divide the major intervals, in the **Properties** pane, type a number in the **Number of Minor Intervals** property.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Related tasks:

“Change the Axis Scale of a Current Default Chart” on page 120
By default, IBM Cognos Report Studio automatically determines the minimum and maximum scale values for the axes in a chart. For example, a Y-axis showing revenue values might have an axis range of zero dollars to one million dollars. You can customize the axis scale, or range, to make your chart easier to understand.

Show Gridlines in a Legacy Chart

Gridlines are the lines on a chart that show the intervals along the axes.

Procedure

1. Select the Y-axis or the X-axis of the chart.
2. In the **Properties** pane, under **General**, double-click the **Gridlines** property.
3. To specify the color, style, and weight of major gridlines do the following:
 - a. Select the **Show major gridlines** check box.
 - b. Click **Line color** and choose a color for the major gridlines.
 - c. To specify the thickness of the gridlines, click **Point size** and select a line weight from the list.
 - d. Click a line style in the **Line style** list.
4. To specify the color, style, and weight of minor gridlines:
 - a. In the **Properties** pane, under **General**, double-click the **Minor Gridlines** property.
 - b. Select the **Show minor gridlines** check box.
 - c. Click **Line color** and choose a color for the minor gridlines.
 - d. To specify the thickness of the gridlines, click **Point size** and select a line weight from the list.
 - e. Click a line style in the **Line style** list.
 - f. To change the transparency of the gridlines, type a percentage in the **Transparency** box.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79
IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize the Legend in a Current Default Chart

You can hide or show the legend and change its position relative to the chart area, chart body, or a data item. For example, in a bar chart showing revenue for each product line by country or region, you could use the expression [Country or Region] = 'Canada' to position the legend relative to the Canada bar.

Note: When you choose a preset legend position, that position appears inside any padding that you have added to the chart object. Customized legend positions do not include any chart padding.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Legend** property.

3. To show the legend on the chart, select the **Show Legend** check box.
4. To choose a preset legend position, click **Preset** and click a position from the diagram.
5. To choose a customized legend position, do the following:
 - a. Click **Advanced** and click the ellipsis (...) button.
 - b. To display the legend at a set distance from the sides of the chart area, from the **Anchor** list, click **Relative to Chart**.
 - c. To display the legend at a set distance from the sides of the chart body, from the **Anchor** list, click **Relative to Chart Body**.
 - d. To display the legend at a set distance from a data item, such as a specific pie slice in a pie chart, from the **Anchor** list, click **Report Expression**, click the ellipsis (...) button beside **Expression**, and enter an expression in the **Report Expression** dialog box.
 - e. Set the horizontal and vertical distances from the anchor.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize the Items in the Legend of a Current Default Chart

If your legend includes items that are too long, you can truncate long legend items at a specific number of characters.

For example, if you want an ellipsis (...) to appear at the end of each truncated legend item, type ... in the **Truncation text** box.

You can also show the values of the data items in your legend.

Procedure

1. Select the legend.
2. To truncate the legend
 - a. In the **Properties** pane, under **General**, double-click the **Text Truncation** property.
 - b. To specify the number of characters at which the legend items are truncated, click **Manual** and type the number of characters in the **Maximum characters** box.
 - c. To shrink the font of the legend item text until all the text fits in the legend, select the **Shrink font as needed** check box.
 - d. To specify some text to appear at the end of truncated legend items, in the **Truncation text** box, type the text that you want to appear at the end of truncated items.
3. To show the values of legend items within the legend
 - a. In the **Properties** pane, under **General**, set the **Show Values** property.
First Value and **Last Value** refer to the first and last item in the child set under the legend data item. **Minimum Value** and **Maximum Value** refer to the lowest and highest value in the child set under the legend data item.
 - b. If you want to change the separator between the legend item and value, type a new separator in the **Legend Separator** property.
4. To customize the title of the legend
 - a. Click the default legend title area in the work area.
 - b. In the **Properties** pane, under **General**, set the **Default Title** property to **No**.

- c. Double-click the default legend title area in the work area and type the new title.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize the Items in the Legend of a Legacy Chart

If your legend includes items that are too long, you can truncate long legend items at a specific number of characters. For example, if you want an ellipsis (...) to appear at the end of each truncated legend item, type ... in the **Truncation text** box.

You can also show the values of the data items in your legend and customize the legend title.

Procedure

1. Select the legend.
2. To truncate the legend text, do the following:
 - a. In the **Properties** pane, under **General**, set the **Auto Truncation** property to **Yes**.
 - b. In the **Properties** pane, under **General**, set the **Auto Truncation** property to **Yes**.
 - c. In the **Maximum Characters** property, type the number of characters to appear before the text is truncated.
 - d. In the **Truncation Text** property, type the characters to append when the text is truncated.
 - e. To shrink the font of the legend item text until all the text fits in the legend, select the **Shrink font as needed** check box.
 - f. To specify text to appear at the end of truncated legend items, type it in the **Truncation text** box.
3. To show the values of legend items within the legend, do the following:
 - a. In the **Properties** pane, under **General**, set the **Show Legend Values** property.

First Value and **Last Value** refer to the first and last item in the child set under the legend data item. **Minimum Value** and **Maximum Value** refer to the lowest and highest value in the child set under the legend data item.
 - b. If you show multiple values and want to change the separator between the values, type a new separator in the **Separator** property.
4. To customize the title of the legend, do the following:
 - a. Click the default legend title area in the work area.
 - b. In the **Properties** pane, under **General**, set the **Default Title** property to **No**.
 - c. Double-click the default legend title area in the work area and type the new title.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Adding a Note to a Chart

Add a note to a chart to provide additional detail. Notes appear as text in a chart.

By default, notes are aligned with the upper left corner of the chart object. When you add a note to a chart, you can set the note's position relative to the sides of the chart area or chart body. You can also use a report expression to position the note next to a data item within the chart. For example, in a bar chart showing revenue for each product line by country or region, you could type [Country or Region]='Canada' to position the note relative to the Canada bar.

Notes overwrite whatever is under them so you must position them properly.

If you apply more than one note, ensure that each note has a different position in the report so that they do not overwrite each other. You can also specify the order that they should be drawn in when the report runs. If you have two notes with the same coordinates, the first one in the list is drawn first and the next one is drawn on top of the first.

Tip: The Top 10 Retailers for 2011 sample report in the GO Data Warehouse (analysis) package includes a note.

Related concepts:


Appendix C, "Sample Reports and Packages," on page 507


Sample reports are included with IBM Cognos Business Intelligence. When installed, you can find them in the **Public Folders** tab in IBM Cognos Connection.


Add a Note to a Current Default Chart

You can add and position multiple notes on your chart.


Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Notes** property.
3. Click the new button .
4. Type the note text in the **Text** box and click **OK**.

Tips: To delete a note, click the note and click the delete button . To move a note up or down in the list, click the up or down arrows.

5. In the **Notes** dialog box, click **OK**.
6. To position the note, do the following:
 - a. Click the note icon  in the list of notes.
 - b. In the **Properties** pane, under **Positioning**, double-click the **Position** property.
 - c. To align the note horizontally, click the left, center, or right alignment button.
 - d. To align the note vertically, click the top, middle, or bottom alignment button.
 - e. To set the margins around the chart body, type margin values and choose margin units.
 - f. To display the note at a set distance from the sides of the chart area, from the **Anchor** list, click **Relative to Chart**.
 - g. To display the note at a set distance from the sides of the chart body, from the **Anchor** list, click **Relative to Chart Body**.

- h. To display the note at a set distance from a data item, from the **Anchor** list, click **Report Expression**, click the ellipsis (...) button beside **Expression**, and enter an expression in the **Report Expression** dialog box.

- 7. To edit the text, double-click the text next to the note object  in the chart.

Related concepts:


“Current Default Charts and Legacy Charts” on page 79


IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.


Add a Note to a Legacy Chart

You can add and position multiple notes on your chart.

Procedure

1. Click the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Notes** property.
3. Click the new button .
4. Type the note text in the **Text** box and click **OK**.

Tip: To delete a note, click the note and click the delete button . To move a note up or down in the list, click the up or down arrows.

5. In the **Notes** dialog box, click **OK**.
6. Click the note icon  and set the note position, size, and border in the **Properties** pane.

You set the location of the note by defining number of pixels from the bottom left corner of the chart area.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Adding a Baseline to a Chart

Baselines are horizontal or vertical lines that cut through the chart to indicate major divisions in the data. For example, you can add a baseline to show a sales quota or break-even point.

Each baseline represents a value on an axis.

Depending on the type of chart, you can use the following options to position the baseline.

Option	Description
Numeric Value	Uses a static numeric value.
Query Calculation	Uses a query calculation from the chart query or from a different query. For more information, see “Using Relational Calculations” on page 248.
Layout Calculation	Uses a layout calculation. For more information, see “Using Relational Calculations” on page 248.

Option	Description
Category Index	<p>Uses the index value of the data item in the categories axis.</p> <p>For example, a Category index value of 1 indicates that the baseline is located at the first data item. This is the default.</p> <p>Note: This option applies only to the current default charts, and does not apply to the legacy charts.</p>
Member Value	<p>When working with dimensional data sources, uses a position relative to a member. For example, a member calculation that uses an expression similar to [Query1].[Current year]=2011 places the baseline in the middle of the chart object that represents 2011. To place the baseline between 2011 and 2012 on the chart, a half member width to the right, set the Member Offset property to 50%. To place the baseline between 2010 and 2011, set the Member Offset property to -50%. You can also type in 100, -200, and so on to place the baseline on the chart.</p>
Statistical Limit	<p>Statistical maximum uses the following expression:</p> $25th\ percentile\ value - 1.5 * (75th\ percentile\ value - 25th\ percentile\ value)$ <p>For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical minimum is -5 [2.5 -1.5(5) = -5].</p> <p>Statistical minimum uses the following expression:</p> $75th\ percentile\ value + 1.5 * (75th\ percentile\ value - 25th\ percentile\ value)$ <p>For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical maximum is 15 [7.5 +1.5(5) = 15].</p> <p>Statistical minimum and Statistical maximum use percentiles to determine values, so the baseline might not appear on the chart if its value is off the axis.</p>
Mean	<p>Uses the statistical mean plus or minus a number of standard deviations based on all charted data values on the specified axis.</p>
Percentile (%)	<p>Uses a specified percentile.</p>
Percent on Axis (%)	<p>Uses a percentage of the full range of the axis.</p> <p>For example, if the axis range is -500 to 1100, a Percent on Axis value of 25% puts the baseline at -100 (25% of the range, 1600).</p>

If you apply more than one baseline, you can specify the order in which they should be drawn when the report runs. If you have two baselines with the same coordinates, the first one in the list is drawn first and the next one is drawn on top of the first one.

By default, the baseline and its label appear in the legend.

Baselines do not support color transparency.

Tip: The Positions to Fill sample report in the GO Data Warehouse (analysis) package includes a baseline.

Related concepts:

Appendix C, “Sample Reports and Packages,” on page 507

Sample reports are included with IBM Cognos Business Intelligence. When installed, you can find them in the **Public Folders** tab in IBM Cognos Connection.

Add a Baseline to a Current Default Chart

When working with current default charts, you can define baselines by values on the numeric axis or the category axis.

Procedure

1. Click the chart object.
2. Depending on your chart and the type of baseline you want to add, in the **Properties** pane, under **Chart Annotations**, double-click the **Numeric Baselines** or **Category Baselines** property.

3. Click the new button  and choose the type of baseline from the list.

4. Specify the necessary criteria for the baseline position

5. Under **Baseline Properties**, type a label for the baseline and specify the line style.

Tip: To remove the baseline from the legend, delete the label.




6. If you add more than one baseline, specify their order using the up and down arrows.

The new baselines appear in the **Markers, notes, baselines, and trendlines** box.

7. To change the label that appears next to the baseline, under the **Markers, notes, baselines, and trendlines** box, double-click the placeholder text next to the

baseline icon   and type your text.

8. To change the line style, select the chart and in the **Properties** pane, under **Chart Annotations**, double-click the **Baselines, Numeric Baselines, or Category Baselines** property.

9. To delete a baseline, select the baseline icon   and click the delete button .

Related concepts:




“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Add a Baseline to a Legacy Chart

When working with legacy charts, you can define baselines by the values on the numeric axis.

Procedure

1. Click the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Baselines** property.
3. Click the new button  and choose the type of baseline from the list.
4. Specify the necessary criteria for the baseline position.
If you use a calculation to determine the baseline, define an expression.
5. If you add more than one baseline, specify their order using the up and down arrows.
6. Click **OK**.
A baseline icon appears in the **Markers, notes, and baselines** box.
7. To define the line style, click the baseline icon  and set the **Line Styles** property.
8. To define the text style, click the baseline text and make changes in the **Properties** pane.
9. To delete a baseline, click its baseline icon and click the delete button .

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Adding Markers to Charts

Markers are symbols that you add to a chart to designate points of significance that can help you analyze or understand the data.

For example, you might want to add a marker to designate the time when a significant event happened, such as the date when a new product was launched.

You can add a marker to combination, progressive column, Pareto, scatter, and bubble charts.

When you define the position of the marker, you define the X- and Y-axis coordinates for the placement of the symbol. You can position the marker in the chart using the following options.

Option	Position
Numeric Value	Uses a static numeric value.
Query Calculation	Uses a query calculation from the same query or from a different query. For more information, see “Using Relational Calculations” on page 248.
Layout Calculation	Uses a layout calculation. For more information, see “Using Relational Calculations” on page 248.

Option	Position
Statistical Minimum	<p>Uses the following expression:</p> $25\text{th percentile value} - 1.5 * (75\text{th percentile value} - 25\text{th percentile value})$ <p>For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical minimum is -5 [2.5 -1.5(5) = -5].</p> <p>Statistical minimum uses percentiles to determine values, and might not always appear in the chart if the values are off the axis.</p>
Statistical Maximum	<p>Uses the following expression:</p> $75\text{th percentile value} + 1.5 * (75\text{th percentile value} - 25\text{th percentile value})$ <p>For example, if 2.5 is the 25th percentile and 7.5 is the 75th percentile, the statistical maximum is 15 [7.5 +1.5(5) = 15]. Statistical maximum uses percentiles to determine values, so the marker might not always appear on the chart if its value is off the axis.</p>
Mean	Uses the statistical mean plus or minus a number of standard deviations based on all charted data values on the specified axis.
Percentile	Uses a specified percentile.
Percent on Axis	Uses a percentage of the maximum axis value.


If you apply more than one marker, you can specify the order in which they should be drawn when the report runs. If you have two markers with the same coordinates, the first one in the list is drawn first and the next one is drawn on top of the first.

Add a Marker to a Current Default Chart

Markers are symbols that you add to a chart to designate points of significance that can help you analyze or understand the data.

Note: Current default scatter charts have a different set of steps.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Markers** property.
3. Click the new button , and then set the marker properties
4. In the **Based on** box, select the chart object that will determine the marker position.
5. In the **Numeric position** box, specify how you want to define the position on the numeric (Y) axis.

6. In the **Category position** box, specify how you want to define the position on the category (X) axis.
7. In the **Marker label** box, type the label that you want to give to the marker.
8. In the **Marker size** box, specify the size of the marker symbol.
9. To specify the color, fill, and shape of the marker symbol, click the **Color and style** box.
10. If you add more than one marker, specify their order by using the up and down arrows.

The new markers appear in the **Markers, notes, and baselines** box.

Tip: To delete a marker, click the marker icon and text and click the delete

button .

11. Run the report.

Related concepts:


“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Add a Marker to a Current Default Scatter Chart

Markers are symbols that you add to a chart to designate points of significance that can help you analyze or understand the data.

Procedure

1. Select the scatter chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Markers** property.
3. Click the new button , and then set the marker properties.
4. In the **X-axis position** box, specify how you want to define the position on the X-axis.
5. In the **Y-axis position** box, specify how you want to define the position on the Y-axis.
6. In the **Marker label** box, type the label that you want to give to the marker.
7. In the **Marker size** box, specify the size of the marker symbol
8. To specify the color, fill, and shape of the marker symbol, click the **Marker color and style** box.
9. If you add more than one marker, specify their order using the up and down arrows.

The new markers appear in the **Markers, notes, and baselines** box.

Tip: To delete a marker, click the marker icon and text and click the delete

button .

Related concepts:


“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Add a Marker to a Legacy Chart

Markers are symbols that you add to a chart to designate points of significance that can help you analyze or understand the data.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Markers** property.
3. Click the new button , and then set the **Numeric position type**, **Marker label**, **Marker shape**, **Numeric value**, and **Color** properties.
4. If you add more than one marker, specify their order by using the up and down arrows.

The new markers appear in the **Markers, notes, and baselines** box.

Tip: To delete a marker, click the marker icon or marker label and click the

delete button .

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Display Trendlines in Current Default Charts

You can display or hide trendlines in the current default bar, line, area, bubble, or scatter charts.

Trendlines, also known as lines of best fit or regression lines, graphically illustrate trends in data series and are commonly used when charting predictions. A trendline is typically a line or curve that connects or passes through two or more points in the series, showing a trend.

You can specify the following types of trendlines:

- **Linear**

Use a linear trendline when your data increases or decreases along a straight line at a constant rate. For example, if your chart displays a steady increase in revenue by product line over time, you could use a linear trendline.

- **Exponential**

Use an exponential trendline when your data values increase or decrease exponentially, or at an increasingly higher or lower rate. For example, if your chart displays an exponential increase in revenue by product line over time, you could use an exponential trendline.

- **Polynomial**

Use a polynomial trendline when your data values both increase and decrease. For example, if your chart displays both increases and decreases in revenue by product line over time, you could use a polynomial trendline.

- **Logarithm or Natural Logarithm**

Use a logarithmic trendline when your data values increase or decrease rapidly and then level out. For example, if your chart displays a rapid decrease in revenue by product line over time and then a plateau, you could use a logarithmic trendline.

- **Power**

Use a power trendline when your data values increase or decrease in a curve at a steady rate. For example, if your chart displays a steady increase in revenue by product line over time and your data points will fit a curved line, you could use a power trendline.


- **Moving Average**

Use a moving average trendline when your data values fluctuate and you want to smooth out the exceptions to see trends. For example, if your chart displays wild fluctuations in revenue by product line over time, but you know that some data points are exceptions, you could use a moving average trendline.

If you are not sure which trendline type to use, try each type to see which one best fits most of your data points. For example, a linear trendline will not fit most points on a scatter chart with widely spread data points.

Trendlines do not support color transparency.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Annotations**, double-click the **Trendlines** property.
3. Click the new button  and click a trendline type.
4. Define the trendline by specifying the following options. The options that are available depend on the type of trendline you chose.
 - To set the order, or degree, of a polynomial trendline, in the **Order** box, type a value between 2 and 6.
 - To set the number of periods to go back in a moving average trendline, in the **Periods** box, type a value.
 - If you have more than one series on your chart, in the **Based on** list, click the data you want to use for the trendline.
 - Click either **One trendline for all series items** or **A trendline for each series item**.
 - To customize the style of the trendlines, click **Line Styles** and customize the line color, weight, and style.
 - To customize the trendline labels in the legend, click **Label** and choose **None**, **Automatic**, or **Custom**.
 - To display the trendline equation, click **Show equation**, and then click **Show in legend** or **Show on chart**, and then click **Position** to define the equation's position on the chart.
 - To display the R-squared value of the trendline, click **Show R-squared value**, and then click **Show in legend** or click **Show on chart** and then click **Position** to define the position of the value on the chart.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Display Regression Lines in Legacy Scatter or Bubble Charts

When using legacy charts, you can display or hide regression lines on scatter charts and bubble charts. Regression lines, also known as lines of best fit or trend lines, graphically illustrate trends in data series. Regression lines are commonly used when charting predictions. A regression line is typically a line or curve that connects or passes through two or more points in the series, showing a trend. Legacy scatter and bubble regression lines are calculated using a numerical algorithm that isn't guaranteed to be optimal. Regressions may or may not match current default chart regressions.

You can specify the following types of regression lines to determine the position and slope of the line:

- **Linear**

Use a linear regression line when your data increases or decreases at a consistent rate. For example, if your chart displays a steady increase in revenue by product line over time, you could use a linear regression line.

- **Common Log or Natural Log**

Use a logarithmic regression line when your data increases or decreases rapidly and then levels out. For example, if your chart displays a rapid decrease in revenue by product line over time and then a plateau, you could use a logarithmic regression line.

- **Exponential**


Use an exponential regression line when your data increases or decreases exponentially, or at steadily increasing or decreasing rate. For example, if your chart displays an exponential increase in revenue by product line over time, you could use an exponential regression line.

- **Polynomial Fit**

Use a polynomial fit regression line when your data both increases and decreases. For example, if your chart displays both increases and decreases in revenue by product line over time, you could use a polynomial fit regression line.

If you are not sure which regression line type to use, try each type to see which one best fits most of your data points. For example, a linear regression line is not going to fit most points on a scatter chart with widely spread data points.

Procedure

1. Select the scatter or bubble chart.
2. In the **Properties** pane, under **Chart Annotations**, set the **Regression Line** property to **Show**.
3. Click the regression line icon  in the report layout.
4. In the **Properties** pane, under **General**, set the **Line Styles**, **Regression Type**, and **Number of Regression Lines** properties.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Showing data values in current default charts

You can show the data labels or data values within the chart so that the data values are clearer.

For example, you can display the data values above each column in a column chart to show the exact height of each column.

Procedure

1. For a bar, column, line, or area chart, under **Series**, select the chart type icon.
2. For a bubble, scatter, Pareto, or progressive chart, click the chart.
3. In the **Properties** pane, under **Chart Labels**, double-click the **Show Values** property.

4. For bar, column, line, area, Pareto, or progressive charts, to specify the data label format, in the **Values** list, select what values to display.
 - **None** does not display data values.
 - **Absolute** displays the absolute value of the data.
 - **Cumulative** displays the cumulative value of the data.
5. For bubble or scatter charts, to specify the data label format, in the **Show** box, select whether to show values or values and labels for the category, series, and measure.
6. For bar, column, line, area, Pareto, or progressive charts, to show lines that point from data labels to data marker they apply to, select the **Show leader lines** check box.
7. For bubble or scatter charts, to show lines that point from data labels to data marker they apply to, select the **Leader lines** check box.
8. To specify where values and labels are to be rendered in the chart, click the **Value Location** list and choose the location that you want.
9. To specify how to display the labels if their positions on the chart overlap, in the **Collision Mode** list, click one of the following modes:
 - **None** specifies that labels appear in default positions and might overlap.
 - **Normal** (for pie and donut charts) specifies that labels are placed just above their corresponding data markers or chart objects. There is no collision detection, so labels can overlap.
 - **Coarse Stagger** specifies that labels are placed close to their data markers and staggered so that they do not overlap. This collision mode takes less time to render than **Fine Stagger** but might result in labels that are farther away from their corresponding data markers.
 - **Fine Stagger** specifies that labels are staggered so that they do not overlap. The labels are as close to the data markers as possible without overlapping. This collision mode takes more time to render than **Coarse Stagger** but might result in labels that are closer to their corresponding data markers.

Showing data values in current default pie and donut charts

You can show the data labels or data values within the chart so that the data values are more clear.

For example, in a pie chart, show the data values within each pie slice, so that you know the exact size of each pie slice.

Procedure

1. Select the chart object.
2. In the **Properties** pane, double-click the **Show values** property.
3. To display data labels for each slice of the pie, under **Show**, select the **Slice names** check box.
4. To show lines pointing from data labels to the slices they apply to, select the **Show leader lines** check box.
5. To specify the data label format, in the **Values** list, select what values to display.
 - **Hide** does not display data values.
 - **Absolute** displays the absolute value of the data.
 - **Percentage** displays the slice's percentage of the whole pie.

- **Absolute and Percentage** displays the slice's percentage of the whole pie as an absolute value.
6. In the **Position** list, select the placement of data labels.

Showing data values in other current default charts

You can show the data labels or data values within the chart so that the data values are more clear.

For example, you can display the data values above each bubble in a bubble chart to show the exact value of each bubble.

You can show data values for the following chart types: Pareto, progressive, scatter, and bubble.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Chart Labels**, double-click the **Show Values** property.
3. For each of the categories, series, and measures, select whether to show only values, values and labels, or neither.
4. To show lines pointing from data labels to the data marker they apply to, select the **Leader lines** check box.
5. To specify how to display the labels if their positions on the chart overlap, in the **Collision Mode** list, click one of the following modes:
 - **None** specifies that labels appear in default positions and might overlap.
 - **Normal** (for pie and donut charts) specifies that labels are placed just above their corresponding data markers or chart objects. There is no collision detection, so labels can overlap.
 - **Coarse Stagger** specifies that labels are placed close to their data markers and staggered so that they do not overlap. This collision mode takes less time to render than **Fine Stagger** but might result in labels being farther away from their corresponding data markers.
 - **Fine Stagger** specifies that labels are staggered so that they do not overlap. The labels are as close to the data markers as possible without overlapping. This collision mode takes more time to render than **Coarse Stagger** but might result in labels being closer to their corresponding data markers.

Related concepts:


“Current Default Charts and Legacy Charts” on page 79




IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Define Query Context When Customizing Legend Entries, Legend Titles, or Axis Labels

You want to use a revenue expression as a chart legend title. If you get an error message saying that the query context of a layout object cannot be determined, you must define the property list for the item to which it refers. You must first add the desired data item to the query before you can define its property list.

Procedure

1. Open the chart to customize.
2. Pause the pointer over the query explorer button  and click the query.

3. From the **Source** tab , drag the desired item to the **Data Items** window to add it to the query.
4. Pause the pointer over the page explorer button  and click the chart page.
5. From the **Source** tab , drag the desired item to the layout object.
6. In the **Properties** pane, under **Data**, double-click the **Properties** property.
7. Select the check box for the data item to define.

Related tasks:

“Specify a List of Data Items for an Object” on page 284

Specify the list of data items for an object when you must reference a data item that is in a query but is not in the layout.

Summarize Small Slices, Bars, or Columns in Current Default Charts

You can summarize the smaller slices or bars in charts to avoid having many tiny slices or bars. For example, if your pie chart shows revenue by product and 10 of your products have less than 1% of the pie, you can summarize these 10 slices into one larger slice and name that slice Other.

Similarly, you can summarize small items in a column, bar, area, and line chart.

You cannot summarize small slices or items in charts that have matrix edges or in charts that have multiple numeric axes.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **General**, double-click the **Summarize Small Slices** or **Summarize Small Items** property.
3. To summarize small slices or items up to a maximum number, select the **Maximum number of slices** or **Maximum number of items** check box and type the maximum number.
4. To summarize all the slices or bars that are smaller than a specific value, select the **Summarize slices smaller than a value** or **Summarize items smaller than a value** check box, type a value that represents the upper size limit, and choose whether the value is a percentage or absolute.
5. Under **Small slice summarization type** or **Small item summarization type**, choose whether to summarize the slices or items as a **Total** or **Average**.

Note: Averages are calculated using only the summarized items in the report.

6. Under **Slice label** or **Item label**, type a label for the one large slice, bar, area, or line that summarizes the smaller ones.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customizing Lines and Data Points in a Line Chart

You can customize the lines in a line chart to show only lines, only data points, or both. Data points represent series values for each category on the Y-axis. You can show special data markers that represent statistically significant values, such as open, high, low, and close values.

You can also add markers at other positions on the chart. For more information, see “Add a Marker to a Current Default Chart” on page 132.

You can also change the shape of the line that connects the data points to one of the following:

- **Point to Point** shows data points connected by straight lines.
- **Step at Point** shows data points connected by steps that start and end at the data points.
- **Step Between Points** shows data points connected by steps that start and end between the data points.
- **Smooth** shows data points connected by smooth curves.

Related tasks:

“Add a Marker to a Current Default Chart” on page 132

Markers are symbols that you add to a chart to designate points of significance that can help you analyze or understand the data.

Customize Lines and Data Points in a Current Default Line Chart

You can change the color and shape or the line or data markers in a line chart. You can also show or hide data labels, the line, and data markers.

You cannot show value markers when the **Data points** option is selected or when the configuration of the line chart is stacked or 100 percent stacked.

Procedure

1. Select the chart object.
2. In the chart area, under **Series**, click the line chart icon to view the line properties.
3. To select whether to show only the line, the line and data markers, or only the data markers, in the **Properties** pane, select an option from the **Line and Markers** list.
4. To show special data markers, double-click the **Value Markers** property. Select the check box for the special data markers that you want to add and for each marker, specify the color and shape.
The options you specify in **Value Markers** overwrite the options for **Line and Markers**.
5. To change the shape of the line that connects data markers, select an option from the **Line Shape** list.
6. To show data labels for the data points, double-click the **Data Labels** property.
7. To change the color of the lines, double-click the **Palette** property.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Customizing the Color Palette of a Chart” on page 108

You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart. For example, if "Telephone" is the first in a data series of order methods, and you want it to appear in blue, use the palette to make the first item in the series blue.

Customize Lines and Data Points in a Legacy Line Chart

You can change the color and shape or the line or data markers in a line chart. You can also show or hide data labels, the line, and data markers.

You cannot show value markers under the following conditions:

- The **Data points** option is selected.
- The configuration of the line chart is stacked or 100 percent stacked.
- The **Show line** property is set to **No**, creating a point chart.

Procedure

1. Select the chart object.
2. In the chart area, under **Series**, click the line chart icon to view the line properties.
3. To select whether to show only the line, the line and data markers, or only the data markers, in the **Properties** pane, under **General**, select an option from the **Line Type** list.
4. To show or hide the line, select an option from the **Show line** list.
5. To show data points or value markers, double-click the **Show Data Points** property:
 - To show or format data points, click **Data points** and specify the point shape and point size.
The point color is defined by the chart palette.
 - To show or format value markers, click **Value markers** and specify the markers to show. For each marker, specify the shape and marker size. Click **Color** to change the marker color.

Tip: To remove all data points and value markers, in the **Show Data Points** dialog box, select **None**.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Customizing the Color Palette of a Chart” on page 108



You can use the chart palette to control the colors or patterns used in the columns, lines, data markers or areas in a chart. For example, if "Telephone" is the first in a data series of order methods, and you want it to appear in blue, use the palette to make the first item in the series blue.

Customize a Current Default Combination Chart


Combination charts show data series using two or more types of charts - area, bar, and line. The different charts are overlaid on top of each other. You can customize the order in which the charts appear along with the type of charts and their configurations.

You can also customize which numeric axes to show and which chart to show on each axes.

Procedure

1. Select the combination chart object.
2. In the **Properties** pane, under **General**, double-click the **Combinations** property.
3. Under **Numeric axes**, select which axes to show.
4. Under **Combinations**, add  or remove  data series.
5. If you want to change the order in which the series appear, use the up and down arrows.

The series appear in the order they are listed. Each chart appears in the foreground of any previous charts.

- If you want to change the configuration type of the series, such as changing clustered bars to stacked bars, under **Combinations**, select the series, click the edit button  and select the type.
- If you use the same data series for multiple charts and want to synchronize the data marker colors, under **Color & Background**, set the **Series Color** property to **Match**.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Create a Matrix of Current Default Charts

You can view a complex chart that includes nested series or categories into a matrix, or crosstab, that shows multiple small charts arranged in rows and columns.

The charts in the rows represent the outer nested levels of the series and categories and, the charts in the columns represent the categories. Each data item in the outer nested levels of the series and categories becomes a separate chart. The numeric scale of all the charts is the same so that you can easily compare.

When working with pie, gauge, and bullet charts, if you include a data item in the categories, you automatically create a matrix of charts. One chart appears for each data item in the category. When working with progressive and bullet charts, if you include a data item in the series, you also automatically create a matrix of charts.

For example, the following column chart shows the revenue for each year (in the categories or X-axis) for all the regions and product lines (in the series or Y-axis). This chart is very complex and difficult to understand.

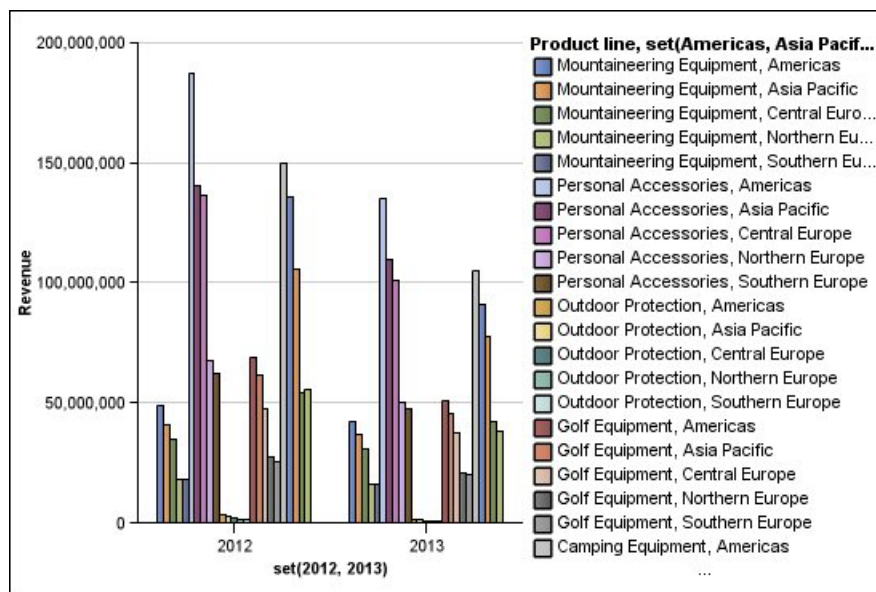


Figure 12. Complex column chart

The following chart contains the same series and categories. However, when converted to a matrix of charts, the information is much easier to analyze. The columns show charts for each year and the rows show charts for each the product lines. The bars represent the revenue for each region.

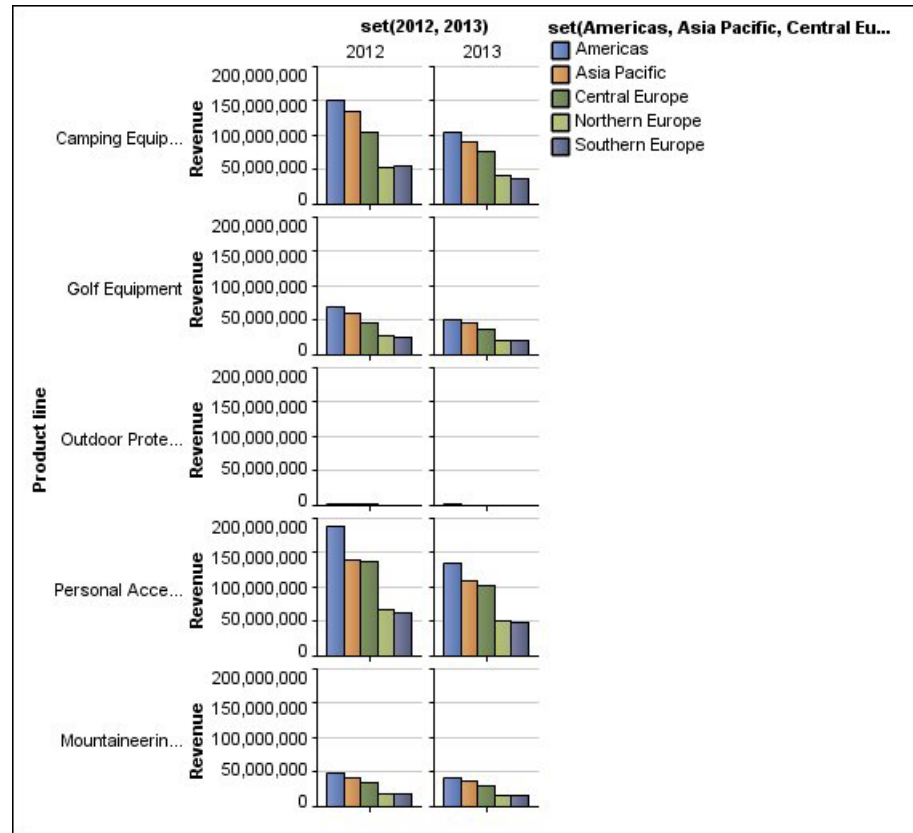


Figure 13. Matrix chart

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **General**, double-click the **Matrix rows and columns** property.
3. Select the **Show outer nested series as matrix rows** or **Show outer nested categories as matrix columns** check boxes (or both).
4. In the **Matrix levels** box, select the number of nested levels to include in the matrix columns or rows.

The remaining nested levels are represented in the chart bodies in the matrix if the chart supports additional categories. The pie, gauge, and bullet charts do not support additional categories. The bullet and progressive column charts do not support additional series.

For example, in the above chart, Regions are nested under Product Line. In the matrix chart, a **Matrix level** of 1 is specified. Therefore, Product Line appears as the matrix rows (series) and Regions appear within the chart bodies.

5. If you want labels for the matrix rows and columns to appear on each chart, select the **Show row labels** or **Show column labels** check box.
6. In the **Labels location** list, select where the nested labels should appear on each chart.

The default position is on the left for rows and on the bottom for columns.

7. If the labels are too long, click **Truncation** and specify where to truncate text or select the **Size fonts automatically** check box to resize the text to fit.
8. To change the font, color, and data format of the labels, click **Style**.
9. To show the title in the row or column axis, select the **Show row title** or **Show column title** check box.
10. If you want to hide or show the axes, select the axis object, and in the **Properties** pane, under **Miscellaneous**, set the **Show in Matrix** property.
11. If your matrix chart includes only rows or columns, and you want them to wrap, select the **Wrap rows or columns if possible** check box.
12. If you want to show the axes and axis labels for each small chart in the matrix, select the **Repeat row and column axis labels** check box.

When this option is cleared, axes and axis labels appears only along the outer edge of the matrix.

Related concepts:


“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Customize a Current Default Gauge Chart

When you create a gauge chart, you can choose from a variety of chart templates, which offer different shape, axis, and border options.

You can customize the following aspects of your gauge chart. As you modify properties, the chart preview shows you what your chart will look like.

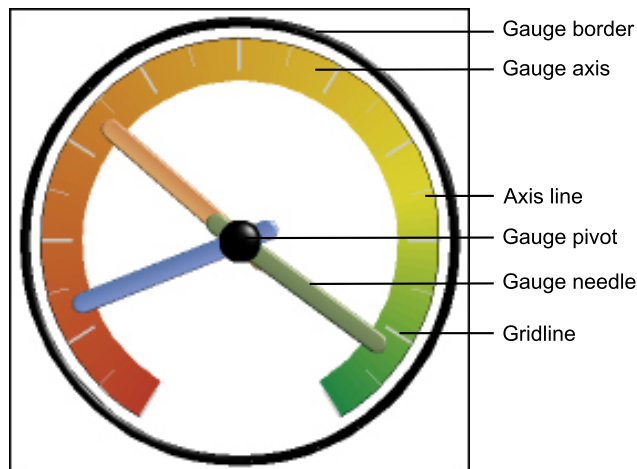


Unless indicated in the user interface, all sizes are a percentage of the maximum allowed.

If your gauge chart includes a border, long axis labels, such as 250,000,000, may overlap the gauge border and be difficult to read. To avoid this problem, customize the data format of your gauge chart measure and reduce the scale so that less zeros are displayed. Or change the gauge border color or size or remove the border.

Procedure

1. Click the gauge chart object.

2. If you want to change the shape of the gauge, modify the start and end angles of the gauge axes and border, as follows:
 - a. In the **Properties** pane, under **General**, double-click the **Gauge Axes** property and specify the start and end angles and the direction of the axes.
 - b. Double-click the **Gauge Border** property and specify the style and the start and end angles of the border.
For example, a border start angle of 0 degrees and end angle of 180 degrees produces a semi-circular gauge.
3. If you want to add an additional axes to a gauge chart, do the following:
 - a. In the **Properties** pane, under **General**, double-click the **Gauge Axes** property.
 - b. Click the new button  and specify the start and end angles and the direction of the new axis.
4. If you want to change the size, shape, and color of the center pivot point, double-click the **Gauge Pivot** property and specify the style.
5. If you want to change the indicators in the gauge axis, click the **Gauge Axis** object in the chart and do the following:
 - a. To change the needle, under **Axes**, double-click the **Gauge Needle** property and specify the style.
 - b. To change, add, or remove color bands that indicate the data range positions, under **Color & Background**, double-click the **Gauge Axis Colors** property and specify the color palette.
 - c. If you want to change the size or thickness of the gauge axis and color bands, under **Axes**, specify a percentage size for the **Gauge Axis Inner Radius** and **Gauge Axis Outer Radius** properties.
 - d. If you want to change the gridlines, under **General**, double-click the **Gridlines** or **Minor Gridlines** properties and specify the style.
 - e. If you want to change the appearance of the gauge axis line, under **General**, double-click **Axis Line**.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Gauge Charts” on page 94


Gauge charts, also known as dial charts or speedometer charts, use needles to show information as a reading on a dial.

Customize a Legacy Gauge Chart

You can customize the colors and threshold boundaries of the gauge axis areas and whether they use numbers instead of percentages. You can also change the colors of the gauge face and outline and hide gauge labels. By default, the legacy gauge chart uses a band divided into thirds that runs from green to red.

Procedure

1. Click the gauge chart object.
2. If you want to customize the color of the gauge face or outline, in the **General** section of the **Properties** pane, double-click the **Face Color** or **Dial Outline Color** property.
3. If you want to hide the gauge labels, in the **Chart Labels** section of the **Properties** pane, set the **Gauge Labels** property to **Hide**.

4. If you want to customize the colors and boundaries of the gauge areas, do the following:
 - a. In the **Color & Background** section of the **Properties** pane, double-click the **Gauge Palette** property.
 - b. To change the color of a boundary area, under **Palette**, select the color, click **Color**, specify the color properties, and click **OK**.
 - c. To change the value of a boundary area, under **Palette**, select the boundary value, and type a new value.
 - d. To add a new boundary area, click the new button .
 - e. To choose a pre-defined threshold style, click the **Palette** drop-down menu. You can choose whether to use discrete colors or continuous colors. To use a number instead of a percentage as a boundary, clear the **Percentage** check box, and then type a number in the **Numeric boundary** box.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Gauge Charts” on page 94

Gauge charts, also known as dial charts or speedometer charts, use needles to show information as a reading on a dial.

Define Color by Value in Current Default Scatter and Bubble Charts

In a scatter or bubble chart you can specify that data points or bubbles appear in different colors based on an additional measure or fact. The color of the points or bubbles adds an additional aspect to the chart to assist you in finding relationships in large amounts of data.

For example, the following bubble chart shows the relationship between the unit cost and unit sale price. The size of the bubbles shows the gross profit and the color of the bubbles shows whether the quantity sold is above (yellow) or below (green) 1,000,000 units.

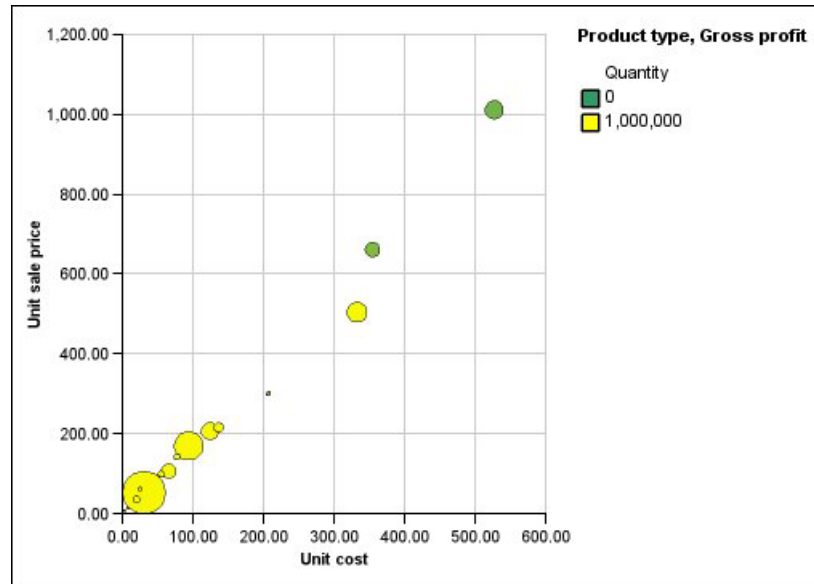



Figure 14. Bubble chart with color specified by value

In a bubble chart, you can combine the color by value and bubble size to create a more meaningful chart.

Procedure

1. Drag a measure to the **Color** drop zone under **Measures** and then select the measure.
2. In the **Properties** pane, under **Color & Background**, double-click the **Color by Value** property.
3. To define the colors by percentages instead of actual values, select the **Percentage** check box.
For example, if the **Percentage** check box is selected and your values range from 25 (red) to 50 (green), then the bottom 25 percent of values will be red, the top 50 percent of values will be green, and the values between 25 and 50 percent will be an interpolated color, such as yellow.
4. If you want to use a preset color palette, click **Palette**, and select the palette that you want to use.
5. If you want to customize a palette color or boundary value, select the palette entry in the **Palette** box and specify the color, transparency, and type a new boundary value.
6. To add a new palette entry, select the palette entry below which you want to add the new entry, click the new palette entry button , and click **Color**.
7. If your chart has lines or markers, under **Style**, set the marker shape, line style, and line weight.
8. To choose a color and transparency for missing or null values, under **Missing Values**, click **Color** and type a value in the **Transparency** box.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Scatter Charts” on page 90

Scatter charts use data points to plot two measures anywhere along a scale, not only at regular tick marks.

“Bubble Charts” on page 91

Bubble charts, like scatter charts, use data points and bubbles to plot measures anywhere along a scale. The size of the bubble represents a third measure.

Specify the Bubble Size in a Current Default Bubble Chart

In a bubble chart, you use a measure or fact to determine the size of the bubbles.

You can use the **Bubble Measure** in the **Measures** drop zone of the chart to specify bubble size. You can then specify the size range of the bubbles in the chart. You can also specify what value the smallest bubbles represent. For example, your bubble measure is revenue, and you set the minimum and maximum bubble size to 5 pt and 20 pt, respectively. You set the smallest bubble to represent the value zero. All the bubbles on your chart will be between 5 and 20 pts and any bubbles between 0 and 5 pts on this scale will appear at 5 pt.

You can combine bubble size with colors by value to create a chart that shows multiple dimensions.

Procedure

1. Select the chart object.
2. In **Properties** pane, under **General**, double-click the **Bubble Size** property.
3. Under **Smallest bubble**, select what value the smallest bubbles represent:
 - To show data items with a value of zero at the minimum bubble size, click **Zero**.

Tip: This setting is consistent with Microsoft Excel 2003.

- To show data items with a value of zero at the minimum bubble size and show negative bubbles as hollow, select the **Zero. Negatives shown as hollow** check box.

Tip: This setting is consistent with Microsoft Excel 2007.

- To set the minimum bubble size to the minimum data value, click **Minimum data value**, and type a size for the minimum and maximum bubble size.

Note: The minimum data value can be positive or negative.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Bubble Charts” on page 91

Bubble charts, like scatter charts, use data points and bubbles to plot measures anywhere along a scale. The size of the bubble represents a third measure.

Set the Position of the First Slice in a Current Default Pie Chart

You can specify the angle in a pie chart where the first pie slice starts. You can also change the direction of the slices so they appear clockwise or counter-clockwise.

The default starting position of the first slice is **90**, which displays the first slice beginning at the 12 o'clock position. By default, the slices appear clockwise around the pie, so a starting position of **90** displays the first slice at the 12 o'clock position, a starting position of **180** displays the first slice at the 9 o'clock position, and so on.

Procedure

1. Select the pie chart object.
2. In the **Properties** pane, under **General**, beside the **First Slice Angle** property, enter the angle at which you want the first slice to appear.
3. To change the directions in which slices appear, change the **Slice Direction** property.

Related concepts:

"Current Default Charts and Legacy Charts" on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

"Pie Charts" on page 86

Pie charts are useful for highlighting proportions.

Create a Donut Chart from a Current Default Pie Chart

You can add a hole to the middle of your pie chart to create a donut chart. You can then display something in the hole, such as a company logo, a calculation, or the legend.

Procedure

1. Select the pie chart object.
2. In the **Properties** pane, under **General**, set the **Hole size (%)** property to the percentage of the pie that you want the hole to take up.

Tip: You can select a value from the **Hole size (%)** list or type a value that is not listed.

Related concepts:

"Current Default Charts and Legacy Charts" on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

"Pie Charts" on page 86

Pie charts are useful for highlighting proportions.

Pull Out Pie Slices in a Current Default Pie Chart

You can highlight pie slices by pulling them out from the rest of the pie. For example, the following chart shows revenue by product line with slices of less than 1,000,000,000 in revenue pulled out by 25%.

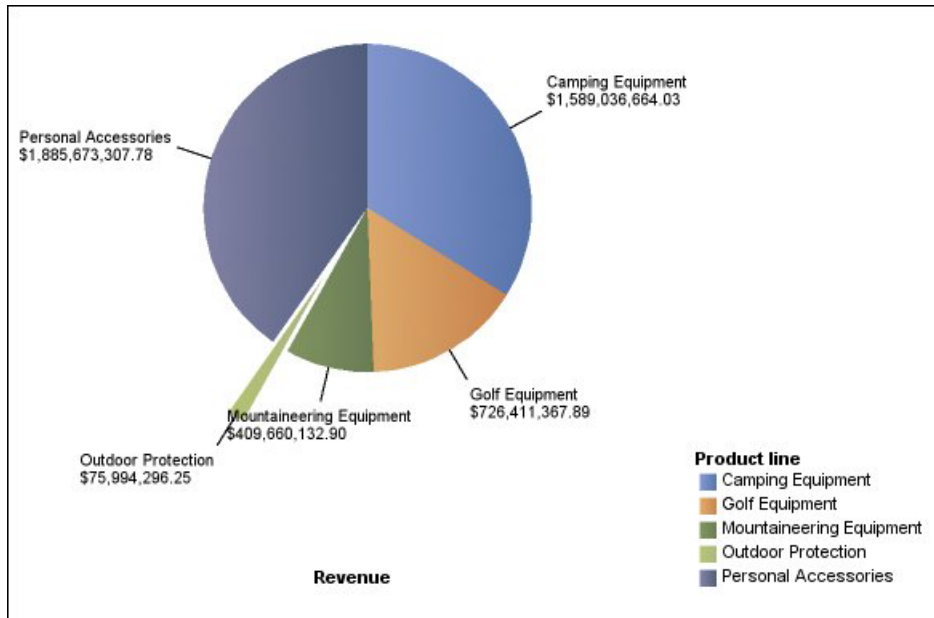



Figure 15. Exploding slices in a pie chart

Procedure

1. Select the pie chart object.
2. In the **Properties** pane, under **General**, double-click the **Exploded Slices** property.
3. In the **Exploded Slice** dialog box, click the new button .
4. In the **Exploded amount** box, type the percentage by which the slice should appear away from the rest of the pie.
 0% displays the pie slice in the pie; 100% displays the pie slice as far out from the rest of the pie as possible.
5. Define which slice to pull out:
 - To select a slice to pull out using its slice index, under **Exploded slice**, click **Slice number** and type the slice number.
 The slice number refers to the order of the slice in the legend. In the example above, Camping Equipment has a slice number of 1 and Personal Accessories has a slice number of 5.
 - To select a slice to pull out using a calculation, under **Exploded slice**, click **Expression** and click the ellipsis (...) beside the **Expression** box to define an expression.
 In the example above, the expression that defines which slices to pull out is as follows: **[Query1].[Revenue] < 100000000**.
 The slice definitions appear in the **Exploded Slices** list.
6. To pull out other slices, repeat steps 3 to 5.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Pie Charts” on page 86


Pie charts are useful for highlighting proportions.

Define the Cumulation Line in a Current Default Pareto Chart

The cumulation line on a Pareto chart displays the percentage of the accumulated total of all the columns or bars. For example, if your chart displays revenue by product line by year, the cumulation line at the second year's column would be the total revenue of the first and second years.

You can customize the appearance of the cumulation line and its data points.

Procedure

1. Select the Pareto chart.
2. To hide or show the cumulation line, in the **Properties** pane, under **Chart Annotations**, set the **Cumulation Line** property.
3. To customize the cumulation line, click the cumulation line icon , and in the **Properties** pane, under **General**, set the following properties:
 - **Line Styles** defines the cumulation line color, style, and weight.
 - **Cumulation Label** defines the label in the legend for the cumulation line. You can use the default label from the data source or type a custom label. The color and marker shape of the cumulation line still appears in the legend when this property is set to **None**.
 - **Data Points** defines whether to show or hide data points along the cumulation line, whether to show or hide data point borders, the color of data point borders, and the data point size and shape.
 - **Data Labels** specifies whether to show or hide the labels for the data points along the cumulation line.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Pareto Charts” on page 95

Pareto charts help you to improve processes by identifying the primary causes of an event. They rank categories from the most frequent to the least frequent. These charts are frequently used for quality control data, so that you can identify and reduce the primary cause of problems.


Define the Cumulation Line in a Legacy Pareto Chart

The cumulation line on a Pareto chart displays the percentage of the accumulated total of all the columns or bars. For example, if your chart displays revenue by product line by year, the cumulation line at the second year's column would be the total revenue of the first and second years.

You can customize the appearance of the cumulation line and its data points.

Procedure

1. Select the Pareto chart.
2. To hide or show the cumulation line, in the **Properties** pane, under **Chart Annotations**, set the **Cumulative Line** property to **Show**.

3. To customize the cumulation line, click the cumulation line icon  and in the **Properties** pane, under **General**, set the following properties:
 - **Cumulation Axis** displays or hides the cumulation line's axis on the right of the Pareto chart.
 - **Cumulation Label** displays or hides the cumulation line label in the legend. The color and marker shape of the cumulation line still appears in the legend when this property is set to **No**.
 - **Line Styles** defines the cumulation line color, style, and weight.
 - **Marker Size (pt)** defines the size of the markers along the cumulation line in points.
 - **Marker Shape** defines the shape of the markers along the cumulation line.
 - **Values** specifies whether to show or hide the values for the markers along the cumulation line.
 - **Value Location** defines the location of the marker values.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Pareto Charts” on page 95

Pareto charts help you to improve processes by identifying the primary causes of an event. They rank categories from the most frequent to the least frequent. These charts are frequently used for quality control data, so that you can identify and reduce the primary cause of problems.

Insert a Microchart into a Crosstab

You can use microcharts to improve the visualization of data in crosstabs.

Procedure

1. Select a crosstab row or column.
2. From the right-click menu, click **Insert Chart for Row Data** or **Insert Chart for Column Data**.
3. From the **Insert Chart** dialog box, select a chart and click **OK**.
4. Specify the data to plot in the microchart.

The chart automatically plots the data in the specified rows or columns. You can change this if necessary.

Customize a Current Default Bullet Chart

After you create a bullet chart, you can customize the shape, color, and size of the bullet and target indicators.

By default, the bullet chart includes three gray colored regions in the background. You can edit the colored regions (**Properties** pane, **Colored Regions**).

Procedure

1. Select the bullet chart object.
2. To change the shape, color, and size of the bullet or target, do the following:
 - a. In the **Properties** pane, under **General**, double-click the **Bullet Indicators** property.
 - b. Under **Bullet**, specify how to show the bullet.

The **Bar width** setting specifies the width of the bullet bar as a percentage of the space available. For example, if you specify 50 percent, the bar uses half of the space available. If you specify 100 percent, the bar uses all the available space.

- c. Under **Target**, specify how to show the target.
3. To change the chart orientation, in the **Properties** pane, under **General**, set the **Chart Orientation** property.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

“Bullet Charts” on page 93

Bullet charts are a variation of bar charts. They compare a featured measure (the bullet) to a targeted measure (the target). They also relate the compared measures against colored regions in the background that provide additional qualitative measurements, such as good, satisfactory, and poor.

Related tasks:

“Add Colored Regions in a Current Default Chart” on page 117

You can define colored regions in the body of a chart. For example, you can divide the background of a scatter chart into quadrants and color each quadrant.

Changing the number of hotspots in a chart

To improve performance, you can limit the number of hotspots that are generated for Report Studio charts.

About this task

A hotspot in a chart appears when you pause a pointer over it. For example, a hotspot on a drill-down symbol or a tooltip gives details about the column, line, or pie slice. The browser response time increases with the number of hotspots. When charts with many members are generated, the hotspots can become an additional burden for the system resources, which can freeze the browser.

When you limit the number of hotspots, priority is given to items such as axis labels and legend labels before individual graphical elements such as bars, pie slices, and so on. Depending on the number of items in a chart and the setting for maximum number of hotspots, some axis items may have hotspots while other axis items and all graphical elements do not, or all axis items and some graphical elements may have hotspots while other graphical elements do not.

The maximum hotspot setting in Report Studio overrides the default set by the administrator. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

Procedure

1. Select the chart object.
2. In the **Properties** pane, under **Miscellaneous**, specify a number for the **Maximum Hotspots** property.

Create a Drill-up and Drill-down Chart

If you use a dimensionally-modeled data source, you can create a chart that allows you to drill down to lower-level data or drill up to higher-level data.

Drilling up and down allows you to view more general or more detailed information on your data within a predefined dimensional hierarchy.

This is an example of a dimensional hierarchy:

Years - Year - Quarter - Month

Before you begin

Before you begin, ensure that you are using a dimensionally-modeled data source.

Procedure

1. Open a chart that uses a dimensionally-modeled data source.
2. From the **Data** menu, click **Drill Behavior**.
3. On the **Basic** tab, under **Report output drill capabilities**, select the **Allow drill-up and drill-down** check box.

By default, the system determines which items can be drilled on based on the dimensional structure.

On the **Basic** tab, you can make drilling unavailable for any data item by selecting the item in either the **Disable drill-up for** box or the **Disable drill-down for** box.

On the **Advanced** tab, you can change the drill-up or drill-down behavior for any parameter by selecting the parameter and then choosing one of the desired behaviors.

Results

The chart generates links for any item that can be drilled down on.

You can drill down or drill up by right-clicking and choosing the action from the context menu. The menu items are unavailable if an item cannot be drilled up or down on.

Related tasks:

“Create a Drill-up and Drill-down Report” on page 308

You can link groups of data items from different queries so that when you drill up or drill down in one query, the data item also drills up or drills down in the linked queries.

Example - Creating Drill-through Access in a Legacy Chart

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a chart that shows the revenue for each product line and allows the reader to drill through from the revenue chart to view the product details for any item selected. You create a drill-through report to link two reports containing related information. You can then access related or more detailed information in one report by selecting a value in the chart. You create two reports: a target list report that contains the details for the item and a source report that contains the chart that shows the product line revenue.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79

IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.


“Set Up Drill-through Access in a Report” on page 423

Set up drill-through access in a source report to link two reports containing related information.



Create the target report

This example has three parts: creating the target report, creating the source report, and defining the drill behavior.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **Sales and Marketing (query)**, **Sales (query)**, and **Product**.
5. Double-click the following data items to add them to the list:
 - **Product line**
 - **Product type**
 - **Product name**
 - **Introduction date**
 - **Product image**


Now you must create a filter to use as a drill-through parameter. A drill-through parameter begins and ends with a question mark (?) symbol.

6. Click the filters button .
7. Click the add button  and type the following in the **Expression Definition** window:
`[Sales (query)].[Product].[Product line]=?p_PL?`
8. Save the report as **Product Line Details**.

Create the Source Report

This example has three parts: creating the target report, creating the source report, and defining the drill behavior.

Procedure


1. Create a new report.
2. In the **New** dialog box, click **Chart** and click **OK**.
3. In the **Chart group** pane, click **Column**.
4. In the **Chart type** pane, click **Column**.
5. Click **OK**.
6. From the **Source** tab , expand **Sales and Marketing (query)** and then **Sales (query)**.
7. Expand **Sales fact** and drag **Revenue** to the **Measure (Y-axis)** drop zone.

8. Expand **Order method** and drag **Order method** to the **Series** drop zone.
9. Expand **Product** and drag **Product Line** to the **Categories (X-axis)** drop zone.

Define the Drill Behavior

This example has three parts: creating the target report, creating the source report, and defining the drill behavior.

Procedure

1. From the **Data** menu, click **Drill Behavior**.
2. On the **Basic** tab, under **Report output drill capabilities**, select the **Allow this report to be a package-based drill-through source** check box and click **OK**.
3. Right-click the chart object and click **Drill-Through Definitions**.
4. Click **New Drill Through**.
5. Under **Report**, click the ellipsis (...) button.
6. Select the **Product Line Details** report you created and click **Open**.
7. Under **Action**, click **Run the Report**.
8. Under **Format**, click **HTML**.
9. Click the edit button .
Any existing drill-through parameters appear. You see the parameter you created for **Product Line Details**.
10. For item **p_PL**, under **Method**, click **Pass data item value**, and under **Value**, click **Product line**.
11. Save the chart as **Product Revenue**.
12. Run the report.

Results

The chart shows the product lines as clickable links. When you click a product line, the second report runs for that product line.

Example - Creating and Customizing a Metrics Range Legacy Chart

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are asked to create a chart that shows revenue compared to planned revenue by quarter by product line. You also want to highlight revenues that were below target.

This example has three parts: creating a metrics chart, customizing it, and customizing the legend labels.

Related concepts:

“Current Default Charts and Legacy Charts” on page 79



IBM Cognos Report Studio has a new default chart technology as of version 10.1.0.

Create a Metrics Range Chart

This example has three parts: creating a metrics range chart, customizing it, and customizing the chart legend labels.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.

2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Chart** and click **OK**.
4. In the **Chart group** pane, click **Metrics Range**.
5. In the **Chart type** pane, click **Column Chart with Range Indicators** and click **OK**.
6. From the **Source** tab , expand **Sales and Marketing (query)**, **Sales (query)**, and **Sales fact**.
7. Drag **Revenue** to the **Actual (Y-axis)** drop zone.
8. Drag **Planned Revenue** to the **Target (marker)** drop zone.
9. Expand **Time dimension**, and drag **Quarter** to the **Categories (X-axis)** drop zone.
10. From the **Toolbox** tab , drag a query calculation to the **Tolerance (marker)** drop zone.
11. In the **Create Calculation** dialog box, type **Tolerance**.
12. In the **Expression Definition** box, type **[Planned revenue] * 0.1** and click **OK**.
13. Run the report and then pause the pointer over each bar to see the revenue for that quarter.

Customize the Chart

This example has three parts: creating the metrics range chart, customizing it, and customizing the legend labels.

Procedure

1. Select the chart body.
2. In the **Properties** pane, under **Target Markers**, ensure that the **Performance Pattern** property is set to **On Target**.
3. Double-click the **Marker Color** property, click **Lime** and click **OK**.
4. Set the **Upper Range Skew (%)** property to **0%**.
This option removes the upper tolerance line. In this example, you do not need to see the upper tolerance line because the revenue is always below the planned revenue target.
5. Ensure that the **Target Range (%)** property is set to **50%**.
This option sets the size of the range around the planned revenue target. The percentage you choose is the percentage of the tolerance measure. In this example, a 50% target range would display 50% of the tolerance calculation you created, which is 50% of 10% of planned revenue.
6. Double-click the **Target Color** property, click **Red** and click **OK**.
7. Double-click the **Target Marker Border Color** property, click **Green** and click **OK**.
8. Run the report.

Customize the Chart Legend Labels

This example has three parts: creating the metrics range chart, customizing it, and customizing the legend labels.

Procedure

1. Under the chart legend select **Marker**.
2. In the **Properties** pane, under **Text Source**, double-click the **Text** property.

3. Replace the text in the **Text** dialog box with **Planned revenue** and click **OK**.
4. Under the chart legend select **Tolerance**.
5. In the **Properties** pane, under **Text Source**, double-click the **Text** property.
6. Replace the text in the **Text** dialog box with **Tolerance: 10% of planned revenue** and click **OK**.
7. Under the chart legend, select **Range**.
8. In the **Properties** pane, under **Text Source**, double-click the **Text** property.
9. Replace the text in the **Text** dialog box with **Planned revenue range = 50%** and click **OK**.
10. Run the report.

Results

The report now shows customized legend labels for the markers, tolerances, and ranges as shown below.

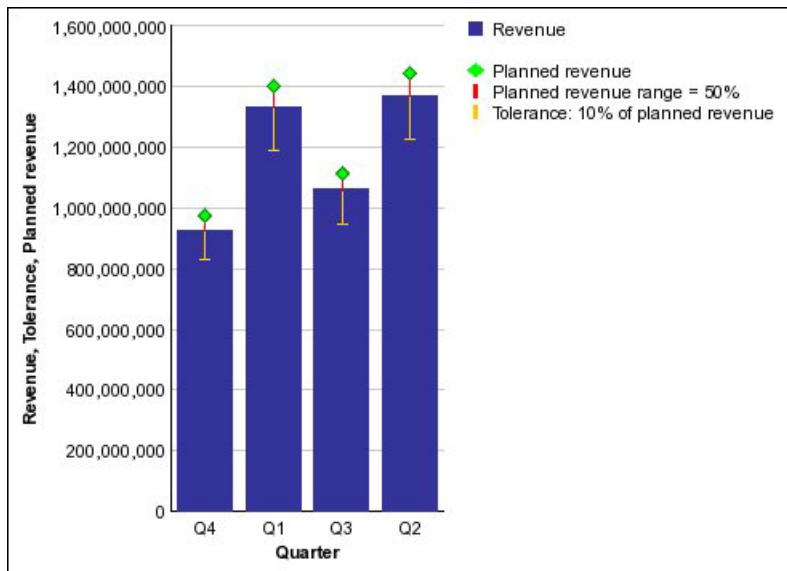


Figure 16. Metrics range chart with customized legend labels for the markers, tolerances, and ranges

Adding a Metric Studio Diagram to a Report

You can add IBM Cognos Metric Studio impact or custom diagrams in your reports. Impact diagrams show cause-and-effect relationships between metrics. Custom diagrams allow you to monitor your metrics using a predefined visual representation, such as a process diagram or strategy map.

The diagrams are added as images within your report.

You can add a diagram in the following ways:

- as a static image with the **Metric Studio Diagram** object
- as a dynamic image from a metrics package

You can also add range indicator charts.


You must first create custom diagrams in Metric Studio before you can add them in an IBM Cognos Report Studio report. Impact diagrams are automatically created in the metrics package. For information about creating Metric Studio diagrams, see the *Metric Studio User Guide*.

Add a Static Metric Studio Diagram to a Report

You insert the image using the diagram identifier from Metric Studio. The identifier is converted to an image URL and the image appears in your report output.

Because the diagram is a static image, any changes to the metrics will not appear in the diagram image within your report.

Procedure

1. From the **Toolbox** tab , drag a **Metric Studio Diagram** object to the report.
2. Select the Metric Studio diagram object.
3. In the **Properties** pane, paste the diagram identifier in the **Diagram Identifier** box.
Tip: Copy the identifier from Metric Studio (**Diagrams** tab, **View the Diagram Identifier** button in the **Actions** column).
4. In the **Description** box, type a description for the diagram.
5. If you want to make the diagram image accessible, in the **Alternate Text** box, type a description for the image.

Related tasks:

“Add Alternate Text to Images and Charts” on page 470


You can add alternate text for images, maps, and charts to make your reports accessible. When a screen reader encounters one of these objects, it reads the alternate text that you added to the object.

Add a Data-driven Metric Studio Diagram to a Report

If you use a metrics package (which is a relational data source), you can insert a Metric Studio diagram directly from the **Toolbox** tab. Because you add the diagram from the metrics store, any changes to the metrics will appear in the diagram image when you re-run your report.

If you add diagrams from the **Metric History** table of the metrics package, one diagram is added for each metric per time history. As a result, your report could contain a large number of diagrams. To improve the performance of your report, consider adding a filter to limit the time period.

Procedure

1. Open IBM Cognos Report Studio with a metrics package.
2. From the **Toolbox** tab , insert a diagram query item to the report.
3. If you want to make the diagram image accessible, select the image object for the diagram, and in the **Alternate Text** box, type a description for the image.

Related tasks:

“Add Alternate Text to Images and Charts” on page 470

You can add alternate text for images, maps, and charts to make your reports accessible. When a screen reader encounters one of these objects, it reads the alternate text that you added to the object.

Chapter 7. Maps

IBM Cognos Report Studio provides a set of maps that you can use to represent tabular data in a spatial context. For example, on a map of the world, countries and regions can be colored to represent the level of revenue.


Maps are not supported for reports run in Microsoft Excel format.

The Report Studio Map Object

Maps are most often used to show geographical areas, but they can be used to show other spatial information, such as a floor plan in a building, seats in an airplane, or parts of the human body.

Maps are similar to crosstabs in the way their data is organized. The display is different, but maps show the intersection of data the same ways as crosstabs; for example, you can see the revenue for golf equipment in Canada.

A map in IBM Cognos Business Intelligence consists of a collection of layers. Each layer contains different information and acts like a transparency that is placed on top of the map. Each layer adds more information to the map. For example a map of the world may contain information related to countries or regions on one layer and information related to cities on another level.

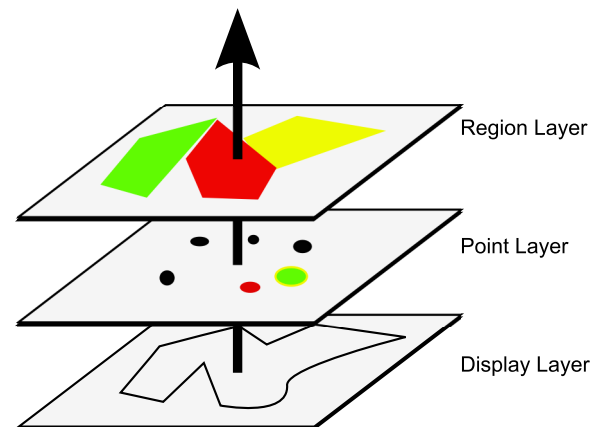

IBM Cognos Report Studio maps provide the following three types of layers:


- **Region layer**
Specifies the regions on a map to be differentiated according to values in the data source. For example, to show the revenue level for each country and region on a map of the world, choose Country and Region as the region layer and then specify that the color of each country and region is based on the revenue value for that country and region. Areas can be set up for drilling through to other reports.
- **Point layer**
Specifies the points to be placed on a map. The color and size of the points is based on the data that you select. For example, you choose to show cities as points on a map and set the color of each point by revenue and the size of each point by profit. Points can be set up for drilling through to other reports.

- Display layer
You can show or hide items such as grid lines or capital cities. This layer is determined in the map file and not in the data source.

Note: If you intend to create CSV or XML output from your map, use only a point layer or a region layer. CSV and XML do not support the simultaneous use of both layers in the same map. Only one layer will be rendered in the output.

Parts of Map Reports

The following shows the parts of a map as they appear in the IBM Cognos Report Studio interface.

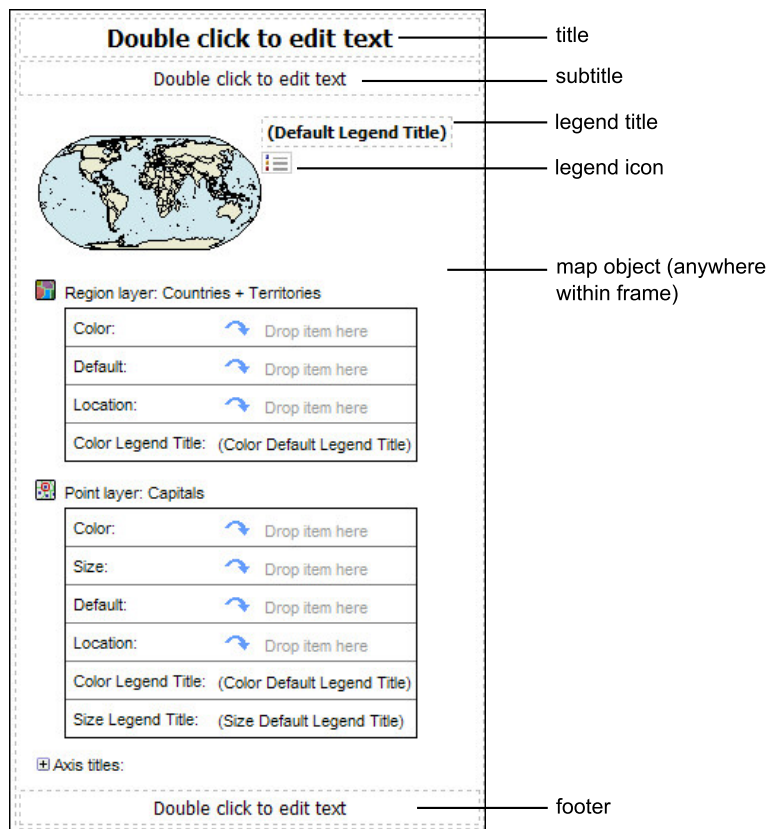

Example - Create a Map Report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are asked to show how revenue for the company is distributed throughout the world. This information can be shown in tabular format using a list report, but a map will create a more meaningful presentation. You decide to create a report that contains a map of the world showing the distribution of revenue by country and region.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Map** and click **OK**.

4. In the **Choose Map** dialog box, in the **Maps** pane, expand the **World** folder and click **World**.
5. In the **Region layers** box, click **Countries and Regions + Territories**.
6. In the **Point layers** box, click **None**.
7. In the **Display layers** box, click **Oceans**.

Tip: You can select or deselect multiple display layers by Ctrl+clicking.

Tip: You can return to the **Choose Map** dialog box at any time by double-clicking the map background.

8. Drag the following data items to the map:
 - **Revenue** (in **Sales fact**) to the **Color** drop zone.
 - **Retailer country and region** (in **Retailer site**) to the **Location** drop zone.
9. Run the report.

Results

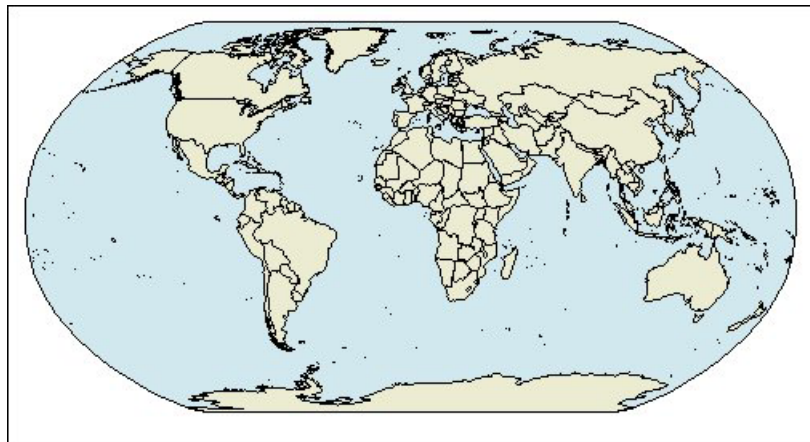


Figure 17. World map

Set Map Properties

When you select an element in a map, you can view its properties in the **Properties** pane. Some properties are dependent on the existence of other properties.

If you are familiar with using conditional variables, you can customize the map to change appearance or provide information in response to expressions or conditions.

When you change a map property, you usually do not see the change until you run the report. Changes to the properties of labels and titles are reflected immediately.

These are some of the properties you can change in maps. These properties are available when you select the map object, unless specified otherwise in the **Action to perform in the Properties pane** column.

Goal	Action to perform in the Properties pane
Hide or show the title, subtitle, footer, or axis title	Under Chart Titles , set the Title , Subtitle , Footer , or Axis Title property.
Hide or show the legend	Under Chart Annotations , set the Legend property.
Hide or show region and point layer values and labels on the map	Select the region or point layer. Under Chart Labels , double-click the Show Values property and select the options that you want. To hide overlapping labels, select the Hide overlapping labels check box.
Hide or show display layer labels on the map	Select the display layer. Under Chart Labels , double-click the Show Labels property and select the option that you want. To hide overlapping labels, select the Hide overlapping labels check box.
Hide or show the border around the legend	Select the legend icon. Under Box , set the Borders property.
Change the border around the map object	Under Box , set the Border property.
Hide or show the tooltips Note: Some versions of Acrobat Reader do not support tooltips.	Under Chart Labels , set the Tooltips property.
Change the amount of white space around the map	Under Box , set the Padding or Margin property.
Change the default colors for all map elements	Under Color & Background , set the Background Color , Foreground Color , or Fill Effects property.
Change the font and the alignment of text	Under Font & Text , set the Font or Relative Alignment property. Tip: The 2011 Quarterly Sales Forecast sample report in the GO Sales (analysis) package includes text alignment. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.
Resize the map	Under Positioning , set the Size & Overflow property.
Change the font for the legend	Select the legend icon. Under Font & Text , set the Font property.
Change the format of values in the legend	Select the value in the region or point layer. Under Data , set the Data Format property.
Ignore data with no features	Under Data , set the Ignore Data with No Features property.
Specify the size of points	In the point layer, click the measure in the Size drop zone and set the Minimum Size and Maximum Size properties.
Add titles, subtitles, footers, or axis titles	Set the Title , Subtitle , Footer , or Axis Title property.

Procedure

1. Select the map object or map element to change:
 - To change general properties, such as size and color, click the map object.
 - To change specific map elements, such as a layer or title, click the element itself.

Tip: To cancel a selection, press the Esc key.

2. In the **Properties** pane, set the property value.


An ellipsis (...) button indicates that a dialog box provides further options.

Note: You may have to scroll to see all the properties.

Example - Define Data Values for the Region Layer

The map that you created in the previous topic is not yet linked to a data source. You will now specify the data values from your data source that will determine the color of each region.

Procedure

1. From the **Source** tab , expand **Sales and Marketing (query)**, **Sales (query)**, and **Sales fact**.
2. Drag **Revenue** to the **Color** drop zone.
3. Expand **Employee by organization**.
4. Drag **Country** or **Region** to the **Location** drop zone.
5. Run the report.

Results

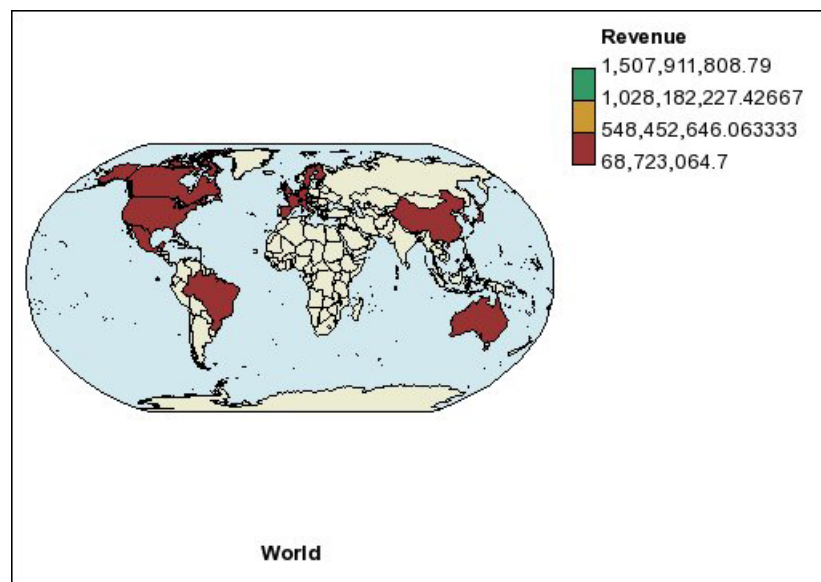


Figure 18. Map showing revenue by country or region


Match Data Values to Names in the Map File

If the **Ignore Data with No Features** property is set to **No**, then each object that is called from the data source must have a matching label in the specified layer of the map file. For example, if your data source has a country and region named United States and the layer in the map file labels the same country and region USA, then there is a mismatch that must be corrected. IBM Cognos Report Studio only makes you aware of a mismatch if each object in your data source does not have a corresponding label in the map file. If there are extra labels in the map file that do not have a match in the data source, the report will run without an error message.

A mismatch between your data and the map file must be corrected by the report author. It can not be corrected by a consumer of the map report at run time. There are two ways to correct a mismatch between your data and the labels in the map files. You can use IBM Cognos Map Manager to edit the labels in the layers of the map file, or you can use the dictionary property to create an alias for each mismatched object. When you use the dictionary property, it resolves the mismatch only for a single report, and is not shared with other reports. If you intend to continue using a map with the same data source, it is best to edit the map in Map Manager so that the labels match the objects in your data source.

For information about using Map Manager, see the Map Manager *Installation and User Guide*.

Procedure

1. Select the map object.
The title bar of the **Properties** pane now shows the word **Map**.
2. In the **General** section of the **Properties** pane, double-click the **Dictionary** property.
3. Click the new button .
4. In the **Dictionary Entry** dialog box, click **Search**.
5. In the **Search string** box, type a word or part of a word for which to search.
For example, if you are searching for United States, type in part or all of the name.
6. In the **Search map layer** box, click the layer to search and click **Search**.
7. In the **Matching features** box, click the label to which to match your data source and click **OK**.
8. In the **Alias** box, type the name as it appears in the data source and click **OK**.
For example, if the country and region in your data source is named USA, type USA as the alias.


Note: To find out the name for the objects in your data source, run a list report. For example, you can run a list report to show the names of all the countries and regions in your data source. For more information see Chapter 4, "Lists," on page 63.

Define Data Values for the Point Layer

The Point layer in a map is used to visually represent data for point locations, such as cities or sales outlets. Both the color and size of points can be based on data from your data source.

Procedure

1. Open the **Choose Map** dialog box:
 - When you create a new map report, this dialog box appears automatically.
 - If you are already in a map report, double-click the map background.
2. In the **Point Layers** box, select the layer containing the points to show on the map.

For example, on a map of the world, you may want the points to represent cities.
3. From the **Source** tab , drag a data item to the **Color** drop zone in the **Point Layer**.

For example, to have the color of the point based on revenue, drag **Revenue** from the **Source** tab to the **Color** drop zone.
4. From the **Source** tab, drag a data item to the **Size** drop zone in the **Point Layer**.
5. From the **Source** tab, drag a data item to the **Location** drop zone in the **Point Layer**.


The object must be supported in the map file as a point location. For example, in the World sample map, city is supported as a point location but country or region is not.
6. If you need to refine the location, drag an object to the **Refine Location** drop zone.

Use this drop zone when there is more than one location with the same name. For example, if you try to run a report with cities in the point layer, and there is more than one city in your data source with the same name, the report does not run. An error message indicates that there are cities in your data source with duplicate names. You can differentiate the cities by using the data object **Region** to refine the location.

Add Colors to the Region or Point Layer

You can add colors for regions or points and specify values to determine when those colors are shown.

Procedure

1. In the report, click the **Region Layer** or **Point Layer**.
2. In the **Color & Background** section of the **Properties** pane, double-click the **Palette** property.
3. Click the new button  and click **Color**.



A new color is added to the list of colors.
4. To view the palette colors as a continuous spectrum in which colors blend into one another, click **Continuous Colors**.
5. With the new color selected, click **Color** in the right pane of the dialog box and select a color.
6. Change the percentage boundaries for the colors.

Tip: To specify absolute values rather than percentages, clear the **Percentage** check box.

Add a Legend Title to a Map

There are legend titles for the entire legend, for the color of the regions, for the color of the points, and for the size of the points.




Procedure

1. If the legend title is not showing, click the legend icon .
2. In the **General** section of the **Properties** pane, set the **Legend Title** to **Show**.
3. In the report, double-click the legend title and type the title.
4. By default, the legend titles are taken from the object you have selected from the data source. To change the legend title for the region color, point color, or point size, do one of the following:
 - From the **Toolbox** tab , drag a text or calculation object to the **Color Legend Title** drop zone in the Region Layer or Point Layer, or the **Size Legend Title** drop zone in the Point Layer.
 - Double-click the **Color Legend Title** or **Size Legend Title** drop zone, to change from the default legend title, then double-click the drop zone again. In the **Text** dialog box, type text for the legend title.

Add a Note to a Map

You can add one or more notes, determine their position in the map report, and specify borders around notes.


Procedure

1. Select the map object.
2. In the **Chart Annotations** section of the **Properties** pane, double-click the **Notes** property.
3. Click the new button , and click **OK** twice.
A note icon with the words **New Note** appears in the report.
4. Click **New Note** next to the note icon .
5. In the **Text Source** section of the **Properties** pane, double-click the **Text** property.
6. Type the text to appear in the note and click **OK**.
7. In the report, click the note icon .
8. In the **Positioning** section of the **Properties** pane, type values to specify the bottom position, left position, height, and width for the note.
The location of the note is defined by the number of pixels.
9. Set the **Note Border** property to specify a border around the note.
10. Run the report to view the note.
If necessary, change the position again.


Drill Through to Another Report From a Map

You can link regions or points on a map to another report. For example, on a map of the world, you can specify that when you click on China, a map of China opens.

Procedure

1. Open the target report.
2. From the **Data** menu, click **Filters**.
3. On the **Detail Filters** tab, click the add button .
4. In the **Available Components** box, click the **Source** or **Data Items** tab to select the data item to use.

For example, to open the target report when Canada is clicked in the source report, expand **Countries and Regions** and double-click **Country and Region**.
5. In the **Expression Definition** box, type an operator after the data item or select an operator from the **Functions** tab and then enter a value.

For example, to open the report when Canada is clicked in the source report, the expression would be as follows:
[Country and Region]='Canada', where [Country and Region] is the name of the data item in the package.
6. Save the target report.
7. Open the source report.
8. Select the region layer or the point layer.
9. In the **Data** section of the **Properties** pane, double-click the **Map Drills** property.
10. In the **Map Drills** dialog box, click the new button .
11. In the **Search string** box, type the name of the feature to use for the drill-through link.

For example, to open a report when you click on Canada in the map, search on all or part of the word **Canada**.
12. Click **Starts with** to search for features that start with the search string or click **Contains** to search for feature names that include the search string.
13. To include a parent layer's name in the results of your search, select a layer in the **Include parent layer** list.

For example, if you searched for **Oslo** and you included the parent layer of **Countries and Regions + Territories**, the search result would be **Oslo (Norway)**.
14. Click **Search**.
15. Select a feature from **Matching features** box and click **OK**.
16. In the **Drill-Through Definitions** dialog box, click the new button.
17. Click the ellipsis (...) button beside the **Report** box, and select the target report.
18. Run the report.

Results

When you click the selected feature in the source report, the target report will open.

Edit a Map

With IBM Cognos Map Manager you can edit the labels in maps to be consistent with the object names in your database.

Administrators and modelers use a Microsoft Windows operating system utility named Map Manager to import maps and update labels for maps in IBM Cognos Report Studio. For map features such as country or region and city names, administrators and modelers can define alternative names to provide multilingual versions of text that appears on the map.

For instructions, see the Map Manager *Installation and User Guide*.

Additional Maps

IBM Cognos supplies a set of standard maps that can be used directly with IBM Cognos Report Studio as well as IBM Cognos Map Manager.

If you already have proprietary geographic data, you can also create your own custom .GST files and then import these into Map Manager. To create custom .GST files, you must use an application that produces MapInfo files, such as MapInfo Professional.

Location Intelligence

Sophisticated mapping functionality, known as location intelligence, can be used for a broad range of business applications that extend the mapping capability of IBM Cognos Business Intelligence. MapInfo provides solutions that can be directly integrated with IBM Cognos BI. These include the ability to dynamically create geographic filters and custom areas for aggregating data for ad-hoc analysis. Examples of business applications of location intelligence are listed in the following table.

Business application	Benefits
Target marketing	Learn who your best clients are and find more like them.
Network optimization and site location analysis	Put stores near your customers and look for gaps in geographical coverage.
Routing and work force optimization	Reduce the number of trucks you need and make your drivers more efficient.
e-government	Provide citizens with self-service opportunities.
Sales territory creation	Create balanced sales territories.
Economic development	Plan the development of your community.
Communications network planning	Avoid costly mistakes by putting cell towers in the right locations. Identify the locations of clients in your service area.

You can contact MapInfo for both data and location intelligence solutions through their Web site: <http://www.mapinfo.com>.

Chapter 8. Active Reports

You can use IBM Cognos Report Studio to create active reports. IBM Cognos Active Report is a report output type that provides a highly interactive and easy-to-use managed report. Active reports are built for business users, allowing them to explore their data and derive additional insight.

Active reports make business intelligence easier for the casual user. Report authors build reports targeted at their users' needs, keeping the user experience simple and engaging. Active reports can be consumed by users who are offline, making them an ideal solution for remote users such as the sales force.

Active reports are an extension of the traditional IBM Cognos report. You can leverage existing reports and convert them to active reports by adding interactive behavior, providing end users with an easy-to-consume interface.

Like existing IBM Cognos reports, you can execute active reports from IBM Cognos Connection as well as schedule and burst them to users.

You build active reports with the same objects that you use to build other report types. However, there are objects that are specific to active reports. These objects fall into two categories:

- active report controls
- active report variables

For tips about building active reports, see the Business analytics proven practices page (<http://www.ibm.com/developerworks/analytics/practices.html>).

Note: Cognos Active Report does not support JavaScript.

Active Report Controls

You use active report controls to create the layout of an active report as well as filter, sort, and navigate through data in the report.

Layout

The following controls are used to build the layout of an active report:

- Tab controls, which are used for grouping similar report items.
- Decks of cards, which are used for layering report items.
- Hiding or showing list columns, which allows users to control the data they see by using check boxes.
- Row numbers, which show the number of rows of data in a control.

Filtering and Sorting

To help report authors deliver the content in the most consumable way possible, IBM Cognos Report Studio provides several new filtering controls:

- List and drop-down list controls
- Interactions with charts

For example, clicking a category in a chart filters the data in a list.

- Radial buttons
- Check boxes
- Toggle buttons
- Push button controls

Navigation

To help users navigate through data in a report, report authors can add the following controls:

- Iterators
- Sliders

Data Containers

Data containers, such as lists, crosstabs, charts, visualizations, and repeater tables, are also considered controls in an active report, as you can add interactive behavior to them.

Related concepts:

“Adding Controls to a Report” on page 185

IBM Cognos Active Report offers several active report controls. For many controls, two different versions are available, a static version and a data-driven version.

Active Report Variables

Active report variables work in conjunction with active report controls to add interactivity to a report.

Actions performed on a control, such as selecting an item in a control or selecting a control itself, can set the value of a variable. In turn, controls can respond to changes in the value of a variable, such as filtering data in a control.

Related tasks:

“Create and Manage Active Report Variables” on page 184

Create active report variables to allow controls in a report to interact with each other. Active report variables pass information from one control to another control.

Convert an Existing Report to an Active Report

You can leverage existing reports by converting them to active reports.

Procedure

1. Open the report that you want to convert.
2. From the **File** menu, click **Convert to Active Report**.



Results

IBM Cognos Active Report menu items, objects, and properties become available in IBM Cognos Report Studio. Objects in the report that are not supported in active reports, such as prompt controls in report pages, are removed.

Specify Active Report Properties

You can specify properties for active reports, such as the text that appears in the browser window title bar, the maximum number of rows that a report can contain, and an access code that users must enter to view a report.

Procedure

1. From the **File** menu, click **Active Report Properties**.
2. To specify the title that will appear in the browser window title bar when the report is viewed, under **Window Title**, type the title that you want.
3. If you want to specify the window title in other languages, do the following:
 - Under **Window Title**, click the ellipsis button (...).
 - Click the add button .
 - Select the languages that you want.
 - In the **Language** column, click one of the languages that you selected.
 - Click the edit button  and type the window title for that language.
4. In the **Window Startup Size** box, choose among the available options to specify the size of the browser window when an active report is viewed.
5. In the **Maximum query rows** box, specify the maximum number of rows of data that the report can contain.

If the number of rows of data returned when the report is run exceeds this value, an error message appears, and users will not be able to view the report.

6. To specify an access code that users will have to enter to view the report, enter the code in the **Access code** box.

You can use any Unicode character in the access code, and there is no limit to the number of characters an access code can contain.

The access code will not be hidden or treated like a password when entered (* will not appear as the code is entered). Users will have three attempts to enter the correct code, after which the active report will shut down. To try again, users have to reopen report.

Note: The access code is a tool to help prevent the unauthorized consumption of an active report within an organization. It is not an enterprise grade security solution.

7. If you do not want to compress the MHT file that is produced when the active report is run, clear the **Compress the active report output** check box.

Compressing the output reduces the size of MHT files so that active reports can support more data and load faster in browsers and mobile devices.
8. To support pinch-to-zoom gestures when the active report is viewed on a mobile device, select the **Scalable** check box.
9. To reuse the **Window Startup Size** and **Maximum query rows** properties when you create other active reports, select the **Use as default for new active reports** check box.

Extensible visualizations

You can use extensible client-side visualizations in IBM Cognos Active Report to visualize data.

Visualizations must be imported into IBM Cognos Administration. The Visualization Gallery is empty until your administrator imports the visualizations and makes them available to you. Your administrator can set permissions to restrict access to only certain report authors.

The visualizations come from the site AnalyticsZone (<https://www.analyticszone.com>). For more information about administration and visualizations, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

Because visualizations are extensible, they can be customized by an author with the necessary skills. Because they are client-side, they can be run when not connected to the web. You can also use visualizations on mobile devices.

Some of the visualizations that you can add to your active reports are treemaps, heatmaps, packed bubble visualizations, and network diagrams.

Extensible visualizations support all Active Report interactivity. For example, you can use Active Report controls to dynamically filter visualizations to view only the data that you want to analyze. You can also set properties that are available for each visualization type. These properties are determined by the visualization definition. Typically, you can set such properties as width, height, animation effect, and fixed-axis scaling.

For more information about visualizations and their uses, go to Many Eyes® (<http://www-958.ibm.com>).

Attention: If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.

Adding a visualization to an active report

You can add a visualization to an active report to efficiently represent your data.

Before you begin

Your administrator must make the visualizations available in the Visualization Gallery.

If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.




About this task

You add data to a visualization by inserting data items in drop zones. Visualizations will not run until all of the required drop zones contain data items. When all the required drop zones contain data items, additional drop zones appear for extra categories or values. You can use extra categories and extra values to filter data or set variables. Extra items are not visible in the visualization.

When working with dimensional data sources, if the visualization does not contain a measure against which to plot data, you must provide one. For example, if you add a single member to the values drop zone, such as '2012', the default measure drop zone appears in which you must insert a measure.

Attention: The supported properties for a visualization are determined by the visualization definition.

Procedure

1. Create a new active report or open an existing active report.
2. From the **Toolbox** tab , drag a **Visualization** icon  to the work area.
3. From the Visualization Gallery, select a visualization and click **OK**.
4. From the **Source** tab , drag items to the appropriate location in the data container.
5. Run the visualization.

Adding a treemap visualization

You can use a treemap visualization in IBM Cognos Active Report to identify patterns and exceptions.

Treemaps show relationships among large numbers of components by using size and color coding in a set of nested rectangles.

A treemap that is colored by category identifies the level 1 category by color. The sizes of the rectangles represent the values. In a treemap that is colored by value, the sizes of the rectangles represent one of the values and the color represents a second set of values.

Attention: The supported properties for a visualization are determined by the visualization definition.

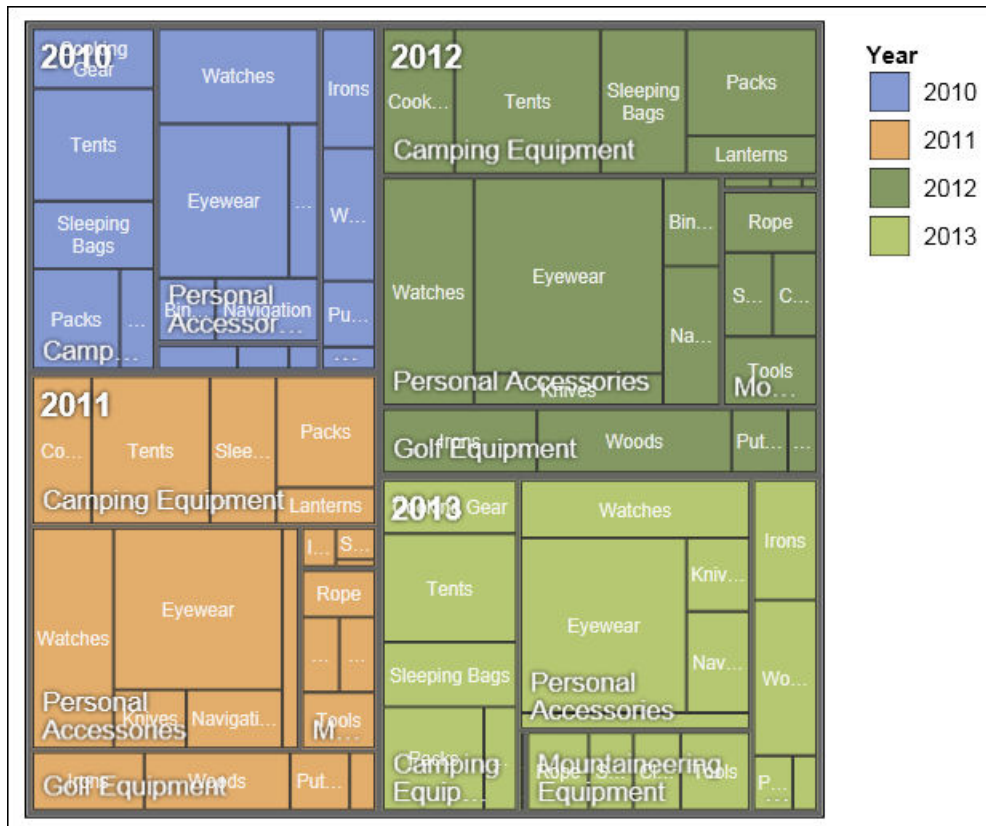


Figure 19. A heatmap visualization

Before you begin

Your administrator must make the visualizations available in the Visualization Gallery.

If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.




About this task

You add data to a visualization by inserting data items in drop zones. Visualizations will not run until all of the required drop zones contain data items. When all the required drop zones contain data items, additional drop zones appear for extra categories or values. You can use extra categories and extra values to filter data or set variables. Extra items are not visible in the visualization.

When working with dimensional data sources, if the visualization does not contain a measure against which to plot data, you must provide one. For example, if you add a single member to the values drop zone, such as '2012', the default measure drop zone appears in which you must insert a measure.

Attention: The supported properties for a visualization are determined by the visualization definition.

Procedure

1. From the **Toolbox** tab , drag a **Visualization** icon  to the work area.
2. From the Visualization Gallery, select a Treemap icon:
 - If you are plotting a single measure, select a treemap colored by category.
 - If you are plotting two measures, select a treemap colored by value.
3. Click **OK**.
4. From the **Source** tab , drag items to the appropriate location in the data container:
 - a. Under **Values**, drag items to define the size and color of the rectangles to **Size** and **Color**.
 - b. Under **Categories**, drag items to the different levels. Each level represents the category within which the subsequent levels are nested. For example, the levels might be Year, Product Line, and Product Type.
5. Add any active controls that you want and run the visualization.

Adding a heatmap visualization

Heatmaps in IBM Cognos Active Report use colors to represent the individual values that are contained in a matrix.

Similar to treemaps, you can use heatmaps to identify patterns and exceptions. Unlike treemaps, the sizes of the rectangles are not proportionate to values.

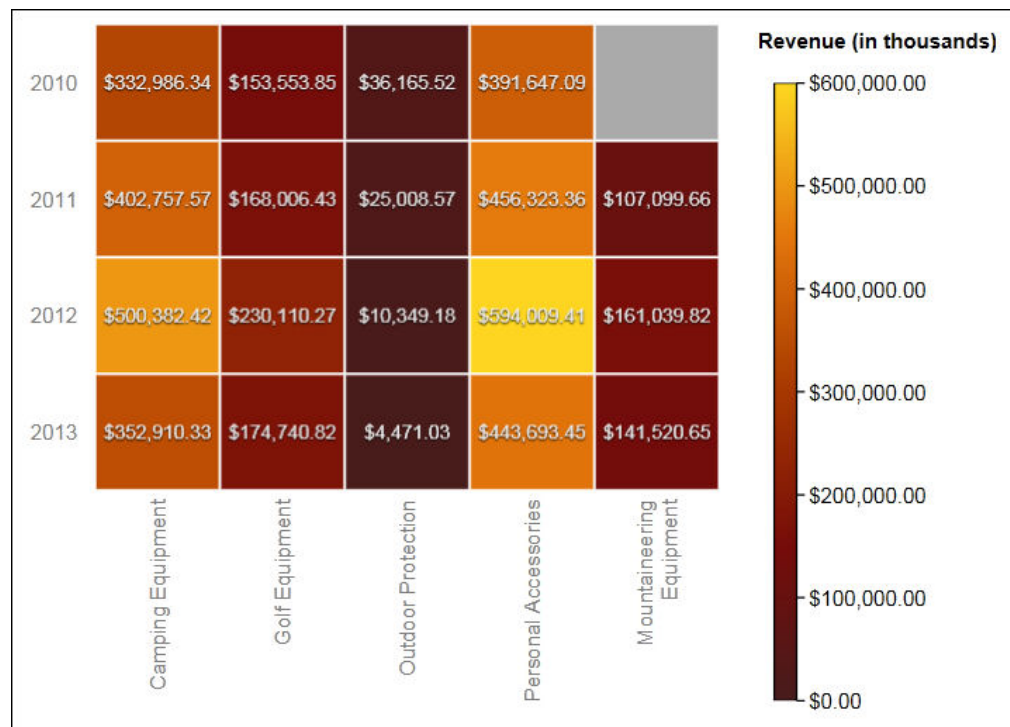


Figure 20. A heatmap visualization

Before you begin

Your administrator must make the visualizations available in the Visualization Gallery.

If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.




About this task

You add data to a visualization by inserting data items in drop zones. Visualizations will not run until all of the required drop zones contain data items. When all the required drop zones contain data items, additional drop zones appear for extra categories or values. You can use extra categories and extra values to filter data or set variables. Extra items are not visible in the visualization.

When working with dimensional data sources, if the visualization does not contain a measure against which to plot data, you must provide one. For example, if you add a single member to the values drop zone, such as '2012', the default measure drop zone appears in which you must insert a measure.

Attention: The supported properties for a visualization are determined by the visualization definition.

Procedure

1. From the **Toolbox** tab , drag a **Visualization** icon  to the work area.
2. From the Visualization Gallery, select the **Heatmap** icon and click **OK**.
3. From the **Source** tab , drag items to the appropriate location in the data container:
 - a. Under **Values**, drag a measure or a single value to define the color shading of the rectangles.
 - b. Under **Categories**, drag items to the Y Category and X Category.

Tip: Ensure that the items in the Y Category and X Category come from different dimensions.

4. Add any active controls that you want and run the visualization.

Creating a packed bubble visualization

A packed bubble visualization in IBM Cognos Active Report is similar to a bubble chart in which the bubbles are tightly packed rather than spread over a grid. You can use a packed bubble visualization to display a large amount of data in a small space.

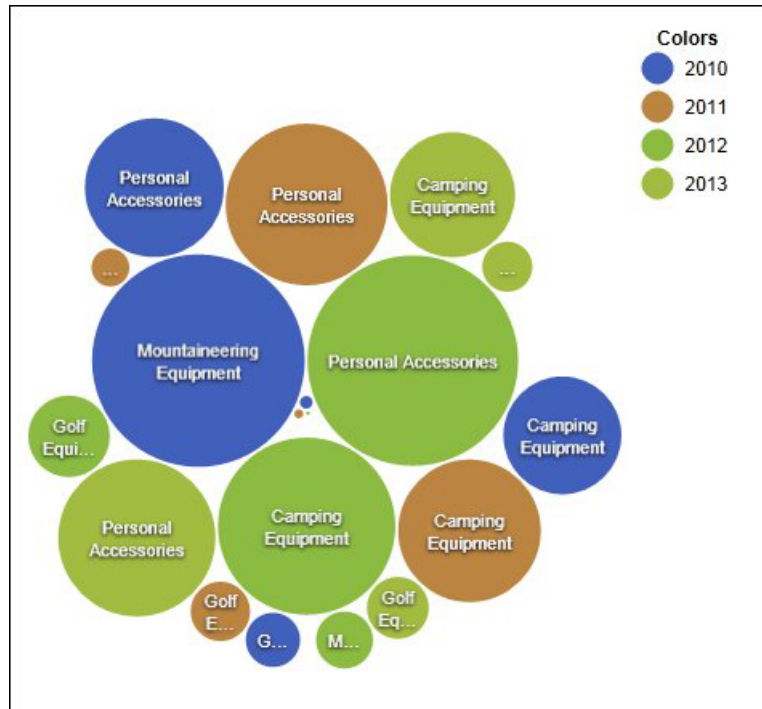


Figure 21. A packed bubble visualization

Before you begin

Your administrator must make the visualizations available in the Visualization Gallery.

If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.



About this task


You add data to a visualization by inserting data items in drop zones. Visualizations will not run until all of the required drop zones contain data items. When all the required drop zones contain data items, additional drop zones appear for extra categories or values. You can use extra categories and extra values to filter data or set variables. Extra items are not visible in the visualization.

When you work with dimensional data sources, if the visualization does not contain a measure against which to plot data, you must provide one. For example, if you add a single member to the values drop zone, such as '2012', the default measure drop zone appears in which you must insert a measure.

Attention: The supported properties for a visualization are determined by the visualization definition.

Procedure

1. From the **Toolbox** tab , drag a **Visualization** icon  to the work area.
2. From the Visualization Gallery, select the **Packed Bubble** icon and click **OK**.

3. From the **Source** tab , drag items to the appropriate location in the data container:
 - a. Drag a measure or a single value to the data container, under **Values**.
 - b. Under **Categories**, drag an item to plot as the bubbles.
 - c. Under **Series**, drag an item to apply as a category. Each item in the category gets a different color from the color palette.
4. Add any active controls that you want and run the visualization.

Adding a network diagram

You can create a network diagram in IBM Cognos Active Report. The nodes data container defines the items that you want to link together. The links data container defines relationship between the items that you want to link together.

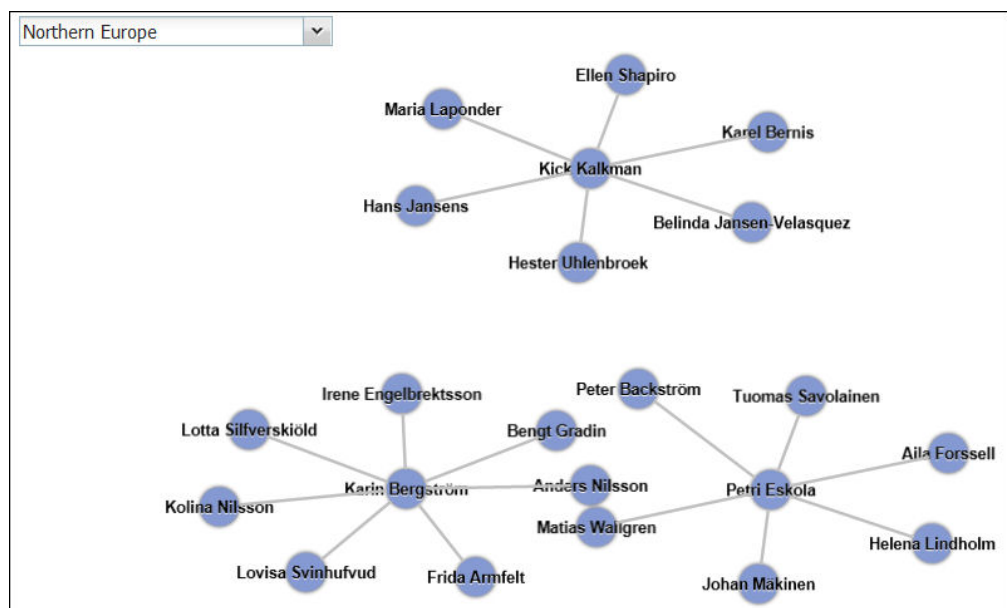


Figure 22. A network diagram in an active report showing employees by region

Before you begin

Network node drop zones only take numeric data items. Not all data sources have the appropriate data to create a network diagram.

Your administrator must make the visualizations available in the Visualization Gallery.

If you use Microsoft Internet Explorer to view visualizations, you must have Microsoft Silverlight 5 installed on your computer. Firefox or iPad users do not need Silverlight.




About this task

You add data to a visualization by inserting data items in drop zones. Visualizations will not run until all of the required drop zones contain data items. When all the required drop zones contain data items, additional drop zones appear for extra categories or values. You can use extra categories and extra values to filter data or set variables. Extra items are not visible in the visualization.

When working with dimensional data sources, if the visualization does not contain a measure against which to plot data, you must provide one. For example, if you add a single member to the values drop zone, such as '2012', the default measure drop zone appears in which you must insert a measure.

Attention: The supported properties for a visualization are determined by the visualization definition.

Procedure

1. From the **Toolbox** tab , drag a **Visualization** icon  to the work area.
2. From the Visualization Gallery, select the Network diagram icon and click **OK**.
3. From the **Source** tab , drag items to the appropriate location in the data container:
 - a. In the **Nodes1** data container, drag items to **Node (Numeric)** and **Name**. The nodes data container defines the items that you want to link together, such as Employees, defined by an employee code.
 - b. In the **Links1** data container, drag items to **From node (Numeric)** and **To node (Numeric)**. The links data container defines relationship between the items that you want to link together, such as Employees and Managers.
4. Add any active controls that you want and run the visualization.

Related tasks:

“Example - Network diagram visualization” on page 209

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a visualization in IBM Cognos Active Report that shows the hierarchies of employee by region.

Resizing a visualization

You can change the size of a visualization in IBM Cognos Active Report.

Procedure

1. Click and drag the lower right corner of the visualization.
2. To maintain the aspect ratio, press the Shift key while you resize the visualization.

You can view the changing height and width of the resized visualization in the **Properties** pane, under **Positioning**.

Changing the nesting order

In IBM Cognos Active Report, you can change the nesting order so that extra items are ordered properly in the query. If the items are not ordered properly in the query, the report might not run.

Extra items are data items that are used for filtering or setting variables. These items are not visible in the visualization. By default, extra categories are nested below other categories, so as not to affect sorting. However, if the extra categories are from the same dimension as a category, they must be in the correct hierarchical order: Years, Quarters, and Months. You can change the nesting order.

For example, you have Quarters and Months as categories. You then add Years as an extra category. You add an Active Report control and connect to Years as a filter. You might have to change the nesting order of the data items for the report to run.

Procedure

1. Select the data container that contains the data set in which you want to change the nesting order.
2. From the **Properties** pane, under **General**, click **Change Nesting Order**.
3. In the Change Nesting Order window, select the extra category and use the arrow icon to reorder it.

Tip: You can click **Show Data Container** to view the new nesting order when the report is run.

Populating a visualization with data from the visualization definition

In IBM Cognos Active Report, you can populate a visualization with data that is specified in the visualization definition instead of adding data items from a package.

About this task

You can use data that is specified in the visualization definition to test a visualization before you add your own data. Using data from the visualization definition is also a way to bring external data into a visualization.

Procedure

1. Select the visualization.
2. In the Properties pane, double-click the **Use Embedded Data** property.
3. Select the check box of the data container for which you want to use data that is defined in the visualization specification.

Results

The data container is removed from the visualization. The data container is not required when the visualization is using data from the visualization definition.

Specifying the range values that are displayed

Specify the values that you want to display in a visualization in IBM Cognos Active Report. For example, you can specify the range of values that is displayed when users select values in a control that is connected to a visualization.

About this task

You can specify the range of values and categorical data that is displayed in visualizations.

To control the range of values that is displayed, the following choices are available to calculate the minimum and maximum values of the range.

- All data
With this choice, minimum and maximum values are calculated to span the values of all Active Report controls that are connected to the visualization.
- Filtered data
With this choice, minimum and maximum values are calculated from values that users select in Active Report controls that are connected to the visualization.
- Specified values

With this choice, you specify the minimum and maximum values that you want to display in the visualization.

Note: The minimum and maximum values that are displayed in the visualization might differ from the values that you specify. For example, if you specify a range of 0 to 195, IBM Cognos BI might display a range of 0 to 200.

To specify the categorical data that is displayed, the following choices are available.

- All data

With this choice, all categorical data that spans the values of all Active Report controls that are connected to the visualization are displayed.

- Filtered data

With this choice, only the filtered data is shown in the legend and on axes.

The choice that you make for displaying categorical data can affect elements in the visualization, such as the legend and axes. For example, when all data is selected, all legend items are always shown in the visualization, and the color of each legend item stays the same in the visualization. When a category is inserted on an axis, space is reserved on the axis for all data. When filtered data is selected, the color of each legend item can change when users select different values in a control that is linked to the visualization. When a category is inserted on an axis, the axis shows only the values that are selected in the control.

Procedure

1. To specify the categorical data that is displayed, follow these steps.
 - a. In the visualization data container, select the category that you want.
 - b. In the Properties pane, click the **Category Range** property and select the choice that you want.
2. To specify the range of values that is displayed, follow these steps.
 - a. In the visualization data container, click the data item in the **Values** section that represents the values in the visualization. For example, in a packed bubble visualization, click the data item that is inserted in the **Size** box.
 - b. In the Properties pane, double-click the **Value Range** property.
 - c. In the **Range type** box, click one of the available choices.
 - d. If you clicked **All data** or **Filtered data** and you want the range of values to include zero, select the **Range includes zero** check box.
 - e. If you clicked **Specified**, type the minimum and maximum values of the range in the **Minimum** and **Maximum** boxes.

Updating visualizations

Update visualizations in IBM Cognos Active Report when a change was made to the visualization definition.

About this task

If any part of a visualization is invalidated by changes that were made to the visualization definition, the invalidated part is removed.

If a new property or field was added to the visualization definition, you must delete and recreate the visualization in the report.

If you do not update visualizations when the visualization definition is changed, the old visualization definition is used when you run the report.

Procedure

1. Open the report that contains the visualizations that you want to update.
2. Click **Tools > Update Visualizations**.

Adding Interactivity to a Report

You create an active report by adding interactive behavior to controls in the report. Adding interactive behavior links controls to each other, allowing an action performed on a control to change the state of another control.

Create and Manage Active Report Variables

Create active report variables to allow controls in a report to interact with each other. Active report variables pass information from one control to another control.

About this task

You can also create active report variables when you define connections between controls. However, you may want to modify these variables, such as changing the name or defining default values.

In addition, active report variables allow active reports inserted in a workspace in IBM Cognos Workspace to interact with each other. For example, selecting a product line in one active report causes another active report to show the data for the selected product line. In addition, variables allow check boxes and sliders in a workspace in Cognos Workspace to drive active reports in the workspace.


To work in Cognos Workspace, active report variables must meet the following criteria:

- The variables must be public.
When you make a public variable, the variable can be consumed in other IBM Cognos products.
- For active reports to listen to each other in a workspace, each report must have a public variable with the same name.
- For a Cognos Workspace slider to drive an active report, a range variable must be defined in the active report.

The data item of the slider and the range variable in the active report must have the same name.

Two variables are used to define the minimum and maximum values of the range variable. The two variables are used to define the minimum and maximum values of the slider.

Procedure

1. Click the **Active Report Variables** tab .
2. Create a variable by following these steps:
 - a. Click **Create a New Variable**.
 - b. In the **Name** box, type the name of the variable.
 - c. Click the **Data Type** drop-down menu and click the type of variable that you want to create.

- d. To make the variable public, select the **Public (External)** check box.
 - e. If you want to specify a default value for the variable, click **Set Default Value(s)** and define or specify the values that you want.
- To define your own default values, in the **Variable Values Source** list, click

Enter Value(s), and then click the new icon .

To specify default values that come from a data item in a control, in the **Variable Values Source** list, click **Select Value(s)**. Specify the control and the data item from which you want to select default values, and then select the values that you want from the **Values** box.

Tip: Define multiple default values when you want more than one item selected in a control that allows multiple selections, such as a check box group.


- 3. To modify an existing variable, right-click the variable and click **Edit Variable**.
- 4. To add a default value, click **Set Default Value(s)**.

To change a default value, click the name of the current default value specified for the variable.

- 5. Create a range variable by following these steps:
 - a. Create the variables that will define the minimum and maximum values of the Cognos Workspace slider.

The variables must have the number data type.

Tip: Range variables are automatically set as public variables. Do not make the variables that are used to define the minimum and maximum values of the slider public.

- b. Click **Manage Ranges**.
- c. Click the new icon .
- d. In the **Name** box, type the name of the range variable.
- e. Click the **Minimum Variable** list and select the variable that will be used to set the minimum value of the slider.
- f. Click the **Maximum Variable** list and select the variable that will be used to set the maximum value of the slider, and then click **OK** twice.

Note: If you later delete the minimum or maximum variable, the range variable is also deleted.

Related tasks:

“Define a Connection Between Controls” on page 192

Define a connection between controls to link them together. When you link controls, an action performed on one control affects the behavior of the other control.

Adding Controls to a Report

IBM Cognos Active Report offers several active report controls. For many controls, two different versions are available, a static version and a data-driven version.

Use the static version of a control when you want to manually define the values that the control can contain. Use the data-driven version of a control when you want the values that the control can contain to come from a data item. Controls are

available on the **Toolbox** tab .


Tip: To view only toolbox items that are specific to active reports, right-click anywhere in the **Toolbox** tab and click **Active Report Toolbox Items**.

When you add a control to an active report, you can convert the control to another type of control that is compatible by right-clicking the control and selecting **Convert Control**. For example, you can convert a data drop-down list control to a data iterator control.

Variable Text Items

Use variable text items to insert active report variables in a report. Variable text items are useful to show the value of a variable when an item in another control is selected. For example, you can use a variable text item as a title for a list that is linked to a drop-down list control. When an item is selected from the drop-down list, the item appears as the title of the list.


Row numbers

The active report row number tool  adds row numbers that reflect the visible row number in the report. This is different from the report row number tool, which reflects the server calculated row number.

Repeater tables

Use static repeater tables and data repeater tables to build a repeating structure of content. Repeater table controls allow you to create button bars or grids of custom content to control the content that appears in other controls. In data repeater table controls, the content that appears in the repeater table is driven by a data item that you insert in the control.

The following image shows a static repeater table when it is inserted in an active report.

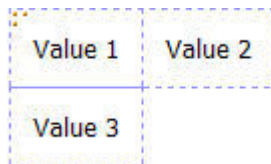

Value 1	Value 2
Value 3	

Figure 23. Static repeater table control

The data repeater table is the repeater table data container that is available for all report types. The static repeater table is available in the **Toolbox** tab only when you are authoring an active report.

Decks and Data Decks

Use decks and data decks to show different objects and different data respectively based on a selection in another control. For example, in a deck, clicking a radio button in a radio button group control shows a list object while clicking a different radio button shows a chart object.

The following image shows a deck control when it is inserted in an active report.



Figure 24. Deck control

Decks are composed of cards. In static decks, you define the number of cards in the deck and you insert the objects that you want in each card. This allows you to create cards that can contain different objects, such as pie chart in one card and a crosstab in another card. In data decks, the cards are defined by a data container or data items inserted in the deck, and a data item determines which card appears.

Tab Controls and Data Tab Controls

Use tab controls and data tab controls to define multiple pages for the same area of a report. In data tab controls, the tabs are driven by a data item that you insert in the control.

The following image shows a tab control when it is inserted in an active report.



Figure 25. Tab control

Button Bars and Data Button Bars

Use button bars and data button bars to add a group of push buttons. In data button bars, the buttons are driven by a data item that you insert in the control.

The following image shows a button bar control when it is inserted in an active report.




Figure 26. Button bar control

In reports, users can click only one button at a time.

Toggle Button Bars and Data Toggle Button Bars

Use toggle button bars and data toggle button bars to add a group of buttons that change appearance when pressed. In data toggle button bars, the buttons are driven by a data item that you insert in the control.

The following image shows a toggle button bar control when it is inserted in an active report.



Figure 27. Toggle button bar control

In reports, users can click one or more buttons simultaneously.

Radio Button Groups and Data Radio Button Groups

Use radio button groups and data radio button groups to group a set of buttons that have a common purpose. In data radio button groups, the radio buttons are driven by a data item that you insert in the control.

The following image shows a radio button group control when it is inserted in an active report.




Figure 28. Radio button group control

In reports, users can click only one radio button at a time.

Check Box Groups and Data Check Box Groups

Use check box groups and data check box groups to group a set of check boxes. In data check box groups, the check boxes are driven by a data item that you insert in the control.

The following image shows a check box group control when it is inserted in an active report.




Figure 29. Check box group control

In reports, users can select one or more check boxes simultaneously.

Drop-Down Lists and Data Drop-Down Lists

Use drop-down lists and data drop-down lists to provide a list of items that users can choose from. In data drop-down lists, the lists are driven by a data item that you insert in the control.

The following image shows a drop-down list control when it is inserted in an active report.



Figure 30. Drop-down list control

In reports, users can select only one item at a time.

List Boxes and Data List Boxes

Use list boxes and data list boxes to provide a list of items that users can choose from. In data list boxes, the lists are driven by a data item that you insert in the control.

The following image shows a list box control when it is inserted in an active report.

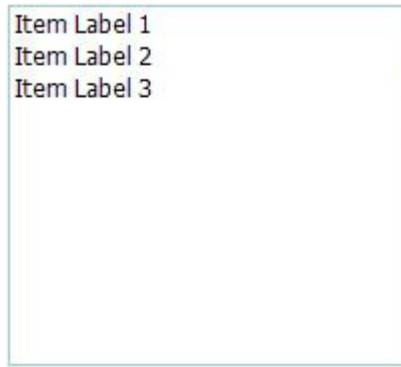


Figure 31. List box control

In reports, users can select one or more items in a list box.

Iterators and data iterators

Use these controls to allow users to navigate or filter values in a control by clicking buttons such as previous and next. In data iterators, the iterations are driven by a data item that you insert in the control.

The following image shows an iterator control when it is inserted in an active report.



Figure 32. Iterator control

Discrete values sliders, continuous values sliders, and data discrete values sliders

These controls allow users to navigate or filter data using a slider bar. Discrete and data discrete values sliders allow users to slide between individual values, such as months. In data discrete values sliders, the values are driven by a data item that you insert in the control. With continuous values sliders, users slide through numeric values between minimum and maximum values that you define, such as 0 and 100.

The following image shows a discrete value slider control when it is inserted in an active report.



Figure 33. Discrete values slider control

Buttons

Use buttons to add individual push buttons to a report.

The following image shows a button control when it is inserted in an active report.




Figure 34. Button control

Data Containers

Lists, crosstabs, charts, maps, visualizations, and repeater tables are also controls in an active report, as you can add interactive behavior to them.


Add Data to a Control

For every control that you insert in a report, you must add the data that you want to appear in the control.


Add data to a data-driven control

For data-driven controls, you insert data items from the package.

Procedure

1. On the **Source** tab , drag query subjects or query items to the control.
2. To add an image to the data in the control, drag the appropriate data item to the **Icon** box.
3. If the data that will appear in the control depends on other data that you do not want to show, drag the appropriate data item to the **Extra Items** box.
For example, you add Product type to a data list box control and you want to filter the product types that appear in the control based on a product line selected in another control. To filter the data, you must drag Product line to the **Extra Items** box.

Tip: IBM Cognos Report Studio can automatically copy data items from other controls when you create connections between controls.

4. If the control is a data deck and you want to create a default card that will appear when no other card matches the variable value passed to the deck, in the **Properties** pane, click **Yes** for the **Default Card** property. Then click the **No Data Contents** tab  for the deck and insert the objects that you want to appear on the default card.

Related tasks:

“Define a Connection Between Controls” on page 192

Define a connection between controls to link them together. When you link controls, an action performed on one control affects the behavior of the other control.

Add data to a static control

For static value driven controls, you manually define the data in a data table.

Procedure



1. In the report, click the definition icon  of the control.

Tip: The definition icon is visible only when the visual aid **Show Interactive Object Controls** is enabled.

2. To add a new object, such as a card in a deck or a button in a button bar, under **Data Table**, click the new button.

3. In **Data Table**, define the values that you want to appear in the control.


Values are organized by data item. In addition to the default data item (Label) and values provided, you can create your own data items and values. For example, to add an icon to each value, you must create a data item for the icons.

- To define a new data item, click the new button  and type the name of the data item that you want to create.
- Click inside each table row and type the name of the value.
- To add translations for the values, to support users in multiple languages, click the ellipsis (...) button, choose the languages that you want to support by clicking the add button , and type the translated text for each language added.
- If you created new data items, in the **Definition** box, click the **Label** drop-down list and select the data item that you want to use in the control.
- To add an icon to each value, select the **Icon** check box, click the drop-down list, and select the data item that contains the icons that you want to use.
You cannot add an icon to values in static decks and discrete values sliders. To add an icon to values in a static repeater table, insert the **Image** object from the **Toolbox**. Then specify the data item for the icons by referencing the data item in the **Properties** pane.

4. Optional: If you want to copy all data values to another static control, click the

copy control definition icon .


After you have copied the data values of the control, click the definition icon of

another static control, and then click the paste control definition icon  to copy the data values.

Tip: You can also drag data items from one control and drop them in another control. This action moves the data item from one control to another control instead of copying the item. You can drag and drop data items only to static controls that can contain objects, such as a deck, tab control, and repeater table. In addition, the data table of the target control must contain a data item with the same name as the data item you are moving, such as Label.

5. If the control is a deck, click the left and right arrows to navigate to each card of the deck and insert the objects that you want to appear on each card.

To create a default card that will appear when no other card matches the variable value passed to the deck, in the **Properties** pane, click **Yes** for the

Default Card property. Then click the **No Data Contents** tab  for the deck and insert the objects that you want to appear on the default card.

Related tasks:

“Referencing data items defined in a static control”

If you insert an object in a static control, such as an image in a static repeater table, you can use a data item in the control to populate the object.

Referencing data items defined in a static control

If you insert an object in a static control, such as an image in a static repeater table, you can use a data item in the control to populate the object.

Before you begin

You must create the data item in the data table of the control before you can reference the item.

About this task

You can reference data items only for text items, images, hyperlinks, and HTML items inserted in decks, tab controls, and repeater tables.

Procedure

1. In the static control, click the object for which you want to reference a data item.
2. In the **Properties** pane, click the **Source Type** property and choose **Control Data Item Value**. The **Control Data Item Value** property appears below the **Source Type** property.
3. Click the **Control Data Item Value** property and select the data item that you want to reference.

Tip: If the object is a hyperlink, you can specify the data item to be used to populate the hyperlink text as well as the data item to be used to populate the URL of each link.

Related tasks:

“Add data to a static control” on page 190

For static value driven controls, you manually define the data in a data table.

Define a Connection Between Controls

Define a connection between controls to link them together. When you link controls, an action performed on one control affects the behavior of the other control.

Procedure

1. Click the create a new connection icon  of a control that you added to the report.

Tip: The create a new connection icon is visible only when the visual aid **Show Interactive Object Controls** is enabled.

2. In the **Source Control** drop-down list, select the source control for which you want to define a connection.
3. Click the **Data Item** drop-down list under the source control and select the data item that will drive the behavior of the target control.
4. In the **Target Control** drop-down list, select the target control for which you want to define a connection.

If the target control is a visualization, select a visualization data container.

5. Click the **Data Item** drop-down list under the target control and select the data item that will determine what appears in the target control.

If the data item that you want to use is not in the query of the target control, and the source control is a data-driven control, select **Copy Data Item from Source** to copy the source data item specified in the previous step to the target control query. If the source control is a static control, select **Use Source Definition**.

If the target control is a data container, the copied data item appears shaded in the container to indicate that the column visibility property for the item is set to **Hidden**.



6. Click the **Behavior** drop-down list between the source and target controls and specify the type of relationship that you want to define between the two controls:
 - To select data in the target control based on what will be selected in the source control, click **Select**.
 - To filter data in the target control based on what will be selected in the source control, select **Filter**.
7. Below the **Behavior** area, click the active variable drop-down list and choose to create a new variable for the connection or use an existing variable.

Tip: If there are no variables defined in the report, you cannot click the active variable drop-down list.

- a. If you create a new variable, type a name for the variable and specify its data type. You can also specify its default values.
 - b. If you choose to use an existing variable, choose the variable that you want. You can also specify its default values.
8. Click **Connect**.

Results

When a connection is defined, IBM Cognos Report Studio creates the appropriate conditions for the selection behavior and reaction behavior of the source and target controls.

Tip: The interactive behavior icon  of a control changes to indicate that a connection was defined. The **Active Report Controls** tab  shows the controls and variables inserted in a report and their relationships to one another. You can click a control in this tab to quickly locate the control in the report as well as set default values for variables.

Related tasks:

“Show or Hide a Column or Row” on page 197

You can show or hide a column in a list or a column or row in a crosstab when the report is viewed.

“Add data to a data-driven control” on page 190

For data-driven controls, you insert data items from the package.

“Add data to a static control” on page 190

For static value driven controls, you manually define the data in a data table.

Specify the Selection Behavior of a Control

Specify the selection behavior of a control to determine what interactive behavior should occur when the control is clicked or when an object in the control, such as a button, check box, or data item, is selected.


Specifying the selection behavior of a control sets the value of active report variables defined in the report. The active report variable values are then used to specify the reaction behavior of controls. For example, you add two drop-down list controls to a report and you create a connection between them. The first drop-down list shows product lines and the second drop-down list shows product

types. When a product line is selected in the first drop-down list box, you want to pass that information to the second drop-down list box so that it shows only the product types of the selected product line.

You can specify a selection behavior for any control, except for decks and data decks.


IBM Cognos Report Studio automatically sets active report variable values when you define a connection between controls. However, you may need to set the value of other variables to specify additional interactive behavior.

Procedure

1. Click the interactive behavior icon  of the source control.

Tip: The interactive behavior icon is visible only when the visual aid **Show Interactive Object Controls** is enabled.

The **Report Behavior** box shows the relationship between the source and target controls when you defined a connection between the controls. You can specify default values for the variable associated with the control by clicking **Set Default Value(s)**.

2. In the **Behavior on Select** box, click inside the **Set Variable Values** box and then click the edit button  that appears.

3. For each active report variable that you want to set as part of the selection behavior of the control, click the **Value** drop-down list and select one of the following choices:

- If you want to clear the current value of the variable, click **Set to Empty**.

Tip: Clearing the current value of a variable is useful when you have cascading controls. For example, if the parent control is reset to a default value, you want to reset the child control to a default value as well.

- If you want to specify your own value, click **Type in a value** and type the value that you want to use.
- If you want the variable values to be driven by a data item in the report, click the data item that you want to use.
- If you do not want the variable to be used for the control, click **Do not set**.

4. To create a new active report variable, click **Create a New Variable**.

Related tasks:

“Specify the Reaction Behavior of a Control”

Specify the reaction behavior of a control to determine how a control will react when another control, or an object in the control, is selected.

Specify the Reaction Behavior of a Control

Specify the reaction behavior of a control to determine how a control will react when another control, or an object in the control, is selected.

You can specify the following reaction behaviors:

- Select an item in a control.

For example, you specify a default value for a variable, and the variable drives a drop-down list control. When the report is run, you want the default value to appear in the control.

You can specify this reaction behavior for any control, except for single button controls.

- Filter data in a control.

For example, you want to filter the product types in a drop-down list control based on the product line selected in another drop-down list control.

You can specify this reaction behavior for drop-down lists, data drop-down lists, list boxes, data list boxes, radio button groups, data radio button groups, check box groups, data check box groups, lists, and crosstabs.

- Enable a control.



For example, you want to make a control interactive only when a selection is first made in another control.

You can specify this reaction behavior for any control, except for decks, data decks, tabs, data tabs, lists, crosstabs, charts, and maps.

In addition to these behaviors, you can specify the item to appear when nothing is selected in a list control, hide or show a column, and whether to allow data to be sorted in a list.

IBM Cognos Report Studio automatically sets the reaction behavior when you define a connection between controls. However, you may want to change the reaction behavior or specify additional interactive behavior.

Procedure

1. Click the interactive behavior icon  of the control.
2. In the **Reaction Behavior** box, click the reaction behavior box that you want, such as **Container Select**, and click the edit button  that appears.

If a condition has not yet been defined, two dialog boxes appear. The second dialog box prompts you to define the condition expression that you want to use to specify the reaction behavior.

3. In the **Item** box on the left, define the left side of the condition expression.
 - To use a data item, click the **Data Item** radio button and then click the item that you want to use.

The data items that are available in the drop-down list depend on the data items that you inserted into the control.
 - To use a static item, click the **Value** radio button, type the value that you want to use, and then specify the value's data type.

The value must be defined as a value of the selected active report variable in the next step.
 - If you want to set the value of an active report variable to null, click the **Empty Variable** radio button.
4. Click the **Operator** drop-down list and select the operator that you want to use.
5. In the **Item** box on the right, define the right side of the condition expression.
 - To use a value in an active report variable, click the **Active Report Variable** radio button and then click the variable that you want to use.

The variables that are available in the drop-down list depend on the variables that you defined in the report.
 - To use a static item, click the **Value** radio button, type the value that you want to use, and then specify the value's data type.
 - To use null as the value, click the **Empty Data Item** radio button.

Use null as the value to specify the reaction behavior when no data exists for the value selected in the source control.

6. If you want to apply the condition when no item is selected in the source control, clear the **Drop this condition if the variable is empty** check box.

Clearing the check box can improve performance and prompt users to perform an action. For example, a report contains a list with many rows of data, and the list is filtered by another control. When the check box is cleared, no data will appear in the list until an item is selected in the other control.

Related concepts:

“Recommendation - use master detail relationships when authoring decks” on page 197

When authoring deck controls in active reports, use master detail relationships to improve performance.

Related tasks:

“Specify the Selection Behavior of a Control” on page 193

Specify the selection behavior of a control to determine what interactive behavior should occur when the control is clicked or when an object in the control, such as a button, check box, or data item, is selected.

“Set the No Value List Item”

Set the no value list item to show a specific item in a control when no value is selected.

“Show or Hide a Column or Row” on page 197

You can show or hide a column in a list or a column or row in a crosstab when the report is viewed.

“Sort Data in a List” on page 197

You can specify whether users can sort data in a list in the report output.



Set the No Value List Item

Set the no value list item to show a specific item in a control when no value is selected.

For example, a report contains a drop-down list control that contains product lines. You create a no value list item named (All) to show all product lines when the report is initially viewed.

Procedure

1. Select the control.
2. In the **Properties** pane, for the **No Value List Item** property, click **Show**.
A text item representing the no value list item appears in the control.
3. In the **Properties** pane, double-click the **Label** property.
4. In the **Default text** box, type the name of the no value list item.
5. To specify the text for other languages, do the following:


- Click the add button .
- Select the languages that you want.
- In the **Language** column, click one of the languages that you selected.
- Click the edit button  and type the name of the no value list item for that language.
- Repeat for all remaining languages.

6. In the **Properties** pane, click the **Position in List** property and specify where you want the no value list item to appear in the control.

Show or Hide a Column or Row

You can show or hide a column in a list or a column or row in a crosstab when the report is viewed.

Procedure

1. Click the title of the column or row that you want to show or hide.
2. If the data container is a crosstab, in the **Properties** pane, click the **Visible** property and click **Yes** or **No**.
3. If the data container is a list, in the **Properties** pane, double-click the **Column Visibility** property.
4. To make the list column visible when the report is viewed, click the **Visible** radio button.
5. To hide the list column when the report is viewed, click the **Hidden** radio button.
6. To make the list column visible based on a condition, click the **Visible based on condition** radio button, click the edit condition button , and specify the condition.
 - If you want to specify a value to use for the condition, click the **Value** radio button, type the value, and in the **Data Type** drop-down list, select the value's data type.
 - If you want to use null as the value for the condition, click the **Empty Variable** radio button instead.
 - Click the **Operator** drop-down list and select the operator that you want to use for the condition.
 - In the **Active Report Variable** drop-down list, select the active report variable that you want to use for the condition.
 - If you want to apply the condition when no item is selected in a control that is connected to the list, clear the **Drop this condition if the variable is empty** check box.

Sort Data in a List

You can specify whether users can sort data in a list in the report output.

Procedure

1. Select the column that you want users to be able to sort.
2. In the **Properties** pane, for the **Allow Sorting** property, click **Yes**.

Recommendation - use master detail relationships when authoring decks

When authoring deck controls in active reports, use master detail relationships to improve performance.

Decks offer greater flexibility in active reports by allowing you to show different objects in each card of a deck. In data decks, the number of cards that are created depends on data items inserted in the deck. As a result, a data deck can contain many cards, which may reduce performance when the report is run and viewed. For example, if a data deck contains Product line and Years, there can be up to 20

cards in the deck (five different product lines multiplied by four different years). In addition, filtering data in a data deck can affect performance when there are many rows of data in the deck.

To improve performance, use a master detail relationship to filter data in a data container inserted in a data deck control. A master detail relationship defined between a data deck and a data container inserted in the deck results in a specific number of cards generated for the deck, which serves as a way to filter the data in the data container. For example, a data deck contains a list object that has many rows of data, and you want to filter the list by product line. Creating a master detail relationship between the deck and the list using Product line produces five cards in the deck, one for each product line. When you filter by product line, the appropriate card appears in the data deck.

In addition, specify **Select** as the behavior instead of **Filter** when defining the connection between the data deck control and the control you want to use to filter the data in the deck.


Tip: If the data container in the data deck is a chart, you must use a master detail relationship if you want to filter data in the chart.

Summarizing Data in the Active Report Output

You can add an output summary to a list or crosstab control that reflects the data that appears in the control when an active report is viewed. In visualizations, you can specify how the data is summarized when users select multiple values in a control that is connected to a visualization.

For example, the data in a list is driven by selecting an item in a data drop-down list control. An output summary specified for the list is recalculated when a different item is selected in the drop-down list.

Procedure

1. In a list or crosstab, follow these steps to add an output summary.
 - a. Click the column or row for which you want to add an output summary.
 - b. In the toolbar, click the summarize button  and then, under **Summarize in Output**, choose the summary that you want to add to the active report output.
2. In a visualization, follow these steps to specify how to summarize data when users select multiple values in a control.
 - a. In the visualization data container, in the **Values** section, click the box that represents the data values in the visualization. For example, in a heatmap, click the **Color** box.
 - b. In the Properties pane, click the **Rollup Method** property and select the aggregation method that you want to use to summarize data in the visualization.

Run or Save an Active Report

You can run an active report in HTML format or save it as a MIME HTML (MHT) file so that you can send the report to your consumers. The MHT file is viewable in the Microsoft Internet Explorer or Mozilla Firefox browsers.

To assist you in resolving problems when you are authoring an active report, a run option that shows the state of active report variables in the report as you click various controls is available. By default, this option is enabled.

If you are using Microsoft Internet Explorer 6.0, you cannot open an active report in MHT format as a file. You can view the report only by using a URL.

Before you begin

To view an active report in MHT format in Mozilla Firefox, you must first download an UnMHT add-on.

Procedure

1. To disable the run option that can show the state of active report variables when the report is viewed, from the **Run** menu, click **Run Options**, and clear the **Enable right-click debug menu** check box.
2. To run a report, from the **Run** menu, click **Run Active Report**.
3. To save a report, from the **Run** menu, click **Download Active Report**, and when prompted, choose to save the report as an MHT file.

Results

When running a report with the **Enable right-click debug menu** check box selected, right-clicking in the report output window allows you to choose to view the active report variables in the report, reset variables, or print the report.

Tip: The right-click debug menu is not available if you run the report from IBM Cognos Connection.

Related tasks:

“Drill-through links in active reports do not work” on page 506

When viewing an active report that contains drill-through links in Microsoft Internet Explorer 8 and later, the links do not work.

Example - Create an Active Report Showing Revenue Data for Core Products

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create an active report showing revenue data for the core products Camping Equipment and Golf Equipment.


The revenue data is specific to countries and regions in the Americas. The report will allow users to filter data by product or by country or region.

To create this report, you will need to add two data drop-down list controls and a list container. The first data drop-down list control will contain the core products that users can select. The second data drop-down list control will contain countries and regions that users can select. The list will show revenue data for each core product and country or region. When users click different products or different countries and regions, the data in the list will be filtered based on the selections made.

Create the active report

Create a new active report and add the objects that you need to build the core products revenue report.



Procedure



1. Open IBM Cognos Report Studio with the **GO Data Warehouse (analysis)** package.
2. In the **Welcome** page, click **Create new**.
3. In the **New** dialog box, click **Active Report**.
4. Double-click the report title and type
Core Products Revenue
5. Click the **Toolbox** tab  and drag the **Table** object to the report.
6. Clear the **Maximize width** check box and then click **OK** to create a table with two columns and one row.
7. Drag the **Data Drop-Down List** object to each cell in the table.
8. Drag the **List** object to the report so that it appears under the table.


Add data to the data drop-down list controls



This task adds the required data items to the two drop-down list controls in the report.

Procedure

1. Right-click the first data drop-down list control and click **Go to Query**.
Query1 opens in the Query Explorer.
2. Click the **Source** tab  and do the following:
 - Expand the **Sales and Marketing (analysis)** folder and the **Sales** namespace.
 - Expand the **Products** dimension and then the **Products** hierarchy.
 - Drag **Product line** to the **Data Items** area.
3. Click **Product line** and in the **Properties** pane, do the following:
 - Click the **Name** property, delete the existing name, and type
Core products
 - Double-click the **Set Definition** property.
 - Click the new button  and then click **Exclude**.
 - In the **Available members** box, expand **Sales and Marketing (analysis)**, **Sales**, and **Products**.
 - Drag the **Mountaineering Equipment**, **Personal Accessories**, and **Outdoor Protection** members to the **Members** box.

The Core products member set now contains only Camping Equipment and Golf Equipment.
4. Click **OK** twice.
5. Pause the pointer over the page explorer button  and click **Page1**.
6. Click the **Data Items** tab  and drag **Core products** from **Query1** to the drop-down list box in the control.
7. Click the control and in the **Properties** pane, for the **No Value List Item** property, click **Show**.
The **Properties** pane for the no value list item property appears.






8. Double-click the **Label** property, type Core products in the **Default text** box, and click **OK**.
9. Right-click the second data drop-down list control and click **Go to Query**. Query2 opens in the Query Explorer.
10. Click the **Toolbox** tab  and drag **Data Item** to the **Data Items** area.
11. In the **Expression Definition** box, type
children ([Sales].[Retailers].[Retailers].[Region]->[Retailers].[710])

Tip: This expression returns the children of the **Americas** member. The MUN for **Americas** is used instead of the member name.
12. In the **Properties** pane, click the **Name** property, delete the name and type Countries and regions
13. Pause the pointer over the page explorer button  and click **Page1**.
14. Click the **Data Items** tab  and drag **Countries and regions** from **Query2** to the drop-down list box in the control.
15. Click the control and in the **Properties** pane, for the **No Value List Item** property, click **Show**.
The **Properties** pane for the no value list item appears.
16. Double-click the **Label** property, type Countries and regions in the **Default text** box, and click **OK**.

Add data to the list

This task adds the required data items to the list.



Procedure

1. Pause the pointer over the query explorer button  and click **Query1**.
2. Copy the **Core products** data item.
3. Pause the pointer over the query explorer button  and click **Query3**.
4. Paste the **Core products** data item into Query3.
5. Repeat steps 1 to 4 to copy the **Countries and regions** data item from Query2 to Query3.
6. Pause the pointer over the page explorer button  and click **Page1**.
7. Click the **Data Items** tab  and drag **Core products** and **Countries and regions** from **Query3** to the list.
8. Click the **Source** tab  and do the following:
 - Expand the **Products** dimension and then the **Products** hierarchy.
 - Drag **Product type** to the list, inserting it between **Core products** and **Countries and regions**.
 - Expand **Sales fact**.
 - Drag **Revenue** and **Planned revenue** to the list, to the right of **Countries and regions**.

Add interactivity to the report

This task defines connections between the various controls and sets an active report variable so that the controls can interact with each other when users view the report.

Procedure


1. Click the interactive behavior icon  of the first data drop-down list control.
2. Click **Create a New Connection**.
3. Click the **Target Control** drop-down list and click **List1**.
4. Ensure that the following information appears in the dialog box and click **Connect**.
 - In the **Behavior** drop-down list, **Filter** is selected.
 - In the **Data Item** drop-down list for both controls, **Core products** is selected.
 - In the **Active Report Variable** box, type Core products Variable 1.
5. In the **Control** drop-down list, click **Data Drop-Down List2**.
6. Click **Create a New Connection**.
7. Click the **Target Control** drop-down list and click **List1**.
8. Ensure that the following information appears in the dialog box and click **Connect**.
 - In the **Behavior** drop-down list, **Filter** is selected.
 - In the **Data Item** drop-down list for both controls, **Countries and regions** is selected.
 - In the **Active Report Variable** box, type Countries and regions Variable 1.
9. In the **Control** drop-down list, click **Data Drop-Down List1**.
10. In the **Behavior on Select** section, click the edit button .
11. Set **Countries and regions Variable 1** to **Set to Empty** and click **OK** twice.

When users select a different product in the first data drop-down list control, the second data drop-down list value will reset to the no value list item.

Specifying default values for the data drop-down list controls

This task specifies default values for the two drop-down list controls in the report.

Procedure

1. Click the **Active Report Variables** tab .
2. Expand **Core products Variable 1** and click **Set Default Values**.
3. In the **Values** box, double-click **Camping Equipment** and click **OK**.
4. Expand **Countries and regions Variable 1** and click **Set Default Values**.
5. In the **Values** box, double-click **United States** and click **OK**.

Revenue data for core products report output

When initially viewed, the revenue data for core products active report shows a list containing data for all core products in all countries and regions.

Selecting a product from the core product drop-down list or selecting a country or region from the country and region drop-down list filters the list to the selections made.

The following image shows the data that appears in the list when Camping Equipment and United States are selected in the two drop-down lists.

Core products	Product type	Countries	Revenue	Planned revenue
Camping Equipment	Cooking Gear	United States	43,152,191	47,952,594.23
Camping Equipment	Tents	United States	90,663,037.65	95,695,990.84
Camping Equipment	Sleeping Bags	United States	50,338,776.21	54,345,028.43
Camping Equipment	Packs	United States	57,520,074.37	61,360,321.97
Camping Equipment	Lanterns	United States	21,597,711.83	23,090,549.81

Figure 35. Revenue data for core products report

Example - Sales analysis active report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create an active report analyzing sales by region and by product line.


You will use a list to show sales by region, with a slider control to allow users to move between different regions. Users will have the option to show or hide the slider control by respectively selecting or clearing a check box.

You will use a pie chart to show sales by product line. Users will be able to click product lines in the chart legend to highlight sales in the chart.

Creating a new active report

Create a new active report and add the objects that you need to build the sales analysis report.

Procedure

1. Open IBM Cognos Report Studio with the **GO Sales (query)** package.
2. In the **Welcome** page, click **Create new**.
3. In the **New** window, double-click **Active Report**.
4. Double-click the report title and type
Sales Analysis
5. Click the **Toolbox** tab , drag **Table** to the report, specify two columns and one row, and click **OK**.
6. Drag **Check Box Group** to the first table cell.
7. Select the second and third check boxes and delete them.
Only one check box is required for this report.
8. Drag **Deck** to the second table cell.
9. Drag **Data Discrete Values Slider** to the deck, in the space under **Card 1**.
The slider control becomes the first card in the deck.

10. Select the slider control and in the **Properties** pane, click the **Track Length** property, change the length of the slider track to 500 px, and click **OK**.
11. Optional: To animate the movement of the slider when users view the report, set the **Animate** property to **Yes**.
12. Optional: To update active report variables associated with the slider when users move the slider thumb, set the **Update Variables Live** property to **Yes**.
The report will be updated live when the thumb is moved. If set to **No**, the report is updated only when the thumb is stopped and released.
13. Drag **Block** below the table.
14. Drag **List** below the block.
15. Insert another block below the list.
16. Click the second block and in the **Properties** pane, double-click the **Padding** property.
17. Specify 20 px for the top of the block and click **OK**.
18. Drag **Data Deck** below the block.
19. Drag **Chart** to the data deck.
 - a. In the left column, click **Pie, Donut**.
 - b. In the right column, click **Exploded Pie with 3-D Effects and Flat Bevel**.

Tip: This pie chart type is available only when the **Use legacy chart authoring** check box (**Tools > Options > Advanced** tab) is cleared. To find this specific pie chart type, hover over each choice to view its tooltip.
 - c. Click **OK**.


Results

The active report now contains all of the objects that you need to build the sales analysis report. In the following tasks, you will add data to each control and define connections between controls so that they can interact with each other.

Adding data to the check box group control

This task defines the data that will appear in the check box group control. The data will appear as the check box label.

Procedure

1. Click the **Check Box Definitions** icon .
2. Under **Data Table**, click **Check Box Label 1** and then click the ellipsis button.
3. In the **Default text** box, type Show Region and click **OK** twice.

Adding a default card to the deck and data to the data discrete values slider

This task adds a default card to the deck and defines the data that will appear in the data discrete values slider control.

No content will be added to default card so that the slider will be hidden when the check box in the check box group control is cleared. The slider control is in the first card of the deck.


Procedure

1. Click the container selector (three orange dots) of the deck so that the entire deck is selected.

Tip: The container selector is visible only when the visual aid **Show Container Selectors** is enabled.

2. In the **Properties** pane, set the **Default Card** property to **Yes**.
A **No Data Contents** tab is created for the deck.


3. Click the **Deck** tab .

4. Click the **Source** tab  and do the following:
 - a. Expand **Sales (query)** and then **Retailers**.
 - b. Drag **Region** to the **Label** box of the slider.

Defining a connection between the check box group and the deck

This task defines a connection between the check box group control and the first deck control that you inserted in the report. The connection will allow users to show or hide the slider control when the check box is selected or cleared.

Procedure

1. In the check box group control, click the **Create a New Connection** icon .
2. Ensure that the following information is specified:
 - **Deck1** appears in the **Target Control** list.
 - **Select** appears in the **Behavior** list.
 - **Label** appears in the **Data Item** list for the source control.
3. Under **Target Control**, click the **Data Item** list and select **Use Source Definition**.



The data value defined for the check box group, Show Region, is copied to the deck control.


4. Optional: In the **Active Report Variable** box, change the default name to a more meaningful name.
5. Click **Connect**.




Adding data to the list object

This task adds data items and an active report summary to the list object.

Procedure

1. Click the **Source** tab  and drag the following data items to the list:
 - **Sales (query) > Retailers > Region**.
 - **Sales (query) > Products > Product line**.
 - **Sales (query) > Sales > Quantity**.
 - **Sales (query) > Sales > Revenue**.
 - **Sales (query) > Sales > Planned revenue**.
2. Pause the pointer over the **Query Explorer** icon  and click **Query2**.


3. Click the **Toolbox** tab  and drag **Data Item** to the **Data Items** pane. The **Data Item Expression** window appears.
4. Copy and paste the following expression into the **Expression Definition** box and click **OK**:

$$([\text{Revenue}] - [\text{Planned revenue}]) / \text{abs}([\text{Planned revenue}])$$
This data item calculates the percentage difference between revenue and planned revenue.
5. In the **Properties** pane of the data item, modify the following properties:
 - a. In the **Name** property, delete the default name and type % Difference.
 - b. Change **Aggregate Function** to **Calculated**.
6. Pause the pointer over the **Page Explorer** icon  and click **Page1**.
7. Click the **Data Items** tab  and drag % **Difference** from **Query2** to the end of the list.
8. Click the % **Difference** column body in the list.
9. In the **Properties** pane, double-click the **Data Format** property and do the following:
 - a. Click the **Format type** list and select **Percent**.
 - b. In the list of properties, click the **No. of Decimal Places**, select 2, and click **OK**.
10. With the % **Difference** column still selected, in the toolbar, click the **Summarize** icon  and under **Summarize in Output**, click **Total**.

Defining a connection between the slider and the list object

This task defines a connection between the slider control and the list object. The connection will allow users to filter data in the list as the slider thumb is moved.

Procedure

1. In the slider control, click the **Create a New Connection** icon .
2. Specify the following information:
 - a. In the **Target Control** list, click **List1**.
 - b. In the **Behavior** list, click **Filter**.
 - c. Ensure that **Region** appears in the **Data Item** list for both the source and target controls.
3. Optional: In the **Active Report Variable** box, change the default name of the variable that will be created when the connection is defined to a more meaningful name.
4. Click **Connect**.

Adding a title to the list

This task adds a title above the list. The title will change according to the region selected in the slider.

Procedure




1. Click the **Toolbox** tab  and drag **Text Item** to the block that you inserted above the list.

2. Type Sales by Region:, add a blank space, and then click **OK**.
3. Select the text item in the report and in the **Properties** pane, modify the following properties:
 - a. For the **Foreground Color** property, specify blue and click **OK**.
 - b. For the **Font** property, specify 12 pt as the size and bold as the weight and click **OK**.
4. From the **Toolbox** tab, drag **Variable Text Item** to the right of the text item.
5. Select the name of the variable that you created when you defined the connection between the slider and the list.
6. Repeat step 3 for the variable text item.

Adding data to the data deck and chart

This task adds data items to the data deck and to the pie chart.

Procedure

1. Click the **Source** tab  and drag the following data item to the **Values** box of the data deck:
 - Sales (query) > Products > Product line**
2. Drag the following data items to the chart:
 - **Sales (query) > Sales > Quantity** to the **Default measure** box.
 - **Sales (query) > Products > Product line** to the **Series (pie slices)** box.
 - **Sales (query) > Retailers > Region** to the **Categories (pies)** box.
3. With the pie chart selected, in the **Properties** pane, click the **Exploded Slices** property and do the following:
 - a. Select the default value and click the **Delete** icon .
 - b. Click the **New** icon .
 - c. Change **Exploded amount** to 25.
 - d. In the **Exploded slice** section, click **Expression** and then click the ellipsis.
 - e. In the **Expression Definition** box, type the following, and click **OK** three times.


```
[Query3].[Product line]=[Query4].[Product line]
```
4. In the **Properties** pane, click the **Clickable Regions** property, select the **Legend Labels** check box, and click **OK**.


By default, the **Intersections** check box is selected. By making the legend labels clickable, users will be able to click different pie slices in the chart or different product lines in the legend.
5. Optional: If you do not want to use the pie chart default colors, specify the colors that you want by clicking the available properties in the **Color & Background** property group.

For example, you can change the color palette for the chart by clicking the **Palette** property.

Defining a connection between the chart and the data deck

This task defines a connection between the pie chart and the data deck. The connection will create an active report variable that will be used to update the title that will be inserted above the chart. The title is described in the next topic.


Procedure

1. In the pie chart, click the **Create a New Connection** icon .
2. Specify the following information:
 - a. In the **Target Control** list, click **Data Deck1**.
 - b. Ensure that **Select** appears in the **Behavior** list.
 - c. Ensure that **Product line** appears in the **Data Item** list for both the source and target controls.
3. Optional: In the **Active Report Variable** box, change the default name of the variable that will be created when the connection is defined to a more meaningful name.
4. Set Camping Equipment as the default value for the variable by doing the following:
 - a. In the **Active Report Variable** box, click **Set Default Value(s)**.
 - b. In the **Values** box, double-click **Camping Equipment** and then click **OK**.
5. Click **Connect**.

Adding a title to the chart

This task adds a title above the pie chart. The title will change according to the product line selected in the chart legend.

Procedure

1. Click the **Toolbox** tab  and drag **Text Item** to the block that you inserted above the chart.
2. Type Sales by Product Line:, add a blank space, and then click **OK**.
3. Select the text item in the report and in the **Properties** pane, modify the following properties:
 - a. For the **Foreground Color** property, specify blue and click **OK**.
 - b. For the **Font** property, specify 12 pt as the size and bold as the weight and click **OK**.
4. From the **Toolbox** tab, drag **Variable Text Item** to the right of the text item.
5. Select the name of the variable that you created when you defined the connection between the chart and the data deck.
6. Repeat step 3 for the variable text item.

Sales analysis report output

When initially viewed, the Sales Analysis active report shows a Show Region check box that is cleared, a list, and a pie chart with Camping Equipment selected in the chart legend.

Selecting the Show Region check box shows the region slider. Moving the slider thumb filters the list to the specified region. Clicking a product line in the pie chart legend highlights the product line in the chart.

The following image shows the Sales Analysis report with the Show Region check box selected, the slider thumb moved to Northern Europe, and with Camping Equipment selected in the chart legend.



Figure 36. Sales Analysis active report

Example - Network diagram visualization


You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a visualization in IBM Cognos Active Report that shows the hierarchies of employee by region.

You will use a network diagram visualization to show employees by region, with a data drop-down list to allow users to move between different regions.

Adding a new visualization in IBM Cognos Active Report

Create a visualization and add the objects that you require to build the network diagram.

Procedure

1. Open IBM Cognos Report Studio with the **GO Sales (query)** package.
2. In the **Welcome** page, click **Create new**.
3. In the **New** window, double-click **Active Report**.
4. Double-click the report title and type
Employees by Region
5. Click the **Toolbox** tab , drag a **Visualization** icon  to the work area.
6. From the Visualization Gallery, select a **Network diagram** icon.
7. Click **OK**.

8. From the **Toolbox** tab  , drag a **Data Drop-Down List** to the report.


Results

The visualization now contains the objects that you require to build the network diagram. In the following tasks, you will add data to each control and define connections between controls so that they can interact with each other.

Adding data to the nodes data container

In IBM Cognos Active Report, the nodes data container defines the items that you want to link together.

Procedure


Click the **Source** tab  , and complete the following steps:

1. Expand **Sales (query)** and then **Sales staff**.
2. Drag **Sales staff code** to the **Nodes1** data container, under **Node (numeric)**.
3. Drag **Staff name** to the **Nodes1** data container, under **Name**.
4. Drag **Sales region** to the **Nodes1** data container, under **Extra categories**.

Adding data to the links data container

In IBM Cognos Active Report, the links data container defines relationship between the items that you want to link together.

Procedure



Click the **Source** tab  , and complete the following steps:



1. Expand **Sales (query)** and then **Sales staff**.
2. Drag **Manager code** to the **Links1** container, under **From node (numeric)**.
3. Drag **Sales staff code** to the **Links1** data container, under **to node (numeric)**.
4. Drag **Sales region** to the **Links1** data container, under **Extra categories**.

Defining a connection between the data drop-down list and the visualization object

This task in IBM Cognos Active Report defines a connection between the data drop-down control and the visualization object. The connection will allow users to filter data in the list as different regions are selected.

Procedure

1. From the **Source** tab  , expand **Sales (query)** and drag **Sales region** to the drop-down list box of the data-drop-down list control.
2. In the data-drop-down control, click the **Create a New Connection** icon  .
3. Complete the following steps:
 - a. In the **Source Control** list, click **Sales region**.
 - b. In the **Behavior** list, click **Filter**.
 - c. In the **Target Control** list, leave the default as **Links1**.

4. Click **Connect**.
5. In the data-drop-down control, click the **Create a New Connection** icon  again.
6. Complete the following steps:
 - a. In the **Source Control** list, click **Sales region**.
 - b. In the **Behavior** list, click **Filter**.
 - c. From the variable drop-down list, click **Reuse an existing variable**.
 - d. In the **Target Control** list, select **Nodes1**.
7. Click **Connect**.
8. Select the **Links1** data container.
9. In the content pane, click the **Active Report Controls** tab .
10. In the Active Report Controls pane, expand and click **Data Drop-Down List1** and click **Set Default Value(s)**.
11. In the Default Variable Values window, under **Values**, select **Northern Europe** and use the arrow icon to move it to **Selected values**.
12. Click **OK**.
13. Run the report.

Network diagram visualization output

When initially viewed, the network diagram visualization in IBM Cognos Active Report shows the employee network for the Americas region.

Select different regions from the drop-down list and the employee network for that region is displayed.

The following image shows the Employees by Region report with the drop-down list selected for the Northern Europe sales region.

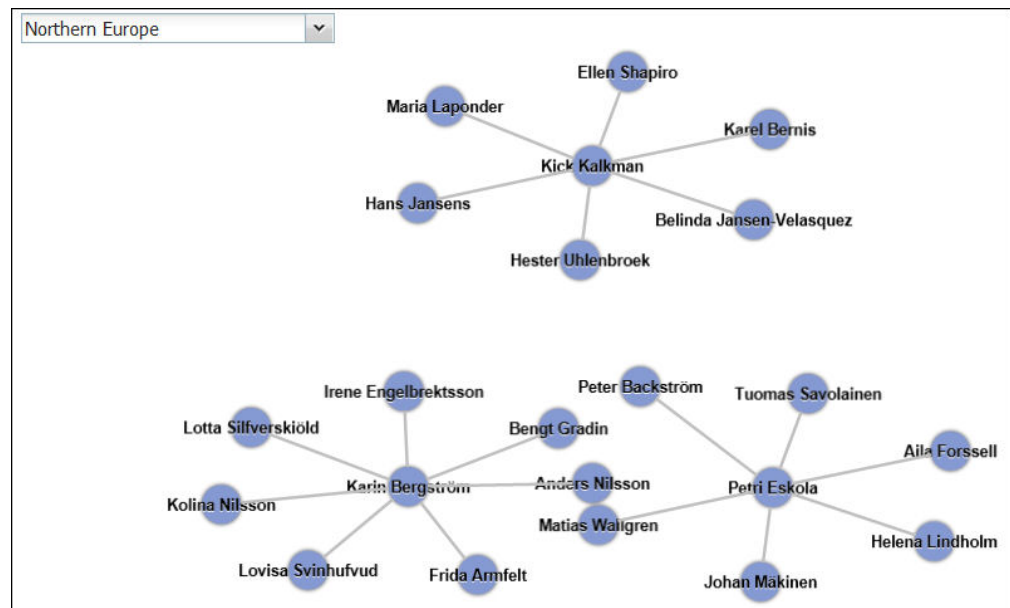


Figure 37. Network diagram visualization

Chapter 9. Relational Reporting Style

The relational reporting style is recommended for relational data sources. Relational data is best represented by lists. This data is organized in IBM Cognos Report Studio by query items.

In relational reporting, you summarize data by using headers and footers in lists, summary functions, and within detail aggregation. You focus data in relational reporting with summary or detail filters.

IBM Cognos Query Studio is also available to work with relational data.

Add Relational Data to a Report


Select the data items to appear in the report.

Note: We recommend using relational data in the relational reporting style. However, if you are using dimensional data, see “Add Dimensional Data to a Report” on page 253.



If you frequently use items from different query subjects or dimensions in the same reports, ask your modeler to organize these items into a folder or model query subject and then to republish the relevant package. For example, if you use the product code item in sales reports, the modeler can create a folder that contains the product code item and the sales items you need.

Procedure

1. From the **Source** tab , drag each query item to the report.

Note: A flashing black bar indicates where you can drop an item. Items inserted in the report appear on the **Data Items** tab .

Other ways to select data items are to double-click each item or to right-click each item and click **Insert**.

2. If you want to remove a data item from the report, select it and click the delete button . To remove the data item from the report but keep it on the **Data Items** tab , click the cut button instead.
3. For more information about a query item, right-click the item in the **Source** tab and click **Properties**. For example, when working with relational data sources, the **Usage** property identifies the intended use for the data represented by the data item. You can also obtain more information by clicking **Lineage**.

Group Relational Data

Group data items in a list report to remove duplicate values. For example, you have a report that shows all the products purchased and their product type. You group the Product type column so that each product type cell spans the products purchased cells.

You can specify whether grouping a column automatically makes it the first column in the list by selecting **Group and automatic summary behavior for lists** in the IBM Cognos Report Studio options. With this option selected, if the list contains any fact or measure columns, footers that show the summary values for the columns are automatically created for each group. Grouping a second column makes it the second column. When you ungroup a column, that column becomes the first column after the grouped column.

After a column is grouped, you can move it elsewhere in the report.

You can also group data items in repeaters and in page sets.

In addition to grouping, you can specify the sort order of data items. In lists, you can sort data items within groups as well as ungrouped items. In crosstabs, you can sort row and column items. For more information, see “Perform Advanced Layout Sorting” on page 235.


Tip: The Succession Report sample report in the GO Data Warehouse (analysis) package includes grouping. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. Click the column on which to group.

You can click either the column title or one of the column cells.

Tip: To perform multiple groupings at once, use Ctrl+click or Shift+click.

2. From the **Structure** menu, click **Group/Ungroup** .

Results

A symbol appears indicating that the column is grouped. You can control when its values appear by setting the group span, and the column appears in the list of headers and footers that you can add to the report.

Note: Grouping all columns in a list is equivalent to creating a single-edge crosstab.

Perform Advanced Grouping


You can perform more advanced groupings in a list to get the results you want.

For example, you can

- view the entire grouping structure and make changes to the grouping order
- group a data item that appears in a query but not in the layout
- specify a list of properties for a group

You can also perform advanced sorting.

Procedure

1. Click a column in the list.
2. Click the select ancestor button  in the title bar of the **Properties** pane and click **List**.

Tip: You can also click the container selector (three orange dots) of the list to select it.

3. In the **Properties** pane, double-click the **Grouping & Sorting** property.
4. To change the grouping order, in the **Groups** pane, click the grouped item in the **Groups** folder and drag it to the grouping hierarchy.
5. To create a new grouping, in the **Data Items** pane, click the data item and drag it to the **Groups** folder in the **Groups** pane.
6. To specify a list of data items for a group, do the following:
 - Click the group.

Tip: Click **Overall** to specify a list of data items for the overall group. The overall group is the grouping of all data into one group. You can specify a list of data items for the overall group to add overall totals to the list.

- Click the properties button .
- Select the appropriate check boxes.

Creating relational custom groups

Create custom groups to classify existing data items into groups that are meaningful to you.


You can use custom groups to convert numeric values into broader categories. For example, you can break down sales results into low, medium, and high categories. Or you can reduce the number of values into a smaller, more meaningful groups. For example, you can change a list of employees into separate teams or departments.

When you create custom groups in a list, a new column is added to the report, with the name *data item* (Custom). You can use this new column to group or sort the report. If you want to show only the new groups, you can delete the original column.

Procedure

1. Click the column that you want to group on and, from the **Data** menu, click **Calculate > Define Custom Groups**.

Tip: You can click either the column heading or one of the column cells.

2. Click the **New Custom Group** icon .
3. To group by values that you select, click **New Select Values Groups**, type a **New Group Name**, select the required values from the **Values** box, and move the values to the **Selected Values** box.
4. To group by a range of values, click **New Range Group**, type a **New Group Name**, and enter the **From** and **To** values.
5. If you do not want a group name to appear for remaining values, select **Do not show remaining values**. Clicking this option will produce empty cells for remaining values.
6. If you want the group name for remaining values to match each value, select **Use each remaining value as a group name**.
7. If you want to specify your own group name for all remaining values, select **Group remaining values into a single group** and type the name that you want.

8. If you are adding custom groups in a list, under **New data item name**, select either the default data item name or type a new data item name.

Set the Group Span for a Column

When columns are grouped, you can choose how often to show column names by changing the group spanning.

For example, when country or region and city are both grouped, you can choose to show the country or region name each time

- the country or region changes, by spanning Country or Region by Country or Region
- the city changes, by spanning Country or Region by City
- there is a new record, by specifying no spanning

Spanning one grouped column by another column is helpful if the second column contains many items.


Procedure

1. Click the column that will span the other column(s).
2. In the **Properties** pane, set the **Group Span** property to the column to span.

Example - Remove Identical Values in a List

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report that lists all product orders organized by order number. To make the report easy to read, you group the Order number column so that only one instance of each order number appears. However, because each order contains different products, the same order date appears for each product. You decide to show the order date only when the order number changes.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. In the **Source** tab , expand **Sales and Marketing (query)** and **Sales (query)**.
5. Expand **Sales order** and add **Order number** by double-clicking it.
6. Expand **Time dimension** and add **Date** by double-clicking it.
7. Expand **Product** and add **Product name** by double-clicking it.
8. Expand **Sales fact** and add **Quantity** and **Revenue** by double-clicking them.
9. Group the **Order number** column.
10. Click the **Date** column.
11. In the **Properties** pane, set the **Group Span** property to **Order number**.

Results


When you run the report, the first row of the **Order date** column appears for each **Order number** row.


Order number	Date	Product	Quantity	Revenue
100001	Jan 12, 2010	Flicker Lantern	256	8,624.64
		Polar Ice	92	9,411.6
100002	Jan 12, 2010	Edge Extreme	162	18,032.22
		Bear Edge	172	6,690.8
		Glacier GPS Extreme	74	24,747.82
		Mountain Man Deluxe	90	6,825.6
		Insect Bite Relief	422	2,532
100003	Jan 12, 2010	BugShield Extreme	3,252	21,170.52
		Sun Shield	1,107	6,376.32
		Polar Extreme	19	2,733.15
		Seeker 50	88	10,975.36
100004	Jan 12, 2010	Star Gazer 2	139	75,289.35
		TrailChef Deluxe Cook Set	279	33,658.56
		Star Lite	261	89,841.42
		Hibernator Lite	354	29,658.12
100005	Jan 12, 2010	Bear Survival Edge	120	10,299.6
		Mountain Man Combination	44	4,139.96
		Mountain Man Extreme	24	6,711.84
		Double Edge	382	6,165.48
		Lady Hailstorm Titanium Woods Set	26	32,878.04

Example - Repeat a Column Value in a List

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report that lists all products sold by the company, organized by the product line and product type. To make the report easier to read, you group the Product line and Product type columns so that only one instance of each column appears. However, because some product lines contain many different product types and products, you decide to show the product line for each product type.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. In the **Source** tab , expand **Sales and Marketing (query)**.
5. Expand **Sales (query)** and **Product** and add the following data items by double-clicking them:
 - **Product line**
 - **Product type**
 - **Product name**
6. Expand **Sales fact** and add **Product cost** by double-clicking it.
7. Group the **Product line** and **Product type** columns.
8. Click the **Product line** column.
9. In the **Properties** pane, set the **Group Span** property to **Product type**.

10. Click any part of the list and then click the select ancestor button  in the title bar of the **Properties** pane.

11. Click **List**.

Tip: You can also click the container selector (three orange dots) of the list to select it.

12. In the **Properties** pane, double-click the **Font** property.

13. In the **Size** box, click **8pt**.

Results

When you run the report, the product line appears whenever the product type changes.

Product line	Product type	Product	Product cost
Camping Equipment	Cooking Gear	TrailChef Canteen	6,607,904.78
		TrailChef Cook Set	28,305,454.21
		TrailChef Cup	1,545,089.31
		TrailChef Deluxe Cook Set	35,527,805.84
		TrailChef Double Flame	18,416,925.00
		TrailChef Kettle	11,373,514.16
		TrailChef Kitchen Kit	13,608,439.00
		TrailChef Single Flame	31,839,545.34
		TrailChef Utensils	8,611,463.50
		TrailChef Water Bag	11,292,005.38
Camping Equipment	Lanterns	EverGlow Butane	4,792,227.24
		EverGlow Double	1,421,083.75
		EverGlow Kerosene	6,304,040.00
		EverGlow Lamp	13,459,561.68
		EverGlow Single	10,363,144.02
		Firefly 2	9,088,038.23
		Firefly 4	4,968,302.40
		Firefly Extreme	4,838,898.69
		Firefly Lite	3,717,927.00
		Firefly Mapreader	5,734,965.00

Figure 38. List showing product line, product type, product name, and product cost


Divide Data into Sections

Create sections in a report to show a data item as the heading of a section. When you run the report, separate sections appear for each value.

Creating sections is similar to creating headers by grouping on a data item. The difference is that section headers appear outside the list, crosstab, chart, or repeater. In addition, you can group data items only in lists.

When working with dimensional data, you can also create page layers to show values on a separate page for each member.



Procedure

1. Click the column to make a section heading.
2. Do one of the following:
 - From the **Structure** menu, click **Section** .
If the column is in a list or repeater, this menu option will create sections without creating a master detail relationship. This can improve performance when running the report.
If the column is in a crosstab or chart, this menu option will create sections using a master detail relationship.
 - From the **Structure** menu, click **Section Using Master/Detail**.
This menu option creates sections using a master detail relationship.
Sections are created, and a section header appears. The data container that contains the column used to create sections is embedded in a list.
3. To add or remove section headers and footers, from the **Structure** menu, click **Headers & Footers**, click **List Headers & Footers**, and select or clear the appropriate check boxes.
The section header and footer check boxes appear under **Overall header**.

Remove Sections

You can remove sections and reinsert the data item that was used to create the sections in the data container.

Procedure

1. From the **View** menu, click **Page Structure**.
2. Expand the page containing the data container with the section.
3. Expand **Page Body** until you see the data container in which you added the section.
The data container is nested in the **List Column Body** object of the **List** object that is created when you add a section.
4. Drag the data container to **Page Body**.
The data container appears as a node of **Page Body**.
5. Delete the **List** object.
6. From the **View** menu, click **Page Design**.
7. From the **Data Items** tab , drag the data item that was used as a section header back into the data container.
8. If you created sections in a list without creating a master detail relationship, click the data item, and then click the group/ungroup button  to ungroup the item.

Summarizing Data Relationally

Summarize data in your reports to obtain totals, averages, and so on.

In a report, you can add both detail and summary aggregation. Detail aggregation, which is supported only for relational data sources, specifies how a data item is totaled at the lowest level in a report. In lists, detail aggregation specifies how the values that appear in the rows are totaled. In crosstabs, detail aggregation specifies how the values in the cells are totaled. For example, detail aggregation for a

measure like Revenue might be Total in both lists and crosstabs. In the following list report, this means that the values you see for the Revenue column represent the total revenue for each product type.

Product line	Product type	Revenue
Camping Equipment	Cooking Gear	272,835,984.18
	Lanterns	126,925,660.64
	Packs	351,880,402.84
	Sleeping Bags	309,172,888.35
	Tents	528,221,728.02
Golf Equipment	Golf Accessories	51,514,343.88
	Irons	254,814,337.99
	Putters	106,184,271.37
	Woods	313,898,414.65

Figure 39. A list showing product line, product type, and revenue

Summaries, which are supported for all data sources, specify how data items are totaled in the headers and footers of a list and in the total rows and columns of a crosstab. For list reports, these summaries only summarize the data that is visible on that page of the report.

You can specify detail and summary aggregation in different ways by using any of the following:

- aggregation properties that are specified in the model
- the **Auto Group & Summarize** property
- the summarize button in the toolbar
- aggregation properties for a data item
- summary functions in data item expressions
- the solve order of calculations

Limitation

If a summary is applied to a report that contains binary large object (BLOB) data, such as images or multimedia objects, you cannot also perform grouping or sorting.

The Type of Data

How data is aggregated also depends on the type of data that you are aggregating. Aggregation rules are applied differently to facts, identifiers, and attributes. For example, if you aggregate a data item that represents part numbers, the only aggregate rules that apply are count, count distinct, count non-zero, maximum, and minimum. For information about how to determine the type of data that a data item represents, see “Add Relational Data to a Report” on page 213 and “Add Dimensional Data to a Report” on page 253.

Add a Simple Summary

You can add simple summaries to the groups in a report by using the summarize button in the toolbar. This button provides a subset of the summary functions

available in IBM Cognos Report Studio. For list reports, a **Custom** option is also available so that you can add your own summary function in the expression of the data item.

The summarize button sets the rollup aggregate property for the data item to the selected summary, and places the data item into an appropriate footer. A footer is created for each group as well as an overall footer, unless they already exist.


In lists, the summary appears as a footer. If the column to which you added a summary is grouped, group and overall summaries appear. In crosstabs and charts, the summary appears as a node.

To change a summary, select it and, in the **Properties** pane, under **Data Item**, click **Rollup Aggregate Function** and choose a different function.

In crosstabs, you can add multiple summaries at the same level. For example, you have a crosstab with Product line as rows, Order year as columns, and Revenue as the measure. For Product line, you can add the **Total** summary as a header, which will total all revenue for each order year. You can then add the **Average** summary as a footer, which will give the average revenue of all product lines for each order year.

For information about adding a rolling or moving average, see “Rolling and Moving Averages” on page 272.

Procedure


1. Click the column to which to add a summary.
2. Click the summarize button  and click a summary type.
3. To change the summary label, do the following:
 - Click the label.
 - In the **Properties** pane, under **Text Source**, set the **Source Type** property to the source type to define the label.
For example, set it as **Data Item Value** to produce a dynamic label for the summary based on data item values.
 - Set the property below **Source Type** to specify the label.
This property depends on the source type you chose. For example, if you chose **Data Item Value** as the source type, set the **Data Item Value** property to the data item to use to define the label.

Set the Auto Group & Summarize Property

Set the **Auto Group & Summarize** query property to specify whether IBM Cognos Report Studio should group non-fact data items (identifiers and attributes) and apply aggregate functions to aggregate fact data items in lists.

If you are using an OLAP data source, data is always summarized regardless of how this property is set.

Procedure

1. Pause the pointer over the query explorer button  and click a query.
2. In the **Properties** pane, set the **Auto Group & Summarize** property:

- To group non-aggregate fact data items and apply aggregate functions to aggregate fact data items in lists, set this property to **Yes**.
- To render detail rows, set this property to **No**.

Specify Detail or Summary Aggregation in the Model

When working with relational or dimensionally-modeled relational (DMR) data sources, you can use the aggregation properties specified for the query item in the IBM Cognos Framework Manager model instead of specifying detail or summary aggregation in the report. The model specifies the default summary function for each query item.

Aggregation functions are mapped between data sources, Framework Manager, and IBM Cognos Report Studio.

Specify Aggregation Properties for a Data Item

When working with relational data sources and list reports, for each data item in a report, you can specify detail and summary aggregation properties to manage summaries without having to create complex data item expressions.

Procedure

1. Click the data item for which to set detail or summary aggregation.
2. In the **Properties** pane, set the **Aggregate Function** or the **Rollup Aggregate Function** property to a function.

Use Summary Functions in Data Item Expressions

You can use summary functions in data item expressions. The summary functions in the expression editor that have the same name as the summary functions available through the **Aggregate Function** and **Rollup Aggregate Function** properties operate the same way. For example, in a relational report, setting the **Aggregate Function** property to **Total** is the same as changing the expression of the data item to `total ([Revenue])`.

In general, report maintenance is easier if the **Aggregate Function** and **Rollup Aggregate Function** properties are used rather than adding summary functions to data item expressions. Use summary functions in expressions if the required summary is not supported as an aggregate or rollup aggregate property or if the complexity of the expression cannot be managed using the data item properties. Add a summary function to a data item expression if one of the following conditions applies:

- The underlying data source is relational, and you want to use database vendor-specific summary functions.
- You want to use summary functions that require more than one parameter, such as percentile.
- You require summary expressions that are not available in the aggregation properties, such as a for clause. You should use for clauses only in relational style reports (list reports).

For example, your report uses Product line, Product type, and Quantity. You want to calculate the percentage of the parent quantity that is represented by each product type. This requires you to compare the total quantity for each product type to the total quantity for the parent product line. In other words, your

expression requires summaries at different group levels. You use summary functions, such as aggregate, in the data item expression with a for clause to specify the group level as follows:

[Quantity] / aggregate ([Quantity] for [Product line])

Product line	Product type	Quantity	% of Product Line
Camping Equipment	Cooking Gear	13,400,351	49%
	Lanterns	4,826,755	18%
	Packs	2,756,540	10%
	Sleeping Bags	3,153,218	12%
	Tents	3,164,285	12%
Camping Equipment - Summary		27,301,149	100%
Golf Equipment	Golf Accessories	3,119,747	61%
	Irons	391,445	8%
	Putters	1,284,570	25%
	Woods	317,939	6%
Golf Equipment - Summary		5,113,701	100%

In some cases, you may need a summary that is different from the default. For example, if the default summary for Quantity is total, you can calculate the average as follows:

[Quantity] / average (aggregate ([Quantity]) for [Product line])

Product line	Product type	Quantity	% of Product Line Average
Camping Equipment	Cooking Gear	13,400,351	245%
	Lanterns	4,826,755	88%
	Packs	2,756,540	50%
	Sleeping Bags	3,153,218	58%
	Tents	3,164,285	58%
Camping Equipment - Summary		27,301,149	100%
Golf Equipment	Golf Accessories	3,119,747	244%
	Irons	391,445	31%
	Putters	1,284,570	100%
	Woods	317,939	25%
Golf Equipment - Summary		5,113,701	100%

The inner summary gives you the expected Quantity values at the Product Type level, which are then averaged to the Product Line level. This two-stage aggregation is required for OLAP data sources and recommended for relational data sources also.

Why is this necessary? Here's what would happen if you simply averaged Quantity, as follows:

[Quantity] / average([Quantity] for [Product line])

Product line	Product type	Quantity	% of Product Line Average
Camping Equipment	Cooking Gear	13,400,351	2,538,352%
	Lanterns	4,826,755	914,305%
	Packs	2,756,540	522,156%
	Sleeping Bags	3,153,218	597,296%
	Tents	3,164,285	599,392%
Camping Equipment - Summary		27,301,149	5,171,500%
Golf Equipment	Golf Accessories	3,119,747	1,205,327%
	Irons	391,445	151,236%
	Putters	1,284,570	496,299%
	Woods	317,939	122,837%
Golf Equipment - Summary		5,113,701	1,975,700%

The denominator is now computed as the average of the detail Quantity rows in the underlying fact table. Since these values are much smaller than the pre-summarized Quantity values you see in the report, the resulting percentage is far too big, and not what we wanted.

Tip: The Total Revenue by Country or Region sample report in the GO Data Warehouse (query) package includes a totalsummary function. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.

Procedure

1. Click a data item.
2. In the **Properties** pane, double-click the **Expression** property and add summary functions to the expression for the data item.

Related concepts:

"Limitations When Using Clauses in Summary Functions" on page 532

A summary function that uses a for clause may yield unexpected results. These may include error messages, warnings, incorrect numbers, and more or fewer than expected rows, columns, or chart points and lines.

Summary Functions

This section describes the summary functions that are available in IBM Cognos Report Studio. Some functions, such as **Custom**, are available only when you click

the summarize button  on the toolbar. Additional summary functions are available in the expression editor.

Automatic Summary

Depending on the type of data item, applies the function **None**, **Summarize**, or **Calculated** based on the context in which the data item appears.

Calculated is applied if the data item expression

- contains a summary function
- is an if then else or case expression that contains a reference to at least a modeled measure in its condition
- contains a reference to a model calculation or to a measure that has the **Regular Aggregate** property set to a value other than **Unsupported**
- contains a reference to at least one data item that has the **Rollup Aggregate Function** property set to a value other than **None**

If the underlying data source is relational and if the data item expression contains no summary functions and a reference to at least one fact that has the **Regular Aggregate** property set to a value other than **Unsupported**, **Summarize** is applied.

In all other contexts, **None** is applied.

For relational and dimensionally modeled relational (DMR) data sources, if this function is applied to a data item expression that has the average function, weighted averages are computed based on the lowest level detail values in the data source.

Note: This is the default function.

Average

Adds all existing values and then divides by the count of existing values.

Calculated

Specifies that all the terms within the expression for a data item are aggregated according to their own rollup rules, and then the results of those aggregations are computed within the overall expression.

For example, a list contains the data item Quantity with the **Aggregation** property set to **Total**. You add a query calculation named Quantity Calculated. You define its expression as Quantity + 100 and you set its **Aggregation** property to **Calculated**. When you run the report, the values for Quantity Calculated are computed by first adding all values for Quantity and then adding 100 to each value.

Note: In crosstabs, this function overrides any solve orders that are specified.

Count

Counts all existing values.

If the underlying data source is dimensionally modeled relational (DMR), Count behaves as follows if it is specified in the **Aggregate Function** or **Rollup Aggregate Function** property for a data item.

Object	Behavior
Level	Count distinct is used. A warning appears when you validate the report.
Member set	Count distinct is used. A warning appears when you validate the report.

Object	Behavior
Attribute	Supported.
Measure	Supported.

If you add the count summary to a non-fact column in a list and then group the column, the column will not be grouped when you run the report. To resolve this issue, group the column first before adding the count summary.

Count Distinct

Returns the total number of unique non-null records.

If the underlying data source is dimensionally modeled relational (DMR), count distinct is supported for levels, member sets, attributes, and measures when it is specified in the **Aggregate Function** or **Rollup Aggregate Function** property for a data item.

Custom

Summarizes data based on an expression that you define.

Maximum

Selects the largest existing value.

Median

Returns the median value of the selected data item.

Minimum

Selects the smallest existing value.

None

Does not aggregate values.

If the underlying data source is relational, the data item is grouped when the query property **Auto Group & Summarize** is set to **Yes**.

Not Applicable

This function is available only for the **Aggregate Function** property. It specifies that the aggregate attribute is ignored. For example, the calculation will be applied after the data is aggregated.

This function differs from the **Calculated** function, which applies aggregation to the rows and then performs the calculation.

For example, for the average ([Quantity]) + 5 expression, when the **Aggregate Function** property is set to **Not Applicable**, five is added to the average of the single Quantity value. When the function is set to **Calculated**, five is added to the average of a set of numbers.

This setting should not be applied to a simple model reference.

This setting is relevant only for reports that are upgraded from IBM Cognos ReportNet 1.x.

Standard Deviation

Returns the standard deviation of the selected data item.

Note: From a mathematical perspective, this function is not useful for small numbers of items and is not supported if the query property **Auto Group & Summarize** is set to **Yes**.

Summarize

Aggregates data based on model or data type information. This function can be thought of as a calculate and then aggregate rule. Data is aggregated using the following rules:

If the underlying data source type is relational and the data item or calculation is a reference to a single fact query item in the model that has the **Regular Aggregate** property set to **Sum**, **Maximum**, **Minimum**, **Average**, or **Count**, aggregate data using this function. Otherwise, data is aggregated according to the data type of the data item as follows:

- **Total** is applied for numeric and interval values.
- **Maximum** is applied for date, time, and date-time values.
- **Count** is applied for everything else.

The underlying data source type can be dimensional and the data item or calculation a reference to a single item in the model. In this case, if the **Regular Aggregate** property of the model item is not **unknown**, the summary function that corresponds to the **Regular Aggregate** property is applied. If the **Regular Aggregate** property is **unknown**, set the function to **Calculated**.

For example, a list contains the data item Quantity with the **Aggregation** property set to **Average**. You add a query calculation named Quantity Summarize. You define its expression as Quantity + 100 and you set its **Aggregation** property to **Summarize**. When you run the report, the values for Quantity Summarize are computed by first adding 100 to each value for Quantity and then calculating the total. The total is calculated because Quantity contains numeric values and the expression for Quantity Summarize is not a simple data item reference. If Quantity Summarize is defined as Quantity, the function **Average** is applied to each value.

Total

Adds all existing values.

Variance

Returns the variance of the selected data item.

Note: From a mathematical perspective, this function is not useful for small numbers of items and is not supported if the query property **Auto Group & Summarize** is set to **Yes**.

Mapping Aggregation Functions From Data Sources to Framework Manager and Report Studio

The summary functions available in IBM Cognos Framework Manager and IBM Cognos Report Studio reflect summary functions supported by relational and dimensional data sources. The following table shows how summary functions in data sources are mapped to Framework Manager and Report Studio.

Data source	Framework Manager	Report Studio
None specified, or none	Unsupported	None
average (avg)	Average	Average
count	Count	Count
count distinct	Count Distinct	Count distinct
maximum (max)	Maximum	Maximum
minimum (min)	Minimum	Minimum
median	Median	Median
standard deviation (stddev)	Standard Deviation	Standard Deviation
sum	Sum	Total
variance (var)	Variance	Variance
count non zero	Count Non-Zero	Automatic
average non zero	unknown	Automatic
external	unknown	Automatic
any	unknown	Automatic
calculated	unknown	Automatic
unknown	unknown	Automatic
first_period	unknown	Automatic
last_period	unknown	Automatic

The following summary functions exist only in either Framework Manager or Report Studio. There is no corresponding summary function in data sources.

Framework Manager	Report Studio
Automatic	Automatic
Calculated	Calculated
No corresponding summary function	Summarize
No corresponding summary function	Not Applicable

Focusing Relational Data

You can limit the data in your report with filters or query parameters. The method you choose should depend on the capabilities of the data source, the performance requirements, the persistence of the dataset, and how complex you want the report to be.

In IBM Cognos Report Studio, summary and detail filters are best for list reports in the relational reporting style. Summary filters are applied to summaries and detail filters are applied to details. These filters remove rows and columns from your reports.

You can also use prompts, or prompt controls, to allow report users to provide input for the filter.

Create a Detail or Summary Filter

Add a filter expression to focus a report and minimize processing time by excluding unwanted data. For example, you can filter data to show only customers who placed purchase orders that were valued at over one thousand dollars during the past year. When you run the report, you see only the filtered data.

Detail filters are applied only to detail data items from the data source, and not to summary data items. Examples of detail data items include customer names, product numbers, and order numbers. Detail filters are Boolean expressions that apply one or more conditions and evaluate to either true or false. If the conditions are true for a row of data, the row is retrieved from the data source and appears in your report. If the conditions are false, the row is not retrieved and does not appear in your report. You can specify whether detail filters are applied before or after summaries using the **Application** property.

Tip: The 2011 Sales Summary sample report in the GO Sales (analysis) package includes a detail filter. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Summary filters are applied to summary data items in a report. They are also Boolean expressions, however they are used to exclude specific groups of data items based on the group summaries. They are based on summary calculations.

You can combine multiple conditions using AND, OR, and NOT operators. By default, multiple conditions are combined with an AND operator, which means that all conditions must be met for the filter to take effect.

For relational data sources, if a filter expression is used in multiple reports or by different report authors, ask your modeler to create the filter as a standalone object in the model and include it in the relevant package. For information about creating filters in the package, see the IBM Cognos Framework Manager *User Guide*.

If you are filtering a multiple-fact query, you should understand the differences between using a detail filter and summary filter.

If you filter values that are floating-point numbers, you may encounter imprecise filtering results due to rounding or data truncation. Floating-point numbers may appear differently in the report than how they are stored in the data source. To ensure accurate results, your filter criteria should account for any rounding issues.

If you are working with a Microsoft SQL Server 2005 Analysis Services (SSAS) data source, we recommend that you not use OR filters in summaries. Doing so causes error characters (--) to appear in summaries instead of values.

Procedure

1. To add a filter that was already created in the package, from the **Source** tab


 , drag the filter  to the report.

You must drag the filter to a data container object that is linked to a query, such as a list, crosstab, or chart.

2. To create your own filter, from the **Data** menu, click **Filters** , and click **Edit Filters**.

To create a simple filter condition based on only one data item, click **Create Custom Filter**.

If more than one query is defined in the report, you must first select a data container object that is linked to a query.

Tip: You can also define filters in **Query Explorer**. Pause the pointer over the query explorer button  and click a query.

3. In the **Filters** dialog box, decide what type of filter to create:
 - To add a filter that will apply to detail values, click the **Detail Filters** tab.
 - To add a filter that will apply to summary values, click the **Summary Filters** tab.

4. Click the add button .

5. In the **Create Filter** dialog box, decide what conditions to include in the filter:
 - To create a simple filter condition based on only one data item, click **Custom based on data item**, select a data item from the query, and click **OK**.
 - To combine multiple filter conditions, click **Combined**, and click **OK**.
 - To create a filter condition that uses advanced calculations, click **Advanced**, and click **OK**.
6. If you create a simple filter condition based on one data item, do the following:
 - a. In the **Filter Condition** window, under **Condition**, select the type of condition that you want.
 - b. If you want to parameterize the filter so that users are prompted when they run the report, select the **Prompt for values when report is run in viewer** check box.
 - c. To choose specific data item values for the filter condition, in the **Values** box, click **Specific values** and choose the values that you want to filter on.

Tip: You can search for values by typing a string in the **Keywords** box. Click the arrow beside **Search** and select the search parameter that you want to use. If you select **Use Tab as keyword delimiter**, you can add a tab in the **Keywords** box only by copying and pasting a tab (or the string you want to search on with a tab in it), from another application, such as Notepad.

- d. To filter values based on a pattern, in the **Values** box, click **Starts with**, **Ends with**, **Contains**, or **Matches SQL pattern**, and type the pattern in the **Value** box.







With the **Matches SQL pattern** choice, you can filter values by using standard SQL syntax to create a SQL supported pattern. You can use a % (percent) symbol to substitute for zero or more characters, or _ (underscore) to substitute for one single character. For example, the pattern '%a_b_c%' returns every value that contains the sequence 'a, any character, b, any character, c' anywhere in the string.


If you search for patterns that include the '%' or '_' characters, specify an escape character in the **Escape character (optional)** box. The value must be a single character. When specified, each occurrence of the escape character

causes the next character to be treated as text and not as a special character. For example, if you specify '\' as the escape character, entering TEST\% in the **Value** box searches for the string 'TEST%' rather than a string that begins with 'TEST' followed by any other characters. Similarly, entering TEST\\% searches for strings that begin with 'TEST\%'.

You can specify whether the filter condition is case sensitive or not. A case-sensitive filter is applied only when the data source supports case-sensitive filtering.

Note: When a filter based on a pattern is converted into a prompt, users are prompted to specify a pattern when the report is run.

- e. If you want the filter to include null values, select the **Include missing values (NULL)** check box.
 - f. Click **OK**.
7. If you create a **Combined** filter, do the following:
- a. In the **Create Filter** dialog box, select the data item for the first filter condition and click **OK**.
 - b. In the **Filter Conditions** dialog box, specify the details for the first condition and click **OK**.
 - c. Click the new condition button  and, in the **Create Filter** dialog box, select the data item for the second filter condition and click **OK**.
 - d. In the **Filter Conditions** dialog box, specify the details for the second condition and click **OK**.
 - e. In the **Combined Filter** dialog box, use the AND, OR, and NOT operators to combine the filter conditions. Select the conditions that you want to combine, and click an operator. To change an operator, double-click the operator to toggle among available ones or select the operator and then select a different one from the list.
 - f. Click **OK**.
8. If you create an **Advanced** filter condition, in the **Filter Expression** dialog box, define the filter expression:
- a. To add data items that are not shown in the report, on the **Source** tab , double-click data items.
 - b. To add data items that are in the report but not necessarily in the model (such as calculations), on the **Data Items** tab , double-click data items.
 - c. To add data items from a specific query in the report, on the **Queries** tab , double-click data items.
 - d. To add functions, summaries, and operators, on the **Functions** tab , double-click elements. You can insert only functions that return a Boolean value (true or false). For example, you cannot insert the function topCount because it returns a set of data. Filter expressions must resolve to a Boolean in order to be valid.
 - e. To add a value that is derived from a parameter, on the **Parameters** tab , double-click the parameter. Parameters define prompts, drill-through reports, and master detail relationships.

- f. To add a macro, on the macros tab , double-click the parameter maps, session parameters, or macro functions you want to add to the macro expression.

Tip: Use **Insert macro block** to get you started with creating the macro expression. **Insert macro block** inserts number signs in the expression. Make sure that the macro expression you create is between the number signs.

- g. Click the validate button  and click **OK**.
h. Click **OK**.

Tip: You can also type the filter expression directly in the **Expression Definition** box. When typing date values, use the YYYY-MM-DD format. For more information about creating expressions, see “Using Relational Calculations” on page 248.

9. In the **Usage** box, specify whether the filter is required, optional, or not to be used.
10. If you create a detail filter, under **Application**, click one of the following options:
- To apply the filter to individual records in the data source, click **Before auto aggregation**.

For example, for a specific product type within a product line, you want to filter out individual orders that generated less than one thousand dollars in revenue.

- To apply the filter to data after the query has grouped and summarized at the lowest level of detail, click **After auto aggregation**.
- For example, you want to filter out the product types that generated less than ten thousand dollars in revenue within a product line.

For example, you have a list that contains the data items Product line, Product type, and Revenue. The revenue values you see are aggregated to the product type level. If you create a detail filter on Revenue and you choose to filter values before auto aggregation, you are filtering non-aggregated revenue values. If you choose to filter values after auto aggregation, you are filtering revenue values aggregated to the product type level.

11. If you create a summary filter, under **Scope**, click the ellipsis (...) button and select the grouping level at which to apply the filter.

For example, a revenue report is grouped on product line and product type. You can choose to filter total revenue for either the product line or product type level.



If the query in which you are creating the summary filter is linked to more than one data container, the data item that you select as the grouping level must be grouped in all data containers linked to the query. Otherwise, the report will not run successfully.


Tip: To filter at the overall level, do not click a level. For example, if a report has an overall footer that shows the total revenue for all products, by not choosing a level you will apply the filter to the footer. In addition, if you are using a dimensional data source, excluding a parent level excludes its children, and excluding all children excludes the parent.

Edit or remove a filter

After you created filters, you can edit or remove them.

Procedure



1. Click a data container object that contains a filter.
2. To remove all filters from the object, from the **Data** menu, click **Filters** , and click **Remove all Filters**.
3. To edit a filter or remove a single filter, from the **Data** menu, click **Filters** , and click **Edit Filters**.

Tip: You can also edit filters from **Query Explorer**. Pause the pointer over the query explorer button  and click the query that contains your filter.


Browse or Search the Values of a Data Item


When building expressions in the expression editor, you can browse the data of a data item. This is useful when you do not know how a particular value is stored in the database. For example, you want to filter a report so that it shows data for only New South Wales. The actual value in the database for New South Wales is NSW, and this is what you must insert in the filter expression to obtain the correct results.

Procedure

1. In the source, data items, or query tab, right-click the data item you want to browse.
2. If you want to insert a single value, click **Select Value** .
3. If you want to insert multiple values, click **Select Multiple Values** .
4. In the **Values** box, click the value you want to insert in the expression.

Tip: Use the **Keywords** box to search for specific values. If you select **Use Tab as keyword delimiter**, you can add a tab in the **Keywords** box only by copying and pasting a tab (or the string you want to search on with a tab in it), from another application, such as Notepad. If the data source is case sensitive and you want to perform a case insensitive search, click the **Search** arrow and then click **Case Insensitive**.

5. If you clicked multiple values, click the right arrow button  to add them to the **Selected values** box.
6. Click **Insert**.

Tip: To control where values appear in the **Expression Definition** box, you can click the copy button  if you selected a single value or the copy all button if you selected multiple values instead. The values are copied to the clipboard, and you can then paste them where you want.

Related concepts:

“Searching for values might return unexpected results” on page 482

In the expression editor, when searching for values for a data item, the results you obtain might contain unexpected results if the data item is not a string data type. Because you can edit the expression for a data item, IBM Cognos Business Intelligence cannot determine with certainty what the data type is.

Ignoring the Time Component in Date Columns

Database systems use Date, Time, and Timestamp to represent date and time values. While a timestamp type holds a date and time component, an application may allow the RDBMS to default the time component. When rows are inserted, updated, or queried, the application may specify only a date value and leave the RDBMS to extend the value to include a default time (usually 00:00:00.000).

The challenge with a timestamp is when the application has no immediate interest in the time component. For example, the business question How many orders were taken today? implies all orders taken irrespective of what time the order was booked. If the application defaulted the time component as it stored rows, the query that was used to answer the question returns the count of orders taken today. If the application stored the actual time component, the query likely returns no data, because the number of orders entered at midnight is probably zero.

Relying on the time defaults can be dangerous if the application changes and starts to capture actual times. To avoid this problem, you can

- truncate the time by creating a derived column
- convert the timestamp to a date
- create a hi-low filter

Truncating the Time by Creating a Derived Column

In the IBM Cognos Framework Manager model, create a derived column using a calculated expression that truncates the time from a timestamp, and returns a timestamp containing the original date and a default time. For example, if you use an Oracle data source, the following expression creates the derived column DATEONLY from COL1, where COL1 contains the values as stored by the application while DATEONLY contains the dates with the default time of 12:00:00 AM:

```
Select COL1,trunc(COL1) as DATEONLY from [SCOTT_TIGER].DATES
```

Tip: You can change the data format of the column to show only the date value by setting the **Date Style** property to **Short**.

You can then apply filters to the DATEONLY column that would return the correct results. If you create a parameter in IBM Cognos Report Studio that filters on this column, the default prompt will present a date and time control because the data type is still a timestamp.

Converting the Timestamp to a Date

In the IBM Cognos Framework Manager model, define a calculation that uses the cast function to convert the timestamp to a date. For example, the following expression converts the data type of the column COL1 to date:

```
cast ([SCOTT_TIGER].[DATES].[COL1],DATE)
```

If you create a parameter in IBM Cognos Report Studio that filters on this calculation, the default prompt presents a date control.

Ignoring the Time by Creating a Hi-Low Filter

You can create a hi-low filter to ignore the time. In the IBM Cognos Framework Manager model, create a filter in the form date-column between date-lowtime and date-hightime. For example, the following expression returns all values between 00:00:00:000 and 23:59:59:000 for a given day:

```
[SCOTT_TIGER].[DATES].[COL1] between?p1? and  
cast(substring(?p1?,1,10),'23:59.59.000',timestamp)
```

Sorting Relational Data

You can sort items to view them in your preferred order. By default, IBM Cognos Report Studio retrieves items in the order defined in the data source. OLAP data sources always have a defined order. Relational and dimensionally-modeled relational data sources may not always have a defined order. The data modeler defines the sorting options in the model.

For more information about data modeling, see the IBM Cognos Framework Manager *User Guide*. Sorting applied in Report Studio applies only to the layout within the report.

You can sort items in a list in ascending or descending order based on a value or a label, such as revenue or employee name. You can also perform advanced sorting to sort columns within groups or to sort a row or column using another data item.

Tip: The Sales Growth Year Over Year sample report in the GO Data Warehouse (analysis) package includes sorting. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. Click the column or row on which to sort.

2. Click the sort button  and click **Ascending** or **Descending**.

An arrow appears beside the data item to indicate that a sort order was set.

When you specify a sort order for more than one column, the columns are sorted in the order in which they were inserted in the report. For example, you add columns A, B, and C to a report and specify a sort order for each. When you run the report, column A is sorted first, then column B, and then column C. You can change the order in which the columns are sorted in the **Edit Layout Sorting** options.

Tip: To remove a sort order, click **Don't Sort**.


Perform Advanced Layout Sorting


If you use relational data, in a list, you can sort columns within groups and change the sort order of columns. In a crosstab, you can sort a row or column by another item, such as Order year by Revenue.

Procedure

1. Click a column.

In a crosstab, click the sorted row or column on which to perform advanced sorting.

2. Click the sort button  and click **Edit Layout Sorting**.
3. To sort a list column within a group, do the following:
 - In the **Groups** pane, under the **Groups** folder, expand the folder of the grouped column.
 - In the **Data Items** pane, drag the data items to sort to the **Sort List** folder.

Tip: You can also drag data items from the **Detail Sort List** folder.
 - Click the sort order button  to specify ascending or descending order.
4. To change the sort order of columns, in the **Groups** pane, change the order of columns in the **Sort List** folder of a group or in the **Detail Sort List** folder.

Tip: Add items to the **Detail Sort List** folder to sort items that are not groups.
5. If you are sorting a crosstab, do the following:
 - From the **Data Items** pane, drag the item on which to sort to the **Sort List** pane.
For example, you have a crosstab with Product line as rows, Order year as columns, and Revenue as the measure. To sort Order year by Revenue, drag Revenue to the **Sort List** pane.
 - Click the sort order button to specify ascending or descending order.

Working with Relational Queries

Queries specify what data appears in the report. In IBM Cognos Report Studio, you create and modify queries using **Query Explorer**.

Query Explorer provides an alternative way to modify existing reports or to author new reports. You can use **Query Explorer** to perform complex tasks and other tasks that are more difficult to do in the report layout. For example, use **Query Explorer** to

- improve performance by changing the order in which items are queried from the database, or by changing query properties to allow the report server to execute queries concurrently where possible

Note: Only queries that are referenced in the report layout can be executed concurrently. If a query is defined in Query Explorer by joining two or more existing queries, IBM Cognos Business Intelligence cannot execute the source queries concurrently. By default, queries run sequentially. Your administrator must enable the concurrent query execution feature. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

- view or add filters and parameters and modify their properties
- view or add dimensions, levels, and facts
- incorporate SQL statements that come from other reports or reports that you write
- create complex queries using set operations and joins

Related concepts:

“Queries” on page 30

Queries determine what data items appear in the report. Sometimes you want detailed rows of data, which you obtain by using a simple SELECT statement. Other times you must calculate totals or averages using summary functions and grouped columns or must apply filters to show only the data you want.

Specify a List of Data Items for an Object

Specify the list of data items for an object when you must reference a data item that is in a query but is not in the layout.

For example, you want to add a layout calculation to a list that uses a data item that is in the query definition. If the data item does not appear in the list, you must reference it in order to make the layout calculation work. You must also specify the list of data items if you apply conditional formatting that uses a data item that is not in the query.

Procedure

1. Click a layout object.

Tip: For a list of layout objects for which you can specify a list of properties, see the **Properties** property in Appendix G, “Report Studio Object and Property Reference,” on page 771.


2. In the **Properties** pane, double-click the **Properties** property and select data items.

Relate a Query to a Layout

Queries and layouts work together. After you decide the type of data that you need, you must create a layout in which to show the results. Each column of data must be both selected for the query and shown in a layout unless there are some columns that you do not want to show. The query and layout portions of a report must be linked to produce a valid report.

IBM Cognos Report Studio automatically links query and layout. For example, when you use Report Studio and the list report layout, query and layout are automatically linked.

Procedure

1. Select a data container.
2. In the **Properties** pane, set the **Query** property to a query.
3. From the **Data Items** tab , drag data items from the query to the data container.

Connecting Queries Between Different Data Sources

This section lists the data sources between which you can and cannot connect queries.

IBM Cognos Business Intelligence supports the following:

- RDBMS to RDBMS joins
- set operations of any two queries
- master detail relationships between any two queries

- drill from any query to any other query

You cannot create the following types of joins:



- cube-to-cube (homogeneous)
- cube-to-cube (heterogeneous)
- cube-to-RDBMS
- cube-to-SAP BW
- SAP-BW-to-RDBMS

Add a Query to a Relational Report

You can create multiple queries in **Query Explorer** to suit your particular needs. For example, you can create a separate query for each data container in a report to show different data.


Tip: The Briefing Book sample report in the GO Sales (analysis) package and the Top 10 Retailers for 2011 sample report in the GO Data Warehouse (analysis) package include multiple queries. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure


1. Pause the pointer over the query explorer button  and click **Queries**.
2. From the **Toolbox** tab , drag one of the following objects to the work area.

Object	Description
Query	Adds a query.
Join	Adds a join relationship.
Union	Adds a union operator.
Intersect	Adds an intersect operator.
Except	Adds an except (minus) operator.
SQL	Adds SQL commands.

Note: When adding queries to the report

- right-click the work area and click **Show Package Sources** to see the queries that use data items from a package
 - right-click the work area and click **Expand References** to see the relationships that exist between queries in the report, which is useful when you are creating complex queries
3. In the **Properties** pane, set the object properties.
For example, if you added a join, set the **Join Relationships** property to define the join.
 4. Double-click a query.
 5. From the **Source** tab , drag data items to the **Data Items** pane.

Tip: You can add data items to the query that you do not want to appear in the layout. For example, to filter on Product line code and show Product line in the layout, you must add both data items to the query.

6. To create a new data item, from the **Toolbox** tab , drag **Data Item** to the **Data Item** pane.
7. To add a filter, from the **Toolbox** tab, drag **Filter** to the **Detail Filters** or **Summary Filters** pane and define the filter expression.

Tip: You can also create a filter by dragging a data item from the **Source** tab to one of the filters panes and completing the filter expression.

Create a Union Query

Create a union query to combine two or more queries into one result set.



You can combine queries that use different data sources. For example, you can combine a query that returns data from a dimensional data source with a query that returns data from a relational data source.


Before you begin

To combine two queries, the following conditions must be met:

- The two queries must have the same number of data items.
- The data items must have compatible types and appear in the same order.
For numeric data types, integer, float, double, and decimal are compatible.
For string data types, char, varChar, and longVarChar are compatible.
For binary data types, binary and varBinary are compatible.
Date data types must match exactly.

Procedure

1. Pause the pointer over the query explorer button  and click **Queries**.
2. From the **Toolbox** tab , do the following:
 - Drag **Query** to the work area.
 - Drag **Union**, **Intersect**, or **Except** to the right of the query.
Two drop zones appear to the right of the operator.
 - Drag a **Query** object to each drop zone.
Two queries are created in the work area, and a shortcut to each query appears in the drop zones.
3. Double-click each query that makes up the union query and add data items to the query.
4. Return to the Queries work area.
5. Click the set operator that you added in step 2.
6. In the **Properties** pane, set the **Duplicates** property to remove or preserve duplicate rows.
7. Double-click the **Projection List** property.
The projection list shows the list of projected data items for the set operation.
8. To automatically produce the list of projected data items, click **Automatically generated**.
IBM Cognos Report Studio generates the projection list using only one of the two queries in the union.

9. To add, delete, move, or rename data items in the projection list, click **Manual** and make the changes.
10. Double-click the union query.
11. From the **Source** tab , drag data items to the **Data Items** pane.






Results








The union query is complete. You can now link the union query to a data container in the layout.


Example - Create a Two-column List Report for Three Data Items

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a list report that shows revenue for all product lines and order methods. However, you want the product lines and order methods to appear in a single column. To create this report, you use a union query to join the Product line and Order method data items.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Blank**.
4. Pause the pointer over the query explorer button  and click **Queries**.
5. From the **Toolbox** tab , do the following:
 - Drag **Query** to the work area.
 - Drag **Union** to the right of the query.
Two drop zones appear to the right of the operator.
 - Drag a **Query** object to each drop zone.
Query2 and **Query3** are created in the work area, and a shortcut to each query appears in the drop zones.
6. Double-click **Query2**.
7. From the **Source** tab , open **Sales and Marketing (query)**, then open **Sales (query)**. Then drag the following data items to the **Data Items** pane:
 - from the **Products** folder, drag **Product line**
 - from the **Sales fact** folder, drag **Revenue**
8. From the **Toolbox** tab , drag **Data Item** to the **Data Items** pane.
The data item will be used to sort product lines and order methods in the report.
9. In the **Expression Definition** box, type 'A' and click **OK**.
10. In the **Properties** pane, set the **Name** property to **Sort key**
11. On the toolbar, press the back button  to return to the Queries work area.
12. Double-click **Query3**.

13. From the **Source** tab , drag the following data items to the **Data Items** pane:
 - from the **Order method** folder, drag **Order method type**
 - from the **Sales fact** folder, drag **Revenue**
14. Repeat steps 8 to 10 to create a Sort key data item in Query3 with 'B' as its definition.
15. On the toolbar, press the back button  to return to the Queries work area.
16. Click the **Union** operator.
17. Double-click the **Projection List** property.
The **Product line** item in the projection list contains both product lines and order methods.
18. Click **Manual**.
19. Click **Product line**, and then click the edit button .
20. In the **Edit** box, type the following after **Product line**:
& Order method
21. Click **OK** twice.
22. Double-click **Query1**.
23. From the **Source** tab , drag the following data items to the **Data Items** pane:
 - **Product line & Order method**
 - **Revenue**
 - **Sort key**
24. Select the **Sort key** data item and, in the **Properties** pane, set the **Pre-Sort** property to **Sort ascending**.
When you run the report, all product lines will appear first followed by all order methods.
25. Pause the pointer over the page explorer button  and click **Page1**.
26. From the **Toolbox** tab , drag **List** to the work area.
27. Click the list.
28. Click the select ancestor button  in the title bar of the **Properties** pane and click **List**.

Tip: You can also click the container selector (three orange dots) of the list to select it.
29. In the **Properties** pane, set the **Query** property to **Query1**.
The list is linked to the union query.
30. Double-click the **Properties** property.
31. Select the **Sort key** check box and click **OK**.
Since the Sort key data item does not appear in the list, you must make it a property of the list before it can sort product lines and order methods.
32. From the **Data Items** tab , drag the following items from Query1 to the list:

- **Product line & Order method**
- **Revenue**

33. Run the report.

Results

A list report with two columns is produced. All product lines and order methods appear in the first column.




Product line & Order method	Revenue
Camping Equipment	1,589,036,664.03
Golf Equipment	726,411,367.89
Mountaineering Equipment	409,660,132.9
Outdoor Protection	75,994,296.25
Personal Accessories	1,885,673,307.78
E-mail	179,843,044.16
Fax	70,073,542.01
Mail	46,091,338.97
Sales visit	310,194,834
Special	27,351,320.25
Telephone	340,985,781.06
Web	3,712,235,908.4

Create a Join Relationship

You can create a join relationship to join two queries.


In general, join relationships should be created in the IBM Cognos Framework Manager model. Create a join relationship in IBM Cognos Report Studio if what you are trying to do cannot be modeled in Framework Manager.

Procedure

1. Pause the pointer over the query explorer button  and click **Queries**.
2. From the **Toolbox** tab , do the following:
 - Drag **Query** to the work area.
 - Drag **Join** to the right of the query.
Two drop zones appear to the right of the operator.
 - Drag a **Query** object to each drop zone.
Two queries are created in the work area, and a shortcut to each query appears in the drop zones.
3. Double-click each query that makes up the join query and add data items to the query.
4. On the toolbar, press the back button  to return to the Queries work area.
5. Click **Join**.

6. In the **Properties** pane, double-click the **Join Relationships** property.
7. Click **New Link**.
8. To create the link, click a data item in the left query, and then click a data item in the right query.
9. For each query, click **Cardinality** and click a cardinality option.
10. Click **Operator** and click an operator.
11. To convert the join relationship to an expression, click **Convert to expression**. Convert the join relationship to an expression to make changes to the join definition.

Note: After you convert the relationship to an expression, you cannot change it back to a relationship.

12. Double-click the join query.
13. From the **Source** tab , drag data items to the **Data Items** pane.



Results

The join query is complete. You can now link the join query to a data container in the layout.

Reference a Package Item in a Child Query

When you create a child query in IBM Cognos Report Studio, you can only reference items from its parent or from other queries. For example, if you add a filter to a child query, the only items that you can insert into the expression are items that exist in other queries defined in the report. To add an item from the package, you must unlink the child query from its parent.

Procedure

1. Pause the pointer over the query explorer button  and click **Queries**.
2. Unlink the child query from its parent by selecting the parent query shortcut to the right of the child query and clicking the delete button .
3. Double-click the child query.

Package items are now available on the **Source** tab .

4. Add package items.
For example, to create a detail filter that references a package item, drag the filter object from the **Toolbox** tab to the **Detail Filters** pane, and then add the items in the **Expression Definition** box.
5. Click the up arrow button in the toolbar to return to the queries work area.
6. Recreate the link between the child query and the parent query by dragging the parent query to the right of the child query.
7. If necessary, double-click the child query to complete it.
For example, if you created a filter, you may need to complete the filter expression.

Create a Master Detail Relationship

Create a master detail relationship to deliver information that would otherwise require two or more reports. For example, you can combine a list with a chart. The list can contain product lines and the chart can show details for each product line.

Master detail relationships must appear in nested frames to produce the correct results. You can create a master detail relationship in two ways:

- Use a parent frame for the master query and a nested frame for the detail query.
- Associate a report page with the master query and use a data container, such as a list or crosstab, for the detail query.

You cannot display parent data in the child frame or child data in the parent frame. Also, you cannot perform calculations across master detail queries.




You can use a master detail relationship to show data from separate data sources in a single report. However, the data sources must be contained in the same package.


If you are working with an SAP BW data source, you cannot use a data item from the master query that contains non-ASCII values.

Before you begin

To create a master detail relationship using queries that reference two different dimensional data sources, you must first link the members by aliasing the levels that contain the members.

Procedure

1. To use a parent frame for the master query and a nested frame for the detail query:
 - From the **Toolbox** tab , drag a **List**, **Repeater Table**, or **Repeater** to the report.
 - Add a second data container to the object you inserted.
You can insert a list, crosstab, chart, repeater table, or repeater into a list.
You can add a list to a repeater table or repeater.
 - Add data items to both data containers.
2. To associate a report page with the master query and use a data container for the detail query:
 - Click anywhere in the report page.
 - In the **Properties** pane, click the select ancestor button  and click **Page**.
 - Set the **Query** property.
 - From the **Toolbox** tab, drag a data container to the report.
3. To link a data item in the master query to a parameter in the detail query instead of to another data item, create the parameter in the detail query.
Use parameters to filter values at a lower level in the detail query.
 - Pause the pointer over the query explorer button  and click the detail query.
 - From the **Toolbox** tab, drag the **Filter** object to the **Detail Filters** box.
 - In the **Expression Definition** box, create the parameter.

4. Pause the pointer over the page explorer button  and click the report page.
5. Click anywhere in the report page.
6. In the **Properties** pane, click the select ancestor button and click **Page**.
7. Click the data container containing the details.
8. From the **Data** menu, click **Master Detail Relationships**.
9. Click **New Link**.
10. In the **Master** box, click the data item that will provide the primary information.
11. To link the master query to a data item, in the **Detail** box, click the data item that will provide the detailed information.
12. To link the master query to a parameter, in the **Parameters** box, click the parameter that will provide the detailed information.

Tip: To delete a link, select the link and press the Delete key.

13. If your detail query object is a chart, you can disconnect a chart title from the master query.
 - Click the chart title, and then, from the **Data** menu, click **Master Detail Relationships**.
 - Clear the **Use the master detail relationships from the chart** check box.
14. If your master detail relationship includes a chart as the detail and you are using automatic axis ranges, you can set the same axis range for all the detail charts:
 - Select the axis.
 - In the **Properties** pane, under **General**, double-click the **Axis Range** property.
 - Under **Maximum** and **Minimum**, click **Automatic**.

The master detail report option is only available with automatic axis ranges.

 - Under **Master detail reports**, select the **Same range for all instances of chart** check box.

For more information about axis ranges, see “Change the Axis Scale of a Current Default Chart” on page 120.

Tip: To avoid seeing the same data item twice in the report, click the data item in the data container driven by the detail query and click the cut button. This removes the item from the report display but keeps it in the query.

Master Detail or Burst Reports with Charts or Crosstabs May Result in Denial of Service

When running a master detail or burst report that includes a chart or crosstab, disk space exhaustion may cause the report or other requests to fail. A large set of burst keys or master rows may produce one or more charts per detail, resulting in many master detail executions. This may cause the temp folder to accumulate many gigabytes of temporary files containing data required for successful chart rendering.

To avoid this issue, we recommend that you test large master detail or burst reports that include charts or crosstabs to determine the potential peak disk requirements for the report.

Working with Queries in SQL

For each query in a report, you can work with the SQL that is executed when you run a report.

You can

- view the SQL for an entire report or a query
- build a report using your own SQL
- convert a report to use SQL directly
- edit the SQL

When working with a relational data source, the SQL that is produced by IBM Cognos Report Studio depends on the report output selected.

Note: MDX is not available with relational or DMR data sources.

View the SQL for an Entire Report or a Query


View the SQL to see what is passed to the database when you run a report.

Procedure

1. To view the SQL for the entire report, from the **Tools** menu, click **Show Generated SQL/MDX**.

This option shows the SQL that will be executed in the data source. The SQL is organized by query and by query result. If a query is used in more than one data container, a query result is generated for each data container.

2. To view the SQL for a specific query, do the following:

- Pause the pointer over the query explorer button  and click the query.
- In the **Properties** pane, double-click the **Generated SQL/MDX** property.

The **Generated SQL/MDX** property shows the SQL that is executed when you view tabular data (from the **Run** menu, click **View Tabular Data**). Tabular data shows the data that is produced by the query in the form of a list. You can use this property to help you build advanced queries.

Results

The SQL for the query appears in the **Generated SQL/MDX** dialog box. You can choose to view native SQL, which is the SQL that is passed to the database when you execute the query, or Cognos SQL, which is a generic form of SQL that IBM Cognos Report Studio uses. Cognos SQL is converted to native SQL before the query is executed.

Related tasks:

“Showing prompt values in generated SQL or MDX” on page 326



You can show prompt values when viewing the generated SQL or MDX of a query or report.

Build a Report Using Your Own SQL

You can build a report by adding SQL from an external source, such as another report.

If you edit the SQL of a query, you must change the **Processing** property for that query to **Limited Local**.



Procedure

1. From the **File** menu, click **New**.
2. Click **Blank**.
3. Pause the pointer over the query explorer button  and click **Queries**.
4. From the **Toolbox** tab , drag **Query** to the work area.
5. From the **Toolbox** tab, to build an SQL query, drag **SQL** to the right of the query


Tip: You can drag **SQL** anywhere in the work area, and IBM Cognos Report Studio will automatically create a query.

6. In the **Properties** pane, double-click the **Data Source** property and click a data source.
7. If required, set the **Catalog** property to the name of the catalog.
8. Double-click the **SQL** property and type the SQL.
9. Click **Validate** to check for errors.
10. In the **Properties** pane, set the **Processing** property to **Limited Local**.
11. Double-click the query.

If the SQL is valid, the data items defined in the SQL appear in the **Data Items** pane.

12. Pause the pointer over the page explorer button  and click a report page.
13. From the **Toolbox** tab, drag an object to the work area.
For example, drag a list, crosstab, chart, or repeater.
14. Click the data container.
15. In the **Properties** pane, click the select ancestor button  and click the container you just created.
For example, if you created a list, click **List**.

Tip: You can also click the container selector (three orange dots) of the container to select it.


16. Set the **Query** property to the query for the report type.
17. From the **Data Items** tab , drag the items from the query you chose in the previous step to the data container.

Convert a Query to SQL

You can convert a query to SQL to edit it. You may want to do this to improve performance or to use SQL features that are not supported directly by IBM Cognos Report Studio.

Converting a query to SQL is an irreversible process.

Procedure


1. Pause the pointer over the query explorer button  and click the query.
2. In the **Properties** pane, double-click the **Generated SQL** property.
3. Click **Convert**.
4. Click **Validate** to check for errors.

5. In the **Properties** pane, set the **Processing** property to **Limited Local**.

Edit the SQL

You can edit the SQL for a query that has been created as an SQL query or that has been converted to SQL.

Procedure

1. Pause the pointer over the query explorer button  and click the SQL item under the query.
2. Double-click the SQL item.
3. Make changes in the text box.
4. Click **Validate** to check for errors.

First-Rows Optimization

The SQL produced by IBM Cognos Report Studio depends on the report format you choose. For example, if you specify HTML format, first-rows optimization is requested. All-rows is requested if you specify PDF.

It is important for database administrators and programmers to remember that Report Studio does not always use first-rows optimization. If you assume first-rows optimization is always requested, this can cause the RDBMS optimizer to process the query differently than you expect.

Using Relational Calculations

Insert a calculation to make your report more meaningful by deriving additional information from the data source. For example, you create an invoice report, and you want to see the total sale amount for each product ordered. Create a calculated column that multiplies the product price by the quantity ordered.

You build calculations in the expression editor using functions.

If a calculation is used in multiple reports, or by different report authors, ask your modeler to create the calculation as a standalone object in the model and include it in the relevant package.

You can add calculations to lists, crosstabs, and all other data containers. You can also add calculations directly to a page header, body, or footer. However, you must first associate a query to the page. For more information, see “Add a Page to a Report” on page 437

Units of Measure

When creating calculations in IBM Cognos Report Studio and IBM Cognos Query Studio, you may encounter problems with the units of measure. For example, the calculation Cost*Cost returns the unit of measure * instead of a currency unit of measure. To avoid this problem, change the format of the corresponding column to obtain the desired unit of measure.

Calculation Solve Order

When calculations in the rows and columns of a report intersect, calculations are performed in the following order: addition or subtraction, multiplication or division, aggregation (rollup), and then the remaining arithmetic functions.

The remaining functions are as follows:

- absolute, round, round down, average, minimum, maximum, medium, count
- percentage, % difference (growth) or % of total
- rank, quartile, quantile, or percentile

If both calculations have the same precedence, for example, if they are both business functions, then the row calculation takes precedence.


Limitations of Calculations

You should use only the expressions and functions available in Report Studio, and follow their syntax.

Minimal checking exists for calculations. If your calculation uses an invalid expression, your report results may contain unexpected values.

In addition, you should define member summaries as follows:

summary_function (*currentMeasure* within set *set_reference*)

where *set_reference* is a level or set inserted from the **Source** tab .

Unless otherwise required, *summary_function* should be the aggregate function. If you use an explicit summary function, you may encounter problems with measures and scenario or account dimension members (such as profit margin, distinct count, and so on) that have complex rollup rules, or members that do not roll up.

Know your data, and confirm with the owner of the cube where overriding the automatic aggregation is safe.

Because of the above limitations, summaries of calculations may not provide reliable values. For convenience, you may have to build reports where row summaries and calculated member columns intersect. In such reports, these intersections may contain unexpected values. In contrast, row calculations intersecting with column aggregates using the aggregate function are safe because the calculation is performed on the reliably summarized values.

Create a Simple Calculation


You can select items in your report and create simple calculations.

In addition to simple arithmetic calculations, you can perform the following calculations:

Calculation	Description
Rollup	Summarizes, or rolls up, all the values in a hierarchy.
%	Calculates the value of a selected item as a percentage of another item.

Calculation	Description
% Growth	Calculates the difference between two items as a percentage.
% Of Base	<p>This calculation is only available if you select two members from different hierarchies, each from a different edge.</p> <p>This calculation takes the first selected member from edge A and the second selected member from edge B. The calculation result of a percent of base should be such that all the values for member A will compare itself to the intersect value of member A and B.</p>
Custom	Allows you to specify your own value when performing a simple arithmetic calculation. Also allows you to change the order of operands or type a custom name for the new calculated row or column.

Procedure

1. Select the items in your report to calculate.
2. Click the insert calculation button  and select the calculation to perform.

Tip: Calculations that are not applicable to the items you selected are greyed out.

3. To change the order of the operands, the name of the calculated item added to the report, or to create a custom calculation, click **Custom**.

Results

The calculation appears as a new row or column in your report.

Insert a Query Calculation

Insert a query calculation into your report to add a new row or column with values that are based on a calculation.

For example, you create a query calculation named Euros that converts dollars to euros by multiplying an existing dollar measure by a conversion rate. Euros can then be displayed to end users in a separate row or column.

Note: When creating an expression that will be used in a double-byte environment, such as Japanese, the only special characters that will work are ASCII-7 and ~ -- | | - \$ ¢ £ ¨.

Not all data sources support functions the same way. The data modeler can set a quality of service indicator on functions to give a visual clue about the behavior of the functions. Report authors can use the quality of service indicators to determine which functions to use in a report. The quality of service indicators are:

- not available (X)

The function is not available for any data source in the package.

- limited availability (!!)

The function is not available for some data sources in the package.

- limited support (!)

The function is available for all data sources in the package but is not naturally supported for that data source. IBM Cognos Business Intelligence uses a local approximation for that function. Because an approximation is used, performance can be poor and the results may not be what you expect.

- unconstrained (check mark)

The function is available for all data sources.

When inserting literal strings in an expression, you must enclose the string in single quotation marks. If the string contains a quotation mark, it must be escaped. For example, if you want to insert the string ab'c, you must type 'ab"c'.







Procedure

1. From the **Toolbox** tab , drag **Query Calculation** to the report.

2. Type a meaningful name for your expression in the **Name** box.

For example, if you are calculating the difference between 2012 revenue and 2011 revenue, you could name your expression **2012 - 2011 Revenue**.



3. In the **Available Components** pane, define the calculation:

- To add data items that are not shown in the report, on the source tab , double-click the data items.
- To add data items that are in the report but not necessarily in the model, such as calculations, on the data items tab , double-click the data items.
- To add data items from a specific query, on the queries tab , double-click data items.
- To add functions, summaries, and operators, on the functions tab , double-click elements.
- To add a value that is derived from a parameter, on the parameters tab , double-click a parameter.
Parameters define prompts, drill-through reports, and master detail relationships.
- To add a macro, on the macros tab , double-click the parameter maps, session parameters, or macro functions you want to add to the macro expression.

Tip: Use **Insert macro block** to get you started with creating the macro expression. **Insert macro block** inserts number signs in the expression. Make sure that the macro expression you create is between the number signs.

Tips:

- You can also type the calculation directly in the **Expression Definition** box.
- When typing date values, ensure that the date format is correct for your database type.

- To copy and paste expression components in the **Expression Definition** pane, you can use the copy button  and the paste button .

For information about specific functions, see Appendix F, “Using the expression editor,” on page 555.

4. Click the validate button .

Any validation errors appear on the **Errors** tab of the **Information** pane.

Related concepts:

Chapter 17, “Using Query Macros,” on page 403






A macro is a fragment of code that you can insert in the Select statement of a query or in an expression. For example, add a macro to insert a new data item containing the user's name.

Create a Layout Calculation

Create a layout calculation to add run-time information to your report, such as current date, current time, and user name.

When creating layout calculations, only report functions are available to you in the expression editor. These functions are executed in the report layout, as opposed to the other functions which are executed in the query.

Procedure

1. From the **Toolbox** tab , drag **Layout Calculation** to the report.
2. In the **Available Components** box, define the calculation:
 - To add data items that are not shown in the report, on the source tab , double-click data items.
 - To add data items from a specific query, on the queries tab , double-click data items.
 - To add functions, summaries, and operators, on the functions tab , double-click elements.
 - To add a value that is derived from a parameter, on the parameters tab , double-click a parameter.
Parameters define prompts, drill-through reports, and master detail relationships.

Tip: You can also type the expression directly in the **Expression Definition** box.

For more information about creating expressions, see Appendix F, “Using the expression editor,” on page 555.

3. Click the validate button .



Chapter 10. Dimensional Reporting Style

The dimensional reporting style is recommended for dimensionally-modeled relational (DMR) and Online Analytical Processing (OLAP) data sources. Dimensional data is best represented by crosstabs, maps, and charts. This data is shown in IBM Cognos Report Studio in dimensions, hierarchies, levels, and members.


In dimensional reporting, you summarize data by using member summaries and within set aggregation. You focus data in dimensional reporting by adding only the relevant members to the edge of a crosstab or to the context filter. You can also enable drilling up and drilling down in dimensional reports.


IBM Cognos Analysis Studio and IBM Cognos Workspace Advanced are also available to work with dimensional data.

Add Dimensional Data to a Report

For dimensional and mixed model data sources, you can view the full data tree by clicking the view package tree button  in the **Source** tab. You can switch to the dimensional-only data tree by clicking the view members tree button .

Note: We recommend using dimensional data in the dimensional reporting style. However, if you are using relational data, see “Add Relational Data to a Report” on page 213.

If you are working with a dimensional data source, data items are organized hierarchically. Dimensional data sources include OLAP and dimensionally-modeled relational (DMR) data sources. The **Source** tab  shows a metadata-based view of the data.

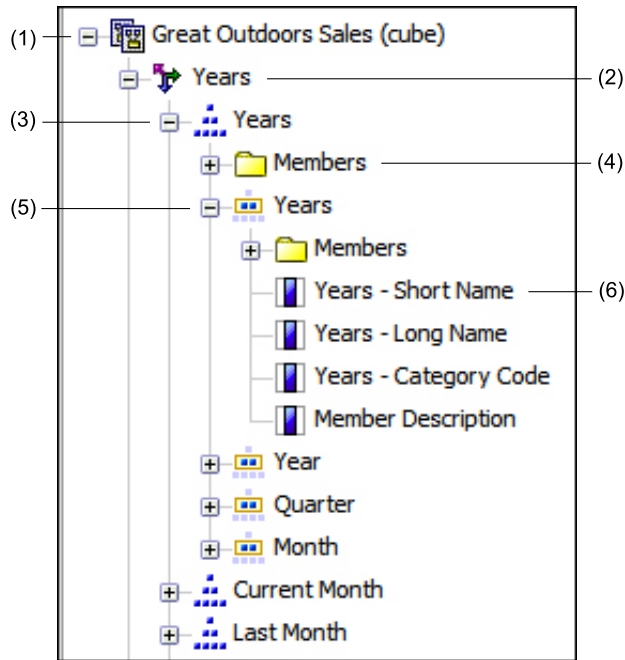

Note: The names of levels and members in a dimension come from the model. It is the responsibility of the modeler to provide meaningful names.

1. Package

Packages are subsets of a model containing items that you can insert in a report.

2. Dimension

Dimensions are broad groupings of descriptive data about a major aspect of a business, such as products, dates, or markets.

3. Level hierarchy

Level hierarchies are more specific groupings within a dimension. For example, for the **Years** dimension, data can be organized into smaller groups, such as **Years**, **Current Month**, and **Last Month**.

4. Members folder

Members folders contain the available members for a hierarchy or level. For example, the **Members** folder for the **Years** level hierarchy contains everything found in the **Year**, **Quarter**, and **Month** levels.

5. Level

Levels are positions within the dimensional hierarchy that contain information at the same order of detail and have attributes in common. Multiple levels can exist within a level hierarchy, beginning with a root level. For example, the **Years** level hierarchy has the following related levels.

Level	Level name	Description
Root	Years	The root level.
First	Year	Years in the Years root level. For example, 2013, 2012, and 2011.
Second	Quarter	Quarters for each year in the Year level. For example, 2013 Q1, 2013 Q2, and 2013 Q3.

Level	Level name	Description
Third	Month	Months for each quarter in the Quarter level. For example, Jan., Feb., and Mar.

Tip: The **Measures** dimension contains the measures available in the data source.

6. Member property

Member properties are attributes that each member possesses. For example, gender could be a property for all employee members. For more information about member properties, see “Insert a Member Property” on page 258.

Related concepts:

“Limited Support for Relational Functions When Used with OLAP Data Sources” on page 533




When working with an OLAP data source, we recommend that you not use relational functions, such as `substring` and concatenation functions, in a report that also contains a measure with the **Aggregate Function** property set to **Calculated** or **Automatic** in the model. If you do so, you may encounter unexpected results. For example, some summaries are calculated using the **Minimum** function instead of the aggregate function derived from the individual query items.

Customize the Source Tree

When using dimensional data, you can customize how you see data in the source tree. You can select a full package tree view that shows dimensions, hierarchies, levels, an optional members folder, and member properties.

Or you can select a members-only tree view, such as the one in IBM Cognos Analysis Studio. This view allows you to add only members in your report.

Procedure

1. Click the **Source** tab .
2. To view the members-only tree view, click the view members tree button .
3. To view the full package tree, click the view package tree button .
4. To change what is included in the tree, right-click and click **Package Tree Settings**.

Use the **Preview** pane to choose the appropriate settings.

Insert a Member




By default, when you insert members from the source tree into your report with IBM Cognos Report Studio, single members are inserted without any details or children. You can change how members are inserted. For example, you may want to insert a member along with all its children or insert only the member's children. Or you may want to insert members as a set.

When you double-click a member that you have already inserted in your report, by default, its children are inserted after the parent member. You can control whether the children are inserted before or after, nested, or not inserted at all: from the **Tools** menu, click **Options**, and then choose a setting on the **Edit** tab.

When inserting members into a crosstab, ensure that you insert members from the same hierarchy on only one of the crosstab edges. If you insert members from the same hierarchy on both edges of the crosstab, you may encounter unexpected results. For example, a report that uses members from years in the rows and Quarters in the columns is very difficult to read because the useful numbers are distributed over a large area of mostly blank cells.

Calculated members from the data source also appear in the source tree. However, calculated members in Microsoft SQL Server Analysis Services (SSAS) cubes do not appear in the list of descendants in the query. If you want these calculated members to appear in a report or a prompt, you must insert them explicitly.

Procedure




1. From the **Source** tab , click the insert single member button  and select how to insert members.
2. If you want to insert members within a set instead of inserting individual members, click the create sets for members button .
3. Do one of the following:
 - To insert a member above or below another member, drag the new member above or below a cell.
A flashing black bar appears where you can drop the new member.
 - To replace a member, drag the new member to the cell with the member to replace.
A flashing black box appears where you can drop the new member.

Search for a Member

You can perform a member search to quickly find data.

You can control the number of members that are returned in a search by specifying a value for the **Member display count limit (in source tree)** option (**Tools, Options, Advanced** tab).

Procedure

1. From the **Source** tab , select and then right-click a hierarchy  or level  and click **Search**.
2. In the **Words** box, type the words or characters for which to search.
3. Click the search parameter to use.
4. To search all descendants instead of just the immediate children, select the **Search all descendants** check box.
For example, when performing a search in a hierarchy, selecting this check box returns members found in all the levels of the hierarchy.
5. Click **Search**.

Results

The search results appear in a hierarchical structure on the **Search** tab . You can browse the hierarchy to explore members at lower levels.

Tip: You can insert members directly from the **Search** tab into a report. This can save you time, because you do not have to define a filter. For example, instead of inserting **Product line** from the **Source** tab and adding a filter for **Camping Equipment**, you can insert **Camping Equipment** from the **Search** tab.

Nest Members

When you insert members in your report, you may want to nest them in another row or column to make your report easier to use. You can nest members from different dimensions. You can also nest sets.


For example, in the following report, the quarters (Q1 to Q4) were selected from the Time dimension and nested only for the GO Americas member, which is from a different dimension.

Amount (year to date)		<#2010#>
<#GO Americas#>	<#Q1 2010#>	<#1234#>
	<#Q2 2010#>	<#1234#>
	<#Q3 2010#>	<#1234#>
	<#Q4 2010#>	<#1234#>
<#GO Consolidated corporate#>		<#1234#>
<#GO Consolidated eliminations#>		<#1234#>
<#GO CONSOLIDATED#>		<#1234#>
<#GO Asia Pacific#>		<#1234#>

Figure 40. Crosstab showing the year to date amount for all four quarters nested beside GO Americas

When you filter out children from nested sets, the parent set still appears in your report. To avoid this, filter only the top level set and nest only the complete set of descendants at the desired levels.

Procedure

From the **Source** tab , drag the members to the work area. A flashing black bar indicates where you can drop an item.

Insert a Hierarchy



You can quickly insert entire hierarchies in a report.

When using an IBM Cognos PowerCube, a SSAS cube, or a dimensionally-modeled relational data source, you can insert multiple hierarchies from the same dimension in a crosstab. For example, you can place one hierarchy from a dimension on an edge of the crosstab and nest another hierarchy from the same dimension on the same edge, on another edge, or in the **Context filter** area.

You can also perform arithmetic, percentage, and ranking calculations using multiple hierarchies.

Summary or analytic calculations that refer to different hierarchies from the same dimension, such as total, count, average, minimum, and maximum, are not supported. These calculations cause an OP-ERR-0250 error.



Procedure

1. From the **Source** tab , drag the hierarchy  to the report.
2. In the **Insert Hierarchy** dialog box, choose which members to insert:
 - To insert only the root members of the hierarchy, click **Root members**.
 - To insert all members of the hierarchy, click **All members**.

Tip: The default **Level Indentation** property for all members is to show the hierarchical structure when the report is run.



Insert a Member Property

You can insert member properties, which are attributes of a member, in your report. Member properties provides additional information about the member. For example, an employee level may have a property named gender.

In the data tree of the **Source** tab , member properties are identified by the icon .

You can only insert properties. You cannot group them.

Procedure

From the **Source** tab , drag the member property  to the report.



Create a Set of Members

Use sets to group members that are logically related for various actions, such as formatting, nesting, and sorting. Creating sets is also useful when members may be dynamic over time. For example, the child accounts of a total assets account may change from year to year. By creating a set, you do not have to modify the report each time accounts are added or removed.

After you create a set of members, you can add or remove members within the set.

You can perform operations on the set such as excluding specific members, moving members within the set, showing only the top or bottom members, filtering the set, and expanding or collapsing the members within a set. You can view the set definition to see and edit operations that are performed on the set.

Procedure

1. From the **Source** tab , click the create sets for members button  to toggle between adding individual members and creating sets for members.
2. From the **Source** tab, select the items to include in the set and drag them to the work area.
3. To add or remove members from the set, right-click the set and click **Edit Members**.

Tip: you can also select the set and, in the **Properties** pane, double-click the **Members** property.

Sharing sets between reports

When you are working with dimensional data, you can share a set to make it available for inclusion in multiple reports.




You must first create a set in a source crosstab report, create a shared set definition, then refer to it in a target report.

A shared set definition is copied from one report to another. As a result, the set definition must not depend on any context from the source report. For example, it must meet the following criteria:

- It cannot reference other shared sets.
- It cannot reference other data items.
- It cannot contain calculated members.

You cannot change the definition of a shared set from within the target report. However, you can carry out other set operations on it, such as excluding a member or creating a top 10 list.

Procedure

1. In the source crosstab report, create a set that you want to share.
2. Select the set. In the Properties pane, in the **Sharing** property, enter a name and description for the set.
3. Save the report.
4. In the **Source** tab , right-click the model. Click **Add Shared Set Report**.
5. In the **Open** box, select the source report that contains the shared set definition. If it does not exist, a new folder that is called **Shared Sets** is created. It is displayed at the bottom of the source tree.
6. Optional: To add or delete other reports in the **Shared Sets** folder, right-click it and click **Add Report** or **Delete Report**.
7. Create or open a crosstab target report that you want to refer to the shared set definition.
8. In the **Source** tab , open the **Shared Sets** folder. Open the source report that contains the shared set definition that you want to use.
9. Add the shared set definition into your target report.
10. Right-click the shared set in the target report and click **Edit Set**.
11. In the **Set Definition** box, select the shared set.
12. Click **Edit** . The Set Reference Properties window opens.
13. Set the **Inclusion** property.
 - a. Select **Run time** to retrieve the latest shared set definition every time that the report runs.
 - b. Select **Design time** to store the shared set definition in the target report. This definition is used until you refresh it.
14. Click **OK**, then save the report.

Managing shared set references



After you share a set to make it available for inclusion in multiple reports, you can manage references to it. You can also copy it locally.

You can manage set references in the following ways:

- Create a copy of a shared set to be used in a report.
Converting a shared set reference into a copy replaces the reference with a set definition that is stored in the report. The report does not reference the shared set from the source report. Any changes that are made to the shared set in the source report are not reflected in the target report. Instead of converting the reference to a copy, you can change the **Inclusion** property of the reference to **Design time**. Design time references use a static stored version of the shared set definition. However, you can later change the **Inclusion** property to be **Run time** to use the latest shared set definition.
- Modify the properties of a set reference in the target report, including its **Inclusion** property. You can also modify a set reference in the target report by changing the set definition it refers to.
- Refresh an existing set reference after a set changed in a source report and you want to use the updated set. To use the updated set if the **Inclusion** property is set to **Design time**, you must refresh its reference.
- Review problems with an existing set reference.

Procedure

1. Open the target report that contains the reference to the shared set that you want to work with.
2. Click **Tools > Manage Shared Set References**.
3. To create a copy of a shared set to be used in a report, do the following steps:
 - a. Select the shared set reference that you want to copy.
 - b. Click **Convert Reference to Copy**. The Confirm Convert window is displayed.
 - c. If you want to convert the set reference into a copy that is stored in this report, click **Yes**. If you do not want to create a copy, click **No**.

Important: If you convert the set reference into a copy, it is not updated when the set in the original report changes.
4. To modify an existing set reference in a target report, do the following steps:
 - a. Select the shared set reference that you want to modify.
 - b. Click **Edit Reference**.
 - c. To modify the set reference properties, select the reference, then click **Edit** . The Set Reference Properties window opens. You can now modify the set reference properties.
 - d. To modify the definition of the set, click **New** . The Set Definition window opens. You can now modify the set definition.
5. To refresh an existing set reference after a set changed in a source report, do the following steps:
 - a. Select the set reference that you want to refresh.
 - b. Click **Refresh Reference**.
6. To review problems with an existing set reference in a target report, do the following steps:
 - a. Select the set reference that is causing the problem.
 - b. Review and act upon the message that is displayed.
7. Save the report.

Edit a Set



After you create a set, you can view its definition to see, change, add, or delete operations, such as the following, that are performed on the set:

- excluding a member
- moving members to the top or bottom of a set
- applying a top or bottom filter
- filtering the set
- expanding or collapsing members in a set

The definition of a set shows you, in the graphical tree, the history of all the operations that are performed on the set.

You can see and change the order in which the operations are performed. For example, you apply a top three filter and then exclude one member. Your set now contains only two members. You can choose to exclude the member before the top three filter so that your set still contains three members.


Procedure

1. Right-click a set and click **Edit Set**.
A graphical tree shows all the operations that are performed on the set of members.
2. To see the details of an operation, hover your mouse over an operation node.
3. To change the order of an operation, click the operation node, and click the right or left arrow.
4. To edit an operation, click the operation node and click the edit button .
5. To add a new operation, click the new button .

Exclude Members from a Set

You can choose to remove individual items that are not needed in your analysis.


Procedure

1. Right-click the set and click **Edit Set**.
2. Click the new button  and click **Exclude**.
3. In the **Exclude** box, choose the members to exclude and use the right arrow to move them to the **Members** pane.

Move Members Within a Set

You can move one or more members to the top or bottom of a set.

Procedure

1. Right-click the set and click **Edit Set**.
2. Click the new button  and click **Move to Top** or **Move to Bottom**.
3. In the **Available members** list, select the member to move to the top or bottom and click the right arrow.

The members appear in the order shown in the **Members** list.

Limit Data to Top or Bottom Values

You want to focus your report on the items of greatest significance to your business question. For example, you want to identify your top 100 customers and what that group of customers is worth.

You can limit the data to the top or bottom values of a set. This keeps the amount of data shown in the work area small, even when using large data sources.


You can define a top or bottom rule by specifying

- a number, such as the 50 top or bottom performing sales people
- a percentage, such as customers who contribute to the top 10% of overall revenue
- a cumulative sum, such as customers who contribute to the first ten million dollars of overall revenue

If the selected set contains a user-defined filter, the top or bottom rule applies only to the included values. For example, if you apply a filter to show only retailers with revenue greater than one million dollars, the bottom rule applies to the lowest values within those results.

You can filter a set of members to show only those at the top or bottom and base the filter on the measure you are using and the set of members on the opposite edge. You can also specify a custom filter.

Procedure

1. Right-click the set and click **Edit Set**.
2. Click the new button  and click **Top** or **Bottom**.
3. Under **Type**, select whether to filter the **Top** or **Bottom** values.
4. To choose how and how much you want to filter, under **Number of items**, click **Count**, **Percent**, or **Sum** and type the number of data items to show, the percent of data items to show, or the value to sum.
5. Choose the intersection on which to base your filter by clicking the ellipsis (...) button and selecting the members and measure for the intersection from either the **Source** tab or the **Calculated Members and Measures** tab.

For more information, see “Create an Intersection (Tuple)” on page 306.

Filter the Members Within a Set





You can remove members from within a set by specifying filter conditions so that only the members that you require remain. You can filter a set based on

- member captions
For example, your set includes employee names and you want to keep only the employees with names that begin with a specific letter.
- properties that are numeric or strings
For example, your set includes employee names and you want to filter employees using the gender property.
- intersection of values (tuple)
For example, you want to keep only the employees who used less than ten sick days for the year 2012.

If you want to create a more complex filter, you can combine multiple conditions using AND, OR, and NOT operators. By default, multiple conditions are combined with an AND operator, which means that all conditions must be met for the filter to take effect.

Filtering the members in a set is not the same as relation detail or summary filters.


Procedure

1. Right-click the set and click **Edit Set**.
2. Click the new button  and click **Set Filter**.
3. Select how you want to filter.
 - If you want to filter the set using a caption, click **Caption**.
 - If you want to filter the set using a member property, click **Property** and select from the drop-down list.
 - If you want to filter the set using an intersection of members, or tuple, click **Intersection (tuple)** and click the ellipsis (...) button. Then, from **Available members and measures**, select the desired items and click the right arrow to move them to the **Intersection members and measures** list.
4. Specify the **Operator** and **Value** to complete your condition and click **OK**.
5. To add additional conditions, click the new button .
6. If you include multiple conditions in your filter, use the AND, OR, and NOT operators to combine them.
 - To add an operator, select the conditions that you want to combine, and click an operator.
 - To change an operator, double-click the operator to toggle among available ones or select the operator and then select a different one from the list.
 - To remove an operator, select it in the condition string, and then click the delete button .
7. To change a condition, click the edit button .

Expand and Collapse a Member Within a Set

You can expand a member to add its child members below it as new rows, and you can collapse expanded members to remove the expanded member's child members.

Procedure

1. Right-click the set and click **Edit Set**.
2. Click the new button  and click **Expand** or **Collapse**.
3. In the **Available members** list, select the member to expand or collapse and click the right arrow to move it to the **Members** list.


Extended Data Items

Extended data items differ from the traditional, expression-based text strings by enabling you to add children, view details, select sets, sort sets, and apply contextual calculations.

Note: Extended data items do not apply to relational packages or non-dimensionally modeled packages.

You can do the following with extended data items that are not available with traditional data items:

- Add an extended data item's child members
You can double-click an extended data item to insert its child members beside it in the report object.
- View an extended data item's details
You can select an extended data item and see where the data item appears in the package in the **Properties** pane under **Data Item**.
- Select member sets
You can select a member in a set to highlight it as the primary selection and the other members as secondary selections.
- Sort sets

You can select an extended data item, click the sort button , and click **Advanced Set Sorting** to sort a set in ascending or descending order, to sort hierarchically, and to sort by caption, by a property, or by an intersection (tuple).

- Apply contextual calculations
You can select an extended data item and then, from the **Data** menu, click **Calculate** to see a contextual list of calculations that are available for this extended data item.

Extended data items are optional. If you use extended data items in a report, we recommend that you use them for the entire report instead of mixing them with expression-based data items. For information about turning on extended data items, see “Specify Report Properties” on page 350.

Note: In IBM Cognos Workspace Advanced, extended data items are always used. Therefore, if you are authoring a report in IBM Cognos Report Studio for report consumers who are working in Cognos Workspace Advanced, you should use extended data items.

Tips for Working with Ragged or Unbalanced Hierarchies

In ragged or unbalanced hierarchies, some members that are not at the lowest level of the hierarchy may have no descendants at one or more lower levels. Support for these hierarchy gaps in relational data sources is limited. More complete support is provided for OLAP data sources, but some reports may still result in unexpected behavior.

For example, the following may occur:

- Groups corresponding to missing members may appear or disappear when grouped list reports are pivoted to a crosstab. This happens with set expressions using the `filter` function, and detail filters on members.
- Ragged and unbalanced sections of the hierarchy are suppressed when set expressions in that hierarchy are used on an edge.
- When a crosstab is sectioned or is split into a master detail report, sections corresponding to missing members become empty.
- Cells that were suppressed may still appear in the report output for reports with ragged or unbalanced hierarchies.

Some of these behaviors may be corrected in a future release, while others may be codified as supported behavior. To avoid these behaviors, do not use levels from ragged or unbalanced hierarchies. Instead of using levels, use the descendants, children, or ancestors.

We consider the following scenarios to be safe:

- One or more nested level references on an edge with no modifying expression.
- A hierarchy reference on only one level of one edge.
- One or more explicit members or sets of explicit members as siblings on only one level of one edge.
- Summaries of the previous three scenarios.

In all cases, you should test reports based on ragged and unbalanced hierarchies to confirm that hierarchy gaps are handled correctly.

For more information about ragged or unbalanced hierarchies, see the IBM Cognos Framework Manager *User Guide*.

Related concepts:

“Creating Sections on Reports That Access SAP BW Data Sources” on page 480
SAP BW data sources may have problems with sections in reports under different circumstances:

Creating dimensional custom groups

Create custom groups to classify existing data items into groups that are meaningful to you.

You can reduce the number of values into smaller, more meaningful groups. For example, you can change a list of employees into my team and others.

When you are working with dimensional data and crosstabs or charts, you can create custom groups only on sets of members. After you create a custom group in a set, the members in the set are replaced by the custom groups.



When you create custom groups in a list, a new column is added to the report, with the name *data_item (Custom)*. You can use this new column to group or sort the report. If you want to show only the new groups, you can delete the original column.


When you are creating custom groups on sets of members, consider the following constraints:

- Members included in a custom group must be from the same level in a hierarchy.
- If you insert a hierarchy that is used in a custom group elsewhere in the data container, it must be inserted as a sibling of the custom group.
- Automatic aggregation on a custom group might not work as expected. For example, you might encounter error cells (- -).

Procedure

1. To add custom groups in a crosstab or chart that includes sets of members, do the following steps:
 - a. Right-click a set and click **Edit Set**.

- b. Click **New**  and select **Custom Grouping**.
 - c. In the Custom Grouping window, click **New Custom Group** .
 - d. Type a New group name.
 - e. Select members from the **Available members** list and move them to the **Members** list.
2. To add custom groups to a list, do the following steps:
 - a. Click the column that you want to group on and from the **Data** menu, select **Calculate > Define Custom Groups**.

Tip: You can click either the column heading or one of the column cells.
 - b. Click **New Group Entry** .
 - c. To group by values that you select, click **New Select Values Group**, type a **New Group Name**, select the required values from the **Values** box, and move the values to the **Selected Values** box.
 - d. To group by a range of values, click **New Range Group**, type a **New Group Name**, and enter the **From** and **To** values.
 3. If you do not want a group name to be displayed for remaining values, select **Do not show remaining values**. Clicking this option produces empty cells for remaining values.
 4. If you want the group name for remaining values to match each value, select **Use each remaining value as a group name**.
 5. If you want to specify your own group name for all remaining values, select **Group remaining values into a single group** and type the name that you want.
 6. If you are adding custom groups in a list, under **New data item name**, select either the default data item name or type a new data item name.

Summarizing Data Dimensionally

Summarize data in your reports to obtain totals, averages, and so on.

The summary options that you can use depend on the type of data source that you are using. If you are querying an OLAP data source, all measure values that appear in reports are pre-summarized because the data source contains rolled up values. The type of summary that is used is specified in the data source itself. As a result, we recommend that you use the Automatic summary when creating dimensional style reports. This ensures that the report always uses the type of summary that the data modeler specified in the data source.

For example, the modeler may have specified that the rollup for revenue is total and the rollup for stock prices is average.

If you use other types of summaries with dimensional style reports, you may encounter unexpected results.

You can also add summaries, which are supported for any data source. Summaries specify how data items are totaled in the headers and footers of a list and in the total rows and columns of a crosstab. For list reports, these summaries only summarize the data that is visible on that page of the report.

Revenue	2010	2011	2012	2013	Total
Camping Equipment	\$332,986,338.06	\$402,757,573.17	\$500,382,422.83	\$352,910,329.97	\$1,589,036,664.03
Personal Accessories	\$391,647,093.61	\$456,323,355.90	\$594,009,408.42	\$443,693,449.85	\$1,885,673,307.78
Outdoor Protection	\$36,165,521.07	\$25,008,574.08	\$10,349,175.84	\$4,471,025.26	\$75,994,296.25
Golf Equipment	\$153,553,850.98	\$168,006,427.07	\$230,110,270.55	\$174,740,819.29	\$726,411,367.89
Mountaineering Equipment		\$107,099,659.94	\$161,039,823.26	\$141,520,649.70	\$409,660,132.90
Total	\$914,352,803.72	\$1,159,195,590.16	\$1,495,891,100.90	\$1,117,336,274.07	\$4,686,775,768.85

Figure 41. Crosstab showing automatic summaries for rows and columns

You can specify summary aggregation in different ways by using any of the following:

- aggregation properties that are specified in the model
- the **Auto Group & Summarize** property
- the summarize button in the toolbar
- aggregation properties for a data item
- the solve order of calculations

Limitation

If a summary is applied to a report that contains binary large object (BLOB) data, such as images or multimedia objects, you cannot also perform grouping or sorting.

The Type of Data

How data is summarized also depends on the type of data that you are summarizing. Summary rules are applied differently to facts, identifiers, and attributes. For example, if you summarize a data item that represents part numbers, the only summary rules that apply are count, count distinct, count non-zero, maximum, and minimum. For information about how to determine the type of data that a data item represents, see “Add Relational Data to a Report” on page 213 and “Add Dimensional Data to a Report” on page 253.

For information about how null or missing values are handled in summaries, see “Null (Missing) Values in Calculations and Summaries” on page 542.

Limitations on Measure Rollups

For all OLAP data sources except IBM Cognos PowerCube and Microsoft SQL Server 2005 Analysis Services (SSAS), aggregation and re-aggregation are supported only for calculations and measures that use the following rollups: Sum (Total), Maximum, Minimum, First, Last, and Count.

All other types of rollup either fail or return error cells, which typically appear as two dash characters (--).

This problem occurs in, but is not limited to, the following:

- footers
- aggregate function
- context filters that select more than one member of a hierarchy that is used elsewhere on the report


Summarizing Sets

When working with Microsoft SQL Server Analysis Services (SSAS) data sources, we recommend that you not summarize values for sets which contain members that are descendants of other members in the same set. If you do so, SSAS double-counts values for automatic summaries and all data sources double-counts values for explicit summaries.

Related concepts:

“Limitations When Summarizing Measures in DMR Data Sources” on page 534
There are limitations when summarizing dimensionally-modeled relational (DMR) measures and semi-additive measures in crosstabs using the aggregation function `count distinct`, `median`, `standard-deviation`, or `variance`. The following limitations can produce empty or error cells when the report is run:

Add a Simple Summary

You can add simple summaries in a report by using the summarize button . This button provides a subset of the summary functions available in IBM Cognos Report Studio.


The summarize button sets the rollup aggregate property for the data item to the selected summary, and places the data item into an appropriate footer. A footer is created for each set, hierarchy, or level.

In crosstabs and charts, the summary appears as a node.

In crosstabs, you can add multiple summaries at the same level. For example, you have a crosstab with Product line as rows, Order year as columns, and Revenue as the measure. For Product line, you can add the **Total** summary as a header, which will total all revenue for each order year. You can then add the **Average** summary as a footer, which will give the average revenue of all product lines for each order year.

For information about adding a rolling or moving average, see “Rolling and Moving Averages” on page 272.

Procedure

1. Click the item to which to add a summary.
2. Click the summarize button  and click a summary type.
3. To change the summary label, do the following:
 - Click the label.
 - In the **Properties** pane, under **Text Source**, set the **Source Type** property to the source type to define the label.
For example, set it as **Data Item Value** to produce a dynamic label for the summary based on data item values.
 - Set the property below **Source Type** to specify the label.
This property depends on the source type you chose. For example, if you chose **Data Item Value** as the source type, set the **Data Item Value** property to the data item to use to define the label.
4. To change a summary, select it and, in the **Properties** pane, under **Data Item**, click **Aggregation Method** and choose a different function.

Summarizing Values in Crosstabs

In crosstabs, summaries are calculated using two summary expressions.

The expressions used to summarize data are:

- aggregate ([*measure* within set [*data item*]) summarizes the member values from the data source within the current content.
- aggregate ([*measure* within detail [*data item*]) summarizes the lowest level of details in the report.

The expression that is used to calculate a summary is controlled by the summary's **Use Set Aggregation** property. For example, in the following crosstab, if you specified **Total** as the summary, the following aggregate expressions are produced when the **Use Set Aggregation** is set to **Yes** and **No** respectively:

		<#Revenue#>
<#Quarter#>	<#Month#>	<#1234#>
	<#Month#>	<#1234#>
<#Total(Quarter)#>		<#1234#>

- Total ([Revenue] within set [Quarter])

This expression totals the quarter values from the data source at the intersecting product line. At the bottom right corner, it totals the aggregate over all product lines for each quarter.

- Total ([Revenue] within detail [Quarter])

This expression totals the month values visible in the report at the intersecting product line. At the bottom right corner, it totals all of the intersecting month - product line values visible in the report.

In simple cases, the members and values visible in the report and the aggregate rules in the report are the same as those in the data source and all of these expressions produce the same results.

For example, for the quarter and month values, if you are totaling the values for all months in all quarters, it makes no difference whether the visible values, the values in the cube, or the month and quarter values are used. The result is the same.

		Revenue
2005 Q 3	2005/Sep	\$5,300,599.08
2005 Q 4	2005/Oct	\$11,778,348.92
	2005/Nov	\$3,353,399.48
	2005/Dec	\$4,645,069.28
2006 Q 1	2006/Jan	\$3,119,227.22
	2006/Feb	\$3,045,478.88
	2006/Mar	\$6,867,919.18
2006 Q 2	2006/Apr	\$8,306,586.26
	2006/May	\$5,129,112.24
	2006/June	\$6,927,447.24
2006 Q 3	2006/Jul	\$5,078,789.96
	2006/Aug	\$5,180,166.38
	2006/Sep	\$4,892,742.38
2006 Q 4	2006/Oct	\$15,887,237.28
	2006/Nov	\$3,609,599.42
	2006/Dec	\$6,240,652.88
Total(Quarter)		\$171,576,387.88

Tip: The Total Revenue by Country or Region sample report in the GO Data Warehouse (query) package includes a totalsummary function. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Different results appear when you start filtering, changing aggregation types, or using set expressions or unions.

For example, the following crosstab shows the quantity of products sold across all product types for each product line. The bottom of the crosstab has two summary values that show the average quantity of products sold by product line.

		Quantity
Camping Equipment	Cooking Gear	13,400,351.00
	Tents	3,164,285.00
	Sleeping Bags	3,153,218.00
	Packs	2,756,540.00
	Lanterns	4,826,755.00
Mountaineering Equipment	Rope	418,560.00
	Safety	1,135,194.00
	Climbing Accessories	5,850,251.00
	Tools	2,496,086.00
Personal Accessories	Watches	4,299,195.00
	Eyewear	20,311,396.00
	Knives	7,229,314.00
	Binoculars	1,075,087.00
	Navigation	1,992,713.00
Outdoor Protection	Insect Repellents	5,800,964.00
	Sunscreen	5,384,127.00
	First Aid	829,354.00
Golf Equipment	Irons	391,445.00
	Woods	317,939.00
	Putters	1,284,570.00
	Golf Accessories	3,119,747.00
Average - within detail		4,249,385.29
Average - within set		17,847,418.20

Each summary value uses a different expression that is set by the value specified for the **Use Set Aggregation** property.

- Average (Product line) - within detail
This summary is the average of the detail values in the crosstab.
- Average (Product line) - within set
This summary is the average of the product type values rolled up into sets at the Product line level. The values are obtained from the data source. If filters or slicers exist, the values are recomputed using the aggregation rules defined in the data source.

In most cases, you should use the within detail expression because the results are easiest to understand and the same as the results for footers in a grouped list report. The within set expression should be reserved for reports with a purely dimensional focus, such as when there are no detail or summary filters defined in the report.

Summarizing Member Sets

When you work with dimensional data sources and you summarize member sets, if an explicit summary function such as **Total** is used and the set contains

duplicates, the result is double-counted. If you are using an OLAP data source, the result produced for the automatic summary function depends on the data source.

For example, the product line rows below were defined using the expression

union ([Product line], [Camping Equipment], ALL)

where [Product line] is the level that contains Camping Equipment.

	Revenue
Camping Equipment	1,589,036,664.03
Mountaineering Equipment	409,660,132.9
Personal Accessories	1,885,673,307.78
Outdoor Protection	75,994,296.25
Golf Equipment	726,411,367.89
Camping Equipment	1,589,036,664.03
Summary	4,686,775,768.85
Total	6,275,812,432.88

Figure 42. Crosstab showing revenue by product line with an aggregate row and a total row

For PowerCubes, Aggregate (Product line) is the sum of the product lines excluding duplicates. For more information about how the aggregate function is processed, see “Summary Functions” on page 273.

Rolling and Moving Averages

Use rolling and moving averages to analyze data for specific time series and to spot trends in that data. When viewing these averages on a line chart, use a longer period of time to reveal long-term trends.

In IBM Cognos Report Studio, to add a rolling or moving average, you must create summary and custom calculations using layout expressions “Insert a Query Calculation” on page 303.

The Rolling and Moving Averages interactive sample report includes rolling and moving calculations. For more information about The Sample Outdoors Company, see Appendix C, “Sample Reports and Packages,” on page 507.

Rolling Average

A rolling average continuously updates the average of a data set to include all the data in the set until that point. For example, the rolling average of return quantities at March 2012 would be calculated by adding the return quantities in January, February, and March, and then dividing that sum by three.

Tip: The Historical Revenue sample report in the Sales and Marketing (Cube) package also includes a rolling average. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Moving Average

A moving average calculates the average of a data set for a specified period. For example, the moving average of return quantities at March 2012 with a specified period of two would be calculated by adding the return quantities in February and March and then dividing that sum by two. In IBM Cognos Report Studio, you can use a prompt to specify the period.


Show Data for Specific Time Periods

Show data for a specific time period to associate a report with a business time period rather than the execution time. For example, you have a monthly report that you run at the beginning of each month, and you want the last business day of the previous month to appear rather than the day on which you run the report.

If the report functions `AsOfDate` and `AsOfTime` are added to the report, they will return a value based on the results of the **As of Time Expression** object. If the **As of Time Expression** object is not added to the report, these two functions return the date and time at which the report is run.

If the **As of Time Expression** object is added more than once in the report, the first occurrence of the object in the layout that returns a valid value is used.

Procedure

1. From the **Toolbox** tab , drag **As of Time Expression** to the report.
2. Double-click **As of Time Expression**.
3. In the **Expression Definition** box, type the expression.
The expression must return a date-time value.

Tip: You can drag a function that returns a constant from the **Constants** folder in the **Functions** tab. You can then change the constant to the value to use.

If you do not specify a time, the default time 12:00:00.000 AM is used.

Summary Functions

This section describes the summary functions that are available in IBM Cognos Report Studio. Some functions, such as **Custom**, are available only when you click

the summarize button  on the toolbar. Additional summary functions are available in the expression editor.

Automatic Summary

Depending on the type of data item, applies the function **None**, **Summarize**, or **Calculated** based on the context in which the data item appears.

Calculated is applied if the underlying data source is OLAP. It is also applied if the data item expression

- contains a summary function
- is an if then else or case expression that contains a reference to at least a modeled measure in its condition
- contains a reference to a model calculation or to a measure that has the **Regular Aggregate** property set to a value other than **Unsupported**

- contains a reference to at least one data item that has the **Rollup Aggregate Function** property set to a value other than **None**

If the underlying data source is relational and if the data item expression contains no summary functions and a reference to at least one fact that has the **Regular Aggregate** property set to a value other than **Unsupported**, **Summarize** is applied.

If the underlying data source is OLAP and if the data item expression contains no summary functions and a reference to at least one fact that has the **Regular Aggregate** property set to a value other than **Unsupported**, **Calculated** is applied.

If the underlying data source is SAP BW, reports containing aggregations and summaries run more efficiently if the aggregation applied to a query item matches the aggregation rule for the underlying key figure on the SAP BW server. In Report Studio, the easiest way to accomplish this is to change the value of the **Aggregate Function** property to **Automatic**.

In all other contexts, **None** is applied.

For relational and dimensionally modeled relational (DMR) data sources, if this function is applied to a data item expression that has the average function, weighted averages are computed based on the lowest level detail values in the data source.

Note: This is the default function.

Average

Adds all existing values and then divides by the count of existing values.

Calculated

Specifies that all the terms within the expression for a data item are aggregated according to their own rollup rules, and then the results of those aggregations are computed within the overall expression.

For example, a list contains the data item Quantity with the **Aggregation** property set to **Total**. You add a query calculation named Quantity Calculated. You define its expression as Quantity + 100 and you set its **Aggregation** property to **Calculated**. When you run the report, the values for Quantity Calculated are computed by first adding all values for Quantity and then adding 100 to each value.

Note: In crosstabs, this function overrides any solve orders that are specified.

Count

Counts all existing values.

If the underlying data source is OLAP, Count behaves as follows if it is specified in the **Rollup Aggregate Function** property for a data item.

Object	Behavior
Level	Count distinct is used. A warning appears when you validate the report.

Object	Behavior
Member set	Count distinct is used. A warning appears when you validate the report.
Attribute	Not supported. An error is returned when you run the report.
Measure	Supported.

If the underlying data source is dimensionally modeled relational (DMR), Count behaves as follows if it is specified in the **Aggregate Function** or **Rollup Aggregate Function** property for a data item.

Object	Behavior
Level	Count distinct is used. A warning appears when you validate the report.
Member set	Count distinct is used. A warning appears when you validate the report.
Attribute	Supported.
Measure	Supported.

If you add the count summary to a non-fact column in a list and then group the column, the column will not be grouped when you run the report. To resolve this issue, group the column first before adding the count summary.

Count Distinct

Returns the total number of unique non-null records.

If the underlying data source is OLAP, count distinct behaves as follows if it is specified in the **Rollup Aggregate Function** property for a data item.

Object	Behavior
Level	Supported.
Member set	Supported.
Attribute	Not supported. An error is returned when you run the report.
Measure	Not supported. An error is returned when you run the report.

If the underlying data source is dimensionally modeled relational (DMR), count distinct is supported for levels, member sets, attributes, and measures when it is specified in the **Aggregate Function** or **Rollup Aggregate Function** property for a data item.

Custom

Summarizes data based on an expression that you define.

Maximum

Selects the largest existing value.

Median

Returns the median value of the selected data item.

Minimum

Selects the smallest existing value.

None

Does not aggregate values.

If the underlying data source is relational, the data item is grouped when the query property **Auto Group & Summarize** is set to **Yes**.

Not Applicable

This function is available only for the **Aggregate Function** property. It specifies that the aggregate attribute is ignored. For example, the calculation will be applied after the data is aggregated.

This function differs from the **Calculated** function, which applies aggregation to the rows and then performs the calculation.

For example, for the average ([Quantity]) + 5 expression, when the **Aggregate Function** property is set to **Not Applicable**, five is added to the average of the single Quantity value. When the function is set to **Calculated**, five is added to the average of a set of numbers.

This setting should not be applied to a simple model reference.

This setting is relevant only for reports that are upgraded from IBM Cognos ReportNet 1.x.

Standard Deviation

Returns the standard deviation of the selected data item.

Note: From a mathematical perspective, this function is not useful for small numbers of items and is not supported if the query property **Auto Group & Summarize** is set to **Yes**.

Summarize

Aggregates data based on model or data type information. This function can be thought of as a calculate and then aggregate rule. Data is aggregated using the following rules:

If the underlying data source type is relational and the data item or calculation is a reference to a single fact query item in the model that has the **Regular Aggregate** property set to **Sum**, **Maximum**, **Minimum**, **Average**, or **Count**, aggregate data using this function. Otherwise, data is aggregated according to the data type of the data item as follows:

- **Total** is applied for numeric and interval values.
- **Maximum** is applied for date, time, and date-time values.

- **Count** is applied for everything else.

The underlying data source type can be dimensional and the data item or calculation a reference to a single item in the model. In this case, if the **Regular Aggregate** property of the model item is not **unknown**, the summary function that corresponds to the **Regular Aggregate** property is applied. If the **Regular Aggregate** property is **unknown**, set the function to **Calculated**.

For example, a list contains the data item Quantity with the **Aggregation** property set to **Average**. You add a query calculation named Quantity Summarize. You define its expression as Quantity + 100 and you set its **Aggregation** property to **Summarize**. When you run the report, the values for Quantity Summarize are computed by first adding 100 to each value for Quantity and then calculating the total. The total is calculated because Quantity contains numeric values and the expression for Quantity Summarize is not a simple data item reference. If Quantity Summarize is defined as Quantity, the function **Average** is applied to each value.

Total

Adds all existing values.

Variance

Returns the variance of the selected data item.

Note: From a mathematical perspective, this function is not useful for small numbers of items and is not supported if the query property **Auto Group & Summarize** is set to **Yes**.

Mapping Summary Functions From Data Sources to Framework Manager and Report Studio

The summary functions available in IBM Cognos Framework Manager and IBM Cognos Report Studio reflect summary functions supported by relational and dimensional data sources. The following table shows how summary functions in data sources are mapped to Framework Manager and Report Studio.

Data source	Framework Manager	Report Studio
None specified, or none	Unsupported	None
average (avg)	Average	Average
count	Count	Count
count distinct	Count Distinct	Count distinct
maximum (max)	Maximum	Maximum
minimum (min)	Minimum	Minimum
median	Median	Median
standard deviation (stddev)	Standard Deviation	Standard Deviation
sum	Sum	Total
variance (var)	Variance	Variance
count non zero	Count Non-Zero	Automatic
average non zero	unknown	Automatic
external	unknown	Automatic
any	unknown	Automatic

Data source	Framework Manager	Report Studio
calculated	unknown	Automatic
unknown	unknown	Automatic
first_period	unknown	Automatic
last_period	unknown	Automatic

The following summary functions exist only in either Framework Manager or Report Studio. There is no corresponding summary function in data sources.

Framework Manager	Report Studio
Automatic	Automatic
Calculated	Calculated
No corresponding summary function	Summarize
No corresponding summary function	Not Applicable

Focusing Dimensional Data

In IBM Cognos Report Studio, there are three approaches to focusing dimensional data in a crosstab:

- drag data items to the edges of your crosstab
- drag data items to the context filter area
- create set expressions on the edges of your crosstab that return members or sets of members, such as the filter function

Note: Summary and detail filters are recommended only for focusing data in relational reporting.

The approach you choose should depend on the capabilities of the data source, the performance requirements, the persistence of the dataset, and how complex you want the report to be.

If you filter values that are floating-point numbers, you may encounter imprecise filtering results due to rounding or data truncation. Floating-point numbers may appear differently in the report than how they are stored in the data source. To ensure accurate results, your filter criteria should account for any rounding issues.

Consider the limitations when filtering dimensional data and when filtering data from SAP BW data sources.

You can also use prompts, or prompt controls, to allow users to provide input for the filter.

Related concepts:

“Limitations When Filtering Dimensional Data Sources” on page 534

Avoid combining context filters (slicers) with dimensional constructs that involve members from hierarchies that are used elsewhere in the report. This combination gives results that are often not what you might expect and that may change in a future release.

Create a Context Filter

When working with dimensional data, you can use context filters, or slicer filters, to quickly focus your report on a particular view of the data.

For example, the following crosstab contains product lines in the rows, years in the columns, and revenue as the measure. We want to filter the values to show us the revenue for only Web orders from Asia Pacific. To change the context, you drag Asia Pacific and Web from the source tree to the **Context filter** section of the overview area. The crosstab then shows the revenue for only Asia Pacific and Web. Changing context changes only the values that appear. It does not limit or change the items in the rows or columns.

Asia Pacific				
Web				
Revenue	2010	2011	2012	2013
Camping Equipment	36,415,479.91	77,222,359.67	121,312,260.99	83,023,522.78
Mountaineering Equipment		18,115,550.83	37,258,799.5	31,810,456.11
Personal Accessories	67,562,845.5	94,998,084.39	136,872,087.64	106,879,947.27
Outdoor Protection	4,135,482.66	4,388,590.73	2,241,092.7	1,107,629.48
Golf Equipment	8,586,746.5	27,061,602.93	49,822,888.09	39,248,971.12

Figure 43. Crosstab showing revenue by product line by year filtered to show only Asia Pacific and web orders


The members that are used as the context filter appear in the report header when you run the report.

Any summary values in the report are recomputed to reflect the results returned by the context filter.

You can create multiple context filters to filter across two or more different hierarchies.

Tip: The Budget vs. Actual sample report in the Sales and Marketing (cube) package includes a context filter. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Note: There are limitations when using context filters:

- Calculated measures do not get suppressed by the filter. To avoid this, drag the desired members from the **Source** tab  directly onto the row or column edge instead of using the members in the context filter.
- Suppression can be slow on large cubes, because all of the data is retrieved and then filtered.

If the desired data in the context filter is from a hierarchy that appears on the crosstab edge, drag the desired members from the **Source** tab directly onto the crosstab edge.

If the desired data is from a hierarchy that does not appear on the crosstab edge, use a context filter in conjunction with other means to limit the data, such as a top or bottom filter.

To use a calculation or expression to define a context filter, create a slicer member set using the query explorer. A slicer member set is an expression that returns a set of members from the same dimension. For example, you can define a slicer member set that filters for the top five products with the greatest revenue.

Context filters are different from other filters. When you filter data, members that do not meet the filter criteria are removed from the report. A context filter does not remove members from a report. Instead, their values are filtered or and you see blank cells.

You can also use context filters as prompts when the report is run.


When creating context filters,

- use only members from hierarchies that are not already projected on an edge of the crosstab
- use only one member per hierarchy

Create a simple context filter

When working with dimensional data, you can use context filters, or slicer filters, to quickly focus your report on a particular view of the data.



Procedure

1. If you do not see the **Context filter** area, show it using the **View** menu (**Panes, Context Area**).
2. From the **Source** tab , select or search for one or more items on which to filter.
3. Drag the item on which to filter into the **Context filter** section of the overview area.
4. To change context, select a new item from the **Context filter** box.

Create an advanced slicer filter

To use a calculation or expression to define a context filter, create a slicer member set using the query explorer. A slicer member set is an expression that returns a set of members from the same dimension. For example, you can define a slicer member set that filters for the top five products with the greatest revenue.

Procedure

1. Pause the pointer over the query explorer button  and click the query to which to add a slicer.
2. On the **Toolbox** tab , drag **Slicer Member Set** to the **Slicer** pane.
3. Drag the members to the **Expression Definition** box.

You must join the members in the expression by using the set function. For example, the following expression contains the Fax and Telephone members from the Order Method dimension:

set ([Fax],[Telephone])

4. To add members from another dimension, repeat step 2 to create a separate slicer member set.

Define a Prompt Using a Context Filter

If context filters (or slicers) are defined, you can use these filters to create prompts in the report.

Prompts provide questions that help users to customize the information in a report to suit their own needs. For example, you create a prompt so that users can select a region. Only data for the specified region is retrieved and shown in the report.

Before you begin

Before you define a prompt, you must create context filters.

Procedure

1. In the **Context filter** section of the overview area, click the down arrow next to the filter to use as a prompt.
2. Click **Prompt** and do one of the following:
 - To remove the prompt, click **No Prompt**.
 - To allow users who run the report to select any member from the hierarchy, click **Prompt on Hierarchy**.
 - To allow users who run the report to select from a list of members in the current level, click **Prompt on Level**.

Sorting Dimensional Data

You can sort items to view them in your preferred order. By default, IBM Cognos Report Studio retrieves items in the order defined in the data source. OLAP data sources always have a defined order. The data modeler defines the sorting options in the model.

For more information about data modeling, see the IBM Cognos Framework Manager *User Guide*.

Tip: The Sales Growth Year Over Year sample report in the GO Data Warehouse (analysis) package includes sorting. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Limitations When Sorting SAP BW Data

If you use a SAP BW data source, each level in a hierarchy has an item with the same name as the level and a role of `_businessKey`. Such items are known as level identifiers. You should use only the level identifier of all the time-related characteristics, such as `0CALDAY` and `0CALMONTH`, for sorting. All other (attribute) items in these hierarchies are formatted string representations of the characteristic values with which they are associated. These formatted values sort alphanumerically and not chronologically.

Tip: By level identifier, we are referring to a query item with the same name as the level that has the role of `_businessKey`. Each level in a SAP BW hierarchy has a level identifier.

Sort Sets by Label


You can sort sets of members based on their label (or caption). By default, when you select **Sort by Label, Ascending** or **Descending**, the members within the set are sorted only by their labels. You can also perform advanced sorting to sort sets using an intersection (tuple) or a member property.

For example, a set contains regions and you sort the regions within the set in descending alphabetical order. Only extended data items that represent sets support set sorting.

Before you can perform set sorting, you must create sets for the members in your report.

You cannot sort data items from different dimensions that are intermixed. For example, if you have years and products on the same edge and at the same level in your crosstab, you can sort the years, and you can sort the product lines, but you cannot sort them as combined set because years and products come from different dimensions.

Procedure

1. In a crosstab, select a set to sort.
2. Click the sort button  and under **Sort by Label**, click **Ascending** or **Descending**.

Tip: To remove a sort order, click **Don't Sort**.

Sort Sets in the Opposite Axis by Value

You can sort members in the sets on the opposite axis based on the value of a member or measure that you select.

For example, a crosstab contains years inserted as individual members in the columns, product lines inserted as a member set in the rows, and revenue as the measure. You select the 2012 column and then select **Sort by Value, Descending**. The values in the 2012 column are sorted.


Revenue	2012	2013
Personal Accessories	594,009,408.42	443,693,449.85
Camping Equipment	500,382,422.83	352,910,329.97
Golf Equipment	230,110,270.55	174,740,819.29
Mountaineering Equipment	161,039,823.26	141,520,649.7
Outdoor Protection	10,349,175.84	4,471,025.26

Figure 44. Crosstab showing revenue by year by product line with the 2012 column sorted in descending order

Before you can perform this sorting, you must create sets for the members in your report.

In nested crosstabs, items are sorted based on the values of the innermost nested row or column of the opposite axis. For example, a crosstab contains years in the columns and retailers nested within product line in the rows. Select 2004, sort in descending order, and you see retailers listed from the largest value to the smallest value for each product line.

Procedure

1. In a crosstab, select a member or measure to sort.
For example, to sort a set in the row axis, select a member or measure in the column axis.
2. Click the sort button  and under **Sort by Value**, click **Ascending** or **Descending**.


Tip: To remove a sort order, click **Don't Sort**.

Perform Advanced Set Sorting

If you use dimensional data, you can sort using the property of a member.

For example, your report includes employee names and you want to sort the employees using the gender property. You can also sort using an intersection of members, also known as a tuple. For example, you want to sort the employees using the value of sick days taken for the year 2012.

Procedure

1. Select a set.
2. Click the sort button  and under **Other Sort Options**, click **Edit Set Sorting**.
3. Specify the sorting options.
4. If you are sorting members from different levels and want to preserve the hierarchy, select the **Hierarchized sorting** check box.
5. To sort items using a member property, under **Sort by**, double-click **Property**, navigate the tree, and select the member property to use.
6. To sort items using an intersection of members, or a tuple, under **Sort by**, click **Intersection (tuple)** and click the ellipsis (...) button. Then, from the **Available members and measures** box, select the items to use and click the right arrow to move them to the **Intersection members and measures** box. You can also select items from the **Calculated Members and Measures** tab.

Working with Dimensional Queries

Queries specify what data appears in the report. In IBM Cognos Report Studio, you create and modify queries using Query Explorer.

Query Explorer provides an alternative way to modify existing reports or to author new reports. You can use Query Explorer to perform complex tasks and other tasks that are more difficult to do in the report layout. For example, use Query Explorer to

- improve performance by changing the order in which items are queried from the database, or by changing query properties to allow the report server to execute queries concurrently where possible

Note: Only queries that are referenced in the report layout can be executed concurrently. If a query is defined in Query Explorer by joining two or more existing queries, IBM Cognos Business Intelligence cannot execute the source queries concurrently. By default, queries run sequentially. Your administrator must enable the concurrent query execution feature. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

- view or add filters and parameters and modify their properties
- view or add dimensions, levels, and facts
- incorporate SQL statements that come from other reports or reports that you write
- create complex queries using set operations and joins

Related concepts:

“Queries” on page 30

Queries determine what data items appear in the report. Sometimes you want detailed rows of data, which you obtain by using a simple SELECT statement. Other times you must calculate totals or averages using summary functions and grouped columns or must apply filters to show only the data you want.

Specify a List of Data Items for an Object

Specify the list of data items for an object when you must reference a data item that is in a query but is not in the layout.

For example, you want to add a layout calculation to a list that uses a data item that is in the query definition. If the data item does not appear in the list, you must reference it in order to make the layout calculation work. You must also specify the list of data items if you apply conditional formatting that uses a data item that is not in the query.

Procedure

1. Click a layout object.

Tip: For a list of layout objects for which you can specify a list of properties, see the **Properties** property in Appendix G, “Report Studio Object and Property Reference,” on page 771.


2. In the **Properties** pane, double-click the **Properties** property and select data items.

Relate a Query to a Layout

Queries and layouts work together. After you decide the type of data that you need, you must create a layout in which to show the results. Each column of data must be both selected for the query and shown in a layout unless there are some columns that you do not want to show. The query and layout portions of a report must be linked to produce a valid report.

IBM Cognos Report Studio automatically links query and layout. For example, when you use Report Studio and the list report layout, query and layout are automatically linked.

Procedure

1. Select a data container.
2. In the **Properties** pane, set the **Query** property to a query.
3. From the **Data Items** tab , drag data items from the query to the data container.

Using Dimensional Data Sources with Queries

When you are working with SAP BW data sources, you can use only a single hierarchy in a query.

Creating queries using a mix of OLAP and relational data is not supported. If you create queries using a database for which you do not know the type, consult your database administrator or modeler.

When performing multi-cube queries using dimensional data sources, the following restrictions apply:

- Only basic operators (+, *, /,-) are available for cross-cube calculations.
- Inner joins are not supported.
- All joins for multi-cube queries are outer joins.
- Viewing MDX using the **Generated SQL/MDX** query property may not show you the actual MDX that is executed. This is because when a multi-cube query is executed, a number of smaller queries are actually executed.

Related concepts:

“Problems with large SAP BW queries” on page 498

When you are working with an SAP BW data source, if your report includes a data set greater than 1,000,000 cells, you might encounter an XQE error.

Connecting Queries Between Different Data Sources

This section lists the data sources between which you can and cannot connect queries.

IBM Cognos Business Intelligence supports the following:

- RDBMS to RDBMS joins
- set operations of any two queries
- master detail relationships between any two queries
- drill from any query to any other query

You cannot create the following types of joins:

- cube-to-cube (homogeneous)
- cube-to-cube (heterogeneous)
- cube-to-RDBMS
- cube-to-SAP BW
- SAP-BW-to-RDBMS

Multiple-fact Queries

You must understand the result of a query on more than one fact table to achieve the results that you want. The result of a multiple-fact query varies depending on whether you are working with conformed or non-conformed dimensions, on the level of granularity, and on the additive nature of the data.

The GO Data Warehouse (analysis) package has characteristics that affect the results if you use a multiple-fact query with the Inventory and Sales namespaces. Granularity for time differs in that inventory levels are recorded monthly and sales are recorded daily. Also, Sales includes a non-conformed dimension, Order method.

The following examples will help you interpret the results of a multiple-fact query and understand the options for changing a query to obtain the results that you want.

Conformed Dimensions

Individual queries on Inventory and Sales by Quarter and Product yield the following results.

Quarter	Product	Opening inventory	Closing inventory	Quantity
Q1 2011	Husky Rope 50	0	4,853	9,259
	Aloe Relief	10,614	6,513	8,805
	Course Pro Umbrella	34,907	37,327	70,256
Q1 2011 - Average		15,174	16,231	
Q1 2011 - Total				88,320
Q2 2011	Husky Rope 50	4,853	5,728	8,725
	Aloe Relief	6,513	7,379	8,266
	Course Pro Umbrella	37,327	39,870	57,964
Q2 2011 - Average		16,231	17,659	
Q2 2011 - Total				74,955

A query on multiple facts and conformed dimensions respects the cardinality between each fact table and its dimensions and returns all the rows from each fact table. The fact tables are matched on their common keys, Product and Time.

Product and Time apply to both Inventory and Sales. However, inventory levels are recorded monthly and sales are recorded daily. In this example, results are automatically aggregated to the lowest common level of granularity. Quantity, which comes from Sales, is rolled up to months.

Nulls are often returned for this type of query because a combination of dimensional elements in one fact table may not exist in the other. For example, if Husky Rope 50 was available in inventory in Q1 2011, but there were no sales of this product in the same time period, Quantity would show a null in the Husky Rope 50 row.

IBM Cognos Business Intelligence does not support conformed dimensions generated by IBM Cognos Framework Manager for SAP BW data sources.

Non-conformed Dimensions

If a non-conformed dimension is added to the query, the nature of the results returned by the query is changed.

Quarter	Product	Order method type	Opening inventory	Closing inventory	Quantity	
Q1 2011	Husky Rope 50	Fax	0	4,853	388	
	Husky Rope 50	Telephone	0	4,853	1,015	
	Husky Rope 50	Mail	0	4,853	240	
	Husky Rope 50	E-mail	0	4,853	210	
	Husky Rope 50	Web	0	4,853	5,031	
	Husky Rope 50	Sales visit	0	4,853	1,961	
	Husky Rope 50	Special	0	4,853	414	
	Aloe Relief	Fax	10,614	6,513	411	
	Aloe Relief	Telephone	10,614	6,513	1,513	
	Aloe Relief	Mail	10,614	6,513	433	
	Aloe Relief	E-mail	10,614	6,513	839	
	Aloe Relief	Web	10,614	6,513	4,740	
	Aloe Relief	Sales visit	10,614	6,513	732	
	Aloe Relief	Special	10,614	6,513	137	
	Course Pro Umbrella	Fax	34,907	37,327	1,568	
	Course Pro Umbrella	Telephone	34,907	37,327	17,120	
	Course Pro Umbrella	Mail	34,907	37,327	2,885	
	Course Pro Umbrella	E-mail	34,907	37,327	7,213	
	Course Pro Umbrella	Web	34,907	37,327	37,123	
	Course Pro Umbrella	Sales visit	34,907	37,327	2,793	
	Course Pro Umbrella	Special	34,907	37,327	1,554	
	Q1 2011 - Average			15,174	16,231	
	Q1 2011 - Total					88,320

Order method type exists only in Sales. Therefore, it is no longer possible to aggregate records to a lowest common level of granularity because one side of the query has dimensionality that is not common to the other side of the query. Opening inventory and Closing inventory results are repeated because it is no longer possible to relate a single value from these columns to one value from Quantity.

Grouping on the Quarter key demonstrates that the result in this example is based on the same data set as the query on conformed dimensions. Summary values are the same. For example, the total quantity for Q1 2011 is 88,320 in both examples.

Filters on Non-conformed Dimensions

By default, to improve performance, filters are applied at the database level. The default behavior can result in unexpected nulls when you add a filter to a multiple-fact query. If you create a filter on the Order method dimension to show only the fax order method and apply the filter at the data source, the report includes nulls.

Quarter	Product	Order method type	Opening inventory	Closing inventory	Quantity
Q1 2011	Husky Rope 50	Fax	0	4,853	388
	Aloe Relief	Fax	10,614	6,513	411
	Course Pro Umbrella	Fax	34,907	37,327	1,568
Q1 2011 - Average			15,174	16,231	
Q1 2011 - Total					2,367
Q2 2011	Husky Rope 50	Fax	4,853	5,728	419
	Aloe Relief	Fax	6,513	7,379	103
	Course Pro Umbrella		37,327	39,870	
Q2 2011 - Average			16,231	17,659	
Q2 2011 - Total					522
Q1 2012	Husky Rope 50	Fax	5,188	9,199	327
	Aloe Relief	Fax	7,093	6,395	277
	Course Pro Umbrella	Fax	39,911	38,343	4,040
Q1 2012 - Average			17,397	17,979	
Q1 2012 - Total					4,644
Q2 2012	Husky Rope 50	Fax	9,199	7,038	424
	Aloe Relief	Fax	6,395	5,085	86
	Course Pro Umbrella		38,343	31,799	
Q2 2012 - Average			17,979	14,641	
Q2 2012 - Total					510
Overall - Average			16,695	16,627	
Overall - Total					8,043

The filter is applied only to one subject area, Sales. Because Order method type does not exist in Inventory, all products still appear in the report. For example, Course Pro Umbrella was in inventory in Q2 2012. Because there were no sales using the fax order method for this product in Q2 2012, Order method type and Quantity are null.

To remove the nulls, change the filter so that it is applied to the result set instead of the data source. By applying the filter to the result set, you get the same results that you would get if you were working with conformed dimensions. Only the products that were ordered using the fax order method appear in the report.

Quarter	Product	Order method type	Opening inventory	Closing inventory	Quantity
Q1 2011	Husky Rope 50	Fax	0	4,853	388
	Aloe Relief	Fax	10,614	6,513	411
	Course Pro Umbrella	Fax	34,907	37,327	1,568
Q1 2011 - Average			15,174	16,231	
Q1 2011 - Total					2,367
Q2 2011	Husky Rope 50	Fax	4,853	5,728	419
	Aloe Relief	Fax	6,513	7,379	103
	Q2 2011 - Average			5,683	6,554
Q2 2011 - Total					522
Q1 2012	Husky Rope 50	Fax	5,188	9,199	327
	Aloe Relief	Fax	7,093	6,395	277
	Course Pro Umbrella	Fax	39,911	38,343	4,040
Q1 2012 - Average			17,397	17,979	
Q1 2012 - Total					4,644
Q2 2012	Husky Rope 50	Fax	9,199	7,038	424
	Aloe Relief	Fax	6,395	5,085	86
	Q2 2012 - Average			7,797	6,062
Q2 2012 - Total					510
Overall - Average			12,467	12,786	
Overall - Total					8,043

The overall summary for Quantity is 8,043 using either filter method, which shows that the results are based on the same data set.



In IBM Cognos Report Studio, there are two types of filters. A detail filter is applied to the data source. A summary filter is applied to the result set. For more information about how to apply detail and summary filters, see “Create a Detail or Summary Filter” on page 229.

Add a Query to a Dimensional Report

You can create multiple queries in Query Explorer to suit your particular needs. For example, you can create a separate query for each data container in a report to show different data.

Tip: The Briefing Book sample report in the GO Sales (analysis) package and the Top 10 Retailers for 2011 sample report in the GO Data Warehouse (analysis) package include multiple queries. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. Pause the pointer over the query explorer button  and click **Queries**.
2. From the **Toolbox** tab , drag one of the following objects to the work area.

Object	Description
Query	Adds a query.

Object	Description
SQL	Adds SQL commands.
MDX	Adds MDX commands.

Note: When adding queries to the report

- right-click the work area and click **Show Package Sources** to see the queries that use data items from a package
- right-click the work area and click **Expand References** to see the relationships that exist between queries in the report, which is useful when you are creating complex queries

3. In the **Properties** pane, set the object properties.

4. Double-click a query.

5. From the **Source** tab , drag data items to the **Data Items** pane.

Tip: You can add data items to the query that you do not want to appear in the layout. For example, to filter on Product line code and show Product line in the layout, you must add both data items to the query.

6. To create a new data item, from the **Toolbox** tab , drag **Data Item** to the **Data Item** pane.

7. To add a filter, from the **Toolbox** tab, drag **Filter** to the **Detail Filters** or **Summary Filters** pane and define the filter expression.

Tip: You can also create a filter by dragging a data item from the **Source** tab to one of the filters panes and completing the filter expression. When working with a dimensional data source, you can quickly filter data by dragging a member to a filter pane instead of dragging the level to which the member belongs. For example, dragging the member 2012 from the Years level will filter data for the year 2012. This method is quicker than dragging the Years level and specifying data only for the year 2012 in the filter expression.

Add Dimension Information to a Query

Add dimension information to a query when the data source has no dimension information available or when you want to override, extend, or restrict the information.





Add dimension information if any of the following apply:

- There is no dimension information available in the data source.
For example, the data source contains flat data that you want to model dimensionally.
- You want to override the dimension information in the data source.
- You want to extend or restrict dimension information in the data source.

If you do not add dimension information and the data source contains dimensions, then the dimension structure of the data source is used. If the data source contains no dimensions, IBM Cognos Business Intelligence creates a default dimension structure.

Dimension information is not intended to define the presentation of information, but to help query planning. Dimension information can be considered as a form of query hint. In addition, users will not be able to drill down on dimensions that you add to a report.


Procedure


1. Pause the pointer over the query explorer button  and click a query.
2. In the **Properties** pane, set the **Override Dimension Info** property to **Yes**.
The **Dimension Info** tab appears in the work area.
3. Click the **Dimension Info** tab.
4. To create a dimension from an existing data item, from the **Source** tab , drag the data item to the **Dimensions** pane.
IBM Cognos Report Studio automatically generates the entire dimension.
5. To create a new dimension, from the **Toolbox** tab , drag **Dimension** to the **Dimensions** pane, and then build the new dimension by adding objects to the dimension:
 - To create a level, drag **Level**.
 - To create a level hierarchy, drag **Level Hierarchy**.
 - To create a member hierarchy, drag **Member Hierarchy**.For information about these objects, see “Add Dimensional Data to a Report” on page 253.
6. From the **Source** tab , drag data items to the objects you added in the previous step.
For example, if you created a level, define a key by dragging a data item to the **Keys** folder.
7. To create a fact, from the **Source** tab, drag a data item to the **Facts** pane.

Example - Create a Crosstab Report that Shows Empty Rows

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a crosstab report that shows the total revenue per year for each product line broken down by order method. By default, if no revenue was produced for a particular product line in a specific year, no row appears in the crosstab for that product line and year. You override the dimension information of the crosstab so that empty rows appear in the report.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **Crosstab** and click **OK**.
4. From the **Source** tab , drag the following data items from **Sales and Marketing (query)**, **Sales (query)** to the crosstab:
 - from the **Product** folder, drag **Product line** as rows
 - from the **Time dimension** folder, drag **Year** as nested rows
 - from the **Order method** folder, drag **Order method** as columns
 - from the **Sales fact** folder, drag **Revenue** as the measure

5. Right-click the crosstab and click **Go to Query**.
6. In the **Properties** pane, set the **Override Dimension Info** property to **Yes**.
The **Dimension Info** tab appears at the bottom of the work area.
7. Click the **Dimension Info** tab.
8. From the **Source** tab, drag the following items to the **Dimensions** pane:
 - **Product line**
 - **Year****Product line** and **Year** become separate dimensions in the query.
9. Pause the pointer over the page explorer button  and click **Page1**.
10. Click **Year**.
11. In the **Properties** pane, double-click the **Sorting** property.
12. In the **Data Items** box, drag **Year** to the **Sort List** box.
13. Run the report.

Results

All order years appear for all product lines, even if no revenue was produced.

Revenue		Telephone	Fax	Mail	Special	Web	E-mail	Sales visit
Camping Equipment	2010	80,467,596.88	9,634,763.39	10,015,621.15	5,844,211.12	125,829,519.92	39,124,634.73	62,069,990.87
	2011	47,562,256.31	6,228,274.27	8,846,759.96	5,012,986.47	270,463,415.88	21,291,005.31	43,352,874.97
	2012	17,715,451.4	5,226,451.57	2,482,266.26	332,095.44	426,353,675.75	10,612,304.02	37,660,178.39
	2013	8,149,587.54	1,964,909.25	3,996.72	1,199,696.41	311,192,071.84	4,871,150.57	25,528,917.64
Outdoor Protection	2010	8,141,169.76	1,435,512.2	1,402,530.23	858,775.41	13,735,716.85	4,135,915.35	6,455,901.27
	2011	3,203,287.7	385,329.2	594,355.43	267,356.86	16,479,270.8	1,406,531.47	2,672,442.62
	2012	507,485.63	123,028.48	101,506.05	10,798.96	8,570,078.91	289,343.01	746,934.8
	2013	76,371.43	22,614.84			4,166,745.33	50,688.04	154,605.62
Personal Accessories	2010	45,940,692.79	11,313,266.47	2,952,291.35	3,497,802.5	284,622,826.47	22,819,708.21	20,500,505.82
	2011	18,428,095.15	3,613,228.75	1,719,745.82	1,390,381.2	411,577,877.16	10,253,053.91	9,340,973.91
	2012	5,979,547.46	2,149,810.49	1,346,338.05	146,195.56	568,668,077.83	5,568,561.15	10,150,877.88
	2013	3,173,298.96	886,679.75	400,981.81	152,249.24	427,367,391.98	4,009,763.27	7,703,084.84
Golf Equipment	2010	44,244,120.93	6,255,930.08	8,396,407.78	3,705,129.72	49,583,401.41	29,322,537.92	12,046,323.14
	2011	27,340,352.57	3,539,563.59	2,355,735	1,259,633.25	116,939,694.38	8,851,232.61	7,720,215.67
	2012	6,411,233.64	2,408,222.14	1,941,144.7		203,385,896.61	5,401,733.78	10,562,039.68
	2013	734,405.51	3,037,587.46			157,698,057.23	4,358,428.85	8,912,340.24
Mountaineering Equipment	2010							
	2011	10,626,292.36	6,129,791.95	2,497,183.28	2,838,822.56	65,855,489.46	2,517,063.13	16,635,017.2
	2012	6,586,124.67	3,538,047.25	1,034,475.38	517,010.05	132,736,443.67	1,829,100.61	14,798,621.63
	2013	5,698,410.37	2,180,530.88		318,175.5	117,010,256.92	3,130,288.22	13,182,987.81

Create a Master Detail Relationship

Create a master detail relationship to deliver information that would otherwise require two or more reports. For example, you can combine a list with a chart. The list can contain product lines and the chart can show details for each product line.

Master detail relationships must appear in nested frames to produce the correct results. You can create a master detail relationship in two ways:

- Use a parent frame for the master query and a nested frame for the detail query.
- Associate a report page with the master query and use a data container, such as a list or crosstab, for the detail query.

You cannot display parent data in the child frame or child data in the parent frame. Also, you cannot perform calculations across master detail queries.

When you are working with dimensional data, IBM Cognos Report Studio does not support master detail relationships that use a custom group.






You can use a master detail relationship to show data from separate data sources in a single report. However, the data sources must be contained in the same package.

If you are working with an SAP BW data source, you cannot use a data item from the master query that contains non-ASCII values.

Before you begin

To create a master detail relationship using queries that reference two different dimensional data sources, you must first link the members by aliasing the levels that contain the members.

Procedure

1. To use a parent frame for the master query and a nested frame for the detail query:
 - From the **Toolbox** tab , drag a **List**, **Repeater Table**, or **Repeater** to the report.
 - Add a second data container to the object you inserted.
You can insert a list, crosstab, chart, repeater table, or repeater into a list.
You can add a list to a repeater table or repeater.
 - Add data items to both data containers.
2. To associate a report page with the master query and use a data container for the detail query:
 - Click anywhere in the report page.
 - In the **Properties** pane, click the select ancestor button  and click **Page**.
 - Set the **Query** property.
 - From the **Toolbox** tab, drag a data container to the report.
3. To link a data item in the master query to a parameter in the detail query instead of to another data item, create the parameter in the detail query.
Use parameters to filter values at a lower level in the detail query.
 - Pause the pointer over the query explorer button  and click the detail query.
 - From the **Toolbox** tab , drag the **Filter** object to the **Detail Filters** box.
 - In the **Expression Definition** box, create the parameter.
4. Pause the pointer over the page explorer button  and click the report page.
5. Click anywhere in the report page.

6. In the **Properties** pane, click the select ancestor button and click **Page**.
7. Click the data container containing the details.
8. From the **Data** menu, click **Master Detail Relationships**.
9. Click **New Link**.
10. In the **Master** box, click the data item that will provide the primary information.
11. To link the master query to a data item, in the **Detail** box, click the data item that will provide the detailed information.
12. To link the master query to a parameter, in the **Parameters** box, click the parameter that will provide the detailed information.

Tip: To delete a link, select the link and press the Delete key.

13. If your detail query object is a chart, you can disconnect a chart title from the master query.
 - Click the chart title, and then, from the **Data** menu, click **Master Detail Relationships**.
 - Clear the **Use the master detail relationships from the chart** check box.
14. If your master detail relationship includes a chart as the detail and you are using automatic axis ranges, you can set the same axis range for all the detail charts:
 - Select the axis.
 - In the **Properties** pane, under **General**, double-click the **Axis Range** property.
 - Under **Maximum** and **Minimum**, click **Automatic**.

The master detail report option is only available with automatic axis ranges.

 - Under **Master detail reports**, select the **Same range for all instances of chart** check box.

For more information about axis ranges, see “Change the Axis Scale of a Current Default Chart” on page 120.

Tip: To avoid seeing the same data item twice in the report, click the data item in the data container driven by the detail query and click the cut button. This removes the item from the report display but keeps it in the query.

Related concepts:

“Master Detail or Burst Reports with Charts or Crosstabs May Result in Denial of Service” on page 499

When running a master detail or burst report that includes a chart or crosstab, disk space exhaustion may cause the report or other requests to fail. A large set of burst keys or master rows may produce one or more charts per detail, resulting in many master detail executions. This may cause the temp folder to accumulate many gigabytes of temporary files containing data required for successful chart rendering.

Link Members from Two Data Sources

If you create a master detail relationship using queries that reference two different dimensional data sources, you may need to create a relationship between levels with the same member captions but different Member Unique Names (MUNs).

For more information about MUNs, see “Recommendation - Use Member Unique Name (MUN) Aliases” on page 547.

For example, you may want to link the Americas member in the Sales territory level in the Sample Outdoors cube with Americas in the GO Subsidiary level in the Sample Outdoors Finance cube. To create the relationship, you must alias the levels that contain the members to link.

Procedure

1. In the parent frame or the report page, double-click the level that contains the member that will provide the primary information.
The **Data Item Expression** dialog box appears.
2. In the **Expression Definition** box, use the expression in the following function:
caption (*expression*)
For example, caption ([great_outdoors_company].[Sales Territory].[Sales Territory].[Sales territory])
3. Repeat steps 1 to 2 for the level in the data container that contains the details.
A caption alias is created for each level. You can now use the caption alias for each level to create a master detail relationship using member captions, which are the same, instead of MUNs, which are different.

Results

You can now create the master detail relationship between the two levels.

Working with Queries in SQL or MDX

For each query in a report, you can work with the SQL or MDX that is executed when you run a report.


Note: MDX is not available with DMR data sources.

View the SQL or MDX for an Entire Report or a Query

View the SQL or MDX to see what is passed to the database when you run a report.

Only SQL is available when using DMR data sources because these data sources were relational.

Procedure

1. To view the SQL or MDX for the entire report, from the **Tools** menu, click **Show Generated SQL/MDX**.
This option shows the SQL or MDX that will be executed in the data source. The SQL or MDX is organized by query and by query result. If a query is used in more than one data container, a query result is generated for each data container.
2. To view the SQL or MDX for a specific query, do the following:
 - Pause the pointer over the query explorer button  and click the query.
 - In the **Properties** pane, double-click the **Generated SQL/MDX** property.

The **Generated SQL/MDX** property shows the SQL or MDX that is executed when you view tabular data (from the **Run** menu, click **View Tabular Data**). Tabular data shows the data that is produced by the query in the form of a list. You can use this property to help you build advanced queries.

Results

The SQL or MDX for the query appears in the **Generated SQL/MDX** dialog box. For SQL, you can choose to view native SQL, which is the SQL that is passed to the database when you execute the query, or Cognos SQL, which is a generic form of SQL that IBM Cognos Report Studio uses. Cognos SQL is converted to native SQL before the query is executed.

Related tasks:

“Showing prompt values in generated SQL or MDX” on page 326

You can show prompt values when viewing the generated SQL or MDX of a query or report.

Build a Report Using Your Own SQL or MDX



You can build a report by adding SQL or MDX from an external source, such as another report.


If you are working with MDX, you must be aware of the MDX syntax that IBM Cognos Report Studio supports.

If you edit the SQL of a query, you must change the **Processing** property for that query to **Limited Local**.


You cannot build a report by adding your own MDX if the data source is IBM Cognos TM1[®]. IBM Cognos TM1 does not support custom MDX.

Procedure


1. From the **File** menu, click **New**.
 2. Click **Blank**.
 3. Pause the pointer over the query explorer button  and click **Queries**.
 4. From the **Toolbox** tab , drag **Query** to the work area.
 5. From the **Toolbox** tab, do one of the following:
 - To build an SQL query, drag **SQL** to the right of the query.
 - To build an MDX query, drag **MDX** to the right of the query.
- Tip:** You can drag **SQL** or **MDX** anywhere in the work area, and Report Studio will automatically create a query.
6. In the **Properties** pane, double-click the **Data Source** property and click a data source.
 7. If required, set the **Catalog** property to the name of the catalog.
 8. Double-click the **SQL** or **MDX** property and type the SQL or MDX.
 9. Click **Validate** to check for errors.
 10. If you are working with SQL, in the **Properties** pane, set the **Processing** property to **Limited Local**.
 11. Double-click the query.

If the SQL or MDX is valid, the data items defined in the SQL or MDX appear in the **Data Items** pane.
 12. Pause the pointer over the page explorer button  and click a report page.
 13. From the **Toolbox** tab, drag an object to the work area.

For example, drag a list, crosstab, chart, or repeater.

- Click the data container.
- In the **Properties** pane, click the select ancestor button  and click the container you just created.
For example, if you created a list, click **List**.

Tip: You can also click the container selector (three orange dots) of the container to select it.


- Set the **Query** property to the query for the report type.
- From the **Data Items** tab , drag the items from the query you chose in the previous step to the data container.

Convert a Query to SQL

You can convert a query to SQL to edit it. You may want to do this to improve performance or to use SQL features that are not supported directly by IBM Cognos Report Studio.

Converting a query to SQL is an irreversible process.


Procedure

- Pause the pointer over the query explorer button  and click the query.
- In the **Properties** pane, double-click the **Generated SQL** property.
- Click **Convert**.
- Click **Validate** to check for errors.
- In the **Properties** pane, set the **Processing** property to **Limited Local**.

Edit the SQL or MDX

You can edit the SQL or MDX for a query that has been created as an SQL or MDX query or that has been converted to SQL.

Procedure

- Pause the pointer over the query explorer button  and click the SQL or MDX item under the query.
- Double-click the SQL or MDX item.
- Make changes in the text box.
If you are working with MDX, you must be aware of the MDX syntax that IBM Cognos Report Studio supports.
- Click **Validate** to check for errors.

First-Rows Optimization

The SQL produced by IBM Cognos Report Studio depends on the report format you choose. For example, if you specify HTML format, first-rows optimization is requested. All-rows is requested if you specify PDF.

It is important for database administrators and programmers to remember that Report Studio does not always use first-rows optimization. If you assume first-rows optimization is always requested, this can cause the RDBMS optimizer to process the query differently than you expect.

Supported MDX Syntax

If you are working with MDX, you must be aware of the syntax that Report Studio supports. IBM Cognos Report Studio supports the MDX grammar as specified in Microsoft Data Access Software Developer Kit version 2.8.

Report Studio supports the following MDX functions. This is a partial list and applies only when you are working with the following data sources:

- cubes
- SAP BW
- IBM Cognos TM1
- DB2[®] OLAP
- IBM Cognos Consolidation
- IBM Cognos Contributor

For these data sources, IBM Cognos Business Intelligence uses a variation of the Microsoft SQL Server Analysis Services syntax.

- Acos
- Aggregate
- Ancestor
- Ancestors
- Asin
- Atan
- Avg
- BottomCount
- BottomPercent
- BottomSum
- Children
- ClosingPeriod
- CoalesceEmpty
- Convert
- Cos
- Cosh
- Count
- Cousin
- Crossjoin
- CurrentMember
- DefaultMember
- Descendants
- Dimension
- Distinct
- Except
- Exp
- Filter
- FirstChild
- FirstSibling
- Generate
- Head

- Hierarchy
- Hierarchy
- IIf
- Intersect
- Is
- IsAncestor
- IsEmpty
- Item
- Lag
- LastChild
- LastPeriods
- LastSibling
- Lead
- Level
- Levels
- LinkMember
- Ln
- Log10
- Max
- Median
- Members
- Min
- Mtd
- Name
- NextMember
- OpeningPeriod
- Order
- Ordinal
- ParallelPeriod
- Parent
- PeriodsToDate
- PrevMember
- PreviousMember
- Properties
- Qtd
- Rank
- Siblings
- Sin
- Sinh
- Stddev
- Subset
- Sum
- Tail
- Tan
- Tanh

- TopCount
- TopPercent
- TopSum
- Union
- Value
- Var
- Wtd
- Ytd

Example - Create a Dynamic Report That Shows Period-to-date Data

When you are working with a dimensional data source, you can use dimensional functions to retrieve data for a specific period-to-date.

In this topic, you learn how to create a dynamic report that retrieves year-to-date revenue for each product line. The report also shows the percentage of the revenue that is generated in the month users select when they run the report.

It should take 15-20 minutes to complete this topic, and your report will look like this.

Revenue	April 2010	YTD Revenue: April 2010	Percent of YTD Revenue
Golf Equipment	11,742,767.4	49,629,733.76	23.66%
Personal Accessories	26,057,935.06	118,968,943.76	21.90%
Camping Equipment	24,764,220	106,693,399.22	23.21%
Outdoor Protection	2,713,436.3	11,690,987.33	23.21%
Mountaineering Equipment			

Figure 45. Crosstab report showing year-to-date revenue for product lines



Procedure

1. Create a crosstab report that uses the **Go Data Warehouse (analysis)** package.
2. Add the following data items to the report:
 - From **Product**, drag **Product line** to the **Rows** drop zone.
 - From **Sales fact**, drag **Revenue** to the **Measures** drop zone.

Tip: Use the **Source** tab .

3. Create the following query calculation named **Selected Month** in the **Columns** drop zone:
`[Sales].[Time].[Time].[Month]->?Month?`
4. Create this query calculation named **Year to Date Set** next to the **Selected Month** column:
`periodsToDate([Sales].[Time].[Time].[Year],[Selected Month])`

Tip: Information about the `periodsToDate` function is displayed in the **Information** pane when you click the function in the **Functions** tab. The `periodsToDate` function is in the **M-Q** folder in the **Dimensional Functions** folder.

5. Click the **Year to Date Set** column and click the cut icon .
6. Create the following query calculation named **YTD Revenue** next to the **Selected Month** column:
total (currentMeasure within set [Year to Date Set])
7. Create the following query calculation named **Percent of YTD Revenue** next to the **YTD Revenue** column:
[Selected Month]/[YTD Revenue]
8. Click the **Unlock** icon  to unlock the report.
9. Add this text item to the left of the text in the **YTD Revenue** column, and add a blank space after the text:
YTD Revenue:
10. Set the font style of the text to italic.
11. In the **YTD Revenue** column, click `<#YTD Revenue#>` and change the **Source Type** property to **Report Expression**.
12. Double-click the **Report Expression** property and drag the **Month** parameter to the **Expression Definition** box.

Tip: You can find the **Month** parameter in the **Parameters** tab.

13. Click the lock icon to lock the report.
14. Right-click the **Percent of YTD Revenue** column title and click **Select Member Fact Cells**.
15. In the **Properties** pane, double-click the **Data Format** property.
16. Under **Format type**, click **Percent**.
17. Set the **No. of Decimals** property to 2.
18. Run the report to view it.

Results

Users are prompted to select a month. When they click **OK**, the report shows year-to-date revenue for each product line and the percentage of revenue that is generated for the selected month.

For more information, see the following references:

- Creating Report Templates
- Add Relational Data to a Report or Add Dimensional Data to a Report
- Using Dimensional Calculations
- Format Crosstabs
- Specify the Font
- Format Data

Using Dimensional Calculations

Insert a calculation to make your report more meaningful by deriving additional information from the data source. For example, you create an invoice report, and you want to see the total sale amount for each product ordered. Create a calculated column that multiplies the product price by the quantity ordered.

You build calculations in the expression editor using functions.

If a calculation is used in multiple reports, or by different report authors, ask your modeler to create the calculation as a standalone object in the model and include it in the relevant package.

Related concepts:

“Considerations when Creating Calculations” on page 537

Consider the following information and limitations when creating dimensional calculations.

Create a Simple Member Calculation


When working with dimensional data sources, you can select members in your report and create simple calculations.

In addition to simple arithmetic calculations, you can perform the following calculations:

Calculation	Description
Rollup	Summarizes, or rolls up, all the values of the selected items in a hierarchy.
%	Calculates the value of a selected item as a percentage of another item.
% Difference	Calculates the difference between two items as a percentage.
% Of Base	<p>This calculation is only available if you select two members from different hierarchies, each from a different edge.</p> <p>This calculation takes the first selected member from edge A and the second selected member from edge B. The calculation result of a percent of base should be such that all the values for member A will compare itself to the intersect value of member A and B.</p> <p>For example, you have a crosstab showing quantity sold by year by product line. You select 2012 and Camping Equipment, right-click the selection, click Calculate, and then click % of Base (2012, Camping Equipment). The calculated row shows the percentage value of each product line for 2012 as compared to Camping Equipment for 2012.</p>

Calculation	Description
Custom	Allows you to specify your own value when performing a simple arithmetic calculation. Also allows you to change the order of operands or type a custom name for the new calculated row or column.

Procedure

1. Select the items in your report to calculate.
2. Click the insert calculation button  and select the calculation to perform.

Tip: Calculations that are not applicable to the items you selected are greyed out.

3. To change the order of the operands or the name of the calculated item added to the report, click **Custom**.

Results

The calculation appears as a new row or column in your report.

Insert a Query Calculation

When working with dimensional data, insert a query calculation into your report to add a new row or column with values that are based on a calculation. For example, you create a query calculation named Euros that converts dollars to euros by multiplying an existing dollar measure by a conversion rate. Euros can then be displayed to end users in a separate row or column.

In IBM Cognos Report Studio, you can create the following types of calculations:








- Create calculated members or calculated measures where the expression is a member or a tuple-based (as opposed to property-based) value expression. For example, [2013] - [2012] is a calculated member and [Revenue] - [Planned Revenue] is a calculated measure.
- Use set expressions to create calculated sets of members. For example, children ([2012]) is a set expression that displays the child members of 2012.
You must base each set expression on a hierarchy and the set expression must contain only members from this hierarchy.
- Create value expressions when you want to insert a string, number, date, or interval value.


You can also create a calculation that uses an intersection (tuple) that you already defined.



If you are using a DB2 data source, the subtract operator is invalid if you combine the datatypes timestamp2 and packed decimal.

When creating an expression that will be used in a double-byte environment, such as Japanese, the only special characters that will work are ASCII-7 and ~ -- | | - \$ ¢ £ ¨.

Procedure



1. From the **Toolbox** tab , drag **Query Calculation** to the report.
2. In the **Name** box, type a meaningful name for your calculation.
For example, if you are calculating the difference between 2012 revenue and 2011 revenue, you could name your expression **2012 - 2011 Revenue**.
3. Click the type of calculation you want to create and select the hierarchy that contains the data that is the focus of your calculation.
4. In the **Available Components** pane, define the calculation:
 - Specify how you want to view the available data items in your data package by clicking the view member tree button  or the view package tree button .
 - To add data items that are not shown in the report, on the source tab , double-click the data items.
 - To add data items that are in the report but not necessarily in the model, such as calculations, on the data items tab , double-click the data items.
 - To add data items from a specific query, on the queries tab , double-click data items.
 - To add functions, summaries, and operators, on the functions tab , double-click elements.

Tip: To filter the visible functions, summaries, and operators in the **Available Components** pane, click the filter button  and filter by the function type, what the function returns, or what the function acts on.

- To add a value that is derived from a parameter, on the parameters tab , double-click a parameter.
Parameters define prompts, drill-through reports, and master detail relationships.
- To add a macro, on the macros tab , drag the parameter maps, session parameters, or functions you want to add to the macro.

Tip: Use **Insert macro block** to get you started with creating the macro expression. **Insert macro block** inserts number signs in the expression. Make sure that the macro expression you create is between the number signs.

Tips:





- You can also type the calculation directly in the **Expression Definition** box.
- When typing date values, ensure that the date format is correct for your database type.
- To copy and paste expression components in the **Expression Definition** pane, you can use the copy button  and the paste button .

For information about specific functions, see Appendix F, “Using the expression editor,” on page 555.

5. Click the validate button .

Any validation errors appear on the **Errors** tab of the **Information** pane.

Tips:

- To show or hide the **Available Components** pane, click the available components button .
- To show or hide the **Information** pane, click the information button .
- To copy and paste expression components in the **Expression Definition** pane, you can use the copy button  and the paste button .

Related concepts:

Chapter 17, "Using Query Macros," on page 403

A macro is a fragment of code that you can insert in the Select statement of a query or in an expression. For example, add a macro to insert a new data item containing the user's name.






Create a Layout Calculation

Create a layout calculation to add run-time information to your report, such as current date, current time, and user name.

When you create layout calculations, unsupported functions do not appear in the **Functions** tab of the expression editor. Specifically, there is no **Summaries** folder, and some operators, constants, and constructs are also unavailable. These functions are not available because only the database can perform them. Report expressions and calculations based on layout expressions are performed in IBM Cognos Report Studio.



To see the complete list of functions available in the expression editor, except for report functions, create a query calculation. All functions are available when you create a query calculation because these calculations are performed in the database and not in Report Studio.

Procedure

1. From the **Toolbox** tab , drag **Layout Calculation** to the report.
2. In the **Available Components** box, define the calculation:
 - To add data items that are not shown in the report, on the source tab , double-click data items.
 - To add data items from a specific query, on the queries tab , double-click data items.
 - To add functions, summaries, and operators, on the functions tab , double-click elements.
 - To add a value that is derived from a parameter, on the parameters tab , double-click a parameter.

Parameters define prompts, drill-through reports, and master detail relationships.

Tips:

- You can also type the calculation directly in the **Expression Definition** box.
- When typing date values, ensure that the date format is correct for your database type.
- To copy and paste expression components in the **Expression Definition** pane, you can use the copy button  and the paste button .

For more information about creating expressions, see Appendix F, “Using the expression editor,” on page 555.

3. Click the validate button .



Create an Intersection (Tuple)

When working with dimensional data, an intersection, also known as a tuple, is useful for obtaining a value from the combination of two or more members that you specify. Each member must be from a different hierarchy. The intersection can include only one measure.

For example, the intersection (Revenue, 2012, Cooking Gear) shows the revenue value for the year 2012 and for the product line Cooking Gear.

Use tuples to avoid report summaries that do not reflect the visible data. For more information about this issue, see “Summaries in a report do not correspond to the visible members” on page 490.

Procedure

1. From the **Toolbox** tab , drag the **Intersection (Tuple)** object to the report.
2. From the **Available members and measures** pane, select items and click the right arrow to move them to the **Intersection members and measures** box. You can also use items from the **Calculated Members and Measures** tab .
3. To define the hierarchy for this intersection, click a parent object in the **Intersection hierarchy** box.

Assigning a Hierarchy or Dimension

You must assign each calculated member, set expression, and intersection (tuple) to a hierarchy or dimension. We recommend that you select the hierarchy or dimension upon which your calculation focuses. For example, if your calculated member is based on years, select the Time hierarchy. If you create a calculated measure, select the Measures dimension.

Select only a hierarchy that cannot affect the value of the calculation. For example, the hierarchy Camping Equipment has the same value no matter what Products context it appears in the report. Therefore,

- the calculation ([Camping Equipment]-[Mountaineering Equipment]) has a well-defined meaning only in the Products hierarchy, so select that hierarchy.
- the calculation tuple ([Revenue], [Camping Equipment]) can be assigned to either the Products or Measures hierarchy, as it is not affected by either context.
- the calculations ([2013] - [Camping Equipment]) and ([Fiscal Year 2013] - [Calendar Year 2013]) do not have a well-defined meaning in any hierarchy, and therefore cannot be used reliably at all.

Drilling Up and Drilling Down in Dimensional Reports

When working with dimensional or dimensionally-modeled relational (DMR) data sources, you can create reports that allow the reader to view more general or more detailed information on your data within a predefined dimensional hierarchy (such as Years - Year - Quarter - Month) without having to create different reports.

You can link groups of data items from different queries so that when you drill up or drill down in one query, the data item also drills up or drills down in the linked queries. Linking data items is useful if your report includes more than one query with the same data item. For example, if your report shows a list and a crosstab that each include the Product Line data item, you can link the Product Line data item from the crosstab query to the Product Line data item from the list query so that when you drill up in the crosstab Product Line data item, the list Product Line data item also drills up.

Member Sets

Member sets are used to group data items that are logically related for various actions, such as drill actions, zero suppression, and ranking. They can be defined as a flat list or as a tree structure in which member sets in the same parent chain are considered related.

For example, for drill operations, a member set defines the set of items that can potentially change when a given item in the set is drilled on. The values of other items in the query or even those in the same hierarchy are preserved when any item in this set is drilled on. Usually, a member set references items that have logical roles in a drill action, such as a detail, a summary of the detail, or a parent of the detail. A single data item can belong to only one member set.

If you do not define member sets for items, the IBM Cognos Business Intelligence server associates items into default member sets and behaviors using simple dimension rules on item expressions. You can override the behavior for a particular item while other items continue to use the default.



When you define a member set, you must explicitly define behaviors for each item in the set. Items in the set that have no behaviors have their values preserved.

Drill behaviors always act from a root member set. This means that when an item is drilled on, the root member of its member set is found and all items from the root down are processed. Although calculations and aggregates are not directly related by hierarchy, they respond because of their dependence on the items upon which they are based.

Create Member Sets

Create a member set when you want to define a non-default drill behavior. You specify what items respond to a drill action by adding them to the member set.

Procedure

1. Pause the pointer over the query explorer button  and click the query in which to create a member set.
2. In the **Properties** pane, set the **Define Member Sets** property to **Yes**.
3. Double-click the query and click the **Member Sets** tab.
4. From the **Source** tab , drag items to the work area.

To define a member set as a tree structure, drag the item that will serve as the root item of the set to the work area, and then drag other items over the root item to create the tree structure.

Note: You can also nest member sets.

Create a Drill-up and Drill-down Report

You can link groups of data items from different queries so that when you drill up or drill down in one query, the data item also drills up or drills down in the linked queries.

When you drill down or up, you can specify whether the column title shows the member caption value or the level label value. By default, titles use member captions. Using level labels may be more meaningful. For example, within the Country or Region column, you drill down on Australia. By default, the column title becomes Australia, the member caption. It may be more meaningful to use Country or Region, the level label, as the column title.

Tip: The Returned Items sample report in the GO Data Warehouse (analysis) package includes drilling. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Before you begin

Before you begin, ensure that you are using a dimensional data source.

Procedure

1. From the **Data** menu, click **Drill Behavior**.
2. On the **Basic** tab, in the **Report output drill capabilities** box, select the **Allow drill-up and drill-down** check box.



By default, IBM Cognos Report Studio determines which items can be drilled on based on the dimensional structure.

Tip: To enable the report to be used as the source during a package drill-through, select the **Allow this report to be a package-based drill-through source** check box and click **OK**. For more information about package drill-through, see the *Administration and Security Guide*.

3. To disable drill-up or drill-down for a data item, select the data item in either the **Disable drill-up for** box or the **Disable drill-down for** box.
4. From the **Advanced** tab, you can change the drill-up or drill-down behavior for any data item by selecting the data item and then choosing one of the following behaviors.

Behavior name	Drill-up behavior	Drill-down behavior
Preserve	The data item's value will remain unchanged.	The data item's value will remain unchanged.
Empty Set	The set of values associated with this data item is set to be the empty set (novalues). For crosstabs, the data item will effectively be removed from the report.	The data item will be removed from the report.

Behavior name	Drill-up behavior	Drill-down behavior
Replace Item	The data item's value will change to become the parent (if a lowest-level summary was drilled up on) or the grandparent (if a lowest-level detail of a dimension was drilled up on) of the item that was drilled on.	The data item's value will change to become the item that was drilled on.
Replace Expression	The data item's value will change to become the children of the parent (if a lowest-level summary was drilled up on) or the children of the grandparent (if a lowest-level detail of a dimension was drilled up on) of the item that was drilled on.	The data item's value will change to become the children of the item that was drilled on.
Change Expression	The data item's value will change to become the value of some other data item in the query.	The data item's value will change to become the value of some other data item in the query.
Depth Based Expression	The data item's value will change to become all data items n generations higher in the dimensional hierarchy than the item that was drilled on. The number of generations or levels is determined by the Depth value.	The data item's value will change to become all data items n generations higher in the dimensional hierarchy than the item that was drilled on. The number of generations or levels is determined by the Depth value.
Ancestor	The data item's value will change to become the data value of the ancestor n generations higher in the dimensional hierarchy than the item that was drilled on. The number of generations or levels is determined by the Depth value.	The data item's value will change to become the data value of the ancestor n generations higher in the dimensional hierarchy than the item that was drilled on. The number of generations or levels is determined by the Depth value.

5. In the **Column title drill behavior** box, specify whether to use member captions or level labels as the columns titles for each data item.
6. From the **Data Items Linking** tab, you can link groups of data items:
 - Click the new button .
 - Type a name for this group of linked data items and click **OK**.
To rename a group of linked data items, click the group, click the rename button , type a name, and click **OK**.
 - Use the arrows to move data items from the queries on the left to the groups on the right.

Note: You can only add a data item to one group.

Results

The report will generate links for any item that can be drilled up or down on.

When you run a report, you can drill down or drill up by right-clicking the data item and choosing the action from the context menu. The menu items will be disabled if an item cannot be drilled up or down on.

Related tasks:

“Create a Drill-up and Drill-down Chart” on page 153

If you use a dimensionally-modeled data source, you can create a chart that allows you to drill down to lower-level data or drill up to higher-level data.

Recommendation - Drilling Down in Very Large Data Sources

When you drill down in a report that uses a very large data sources query results can be much larger than what can be held in memory. For example, if you insert the lowest level of four hierarchies that each contain 1000 members, the report can contain 1000,000,000,000 cells. At best, this query will take a very long time to run. While this large query executes, all other queries for the same server process will likely be blocked. For most data sources, the query will likely fail due to insufficient memory or timing out. Then the memory is released and normal services resume.

However, when using a Microsoft SQL Server 2005 Analysis Services (SSAS) cube, the memory consumed by the SSAS client is not always released in a way that other queries can effectively re-use. The server continues to run with insufficient memory, causing new queries to either run very slowly or fail completely. You may encounter an error, and, to continue, the system administrator must manually stop and restart the IBM Cognos BI service.

To avoid these problems, consider the size of hierarchy levels and sets when creating reports and avoid combining them in ways that create large queries. To determine the size of a set, create and run a very small report that includes only a count of the members within that set. You can also use filtering techniques to focus your data.

Example - Create a Dashboard Report

Create a dashboard report to show a high-level graphical view of company performance indicators.


By using dashboard reports, users can

- drill up and drill down to see higher and lower levels of detail
- navigate to other targets, including IBM Cognos Report Studio reports, IBM Cognos Query Studio reports, and IBM Cognos Analysis Studio analyses
- include multiple charts derived from different data sources in a single report

Dashboard reports are not the same as workspaces or dashboards created in IBM Cognos Workspace. Dashboard reports display several different report objects in one report, but the information in the report is static. Workspaces created in Cognos Workspace are a collection of IBM Cognos content that you assemble into an interactive workspace. Content is displayed in widgets. For information about creating interactive and sophisticated workspaces, see the IBM Cognos Workspace *User Guide*. You can also create dashboards within IBM Cognos Connection. In these dashboards, content is displayed in portlets within pages. For more information, see the IBM Cognos Connection *User Guide*.


In this topic, you learn how to create a dashboard report so that users can examine important sales data in a single view.

It should take 15 to 20 minutes to complete this topic, and your dashboard report will look like this.

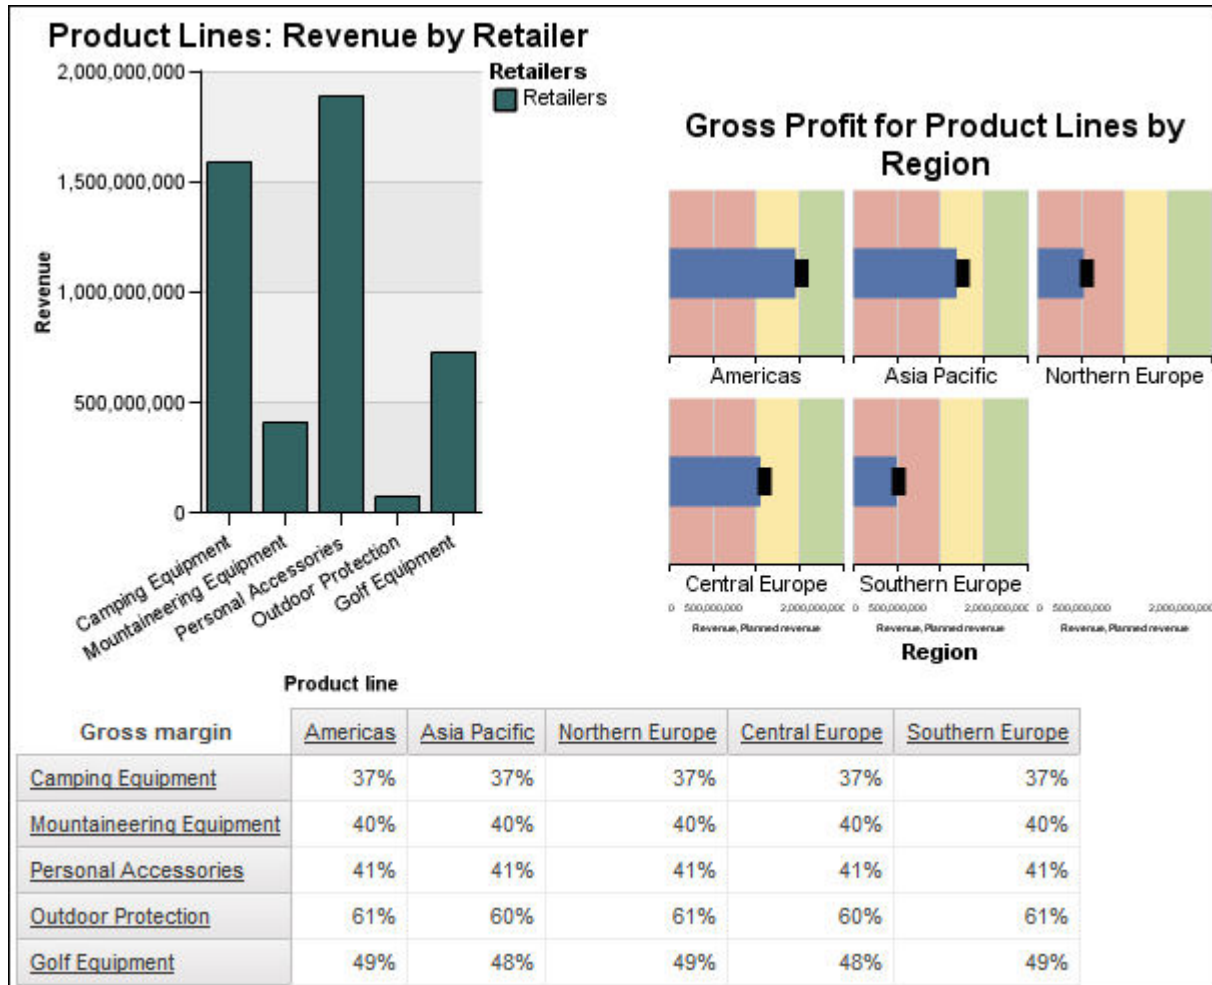

Procedure

1. Create a blank report with the **GO Data Warehouse (analysis)** sample package.
2. Add a column chart, a bullet chart, and a crosstab.
3. Drag the following items to the bullet chart:
 - **Revenue** (in **Sales and Marketing (analysis)**, **Sales**, **Sales fact**) to the **Bullet Measure** drop zone
 - **Planned Revenue** to the **Target Measure** drop zone
 - **Product line level** (in **Products**) to the **Series (matrix rows)** drop zone
 - **Region level** (in **Retailers**) to the **Categories (matrix columns)** drop zone
4. Drag the following items to the column chart:
 - **Revenue** (in **Sales fact**) to the **Default measure (y-axis)** drop zone
 - **Product line level** (in **Product**) to the **Categories (x-axis)** drop zone
 - **Retailers level** (in **Retailers**) to the **Series (primary axis)** drop zone

5. Drag the following items to the crosstab:
 - **Gross margin** (in **Sales fact**) to the **Measures** drop zone
 - **Product line** level (in **Product**) to the **Rows** drop zone
 - **Region** level (in **Retailer site**) to the **Columns** drop zone
6. Click the bullet chart.
7. Set the **Size & Overflow** property width to **300 px** and height to **300 px**.
8. Set the **Title** property to **Show**.
9. Double-click the chart title and type the following text:
Gross Profit for Product Lines by Region
10. Set the **Font** property for the chart title to **Arial, 12pt, Bold**.
11. Set the **Padding** property for the left and bottom padding to **20 px**.
12. In the **Bullet Indicators** property, set the bar width to 30%.
13. Click the chart, click the palette button , and click **Contemporary** from the available palettes.
14. Set the **Size & Overflow** property width to **300 px**.
15. Set the **Title** property to **Show**.
16. Double-click the chart title and type the following text:
Product Lines: Revenue by Retailer
17. Set the **Font** property for the chart title to **Arial, 12pt, Bold**.
18. From the **Data** menu, click **Drill Behavior**.
19. Select the **Allow drill-up and drill-down** check box.
20. Run the dashboard report to view what it will look like for your users.

Results

Users can drill up or drill down on values in the report to view related information.

For more information, see the following references:

- Creating Report Templates
- Add Relational Data to a Report or Add Dimensional Data to a Report
- “Customize a Current Default Gauge Chart” on page 144
- Customize a Legacy Gauge Chart
- Specify the Height and Width
- Specify the Font
- Create a Drill-up and Drill-down Report

Chapter 11. Adding Prompts to Filter Data

You can add prompts to a report to add interactivity for users. Prompts act as questions that help users to customize the information in a report to suit their own needs. For example, you create a prompt so that users can select a product type. Only products belonging to the selected product type are retrieved and shown in the report.

Prompts are composed of three interrelated components: parameters, prompt controls, and parameter values. Parameters are based on parameterized filters and form the questions to ask users. Prompt controls provide the user interface in which the questions are asked. Parameter values provide the answers to the questions.

IBM Cognos Report Studio provides several ways to create prompts. You can

- use the Build Prompt Page tool
- build your own prompt and prompt page
- create a parameter to produce a prompt
- insert prompts directly into the report page
- in dimensional reporting, you can also define prompts using context filters

If you include reports from different packages in an interactive dashboard that uses global filters, ensure that you use the same parameter name for the prompt in all the reports. For more information about creating interactive dashboards in IBM Cognos Connection, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

You can also create prompts in the package. For more information, see the IBM Cognos Framework Manager *User Guide*.

You can also use context filters, also known as slicer filters, to focus the data in your report.

Syntax of Prompt Expressions

Prompt expressions use the following syntax, where p represents the parameter name.

You can also use these expressions to create parameterized data items that you can then use in master detail relationships.

The type of expression you use depends on whether you have chosen relational or dimensional reporting style. For more information about reporting styles, see “Relational and dimensional reporting styles” on page 22.

Relational: Detail Filter Expressions	Dimensional: Context (Slicer) or Edge Expressions
[data item] = ?p?	[level or hierarchy]->?p?
for single-select prompts and master detail relationships	For single-select member prompts and master detail relationships

Relational: Detail Filter Expressions	Dimensional: Context (Slicer) or Edge Expressions
<p>[data item] in ?p?</p> <p>for multi-select prompts</p>	<p>set([level or hierarchy]->?p?)</p> <p>For multi-select member prompts</p> <p>filter [set], [property expression] = ?p?)</p> <p>For single-select value prompts and master detail relationships</p> <p>A property expression is an expression that is assigned to a property to enable dynamic update of the property when the report runs.</p> <p>filter [set], [property expression] IN ?p?)</p> <p>For multi-select value prompts</p> <p>A property expression is an expression that is assigned to a property to enable dynamic update of the property when the report runs.</p>

Related concepts:

“Prompt control labels” on page 472

You can associate labels to prompt controls to make the prompts accessible.

Related reference:

Appendix H, “Prompt API for IBM Cognos BI,” on page 975

The JavaScript Prompt API provides report authors with a method of customizing prompt interaction in the reports they author.

Use the Build Prompt Page Tool

Use the **Build Prompt Page** tool to quickly add filters and prompts to a report. This tool creates filters in the query using the prompt information properties that are set in the IBM Cognos Framework Manager model. For more information about the prompt information properties, see the Framework Manager *User Guide*.

Note: The Promotion Success sample report in the GO Data Warehouse (analysis) package includes a prompt page. The Historical Revenue sample report in the Sales and Marketing (cube) package and the Eyewear Revenue by Brand and Size sample report in the GO Data Warehouse (analysis) package include multiple prompts. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Before you begin

Note: The **Build Prompt Page** tool creates a static report specification, so if the prompt information properties are updated in the Framework Manager model, those updates will not be reflected in your report.

Procedure

1. Click the column or row on which users will be prompted.
To create multiple prompts or a cascading prompt, click more than one column or row.

- From the **Tools** menu, click **Build Prompt Page**.

A prompt page is created that has



- a page header
- a prompt control for each selected column
- a page footer containing **Cancel**, **Back**, **Next**, and **Finish** buttons

Build Your Own Prompt and Prompt Page

Create your own prompt and prompt page to control how they appear in a report.

Note: The Promotion Success sample report in the GO Data Warehouse (analysis) package includes a prompt page. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

- Pause the pointer over the page explorer button  and click **Prompt Pages**.
- From the **Toolbox** tab , drag **Page** to the **Prompt Pages** box.
- Double-click the page you just created.
- From the **Toolbox** tab, drag one of the following prompt controls to the prompt page.

Prompt control	Description
Text Box Prompt	Retrieves data based on a value that users type. Use this control when users know exactly what value they want to enter, such as a name or account number.
Value Prompt	Retrieves data based on values that users select from a list. Use this control to show a list of possible values from which users can choose. Note: The maximum number of items that can appear in a list is 5000.
Select & Search Prompt	Retrieves values based on search criteria that users specify. Data is then retrieved based on values users select from the search results. Use this control instead of a value prompt if the list of values is very long, which can slow down performance. Tip: Users have the option of performing a case sensitive or case insensitive search. A case sensitive search is faster, while a case insensitive search usually returns more values. You cannot use this control if you are working with SAP BW data sources.

Prompt control	Description
<p>Date Prompt</p>	<p>Retrieves data based on a date that users select.</p> <p>Use this control to filter a date column. Users can retrieve data for a specific day, a set of days, or a range of days.</p>
<p>Time Prompt</p>	<p>Retrieves data based on a time that users select.</p> <p>Use this control to restrict a report to a particular time or time range. For example, users can see how many orders are received after business hours. Users can then use this information to determine the number of staff needed to work after hours.</p>
<p>Date & Time Prompt</p>	<p>Retrieves data based on a date and time that users select.</p> <p>Use this control to filter a datetime or timestamp column. This control is useful for specifying ranges. For example, users can retrieve all orders received from Monday at 12:00 a.m. to Friday at 5:00 p.m.</p>
<p>Interval Prompt</p>	<p>Retrieves data based on a time interval that users specify.</p> <p>Use this control to retrieve data that is related to the passage of time. For example, users can retrieve a list of products that were returned 30 or more days after they were purchased.</p>
<p>Tree Prompt</p>	<p>Retrieves data based on values that users select from a list. Values are organized hierarchically.</p> <p>This control is useful when you are working with dimensional data sources. Data is shown from the top of a dimension hierarchy to the most detailed member, and users can choose the level of detail they want to view in the report. For more information about tree prompts, see “Control the Data That Appears in a Tree Prompt” on page 326.</p> <p>Tree prompts let you page through large numbers of prompt values with a More link at the bottom of the tree.</p>
<p>Generated Prompt</p>	<p>Selects a prompt control based on the data type of the data item.</p> <p>This control acts like a placeholder. When users run the report, the control is replaced by the appropriate prompt control. For example, if users are prompted for date values, the control is replaced by a date & time prompt.</p>

The **Prompt Wizard** dialog box appears.

5. If you are creating a text box, date, time, date and time, interval, or generated prompt, do the following:
 - Create a new parameter for the prompt or use an existing parameter.
 - Click **Next**.
 - If you created a new parameter, define the expression by selecting a data item from the package and the operator to use.

Tip: Make the prompt optional by selecting the **Make the filter optional** check box.

- Go to step 7.
6. If you are creating a value, select & search, or tree prompt, do the following:
 - Create a new parameter for the prompt or use an existing parameter.
 - Click **Next**.
 - If you created a new parameter and you want to use the parameter to filter data, select the **Create a parameterized filter** check box and define the expression by selecting a data item from the package and the operator to use. If you are creating a tree prompt, you must choose **in** in the **Operator** box. You can also use a parameter to provide a value for a layout calculation, such as showing a user's name in the report. When the report is run, you can use a parameter to prompt the user to type his name and have it appear in the report.

Tip: Make the prompt optional by selecting the **Make the filter optional** check box.

- Click **Next**.
- If you created a parameterized filter and you have more than one query defined in the report, select the check box for the query on which to filter and click **Next**.
- Select the **Create new query** check box to create the query that will be used to build the list of data values shown when the report is run.

Tip: Do not create a new query if you want to link the prompt to an existing query or if you intend to create the query at a later time.

- Click the ellipsis (...) button beside **Values to use** and click the data item on which to prompt.
 - To choose a data item that is different than what users will see when they are prompted, click the ellipsis (...) button beside **Values to display** and click the data item.
 - To create a cascading prompt, in the **Cascading source** box, click the parameter that represents the cascade source.
7. Click **Finish**.

Results






The prompt control is added to the prompt page. A prompt page is like a report page. You can insert graphics and text and apply formatting.


You can also modify the properties of the prompt control by clicking it and making changes in the **Properties** pane.

Example - Create a Report Showing Products Shipped for a Specific Time Interval

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report that shows the time interval between closing and shipping dates.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **Sales and Marketing (query)** and **Sales (query)**.
5. Expand **Sales fact** and double-click **Quantity**.
6. Expand **Products** and double-click **Product type**.
7. Expand **Sales order** and double-click **Order number**.
8. Create a time interval calculation:
 - From the **Toolbox** tab , drag **Query Calculation** to the right of **Quantity** in the list.
 - In the **Name** box, type the following and click **OK**:
Time Interval
 - In the **Expression Definition** box, type the following and click **OK**:
[Sales (query)].[Time (close date)].[Date (close date)]-[Sales (query)].[Time (ship date)].[Date (ship date)]
9. Create a filter:
 - From the **Data** menu, click **Filters** .
 - Click the add button .
 - In the **Expression Definition** box, from the **Data Items** tab , double-click **Time Interval** calculation you created.
 - Add **> ?p1?** after **Time Interval** to create the following expression:
[Time Interval] > ?p1?
 - Click **OK** twice.

A parameterized filter is created that will return data when the difference between the return date and the order date is greater than the value specified by the user.
10. Create a prompt page:
 - Pause the pointer over the page explorer button  and click **Prompt Pages**.
 - From the **Toolbox** tab, drag **Page** to the **Prompt Pages** pane, and then double-click it.
 - From the **Toolbox** tab, drag **Interval Prompt** to the work area.
The **Prompt Wizard** dialog box appears.
 - Click **Use existing parameter**, and then click **p1**.

- Click **Finish**.
11. Run the report.
An interval prompt appears.
 12. In the **Days** box, type a value and click **Finish**.

Tip: You can also type values for the **Hrs** and **Mins** boxes.

Results

A list report appears showing all products that were shipped after the time interval you specified. For example, if you typed 5, the list will show products that were shipped more than 5 days after the order date.

Order number	Product type	Quantity	Time Interval
100001	Lanterns	256	29 days
100005	Binoculars	65	9 days
100005	Knives	502	9 days
100005	Watches	24	9 days
100005	Woods	26	9 days
100011	Cooking Gear	2,172	10 days
100011	First Aid	312	10 days
100011	Insect Repellents	1,792	10 days
100011	Knives	2,490	10 days
100011	Navigation	98	10 days
100011	Sleeping Bags	242	10 days
100011	Sunscreen	1,164	10 days

Figure 46. List showing order number, product name, quantity, date, and time interval



Create a Parameter to Produce a Prompt




IBM Cognos Report Studio can automatically generate prompted reports based on parameters you create. When you run the report, Report Studio can generate a prompt page for each parameter not associated to an existing prompt page depending on whether the prompt run option is selected or not.

Note: When Report Studio automatically generates a prompt, it creates filters in the query using the prompt information properties that are set in the IBM Cognos Framework Manager model. For more information about the prompt information properties, see the Framework Manager *User Guide*.

You can also define parameters when you want to create a drill-through report or define master detail relationships.

Procedure

1. From the **Data** menu, click **Filters** .
 2. On the **Detail Filters** tab, click the add button .
- The **Detail Filter** dialog box appears.

3. In the **Available Components** box, click the **Source** tab  or the **Data Items** tab  to select the data item to use for the prompt:
 - To filter data based on data items not shown in the report, double-click a data item on the **Source** tab.
 - To filter data that appears in the report but not necessarily in the model, such as calculations, double-click a data item on the **Data Items** tab.
 The data item appears in the **Expression Definition** box.
4. In the **Expression Definition** box, type an operator after the data item or select an operator from the **Functions** tab .

The operator sets some of the default properties of the prompt. For example, if the operator is equals (=), users will be able to select only a single prompt value and the prompt's **Multi-Select** property is set to **No**.

For more information about creating expressions, see “Using Relational Calculations” on page 248 or “Using Dimensional Calculations” on page 302.
5. Type a name after the operator to define the prompt parameter. A question mark must precede and follow the name.
6. To specify whether the prompt is mandatory, in the **Usage** box, click **Required**, **Optional**, or **Disabled**.

Create a Prompt Directly in a Report Page

You can add prompt controls directly in a report page instead of creating a prompt page.

Prompt controls that are added to report pages will not appear in the following:

- saved reports
- PDF reports
- reports that are sent to users by email
- scheduled reports


Prompt controls are interactive. They are used to satisfy parameter values before running a report. As a result, prompt controls added to a report page only appear when you run the report in HTML format. When you run a report in HTML format, users select which values they want to see, and the report is refreshed, producing a new report.

For the non-interactive reports listed above, prompt parameter values must be collected and satisfied before the report is run. You provide the parameter values using the **Run options** tab in IBM Cognos Connection. If you do not provide all the required values, the report will fail to run. You can access the Run options tab

by clicking the set properties button  for the report.

Tip: The Revenue by Product Brand (2011) sample report in the Sales and Marketing (cube) package and the Rolling and Moving Averages interactive sample report include value prompts. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. From the **Toolbox** tab , drag a prompt control to the report.
The **Prompt Wizard** dialog box appears.
2. Provide the information necessary to create the prompt.

Tip: Make the prompt optional by selecting the **Make the filter optional** check box. Otherwise, when you run the report for the first time, the prompt appears in a generated prompt page rather than in the report page. Alternatively, you can specify a default selection for the prompt.

3. In the work area, click the prompt.
4. In the **Properties** pane, set the **Auto-Submit** property to **Yes**.
If you do not set the **Auto-Submit** property to **Yes**, the report will not refresh when users select a different prompt value.

Tip: An alternative to setting the prompt to auto-submit is to add a prompt button from the **Toolbox** tab and set its **Type** property to **Finish**.

Results

The prompt control is added to the report page. You can modify its properties by clicking it and making changes in the **Properties** pane.

Modifying Prompts

For each prompt you create, you can modify its properties by specifying values in the **Properties** pane.

For example, you can

- change the prompt control interface
- require user input
- enable multiple selections
- show or hide prompt statuses
- specify default selections
- specify prompt values
- add prompt buttons
- create cascading prompts

Some properties you set for a prompt may be overridden under some conditions. For example, some properties set for the filter associated with a prompt may override the corresponding prompt property.

Change the Prompt Control Interface

By default, when you create a prompt, IBM Cognos Report Studio selects the prompt control interface. You can change the prompt control interface depending on the type of prompt you created. For example, for a value prompt, you can choose a drop-down list, a list box, or a radio button group.



Procedure

1. Click the prompt control.
2. In the **Properties** pane, set the **Select UI** property to the interface.

Specify That a Prompt Requires User Input

You can specify that a prompt requires user input before the report can run.

Procedure

1. Click the prompt control.
2. In the **Properties** pane, set the **Required** property to **Yes**.
3. Pause the pointer over the page explorer button  and click a report page.
4. From the **Data** menu, click **Filters** .
5. Click the filter associated with the prompt.
6. In the **Usage** box, click **Required**.

Results

When you run the report, a star appears next to the prompt indicating that the user must select or type a value.



If you have a cascading prompt and the parent prompt control is required, the child prompt control is disabled. This ensures that users choose at least one value in the parent prompt before they can choose a value in the child prompt. Conversely, if the parent control is optional, then the child control is populated. This gives users the ability to choose values in the child prompt without having to choose a value in the parent prompt.

Allow Users to Select Multiple Values in a Prompt

You can allow users to select more than one value in a prompt. For example, you have a prompt for which users must select a product line. You can modify the prompt so that users can select more than one product line.

If you enable multiple selections, the **Auto-Submit** property is always set to no.

Procedure

1. Click the prompt control.
2. In the **Properties** pane, choose whether to allow users to specify more than one value or a range of values:
 - To allow users to specify more than one value, set the **Multi-Select** property to **Yes**.
 - To allow users to specify a range of values, set the **Range** property to **Yes**.
3. Pause the pointer over the page explorer button  and click a report page.
4. From the **Data** menu, click **Filters** .

If you have more than one query defined in the report, you must first click an object linked to a query.
5. Double-click the filter associated with the prompt.
6. Change the operator to one of the following:
 - If you are creating a multi-select prompt, change the operator to **in**.
For example, [Product_line] in ?Product line? where [Product_Line] is the name of the data item allows users to select multiple product lines.
 - If you are creating a range prompt, change the operator to **in_range**.

For example, [Margin] in_range ?Margin? where [Margin] is the name of the data item allows users to specify a margin range.

Show or Hide Prompt Status

Each prompt you create in a report provides dynamic validation when the report is run. Validity checks are performed to ensure that the data is correct and that required values are supplied. For example, a star appears next to each required prompt. An arrow appears next to a prompt if you must select or type a value. If you type an incorrect value, a dotted line appears. You can choose whether to show the star and arrow for each prompt.


Procedure

1. Click the prompt control.
2. In the **Properties** pane, set the **Hide Adornments** property to **Yes** to hide the prompt characters or **No** to show them.

Specify a Default Selection for a Prompt

You can specify a default selection for a prompt so that users do not have to select or type a value when they run the report.

Procedure

1. Click the prompt control.
2. To define a range of values, in the **Properties** pane, set the **Range** property to **Yes**.
3. To specify more than one default selection, in the **Properties** pane, set the **Multi-Select** property to **Yes**.
4. In the **Properties** pane, double-click the **Default Selections** property.
5. Click the add button  and do one of the following:
 - If you chose to define a single value, type the value as the default selection.
 - If you chose to define a range of values, type the minimum and maximum values of the range in the **Minimum value** and **Maximum value** boxes, respectively.
6. Repeat step 4 to specify other default selections.

Customize Prompt Text

You can customize the instructional text that appears around prompts. For example, a value prompt with multiple selections includes a **Select all** link below the choices that you can customize to text other than **Select all**. You can also specify translated text in many languages for international report users.

Procedure

1. Click the prompt control.
2. To change the default prompt text, in the **Properties** pane, double-click any of the properties under **Prompt Text**.

Note: When you select a property in the **Properties** pane, its description appears in the information pane below the **Properties** pane.

3. Click **Specified text**, and then click the ellipsis (...) button.
4. In the **Localized Text** dialog box, type the text that you want to appear.
5. To add customized text for other languages:

- Click **Add**.
- Select the countries and regions for which you want to specify localized text and click **OK**.
- To specify text for a country and region, select the country and region and click **Edit**, and then type the localized text in the text box.

Specify Prompt Values

You can provide your own values in a prompt instead of the default values that come from the database.



You can specify your own prompt values to

- show something different from what is in the database
- improve performance by not accessing the database
- provide text for optional prompts, such as Select a value
- restrict the number of values available

For example, you have a prompt in which users choose a country or region. For the database value United States, you want USA to appear in the prompt.

Tip: The Rolling and Moving Averages interactive sample report includes a value prompt. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure




1. Click the prompt control.
2. In the **Properties** pane, double-click the **Static Choices** property.
3. Click the add button .
4. In the **Use** box, type the prompt value to add.
5. In the **Display** box, type the value that will appear in the prompt.
6. Repeat steps 3 to 5 to add other prompt values.
7. To link a prompt value to a condition, do the following:
 - In the **Variable** box, choose the variable to use or create your own. For information about creating variables, see “Add a Variable from the Condition Explorer” on page 370.
 - In the **Value** box, click one of the possible values for the variable.
 - Click the static value to link to the variable and click the edit button .
 - In the **Display** box, type the value to appear in the prompt.
 - Repeat this procedure for each additional value.

Add a Prompt Button

Add prompt buttons so that users can submit selected items, cancel reports, or navigate between pages.

When you are building prompts and prompt pages, you may have to add prompt buttons to submit selections. Some prompt controls, such as the value prompt, can be set to submit selections automatically. Other prompt controls, such as the date prompt, require a prompt button.

Procedure

1. Pause the pointer over the page explorer button  and click the page to which to add a prompt button.
2. From the **Toolbox** tab , drag **Prompt Button**  to the work area.
3. Click the prompt button and, in the **Properties** pane, set the **Type** property to one of the following actions.




Goal	Action
Cancel the report	Cancel
Go to the previous prompt page	Back
Go to the next prompt page	Next
Run the report	Finish
Reprompt the user Tip: Reprompting users is useful when you have cascading prompts.	Reprompt

Create a Cascading Prompt

Create a cascading prompt to use values from one prompt to filter values in another prompt. For example, a report contains the columns Product line and Product type. You create prompts for these columns, and you specify that the Product type prompt is a cascading prompt that uses Product line as the source. When users select a product line, they see only the product types related to the selected product line.

Tip: The Employee Training by Year sample report in the GO Data Warehouse (analysis) package includes cascading prompts. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure


1. To make the cascading source a required prompt, select it and, in the **Properties** pane, set the **Required** property to **Yes**.
2. Click the prompt control to use as a cascading prompt.
3. In the **Properties** pane, double-click the **Cascade Source** property.
4. Click the parameter that represents the cascade source.
5. If the prompt allows users to select multiple values, add a prompt button to the cascade source to provide the cascading prompt with the appropriate values:
 - From the **Toolbox** tab , drag **Prompt Button**  to the report.
 - Click the prompt button and, in the **Properties** pane, set the **Type** property to **Reprompt**.
 - To change the text in the prompt button, on the **Toolbox** tab, drag **Text Item**  to the prompt button and type the text.

Control the Data That Appears in a Tree Prompt

You can control what data appears in a tree prompt and how the data is structured to get the results that you want. To do this, you add various functions to the filter expression.

In addition, the operator that you chose in the **Prompt Wizard** dialog box controls what appears next to each prompt value. If the operator is in or not in, check boxes appear next to each prompt value. If the operator is equals (=), no check boxes appear.

Procedure

1. Pause the pointer over the query explorer button  and click the query that is associated with the prompt.
2. In the **Data Items** pane, double-click the data item on which you are prompting.
3. In the **Expression Definition** box, type one of the following functions.

Goal	Function
Show the hierarchical structure of all members in the hierarchy. If this function is not used, all members are shown in a flat list.	rootmembers (<i>data_item</i>)
Show the descendants of the data item in a hierarchical structure where x represents the level. For example, if you are prompting on the Year hierarchy and x=1, you will see 2010, 2011, and 2012 in the tree. If x=2, you will see 2010 Q1, 2010 Q2, and so on.	descendants (rootmembers (<i>data_item</i>), x)
Show the children of a member. For example, 2012 Q1, 2012 Q2, 2012 Q3, and 2012 Q4 appear for the member 2012.	children (<i>member</i>)

Using in_range Filters with Character Data

If you use an in_range filter with character data, and the **From** value is greater than the **To** value, the filter returns no results. For example, if the **From** value is "Zone" and the **To** value is "Aloe Relief", the report returns no data.

To allow results within a range regardless of whether the **From** value is greater than the **To** value, your IBM Cognos administrator can enable a prompting setting. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Showing prompt values in generated SQL or MDX

You can show prompt values when viewing the generated SQL or MDX of a query or report.

Procedure

1. Pause the pointer over the query explorer button  and click the query for which you want to view the generated SQL or MDX.

2. In the **Properties** pane, set the **Use SQL Parameters** property to **Literal**.

Related tasks:

“View the SQL for an Entire Report or a Query” on page 246

View the SQL to see what is passed to the database when you run a report.

“View the SQL or MDX for an Entire Report or a Query” on page 295

View the SQL or MDX to see what is passed to the database when you run a report.

Chapter 12. Laying Out a Report

When creating a report, a good layout is essential to ensure that the information in the report is presented in a clear and effective manner.

Report Layout Recommendations

Consider the following recommendations when creating the layout of a report.

- Define the page structure.

Determine what goes into the page header, body, and footer. The page header contains information that appears at the top of each page. The page body contains information that starts on the first instance of the page. If there is too much data to fit on a single page, it continues across all instances of the page. The page footer contains information that appears at the bottom of each page.

- Identify horizontal bands of information.

Look for natural bands of information running across the page. Each of these bands typically translates into a block.

- Identify vertical bands of information.


In each horizontal band of information, look for bands that run up and down the page. Each of these bands typically translates into table cells.

- Decide which data frames to use to lay out the data.

Choose a list, crosstab, chart, repeater, or text frame.

- Set properties at the highest level item possible.

By setting properties at the highest level, you set them once instead of setting them for each child object. For example, if you want all text items in a report to appear in a specific font, set the font for the page.

Tip: When setting properties for an object, click the select ancestor button  in the **Properties** pane title bar to see the different levels available.

- Use padding and margins to create white space.

Do not use fixed object sizing unless it is absolutely necessary. When you specify that an object has a fixed size, your layout becomes less flexible.

The Page Structure View

When you add objects to a report, you usually work in the layout. An alternative view of the report is available.

From the **View** menu, click **Page Structure** to view the report in a different way.

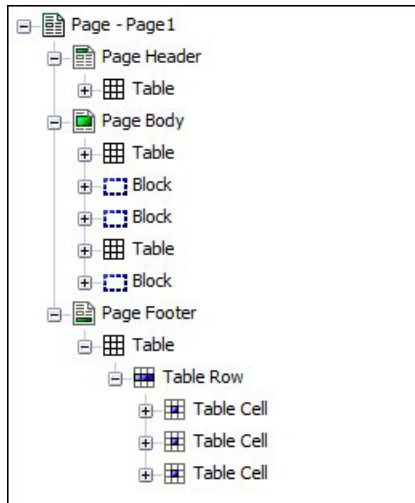


Figure 47. Example of the page structure view

Use the page structure view

- to view the entire contents of a report page in a tree structure
Using a tree structure is useful for locating the objects in a page and troubleshooting problems with nested objects.
- to quickly move objects from one area of a page to another
If you have a complex layout, it may be difficult to select, cut, and paste objects in the layout view. Objects are easier to locate in the page structure view.
- to modify object properties
You can modify object properties in the layout or in the page structure view.

Tip: To switch back to the report layout, from the **View** menu, click **Page Design**.

Related concepts:



“Work in design or structure view” on page 28

IBM Cognos Report Studio has two views in which you can author reports: **Page Design** view and **Page Structure** view. You can choose a report authoring view on the **View** menu.

Copy Object Formatting

You can quickly copy the formatting of items in your report, such as fonts, colors, borders, and number formats, and apply that formatting to other items.

Procedure

1. Click an item that has the formatting to copy.
2. Do one of the following:
 - To copy all the formatting applied to the item, click the pick up style button , click the item to format, and then click the apply style button .
 - To copy only one of the formatting styles, click the down arrow to the right of the pick up style button and click the style to copy. Then click the item to format and click the apply style button.
3. If you want to make changes to a style that you copied, click the down arrow to the right of the pick up style button and click **Edit Dropper Style**.
4. In the **Style** dialog box, specify basic and advanced style characteristics.

Add a Header or Footer to a Report or List

Add a header or footer to make a report easier to read. Headers and footers are containers in which you can add objects like text, images, and report expressions such as the current date and page numbers. You can add headers and footers to pages and lists.

Tip: The Revenue by Product Brand (2011) sample report in the Sales and Marketing (cube) package includes a customized header and footer. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Add a page header or footer when you want information to appear on every page in the report, such as a title or page numbers. You can use combinations of text, data items, and report expressions in titles.

You can add the following headers and footers to lists to organize data into logical sections or to identify every change in value of a column.

Type	Description
List page header	Adds a header that appears at the top of the list on every page in which list data appears.
Overall header	Adds a header that appears once at the top of the list.
Group or section header	Adds a header that appears for each group of a grouped column or each section.
Group or section footer	Adds a footer that appears for each group of a grouped column or each section.
Overall footer	Adds a footer that appears once at the bottom of the list.
List page footer	Adds a footer that appears at the bottom of the list on every page in which list data appears. Note that summary calculations in list page footers only summarize the data that is visible on that page of the list report.

You can also add section footers by adding a summary.

Before you begin


To see the headers and footers, ensure that the visual aids are turned on.


Procedure

1. If you want to add a page header or footer, from the **Structure** menu, click **Headers & Footers, Page Header & Footer**, select the appropriate check boxes, and click **OK**.

Tip: You can also click the headers & footers button  on the toolbar.

2. If you want to add a list header or footer, from the **Structure** menu, click **Headers & Footers, List Headers & Footers**, select the appropriate check boxes, and click **OK**.

Tip: You can also click the headers & footers button on the toolbar and then click the list headers & footers button .

3. If you want to add objects to a header or footer, drag the objects from the **Toolbox** tab  to the appropriate location.

To add objects to a list header or footer, you must first unlock the report. From the **Structure** menu, click **Lock Page Objects**.

Tip: To add data items to the page header or footer, you must associate a query to the page.

4. To split a header or footer into multiple cells that span the list, from the **Structure** menu, click **Headers & Footers** and click **Split List Row Cell**.
5. To merge multiple cells in a header or footer, from the **Structure** menu, click **Headers & Footers** and click **Merge List Row Cells**.
6. To add rows to a header or footer, from the **Structure** menu, click **Headers & Footers** and click **Insert List Row Cells Above** or **Insert List Row Cells Below**.


Add Borders to an Object

You can add borders to objects in a report such as a column, a header, or a footer or to the whole report.

Tip: You can also add borders using the IBM Cognos Report Studio toolbar.

Procedure

1. Click the object to which to add a border.

Tip: To quickly select the parent of an object, click the object, and then click the select ancestor button  in the title bar of the **Properties** pane.

2. In the **Properties** pane, double-click the **Border** property and select values in the **Color**, **Style**, and **Width** boxes.

Note: Specifying a width using % as the unit of measure is not supported when producing reports in PDF.

3. Apply the selected values to the top, bottom, left side, right side, or all sides of the object by clicking the appropriate button in the **Preview** section.

Tip: To clear the border applied, click the clear borders button .



Add a Text Item to a Report

You can add text to a report. You can insert text in other objects, such as a block or table cell, or directly in the report page.

You can also add multilingual text to a report.

You can now format the text by changing the font, color, size, and so on. Select the text and make the appropriate changes in the **Properties** pane.

Procedure

1. From the **Toolbox** tab , drag the **Text Item** object  to the report.
The **Text** dialog box appears.
2. Type the text and click **OK**.

Tip: You can also paste text from another part of the report.

Specify the Font for a Report

You can specify the font for text in a report.

Procedure

1. Click the object.

Tip: To specify the default font for the report, click the page.

2. Do one of the following:
 - From the toolbar, specify the font properties.
 - In the **Properties** pane, double-click the **Font** property and specify the font properties.

To specify the color of the text, click **Foreground Color**. Alternatively, you can specify the color of the text by clicking the **Foreground Color** property for the object.

Tip: Type a list of fonts in the **Family** box if you are not sure whether a specific font is installed on a user's computer. For example, if you type Times New Roman, Arial, monospace, IBM Cognos Report Studio checks to see if Times New Roman is installed. If it is not, Report Studio checks for Arial. If Arial is not installed, the monospace font used by the computer is used.

Results

If you clicked **(Default)** for any of the font properties, the default value for the property is used. Default values are stored in a style sheet that is used across all IBM Cognos Business Intelligence tools. You can modify default values by modifying classes.



Insert an Image in a Report

You can insert an image in a report. You can insert images in other objects, such as blocks or table cells, directly in the report page or as the background image of another object.

Before you begin

The images that you insert must first be uploaded to the IBM Cognos Business Intelligence server or another Web server and must be .gif or .jpg format.

Procedure

1. From the **Toolbox** tab , drag the **Image** object  to the report and then double-click it.
2. In the **Image URL** dialog box, type the URL of the image to insert or click **Browse** to go to the location containing the image.

To browse images on a Web server, you must enable Web-based Distributed Authoring and Versioning (WebDAV) on your Web server. For more information about configuring Web servers, see the IBM Cognos Business Intelligence *Installation and Configuration Guide*.

Insert a Background Image in an Object

You can insert a background image for objects in a report. For example, use a background image to add a watermark to a page.

You can also create your own background visual effects, such as drop shadows and gradient fills. For more information, see “Add Background Effects.”

Before you begin

The images that you insert must first be uploaded to the IBM Cognos Business Intelligence server or another Web server and must be .gif or .jpg format.

Procedure

1. Select the object.
2. In the **Properties** pane, under **Color & Background**, double-click the **Background Image** property.
3. To use the background from the default style for the object (Cascading Style Sheet (CSS) class), click **Default**.
4. To explicitly not insert a background image, click **None**.
This option overrides any default background images including background gradients on objects that appear in the 10.x report styles.
5. To insert a specific image, click **Specified** and in the **Image URL** box, type the URL of the image to insert or click **Browse** to go to the location containing the image.
To browse images on a Web server, you must enable Web-based Distributed Authoring and Versioning (WebDAV) on your Web server. For more information about configuring Web servers, see the IBM Cognos Business Intelligence *Installation and Configuration Guide*.
6. In the **Position** box, choose how to align the image in the object.
7. In the **Tiling** box, click a tiling option.

Related tasks:

“Change a Chart Background in a Legacy Chart” on page 115

You can use a solid color, a pattern, or a gradient fill effect to customize the chart background.

Add Background Effects

You can add background effects to enhance the appearance of your report. You can enhance objects, such as data containers (lists, crosstabs, and charts), headers, footers, page bodies, and so on with borders, gradient fill effects, drop shadows, and background images. You can also apply background effects as a class style.

The background effect is rendered within the rectangle area that bounds the object. To use a generated background in a chart, the chart must have a fixed size.

If the background image is complex and large, the size of the report output may be affected proportionately.


Background effects are rendered only if the data container has a fixed height and width; if a percentage size is used, the effects are ignored.

Resizing or overflow behavior is ignored for generated images in HTML reports.

Add background effects to a chart

Background effects include borders, fills, drop shadows, and images.

Procedure


1. Click the chart object.
2. To choose a preset background effect, click the background effects presets button  on the style toolbar, and then click a background.
3. In the **Properties** pane, under **Color & Background**, double-click the **Background Effects** property.
4. Select one or more of the following:
 - To apply a border, click **Border** and specify settings for border style, width, color, corner radius for rounded rectangles, and transparency. If the element also includes a fill with a transparency setting, select the **Allow transparent bleed** check box to apply the same transparency to the border.
 - To apply a fill effect, click **Fill** and specify the settings. The fill effect can either be a solid color, a gradient, or a pattern. You can define a gradient fill effect as a linear, radial line, or radial rectangle gradient.
 - To apply a drop shadow effect, click **Drop Shadow** and specify the shadow color, transparency value, color, and offset settings. The default horizontal and vertical offset is 5 pixels.
 - To specify one or more images as a background, click **Images**. You can specify the transparency value and the position for each defined image. You can also specify a custom position for each image.

Tip: To remove the effect, clear its check box.

Add a background gradient to a page

A background gradient is a shading that goes from one color to another either horizontally or vertically across your page.

Procedure

1. Click anywhere in the report page.
2. In the **Properties** pane title bar, click the select ancestor button  and click **Page**.
3. Under **Color & Background**, double-click the **Gradient** property.
4. Select the **Gradient** check box and then select the colors and direction for the gradient.


Background gradients and drop shadows do not appear in Microsoft Excel spreadsheet software output. They are also supported only for report outputs run in the Microsoft Internet Explorer Web browser.

Tip: To remove the effect, clear the **Gradient** check box.

Add a drop shadow to a container

A drop shadow is a border on the bottom and right of an object. You can specify the color and transparency of this shadow.

Procedure

1. Click the crosstab, list, repeater table, or table in the report.
2. In the **Properties** pane title bar, click the select ancestor button  and click **Crosstab, List, Repeater Table, or Table**.

Tip: You can also click the container selector (three orange dots) of the container to select it.

3. Under **Color & Background**, double-click the **Drop Shadow** property.
4. Select the **Drop shadow** check box and then select the color, offset, and transparency values.

Background gradients and drop shadows do not appear in Excel output. They are also supported only for report outputs run in the Internet Explorer Web browsers.

If you add a drop shadow, ensure that you also specify a background color for the object. Otherwise, if you keep the default transparent background, data values also have a drop shadow and are difficult to read.

Tip: To remove the effect, clear the **Drop shadow** check box.

Insert a Formatting Object in a Report

In addition to text and images, the **Toolbox** tab  contains other objects that you can add to the report layout.

Object	Description
Block	Adds an empty block, which is a container in which you can insert other objects. This is useful for controlling where objects appear. Tip: You can use blocks to add space between objects. However, empty blocks are not rendered. You must insert an object or specify the height and width. Tip: The Revenue by GO Subsidiary 2011 sample report in the GO Data Warehouse (analysis) package includes an empty block. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.
Table	Adds a table, which is a container in which you can insert other objects. This is useful for controlling where objects appear.
Field Set	Adds an empty block that has a caption. This is similar to the Block object, but with a caption.
Intersection (Tuple)	Adds an intersection (tuple). For more information, see "Create an Intersection (Tuple)" on page 306.
Query Calculation	Adds a calculated column. For more information, see "Using Relational Calculations" on page 248 or "Using Dimensional Calculations" on page 302.

Object	Description
Crosstab Space	<p>Inserts an empty cell on a crosstab edge. Allows for the insertion of non-data cells on an edge. Blank cells appear for the edge when the report is run.</p> <p>Insert this object when a crosstab edge does not produce useful data and you want blanks to appear in the cells instead.</p>
Crosstab Space (with fact cells)	<p>Inserts an empty cell on a crosstab edge. Allows for the insertion of non-data cells on an edge. The contents of the fact cells for the edge are rendered when a measure is added or the default measure is specified.</p> <ul style="list-style-type: none"> • If the crosstab space is nested, the scope of the fact cells is the scope of the item that is at the level before the space. • If the crosstab space is not nested and there are no items nested below it, the scope of the fact cells is the default measure.
Singleton	Inserts a single data item.
Conditional Blocks	Adds an empty block that you can use for conditional formatting.
HTML Item	<p>Adds a container in which you can insert HTML code. HTML items can be anything that your browser will execute, including links, images, multimedia, tooltips, or JavaScript.</p> <p>HTML items appear only when you run the report in HTML format.</p> <p>Note: You cannot include <form> tags in HTML items.</p> <p>Tip: The Table of Contents sample report in the GO Sales (analysis) package includes an HTML item. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.</p> <p>Note: When you upgrade to the next version of IBM Cognos Business Intelligence, the report upgrade processes do not account for the use of undocumented and unsupported mechanisms or features, such as JavaScript, that refers to IBM Cognos HTML objects.</p>
Rich Text Item	<p>Inserts an object that is used to render HTML in the layout. This object is similar to the HTML Item, except that rich text items also render in PDF output. Using rich text items is useful when you want to add annotations defined in a data source to a report.</p> <p>Note: Rich text items support only a restricted set of well-formed XHTML.</p>
Hyperlink	Adds a hyperlink so that users can jump to another place, such as a Web site.
Hyperlink Button	Adds a hyperlink in the form of a button.
As of Time Expression	Adds an As of Time expression so that you can show data for a specific time period.
Page Number	Inserts page numbers that you can customize.

Object	Description
Row Number	Numbers each row of data returned when the report is run. Note: You can add row numbers only to lists and repeaters.
Layout Component Reference	Adds a reference to another object. Useful when you want to reuse an object.
Table of Contents	Creates a table of contents that is rendered in the output of a report.
Table of Contents Entry	Adds a table of contents marker.
Bookmark	Inserts a bookmark so that users can move from one part of a report to another.

For information about each prompt control and prompt buttons, see Chapter 11, “Adding Prompts to Filter Data,” on page 313. The **Toolbox** tab contains other objects when you work in other areas such as Query Explorer and Condition Explorer.

Before you begin

Before you can add a hyperlink, HTML item, or hyperlink button, you must have the **HTML Items in Report** capability. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Procedure

To add an object, drag or double-click it from the **Toolbox** tab .

Elements Supported in Rich Text Items

Rich text items support all XHTML character entities, such as (non-breaking space), and the following elements: div, span, ul, ol, and li.

Each element only supports the style attribute, which must contain a valid CSS style. In addition, ul and ol elements support list-style attributes. Specifically, the ol element supports decimal, and the ul element supports circle, disc, and square, as well as list-style-image.

For example, the following code produces an unordered list entitled List: with three items. Each list item is in a different color, and the list-style attribute used is circle.



```
<div style="font-size:14pt; text-decoration:underline">List:</div>
<ul style="list-style-type:circle">
<li style="color:green">Item <span style="font-weight:bold">A</span></li>
<li style="color:red">Item B</li>
<li style="color:blue">Item C</li>
</ul>
```

Example - Add a Multimedia File to a Report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You want to insert a Microsoft Windows Media Audio/Video file named GO.wmv in a template that serves as a cover page for all reports.

You must have Windows Media Player installed on your computer.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template** and in the **New** dialog box, click **Blank**.
3. From the **Toolbox** tab , drag the **HTML Item** object  to the report.
4. Select the **HTML Item**.
5. In the **Properties** pane, double-click the **HTML** property.
6. In the **HTML** dialog box, type the following:

```
<OBJECT classid="CLSID:6BF52A52-394A-11D3-B153-00C04F79FAA6">
<PARAM NAME="URL" VALUE="/c10/webcontent/samples/images/
GO.wmv"/> </OBJECT>
```

Results

When you run the report in HTML format, the multimedia file plays in Windows Media Player.

Align an Object in a Report

You can specify a horizontal and vertical alignment for an object in a report to determine where they appear.

Tables can also be used to determine where objects appear in a report.

Note: The **Justify** horizontal alignment works with HTML output but does not apply to PDF output.

Procedure

1. Select the object to align.
2. From the toolbar, click one of the available horizontal or vertical alignment buttons.

Using a table to control where objects appear




You can use tables in your report to control where objects appear. Tables can be inserted anywhere in a report, such as a header, a footer, or the page body. After you create a table, insert the objects you want in the cells.

You can also apply a predefined table style to tables. Other table properties are described in Appendix G, "Report Studio Object and Property Reference," on page 771.

The alignment buttons can also be used to determine where objects appear in a report.

Tip: The Singletons on Page Body sample report in the GO Sales (analysis) package includes a table to control the report layout. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.

Procedure

1. From the **Toolbox** tab , drag **Table**  to the report.
The **Insert Table** dialog box appears.
2. In the **Number of columns** and **Number of rows** boxes, type the number of columns and rows for the table.
3. If you want to have the table span the width of the report page, select the **Maximize width** check box.
4. If you want to add borders to the table, select the **Show borders** check box.
5. If you want to merge cells in the table, select the cells and click the merge cells  button.
6. Select the table object.
7. In the **Properties** pane, under **Positioning**, double-click the **Table Properties** property.
8. To display both the inside and outside borders, do the following:
 - Clear the **Collapse borders** check box.
 - Type a number in the **Cell spacing** text box to define how much space to add between the table cells.
 - Select the **Show empty cell borders** check box to display the borders even for empty cells.
9. To fix the size of the columns in the table, check the **Fixed size** check box.
When this check box is cleared, the table columns expand to fit the text.

Apply a Table Style

Apply a table style to quickly format tables. You can also apply a table style to lists, crosstabs, and repeater tables.

About this task

By default, when a new object is inserted in a list or crosstab, the object inherits the style from an object of the same type in the data container. For example, if you insert a measure in a list, the measure inherits the style of a measure that is already in the list, if there is one. If you do not want objects to inherit styles, clear the **Table Style inheritance** option in the **Tools** menu (**Tools, Options, Report** tab).

The following rules explain how style inheritance is applied to lists and crosstabs.

- Styles are inherited in the following order: custom, client default, and server default.
A custom style is a style that you manually apply. A client default style is one of the styles available in the **Apply Table Style** dialog box. The server default style is the style applied when **Default** is selected in the **Apply Table Style** window.
- When a new column or row is inserted, it inherits the style from the sibling of the same type that is on its right or below.
- If there is no sibling of the same type, then the nearest sibling that is on its left or above is applied.
- If there is no sibling of the same type in the container, then the client or server default table style is applied.
- If a custom style is applied to a column or row and the object is then moved to another location, the object retains the custom style.

Custom styles applied to part of an object, such as the header, body, or footer, may be lost. For example, if a container has a footer, the footer is recreated when a column is moved. The recreated footer is rendered using the style that was applied to the footer before you customized its style.

- Deleting a column or row has no impact on the styles of the other objects in the container.
- Styles are preserved if a column is grouped or ungrouped. The same applies when creating or removing sections.
- When drilling up or down, the style of the parent item is applied.

Procedure

1. Click the table, list, crosstab, or repeater table.
2. From the **Table** menu, click **Apply Table Style**.
3. In the **Table styles** box, click a table style.

Tip: Some styles are unique to tables, lists, or crosstabs.

4. If you are applying a table style to a table or list, in the **Apply special styles to** section, select or clear the various column and row check boxes based on how you want to treat the first and last columns and rows.

Some check boxes may not be available for particular table styles, or to particular columns or rows.


5. If you are applying a table style to a list or crosstab and you want the style to be applied to all lists or crosstabs in the report, select the **Set this style as the default for this object type** check box.

For a list, you may need to clear the **First column** and **Last column** check boxes in the **Apply special styles to** section before you can select this check box. In addition, some table styles cannot be set as the default.

Apply Padding to an Object

Apply padding to an object to add white space between the object and its margin or, if there is a border, between the object and its border.

Tip: You can quickly apply left or right padding by either pressing Tab and

Shift+Tab or by clicking the increase indent  and the decrease indent buttons in the toolbar. When using the toolbar buttons, you can indent an object by up to nine times the indentation length. You can specify the indentation length to use by clicking the arrow beside either button and clicking **Set Default Indent Length**.

Tip: The GO Balance Sheet as at Dec 31 2012 sample report in the GO Data Warehouse (analysis) package includes padding. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.

Procedure

1. Select the object to which to apply padding.
2. In the **Properties** pane, double-click the **Padding** property.
3. Specify top, bottom, left, and right padding by typing values in the corresponding boxes and choosing the unit of measure.

Note: Specifying padding using % as the unit of measure is not supported when producing reports in PDF.

Set Margins for an Object

Set the margins for objects in a report to add white space around them.

For Date, Time, Row Number, and Page Number objects, you can only set the left and right margins. If you want to set the top or bottom margins for these objects, place them in a table or a block. Then set the margin or padding properties on the table or block object.

Procedure

1. Select the object.
2. In the **Properties** pane, double-click the **Margin** property.
3. Specify the top, bottom, left, and right margins by typing values in the corresponding boxes and choosing the unit of measure.



Note: Specifying margins using % as the unit of measure is not supported when producing reports in PDF.

Add Multiple Items to a Single Column

You can add multiple items to a single column to condense a report. For example, you have a list report that contains many columns. You can reduce the number of columns in the list by putting related information in a single column.

Procedure


1. From the **Structure** menu, click **Lock Page Objects** to unlock the report.
2. From the content pane, drag the items to the column.




For example, you can add data items from the **Source** tab  or text items from the **Toolbox** tab .

Example - Create a Report with Multiple Items in One Column

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a list report showing the name, position, email address, phone number, extension, and fax number for each sales representative in each city organized by country or region. To reduce the number of columns in the list, you show email addresses, phone numbers, extensions, and fax numbers in a single column.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **HR (query)**, **Employee summary (query)**, and **Employee by region**. Add the following data items to the list by double-clicking them:
 - **Country or Region**
 - **City**
 - **Employee name**

- **Position name**
 - **Email**
 - **Work phone**
 - **Extension**
 - **Fax**
5. Click the **Country or Region** column and, from the **Structure** menu, click **Section**  .
 6. From the **Structure** menu, ensure that the report is unlocked
 7. Click **Country or Region** and, in the **Properties** pane, double-click the **Font** property.
 8. Change the font to **Arial Black, 11 pt, and Bold**, and then click **OK**.
 9. From the **Toolbox** tab  , drag **Table** to the right of the **Work phone** text item in the first row of **Work phone** column and create a table that has one column and three rows.
 10. Drag the following data items to the table:
 - **Email** to the first row
 - **Work phone** to the second row
 - **Fax** to the third row
 11. Drag **Extension** to the right of **Work phone** in the table.
 12. From the **Toolbox** tab, drag **Text Item** to the left of each item in the table and type the following for each item, putting a blank space before and after the text:
 - **Email:**
 - **Work phone:**
 - **ext:**
 - **Fax:**
 13. Ctrl+click the **Extension**, **Email**, and **Fax** column titles and click the delete button  .
 14. Click the **Work phone** column title.
 15. In the **Properties** pane, click the **Source Type** property and click **Text**.
 16. Double-click the **Text** property.
 17. Type the following and click **OK**:

Contact Information
 18. Select the **Work phone** data item in the first row of the list above the table and click the delete button.
 19. Double-click the text item in the page header, type the following, and click **OK**:

Sales Representatives Contact List
 20. From the **Structure** menu, click **Lock Page Objects**.
The report is locked.
 21. Run the report.

Results

Contact information for each sales representative appears in a single column.

Sales Representatives Contact List

Australia

City	Employee name	Position name	Contact Information
Melbourne	Alice Walter	Branch Sales Manager	Email: AWalter@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8910 Fax: +(61) 03 2982 4243
Melbourne	Alice Walter	Level 3 Sales Representative	Email: AWalter@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8910 Fax: +(61) 03 2982 4243
Melbourne	Andrea Samuel	Payroll Clerk	Email: ASamuel@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8224 Fax: +(61) 03 2982 4243
Melbourne	Catherine Fowle	Warehouse Worker	Email: CFowle@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8465 Fax: +(61) 03 2982 4243
Melbourne	Cindy Sandles	Product Technician	Email: CSandles@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8225 Fax: +(61) 03 2982 4243
Melbourne	Dan Michaels	Budget Analyst	Email: DMichaels@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8480 Fax: +(61) 03 2982 4243
Melbourne	Dave Smythe	Level 1 Sales Representative	Email: DSmythe@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8909 Fax: +(61) 03 2982 4243
Melbourne	David Dolby	District Sales Manager	Email: DDolby@grtd123.com Work phone: +(61) 03 2982 4242 ext: 8288 Fax: +(61) 03 2982 4243


Figure 48. List showing the city, employee name, position, and contact information for Australia

Reuse a Layout Object

You can save time by reusing layout objects that you add to a report instead of re-creating them. For example, you have a multiple-page report and you want to show the company logo in the page header of each page. Insert the logo once and reuse it on all other pages.

Procedure


1. Click the object to reuse.

Tip: To quickly select the parent of an object, click the object, and then click the select ancestor button  in the title bar of the **Properties** pane.

2. In the **Properties** pane, set the **Name** property to a value beginning with a letter to uniquely identify the object and press the Enter key.

IBM Cognos Report Studio may have already specified a name for the object.

3. To reuse the object in another report, open that report.

4. From the **Toolbox** tab , drag the **Layout Component Reference** object to the location in which it will be reused.

5. In the **Component Location** box, do one of the following:
 - To reference an object in the current report, click **This report**.
 - To reference an object in another report, click **Another report**, click the ellipsis (...) button, and open the report.

Note: In active reports, you cannot reference objects from another active report.

6. In the **Available components to reference** box, click the object and click **OK**.
7. If the referenced object is in another report, click the **Layout Component Reference** object and in the **Properties** pane, set the **Embed** property to specify how to store the referenced object in the report:

- Click **Copy** to store a copy of the object.
The copy is not automatically updated if the source object is modified.

Note: In active reports, you can store referenced objects only by copying them to the report.

- Click **Reference** to store a reference, or pointer, of the object.
The reference of the object is automatically updated if the source object is modified. For example, if you open or run the report, you see the modified object.

Results

A copy or reference of the object appears where you placed the **Layout Component Reference** object. If a source object is changed, you can update reused objects.

Tip: You can also create a new report or template and add all the objects to share. All your shared objects then reside in a single location, like a library.

Change a Reused Object

If you reuse an object that contains other objects, you can change the child objects to something different. For example, you have a block object containing a text item in the page header and you decide to reuse the block in the page footer. However, you want the text item in the page footer block to show different text from that in the page header.

About this task

If you reuse a visualization, you cannot change the data container of the visualization.

Procedure

1. In the parent object to reuse, click the child object to change.
2. In the **Properties** pane, set the **Name** property to a value beginning with a letter to uniquely identify the object.
IBM Cognos Report Studio may have already specified a name for the object.
3. Select the copy of the parent object you created with the **Layout Component Reference** object.
4. In the **Properties** pane, double-click the **Overrides** property.
5. In the **Overrides** dialog box, select the child object to change and click **OK**.

The child object in the copy of the parent object is replaced by the following text:

Drop item to override component child.

6. Drag an object to replace the child object.

You can replace the child object with any other object, not just an object of the same type. For example, if the child object is a text item, you can replace it with an image.

Update Reused Objects

If a report contains objects referenced in another report, you can quickly update the referenced objects if the source objects have changed. Shared objects are stored in the layout component cache.

Procedure

1. Open the report to update.
2. From the **Tools** menu, click **Layout Component Cache**.

The **Layout Component Cache** dialog box appears, showing all reports that contain referenced objects and the source reports where the objects exist.

3. To view which components are reused, click a source report.

The components that are reused appear in the **Components used** pane.


4. Click **Reload Components** to refresh all referenced objects.

Although referenced objects are automatically refreshed when you open or run a report, clicking this button updates components that were changed while the report is open.

5. Click **Update All Component Copies** to refresh all copied objects.
6. Click **Close**.

Specify text and container direction

You can specify text and container direction by choosing any of these options.

Option	Description
Direction	<p>Sets the reading order of an object, such as right-to-left. If Inherit is selected, the direction is inherited from the parent object. The default is left-to-right.</p> <p>For text objects, an additional choice named Contextual exists. This choice sets the text direction based on the first letter in the text. If the letter belongs to a right-to-left script, the text direction is right-to-left. Otherwise, the text direction is left-to-right. Numbers and special characters do not influence the text direction. For example, if the text starts with a number followed by an Arabic letter, the direction is right-to-left. If the text starts with a number followed by a Latin letter, the direction is left-to-right.</p> <p>Tip: You can also set the direction of text objects by clicking the Text direction icon  in the toolbar. This icon is visible only when the IBM Cognos Connection user preference Enable bidirectional support is selected.</p>
Writing mode	Sets the direction and flow of content in an object.

Option	Description
Bidirectional	Sets the level of embedding in an object. For text objects, if the Direction option is set to a value other than (Default) and no value is selected for this option, this option is set to Embed . Setting this option to Embed ensures that the base text direction specified for the text is applied.
Justification	Sets the type of alignment used to justify text in an object.
Kashida space	Sets the ratio of kashida expansion to white space expansion when justifying lines of text in the object. This property is used in languages that use the Arabic writing script.

About this task

Specifying text direction and container direction depends on the object selected in the report. The following list describes the types of objects in Report Studio that you can specify text or container direction.

- Compound objects

Compound objects are container objects that contain text. Examples include charts, maps, active reports, and prompts. You cannot set text direction for specific text objects in a compound object.

To specify container direction for compound objects, click the **Direction & Justification** property for the object. To specify text direction for text in compound objects, click the **Contained Text Direction** property for the object.

- Container objects

You can specify only container direction for container objects, such as a report page. Click the **Direction & Justification** property for the object to specify container direction.

By default, the text direction of text in a container object is inherited from the container.

- Text objects

For all text objects, the **Direction & Justification** property specifies the text direction.

In charts, container direction impacts all aspects of a chart. The following list describes the parts of a chart that are affected by container direction.


- The chart itself.
- The location of the Y-axis and the horizontal run direction of the X-axis.
- The labeling, including the orientation of angled labels on axes.
- The location of the legend as well as the legend content.

Container direction has no impact on rotary axes. For example, the slices in a pie always progress in the same direction around the pie. However, container direction does affect labelling as well as position and direction of the legend.

Note: You cannot specify base text direction and container direction for legacy charts.

Procedure

1. Click an object.

Tip: To specify the base text direction of a text object that is inside another object, such as a list column, you must first unlock  the report.

2. In the **Properties** pane, click one of the following properties:

- **Direction & Justification**
- **Contained Text Direction**

This property applies only to compound objects.

3. Specify the text direction and container direction options that you want.

Related concepts:

“Support for bidirectional languages” on page 56

You can author reports that support bidirectional languages. You can specify base text direction, digit shaping, and container direction.

Specify Line Spacing and Breaking

You can specify text properties by choosing any of these options.

Option	Description
Line Height	Sets the distance between lines of text in an object.
Letter Spacing	Sets the amount of additional space between letters in an object.
Text Indent	Sets the indentation of the first line of text in an object. Note: This property works with HTML output but does not apply to PDF output.
Word Break	Sets line-breaking behavior within words.
Break words when necessary	Sets whether to break words when the content exceeds the boundaries of an object.
Enforce stricter line-breaking rules for Japanese Text	Sets line-breaking rules for Japanese text.

Procedure

1. Click an object.
2. In the **Properties** pane, double-click the **Spacing & Breaking** property.
3. Specify the text properties.

Specify the Height and Width of an Object

You can specify the height and width of objects using various units of measurement. In addition, if the object is a field set, text box prompt, prompt button, hyperlink button, block, or a conditional block, you can specify how to handle content overflow. Specify the height and width by choosing any of these options.

Option	Description
Height	Sets the height of the object.

Option	Description
Width	Sets the width of the object.
Content is not clipped	If the contents of the block exceed the height or width of the block, the block automatically resizes to fit the contents.
Content is clipped	If the contents of the block exceed the height or width of the block, the content is clipped. Note: The clipped content still exists. It is just not visible in the block.
Use scrollbars only when necessary	If the contents of the block exceed the height or width of the block, scrollbars are added to the block.
Always use scrollbars	Scrollbars are added to the block.

Do not use percentages to resize charts and maps that contain interactive elements that are activated when you pause the pointer over them, such as tooltips or drill-through links, because the browser is unable to realign the hard-coded hot spots after an image is resized.

When you use a percentage to specify the size of an object, the percentage is relative to the object's parent. In some cases, setting the size of an object using percentages will not give you the results that you want unless you also specify the size of the parent container.

Procedure

1. Click an object.
2. In the **Properties** pane, double-click the **Size & Overflow** property and specify the height and width.

Control How Other Objects Flow Around an Object

You can control how objects flow around other objects by choosing any of the following options.

Option	Description
Float	Sets how other objects flow around the object.
Allow floating objects on both sides	Allows other objects to flow on both sides. The Float property must be set.
Move below any floating object on the left side	If there are other objects to the left of the object, the object moves below those objects. The Float property must be set.
Move below any floating object on the right side	If there are other objects to the right of the object, the object moves under those objects. The Float property must be set.
Move below any floating object	Moves the object under any other object in which the Float property was set.

Procedure



1. Click an object.
2. In the **Properties** pane, double-click the **Floating** property.

3. Specify how other objects flow around the object by specifying the floating options.

Specify Report Properties

You can change the default report property settings.

Procedure

1. From the **File** menu, click **Report Properties**.
2. To specify the classes that IBM Cognos Report Studio uses to format objects, click **Report styles** and choose one of the available options.
For more information, see “Create and Modify Report and Object Styles.”
3. For reports with multiple data containers, to render the default number of rows of each data container on each HTML page, you must set the **Page break by data container for interactive HTML** option to **Yes**. The default value is **No**.
For more information, see “Controlling the Rows Per Page for Multiple Containers in HTML and PDF” on page 48.
4. To automatically create extended data items every time a data item is inserted, select the **Always create extended data items** check box.
IBM Cognos Report Studio creates extended data items by default. For more information about extended data items, see “Extended Data Items” on page 263.
5. To create a single, scrollable HTML page when you run and save this report as HTML from IBM Cognos Connection, clear the **Paginate saved HTML output** check box.
The default is to paginate HTML reports with the same page breaks as PDF reports. The single, scrollable HTML page will be available from IBM Cognos Connection when you click the view report output versions action .

6. When producing reports in Excel 2007 format, if you do not want to group repeating cells in lists and crosstabs, clear the **Group repeating cells when exporting to Excel** check box.
When this check box is selected, grouped cells in crosstab rows and columns and grouped columns in lists are merged into a cell area in the Excel output. When the check box is cleared, merged cells are split. For more information, see “Option to group repeating cells in reports produced in Excel 2007 format” on page 50.
7. If you are working with reports created in IBM Cognos ReportNet and you want to create CSV report output, click **Use 1.x CSV export**.
This option ensures that all the query columns are exported. In IBM Cognos ReportNet, if a data item was referenced using the **Properties** property of a list, it was included in the CSV output. In IBM Cognos Business Intelligence, the default is to export only the columns in the list.

Create and Modify Report and Object Styles

Create your own classes or modify existing classes in a report to format objects across a report according to your particular needs. In IBM Cognos Report Studio, objects in reports are assigned a Cascading Style Sheet (CSS) class that provides a default style for the object. For example, when you create a new report, the report title has the class property **Report title text** assigned to it. In addition, objects inherit the classes set on their parent objects.

You can use classes to highlight data using conditional styles.

Classes you create or modify can be applied only to the current report. To create or modify classes for all reports, you must modify a layout style sheet. In addition, some classes can be used to format Query Studio reports.

If you use the Microsoft Internet Explorer Web browser, version 6, some color gradients used in the 10.x default report styles are not supported.

Modify the report style

You can define whether your report uses the default styles for this version or the styles from a previous version.



Procedure

1. From the **File** menu, click **Report Properties**.
2. Click **Report styles** and select one of the following options:
 - To work with classes in the default style sheet, click **10.x styles**.
 - To work with classes that were used in IBM Cognos 8, click **8.x styles**.
Use 8.x report styles when you are working with reports created in IBM Cognos 8 and you want to preserve their original appearance.
 - To work with classes that were used in IBM Cognos ReportNet, click **1.x styles**.
Use 1.x report styles when you are working with reports created in ReportNet and you want to preserve their original appearance.
 - To work with classes that have minimal styling defined, click **Simplified styles**.
This option is useful when creating financial reports.

Modify object styles

You can change global classes to modify the style of all objects in a report or you can modify local classes and apply them to specific objects.

Procedure

1. Pause the pointer over the page explorer button  and click **Classes**.
2. To create a new class, from the **Toolbox** tab , drag **Class** to the **Local Classes** pane.
3. To modify an existing class, in the **Local Classes** or **Global Class Extensions** pane, click the class.


Modify a global class to apply a change to all objects that use that class. For example, if you modified the style **List column title cell**, all column titles in lists will reflect your modifications.

Tip: Ctrl+click classes to make the same change to more than one class.

4. In the **Properties** pane, modify the properties to specify your desired formatting.

Tip: Look at the **Preview** pane to preview your changes for different report objects, such as blocks, table cells, and text items.

If you modify a global class, a pencil symbol appears beside the global class icon to indicate that the class was modified.

5. Apply the class to objects:
 - Pause the pointer over the page explorer button and click a report page.
 - Click an object to which to apply a class.
 - In the **Properties** pane, double-click the **Class** property.
 - Click the classes to apply from the **Local classes** and **Global classes** panes and click the right arrow button .
 - If you applied more than one class, in the **Selected classes** pane, specify the order in which the classes are applied using the up and down arrow buttons. Classes in the **Selected classes** pane are applied from top to bottom. The style properties from all classes are merged together when they are applied. However, if the classes have style properties in common, the properties from the last class applied override those from previous classes.

(Don't Print) Class

The **(Don't Print)** class allows HTML items to display in the Web browser but not to print.

The **(Don't Print)** class behaves as follows in the various report output formats:

- HTML

The Web browser defines the behavior. The HTML standard is that the item appears on the screen in the Web browser but is excluded by the print operation of the Web browser.
- PDF

The item is excluded from the output.
- Microsoft Excel 2002 spreadsheet software

The class is specified in the HTML that IBM Cognos uses to render Microsoft Excel 2002 output. However, Microsoft Excel 2002 does not appear to honor it and displays the item as missing some or all other style definitions.
- Microsoft Excel 2007 spreadsheet software

The item is excluded from the output.
- CSV

The item is included in the output.
- XML

The item is included in the output.

An alternative way to consistently exclude a report object from HTML, PDF and Microsoft Excel output is to set the **Box Type** property for the object to **None**. CSV and XML report outputs will still contain the object.

Modify Classes to Format Query Studio Reports

Some global classes are specific to IBM Cognos Query Studio or can be applied to Query Studio reports. You can modify the following classes to format Query Studio reports.

To format a Query Studio report using the modified classes, the template must be applied to the report. For more information about applying a template to a Query Studio report, see the *Query Studio User Guide*.

Class	Description
List column body cell	Style used to format list data.
List column title cell	Style used to format list column titles.

To modify classes, you must

1. Create a Query Studio template.
2. Modify the global classes.
3. Save the template.

Modifying the Default Layout Style Sheet

In addition to creating or modifying classes in a report, you can create and modify classes that will apply to all reports. Default styles are stored in a style sheet named `GlobalReportStyles.css`.

For information about modifying the style sheet, see the IBM Cognos Business Intelligence *Administration and Security Guide*.


Add Color to an Object

You can add background and foreground color to objects in the report. The foreground color applies to the text within objects.



Tip: The TOC Report sample report in the GO Data Warehouse (query) package includes objects with color. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. Select the object.

Tip: To quickly select the parent of an object, click the object, and then click the select ancestor button  in the title bar of the **Properties** pane.

2. Do one of the following:

- Click the background color button  or the foreground color button .
- In the **Properties** pane, double-click the **Background Color** or **Foreground Color** property.

3. To apply an existing color, click the **Named Colors** tab or **Web Safe Colors** tab and choose one of the available colors.

Use a named color to select a color from a small set of colors. Use Web safe colors to select from 216 available colors.

4. To apply a custom color, click the **Custom Color** tab and type values in the **Red**, **Green**, and **Blue** boxes.

The values must be hexadecimal.

Related tasks:

“Add Background Effects to a Chart Object in a Legacy Chart” on page 116

You can change the look of certain charts and chart objects by applying visual effects such as drop shadows, borders, fills, texture effects, and bevel effects.

Chapter 13. Working With Your External Data

You can supplement your enterprise data with your own external or personal data file.

This allows you to create a report using an external file that contains data which is not part of your IBM Cognos Business Intelligence enterprise data. For example, you are an analyst and you receive a spreadsheet that contains what-if data about opening new branches of your retail store. You are asked to analyze the impact of these possible new branches on existing sales volumes. You link this scenario data with your enterprise data and create a professional report using IBM Cognos BI.

You import your own data file and start reporting on it right away. After importing, your external data file is protected by the same IBM Cognos security as your enterprise data, thus allowing you to report on your data in a secure and private environment.

You can use the following types of files:

- Microsoft Excel (.xls) spreadsheet software files

IBM Cognos BI supports external data sources from Microsoft Excel up to version Microsoft Excel 2007.

To review an up-to-date list of the environments that are supported by IBM Cognos products, including information about operating systems, patches, browsers, web servers, directory servers, database servers, and application servers, see Supported Software Environments (<http://www.ibm.com/support/docview.wss?uid=swg27037784>).

- tab-delimited text (.txt) files
- comma-separated (.csv) files
- XML (*.xml) files

Your XML files must adhere to the IBM Cognos schema specified at `c10_location/bin/xmldata.xsd`. For more information, contact your IBM Cognos administrator.

This schema consists of a dataset element, which contains a metadata element and a data element. The metadata element contains the data item information in item elements. The data element contains all the row and value elements.

For example, the following simple XML code produces a table with two columns (Product Number and Color) and two rows of data.

```
<?xml version="1.0" ?> <dataset xmlns="http://developer.cognos.com/schemas/xmldata/1/" xmlns:xs="http://www.w3.org/2001/XMLSchema-instance">
<metadata> <item name="Product Number" type="xs:string" length="6"
scale="0" precision="2" /> <item name="Color" type="xs:string"
length="18" scale="0" precision="8" /> </metadata> <data> <row>
<value>1</value> <value>Red</value> </row> <row> <value>2</value>
<value>Blue</value> </row> </data> </dataset>
```

To work with your external data, you start with an existing IBM Cognos package. You import data from your external file into the package and create links between data items in your file and data items in your enterprise data source. You then publish a new package that allows you to create reports that use your data and

your enterprise data, or reports that use only your data. You can link your external data with both dimensional and relational data sources.

Before you can import your own external data file, your IBM Cognos administrator must grant you permission for the **Allow External Data** capability found within the **Report Studio** capability, and you must have permission to use IBM Cognos Report Studio or IBM Cognos Workspace Advanced. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

External Data Packages

When you import external data into a package, you do not overwrite the original package. You create a new package that includes the original package, the new external data, and any links or relationships that you defined between the two. By default, the new package is saved in the **My Folders** area of IBM Cognos Connection, with **External Data** appended to the original package name. You can change where your package is published.

Note: The current content language is used to create the new package, and users cannot select the language for the package. For example, the content language in Cognos Connection is set to English. External data is imported into the GO Sales (query) package, and a new package called GO Sales (query) External Data is created. If the content language is changed to a different language, the package name is not translated, even though GO Sales (query) is a multilingual package.

IBM Cognos Samples

Sample external data sources in Microsoft Excel (.xls) format are provided with IBM Cognos BI. You can import these sample files into the Sample Outdoors Company sample reports found within the **Cognos Workspace Advanced** folder of the **GO Data Warehouse (analysis)** or **GO Data Warehouse (query)** package.

You can find the following external data source files on the server where IBM Cognos BI is installed in the `c10_location/webcontent/samples/datasources/other` directory.


- accounts.xls
- employee.xls
- organization.xls
- product_brand.xls
- product_color.xls
- product_line.xls
- product_name.xls
- product_size.xls
- product_type.xls
- products.xls
- promo_sets.xls
- promotions.xls
- region.xls
- retailers_site.xls
- time.xls

To obtain these files, contact your IBM Cognos administrator.

Preparing to Work with your External Data

To work with your external data, follow the process in this section.

There are four steps to preparing to work with your external data. The following diagram details these steps.

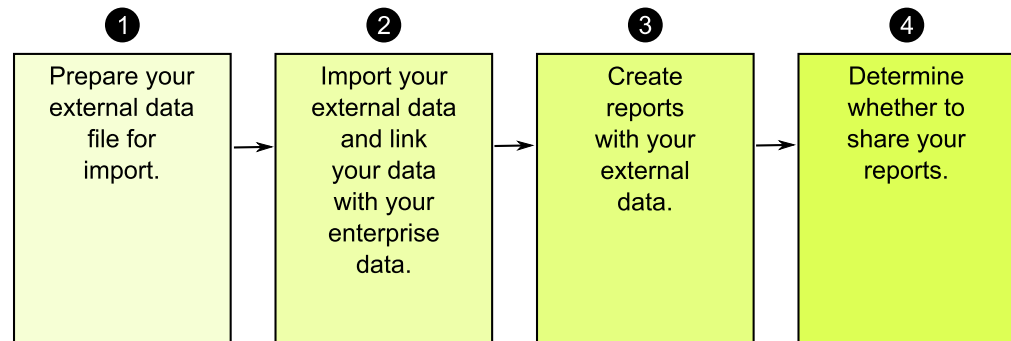

1. Prepare your external data file for import.

Ensure that your external data file matches your enterprise data for your reporting needs. For example, if your external data file contains sales values by month, ensure that the formatting of months in your file matches the formatting used in your enterprise data source. Ensure that you can uniquely link at least one column from your external data file, such as product codes or years, with your enterprise data source.

The maximum file size that you can import is 2.5 MB, with a maximum of 20000 rows. You can import a maximum of one external data file per package. Your IBM Cognos modeler can override these governors in IBM Cognos Framework Manager.

2. Import your external data.


You import your external data file from your own computer or from a location on your network into an existing IBM Cognos package.

A step-by-step wizard guides you through importing your data. If you want to create reports that contain data from both your external data file and your enterprise data source, you must link data items from the two data sources. You can import all or a subset of data columns from your external file.

By adding external data, you extend an existing IBM Cognos package definition with the new data items from your file and you create a new package.

3. Create reports with your external data file.

After you import and link your external data, it appears as a new namespace in

the data tree of the **Source** tab  and is integrated with the IBM Cognos content.

You can then create reports with your data and perform any operation, such as filtering, sorting, grouping, or adding calculations. When you run the report, it uses data items from your external data file.

You can save reports that contain your external data within the **My Folders** area of the IBM Cognos portal.

4. Determine whether you want to share your reports that use external data with other people in your organization. If you decide to share, take into account these considerations.

Working with Date Data

If the data that you import contains dates, ensure that the dates use the format yyyy-mm-dd.

Working with Dimensional Data Sources

If your enterprise data source is dimensional, such as OLAP or dimensionally-modeled relational, and you want to link your external data with your enterprise data, you must first create a tabular or list report. Create and save a list report with your enterprise data that contains the data items that you want to use to link with your external data. Ensure that you remove the aggregate rows that are automatically added in the footer of the list. This list is a projection of your dimensional data source.

When you import your external data, use the list report that you created to link your external data with the query subject from your enterprise data.

Data in your external file is relational by nature because it consists of tables and rows. If your enterprise data source is dimensional, you can still import and work with your external data. However, you cannot mix relational data from your external data files, and dimensional data from your enterprise data source within the same query. For example, a data container, such as a list, crosstab, or chart, uses one query and you cannot mix relational and dimensional data within the same list, crosstab, or chart. Doing so will cause an error.

If you want to use data from both the external data file and the original package within the same query, you must link the external data to a query subject within the current package instead of another report.

Working with External Data in an Unsecured IBM Cognos Application

If your IBM Cognos application is not secured, and users can log on anonymously, you may encounter issues if multiple people import external data in the same package.

For example, Robert imports his external data into package A and saves the package and reports he created in **My Folders**. Then, Valerie also imports her external data into the same package A and saves the package in **My Folders**. Valerie has therefore overwritten Robert's external data in package A. Now, if Robert tries to run one of his reports, he encounters errors because his external data is no longer in package A.


To avoid this problem,

- save packages that contain external data with a unique name.
- apply security to your IBM Cognos applications so that users do not share the same **My Folders** area.

Import Data

You select the file to import from your own computer, or from your local area network.



You select which columns to import.

You then specify a namespace to use. The namespace provides a unique name to associate with the data items that you import. The namespace appears in the data tree in the **Source** tab  and is used to organize the data items. By default, the namespace is the imported file name without the extension.

If you change the default name for the namespace, you are prompted to select the external data file each time you run the report. To avoid this, select the **Allow server to automatically load file** check box.

Procedure

1. From the **Tools** menu, click **Manage External Data**.

Tip: You can also click the manage external data button  at the top of the **Source** tab .

2. On the **Select Data** page of the wizard, under **External data file**, click **Browse** and select your external data file to import.

If you want the server to load the file without prompting users when they run the report, select the **Allow the server to automatically load the file** check box.

If selected, you must use the Universal Naming Convention (UNC) path, such as `\\servername\filename` and you must ensure that the IBM Cognos server has access to the file.

3. Under **Data items**, select the check box for the data items that you want to import.
4. Type a name for the namespace and click **Next**.

The namespace appears in the **Source** tree, and identifies the external data within the package. By default, the name is the name of your imported external data file.

5. If you do not want to link your data or change the data attributes, click **Finish** now.

Related tasks:

“MSR-PD-0012 error when importing external data” on page 483

When you try to import an external data file, you receive an MSR-PD-0012 error.

“MSR-PD-0013 error when importing external data” on page 483

When you try to import an external data file, you receive an MSR-PD-0013 error.

Map Data

If you want to create reports that contain data from both your external file and from your enterprise data, you must link at least one query subject from your package or from an existing report to a data item in your external data. This mapping creates a relationship between your external data and your enterprise data. For example, your external data contains information about employees, including an employee number. You map the employee number from your external data file to the employee number in your enterprise data. This ensures that your data is integrated smoothly.

About this task

Mapping a data item in your external data to a query subject that references other query subjects is not supported. For example, the query subject cannot contain a

calculation that references a query item from another query subject. Such a mapping produces the following error message:

MSR-PD-0001 Failed to relate external data to objects in the underlying package. The item [query item] does not lead to a query subject.

Procedure


1. On the **Data Mapping** page, link existing query subjects in your enterprise data to data items in your external data file.
2. Under **Existing query subject / report**, click the ellipsis (...) button and do one of the following:
 - If you want to select a query subject from the data tree, click **Choose Query Subject** and select a query subject.

Note: This option is not available when working with dimensional packages.

- If you want to select from the query subjects included in a report, click **Choose a Report** and select a report.
3. Click the two data items that you want to link and click the **New link** button. You cannot link a data item in your external data to a calculation in a query subject.
A link appears linking two data items.
Tip: You can create multiple links for multiple data items. To delete a link, select the link and click **Delete Link**.
 4. Click **Next**.

Finish Importing Data

You can change how query items from your external data file appear after they are imported into IBM Cognos Business Intelligence. For example, you can change the number of decimal places or the default summary.

If you want to use numeric data from your external data source as a measure in a crosstab, you must assign that data item a default summary other than **Unsupported**. A specified default summary makes the data item appear as a measure in the data tree in the **Source** tab . Otherwise, if you add the data item with an **Unsupported** default summary as the measure in a crosstab, no values appear.

Attribute	Description
Data type	Identifies whether data in the file is one of the following types: Integer , which represents numeric values. Decimal , which represents integer values that are scaled by a variable power of 10. Text , which represents values that contain letters and symbols. Date or Date Time , which represent dates and times.
Default summary	Identifies Sum, Average, Max, Min, Count or Unsupported as the default type of summary for the data item. Applies only to Integer and Decimal data types.

Attribute	Description
Decimal places	Specifies the number of decimal places for the data item. Applies only to the Decimal data type.

If you mapped links between data items in your external data and data items in your enterprise data, specify the options that define the relationships between the data items.

For each data item that you import and link, specify whether values are unique or exist more than once in both your external data and in your enterprise data. You can also specify how to handle rows that contain missing values in the report results.

Procedure

1. On the **Data Attributes** page, specify the attributes for each data item after it is imported and click **Next**.
For example, if you import numeric data items, you can change the default summary and number of decimal places.
2. On the **Mapping Options** page, specify the relationships between the linked data items and how to process the results in the report output.
3. Click **Finish**.

Publish the Package


You can change the name and location of the package with your external data to help you differentiate between data packages.

Procedure

1. If you want to rename the package that will be published or change the location where it is published, do the following:
 - In the **Manage External Data** dialog, under **Package name**, click the ellipsis (...) button.
 - Type a new name for the package and select the location where to save it.
 - Click **Save**.
2. Click **Publish**.

Results

IBM Cognos Business Intelligence imports your external data into a new package. A namespace with the data items from your external file appears in the data tree in


the **Source** tab .

You can now create reports with your external data.

Edit Your External Data



After you import your data, you can change the data mappings and options that you originally specified and republish the package.

You can


- rename the namespace, which renames the organizational folder that appears in the data tree in the **Source** tab . If you change the namespace, you are prompted for the external data file when you run the report.
- change which columns to import
- change the data mapping links
- change the data attributes
- change the mapping options

You can also import multiple external data files into the same package. To do this, your data modeler must modify governors in the model and republish the package that contains your enterprise data. For more information, see the IBM Cognos Framework Manager *User Guide*.

Procedure

1. From the **Tools** menu, click **Manage External Data** .
2. In the **Manage External Data** dialog box, select the external data to edit and click the edit button .
3. In the left pane, select the options that you want to change.
4. Click **OK** and then republish the package.

Results



IBM Cognos Business Intelligence re-imports your external data and updates the data items that appears in the data tree in the **Source** tab .

You can now create and update reports with your external data.

Delete Your External Data

You can delete your external data from within the package that you created if you no longer need it.

Procedure

1. From the **Tools** menu, click **Manage External Data** .
2. In the **Manage External Data** dialog box, select the external data package to delete and click the delete button .
3. Click **Publish**.

Results

The external data namespace is removed from the package.

If you also no longer require the external data package or any reports created with the package, you can delete it from within IBM Cognos Connection.

Running a Report That Contains External Data

Reports that contain external data run the same way as reports that contain only enterprise data. If you have access to the report, you will also have access to the external data included within the report.

You may be prompted to select the location of the external data file when you run the report if either

- the report author did not specify to automatically load the file.
- the IBM Cognos Business Intelligence server cannot locate the file.

However, you are not re-prompted within the same Web browser session.

You can determine whether data in a report uses external data by tracing its lineage. For more information, see “View Lineage Information for a Data Item” on page 53.

Making your Reports Public

After you create a report that uses your external data, you may want to make it public to share it with coworkers. They can run your report using your external data file that you made available on a public network drive that the IBM Cognos server can access. They can also use their own version of the file. If they use their own version, the file must contain the same columns as your original external data file that you used to import the data and create the report. In addition, you must clear the **Allow server to automatically load file** check box in the **Select Data** page of the **Manage External Data** wizard.

To make reports public, you must save them in the **Public Folders** area of the IBM Cognos portal. To save content in **Public Folders**, you must have the appropriate permissions. Contact your IBM Cognos administrator to obtain permissions and to inform him or her that you are sharing a package or files.

If you share your reports, ensure that you maintain the reports.

Chapter 14. Using Conditions

You can define conditions to control what users see when they run a report. Conditions can apply to specific items in a report. For example, you can define a conditional style to highlight exceptional data, such as product revenue that exceeds your target.

Conditions can also apply at the report layout level. Conditional layouts are useful for delivering reports to a multilingual audience. For example, you can have text items, such as titles and cover pages, appear in the same language as the data in the report.

Related concepts:

“Creating a Conditional Color Palette in a Chart” on page 111

You can create a conditional palette to color data items in your chart in different ways depending on a condition. For example, in a column chart that shows revenue per month, you want to make the columns for the months that have a revenue greater than \$1000000 green.

Highlight Data Using a Conditional Style

Add conditional styles to your report to better identify exceptional or unexpected results. A conditional style is a format, such as cell shading or font color, that is applied to objects if a specified condition is true.

For example, you want to automatically highlight in green the departments in your organization that meet their budget quotas and highlight in red the departments that go over budget. Creating conditional styles color-codes information in your reports so that you can find areas that need attention.

You can apply multiple conditional styles to objects. For example, you can apply one style in specific cells and another style for the overall report. If multiple styles set the same property, such as font color, the last style in the list is applied.

You can apply conditional styles based on any data item in your report.

You can create the following types of conditional styles.

Type	Description
Numeric Range	Highlights straight numerical data, such as revenues and losses.
Date/Time Range	Highlights data from specific dates and times.
Date Range	Highlights data from specific dates.
Time Range	Highlights data from specific times.
Interval	Highlights data falling between set intervals.

Type	Description
String	Highlights specific alphanumeric items in a report. For example, you can highlight all instances of a specific word or phrase, such as Equipment. String criteria are case-sensitive. If multiple string conditions are met, only the first conditional style is applied.
Advanced	Creates conditional styles that use calculations or expressions. If multiple advanced conditions are met, only the first conditional style is applied.

You can also apply a conditional color palette to a chart.

Note: Conditional styles and conditional data formatting do not work on chart axis labels. If you apply a conditional style or conditional data formatting to a chart axis, only the first style defined is applied.

You can perform a search to find objects in your report that use conditional styles. You can also view all the conditional styles used in your report to delete or modify them.


You can also use variables to highlight data. If a report contains both conditional styles and style variables, the style variables are applied first and then the conditional styles are applied.

Tip: The Return Quantity by Order Method sample report in the GO Data Warehouse (analysis) package includes conditional highlighting. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.



Create a New Conditional Style

You can apply conditional styles based on any data item in your report.


Procedure

1. Click the object for which you want to define a conditional style and click the conditional styles button .

Tip: You can also right-click the object and click **Style, Conditional Styles** or click the object, and then, in the **Properties** pane, set the **Conditional Styles** property.


2. Click the add button  and click **New Conditional Style**.
3. Select the data item to determine the condition and click **OK**.
The type of conditional style that you can use depends on the type of data item you select.
4. In the **Name** box, type a name for the conditional style.
5. To define a numeric value, date/time, date, time, or interval condition:
 - Click the new button  and select a value to define a threshold.


The value appears in the **Range** column, and two ranges are created.

- For each range, under **Style**, click one of the predefined styles to apply to the range or click the edit button  and create a new style.

Tip: You can also define a style for the cells in your report that have missing values.

- Repeat the steps above to add other conditions.

Tip: Under **Style**, pause the pointer over each range  to see the condition produced for that range.

- To move a value above or below a threshold, click the arrow button  next to the value.

For example, you insert a threshold value of five million. By default, the ranges are less than or equal to five million and greater than five million. Moving the five million value above the threshold changes the ranges to less than five million and greater than or equal to five million.

6. To define a string condition:


- Click the new button and select how to define the condition.
- To select more than one individual value, click **Select Multiple Values** and click the values.
- To type specific values, click **Enter Values** and type the values.
- To specify your own criteria, such as values that begin with the letter A, click **Enter String Criteria** and specify the condition.
- For each condition, under **Style**, click one of the predefined styles to apply or click the edit style button and create a new style. Specify the style to apply to remaining values by clicking one of the predefined styles beside **Remaining values (including future values)**.
- Specify the order in which to evaluate the conditions.

Conditions are evaluated from top to bottom, and the first condition that is met is applied.

Reuse an Existing Conditional Style

You can create a conditional style once and reuse it on multiple objects in your report. You can specify the order in which conditional styles are applied. You can also use existing local classes as your conditional styles.

Procedure

1. Click the data item for which you want to define a conditional style, and then click the conditional styles button .

Tip: You can also right-click the data item and click **Style, Conditional Styles** or click the data item, and then, in the **Properties** pane, set the **Conditional Styles** property.


2. Click the add button , click **Use Existing Conditional Style**, and select the style.

Create an Advanced Conditional Style




You can create advanced conditional styles that use calculations or expressions.

If multiple advanced conditions are met, only the first conditional style is applied.

Procedure

1. Click the data item for which you want to define a conditional style, and then click the conditional styles button .

Tip: You can also right-click the data item and click **Style, Conditional Styles** or click the data item, and then, in the **Properties** pane, set the **Conditional Styles** property.

2. Click the add button  and click **Advanced Conditional Style**.
3. Type a name for the conditional style.
4. Click the add button  and specify the expression that defines the condition.
5. For each condition, under **Style**, click one of the predefined styles to apply or click the edit button  and create a new style. Specify the style to apply to remaining values by clicking one of the predefined styles beside **Remaining values (including future values)**.
6. Specify the order in which to evaluate the conditions by clicking a condition and then clicking the move up or move down arrow.
Conditions are evaluated from top to bottom, and the first condition that is met is applied.

Manage Conditional Styles

You can view, modify, or delete the conditional styles that are applied to your report. You can also define a new conditional style.

In the IBM Cognos Report Studio options, you can specify whether to automatically delete conditional styles that are no longer used in a report.

Procedure


From the **Tools** menu, click **Manage Conditional Styles**.

Example - Add a Conditional Style to an Existing Report

You are a report writer at The Sample Outdoors Company, which sells sporting equipment. You have a report that compares current year data to previous year data and highlights negative percentage variances in red (Poor) and positive percentage variances in green (Excellent). You want to add a third conditional style to indicate percentage variances above 0 but less than 10. You create a conditional style that highlights percentage variances between 0 and 10% in yellow (Average).

Procedure

1. Open the **GO Balance Sheet as at Dec 31 2012** report from the **GO Data Warehouse (analysis)** package.
2. Right-click any cell in the **% Variance** column and click **Style, Conditional Styles**.

3. Select **Conditional Style 1** and click the edit button .
4. Select the first advanced condition listed and click the edit button.
5. Delete **=0** from the expression definition.
6. Click the **Functions** tab, and then expand the **Operators** folder.
7. Double-click **between**, and then click after **between** in the expression, add a space, and type **0**.
8. Double-click **and**, and then click after **and** in the expression, add a space, type **.1**, and click **OK**.
9. From the **Style** box associated with this condition, click **Average**.
10. Select the second advanced condition listed and click the edit button.
11. Replace **>0** in the expression with **>.1** and click **OK**.
12. Leave the style associated with this condition as is.
13. Run the report.

The new conditional style appears in the % **Variance** column.

Year to date (USD \$000's)	Current Year (2012)		Previous Year (2011)	
	December	December	Variance	% Variance
Assets (total)	9,459,048	10,717,093	-1,258,045	-11.74%
Current assets (total)	5,709,903	5,960,900	-250,996	-4.21%
Operating assets (total)	3,319,279	4,301,658	-982,378	-22.84%
Other assets (total)	429,865	454,536	-24,671	-5.43%
Liabilities (total)	-4,255,662	-3,856,126	-399,536	10.36%
Current liabilities (total)	-3,364,742	-3,059,376	-305,366	9.98%
Long-term and other liabilities (total)	-890,920	-796,749	-94,171	11.82%
Equity (total)	-5,203,386	-6,860,968	1,657,582	-24.16%
Common stock	-1,871,226	-1,780,558	-90,668	5.09%
Other capital	-991,916	-615,202	-376,714	61.23%
Retained earnings - net	-2,327,374	-4,450,170	2,122,797	-47.70%
Currency translation gain (or loss)	-12,870	-15,038	2,168	-14.41%
Declared dividends	0	0	0	-
BALANCE	0	0	0	-

Highlight Data Using a Style Variable

Highlight data in your report to better identify exceptional results. For example, you want to identify sales representatives who have exceeded their quota. You create a condition that checks whether each representative's sales for the year is greater than their quota for the year.

Style variables are useful if you are working with reports that were created in a previous version of IBM Cognos Business Intelligence or if you want to use language variables to specify conditional styles.

You can also use conditional styles to highlight data. If a report contains both conditional styles and style variables, the style variables are applied before the conditional styles.

Procedure

1. Create a variable and define the condition that determines if the data will be highlighted.
2. In the work area, click the column to highlight based on the condition.


3. In the **Properties** pane, double-click the **Style Variable** property.
4. Click **Variable**, click the variable to assign to the object, and click **OK**.
5. If you assigned a string variable, in the **Values** box, select the values for the condition to support.

Tip: A default value exists for the variable, and it is always selected.

6. If you assigned a language variable, in the **Values** box, select the languages for the condition to support.

Tip: A default value exists for the variable, and it is always selected.

7. Click **OK**.

8. Pause the pointer over the condition explorer button  and click a value other than the default value.

Tip: When you select a value in the condition explorer, the Explorer bar becomes green to indicate that conditional formatting is turned on and that any changes you make to the report apply only to the variable value.

For example, if you created a Boolean variable, click **Yes**.

9. In the **Properties** pane, specify the formatting with which to highlight the column when the condition is satisfied.

For example, click the **Border** property to create a thicker border around the column.

10. Repeat steps 8 to 9 for other possible values defined for the variable.

Tip: To view the report with no variables applied, pause the pointer over the condition explorer button and click **(No variable)** or triple-click the Explorer bar.

Results

When you run the report, the report objects to which you applied the variable are highlighted when the condition is satisfied. For example, if you created a Boolean variable, the objects are highlighted when the condition is met. If the condition is not satisfied for any object, no conditional formatting is applied.

Adding Conditional Rendering to a Report

You can specify which objects are rendered when a report is run.


Before you can add conditional formatting or conditional rendering to your report, you must add a variable. You can create a variable in the condition explorer or in the **Properties** pane.

Add a Variable from the Condition Explorer

Before you can add conditional formatting or conditional rendering to your report, you must add a variable. You can create a variable in the condition explorer or in the **Properties** pane.

Procedure


1. Pause the pointer over the condition explorer button  and click **Variables**.


2. From the **Toolbox** tab , drag one of the following variables to the **Variables** pane:
 - To create a variable that has only two possible values, **Yes** and **No**, drag **Boolean Variable**.
 - To create a variable whose values are string-based, drag **String Variable**.
 - To create a variable whose values are different languages, drag **Report Language Variable**.
3. If you created a Boolean variable, in the **Expression Definition** box, define the condition and click **OK**.
 For example, the following expression returns the value **Yes** if revenue is less than one million and the value **No** if revenue is greater than or equal to one million:

```
[Revenue]<1000000
```

 For information about creating expressions, see “Using Relational Calculations” on page 248 or “Using Dimensional Calculations” on page 302 and Appendix F, “Using the expression editor,” on page 555.
4. If you created a string variable, do the following:
 - In the **Expression Definition** box, define the condition and click **OK**.
 For example, the following expression returns the value **high** if revenue is greater than one million and the value **low** if revenue is less than or equal to one million:

```
if ([Revenue]>1000000) then ('high') else ('low')
```

 For information about creating expressions, see “Using Relational Calculations” on page 248 or “Using Dimensional Calculations” on page 302 and Appendix F, “Using the expression editor,” on page 555.
 - Click the add button  in the **Values** pane.
 - For each value that the variable can assume, type the name of the value that corresponds with the possible outcomes defined in the expression.
 For example, in the previous expression, you must create two values for the variable, high and low.

Tip: You can create a group by clicking two or more values and then clicking the group values button . For example, you can create a group that includes the available French languages.
5. If you created a language-specific variable, in the **Languages** dialog box, select the languages to support.

Add a Variable from the Properties Pane


Before you can add conditional formatting or conditional rendering to your report, you must add a variable. You can create a variable in the condition explorer or in the **Properties** pane.

Procedure

1. Select the report object.
2. In the **Properties** pane, under **Conditional**, double-click the conditional property to which to assign the variable.

The following conditional properties are available:

Goal	Conditional Property
Specify a variable based on which text can be conditionally shown. For example, you want different text to appear when a report is run in a different language.	Text Source Variable
Specify a variable based on which object can be conditionally rendered. For example, you want to make a revenue report smaller by not rendering rows that are below a threshold.	Render Variable
Specify a variable based on which object can be conditionally styled. For example, you want data that meets some criterion to appear in a different color.	Style Variable
Specify a variable based on which objects in a block can be conditionally rendered. Applies only to conditional block objects that you insert in a report.	Block Variable

3. In the **Variable** box, click an existing variable or one of the following variable types:
 - <New language variable>
 - <New string variable>
 - <New boolean variable>
4. In the **New Variable** dialog box, in the **Name** box, type the name of the variable.
5. If you created a string variable, click the add button , type the string values to define, and click **OK**.
6. If you created a language variable, select the languages to support and click **OK**.
7. In the **Expression Definition** box, define the condition.

Hide or Show an Object

You can hide and show objects in a report based on a condition you define.


You can also specify that an object should not be rendered based on a condition.

Tip: The Global Bonus Report sample report in the GO Data Warehouse (analysis) package includes hidden objects. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Procedure

1. Create a variable, and define the condition that determines if the object is shown or hidden.

Tip: Create a Boolean variable to show and hide objects, as this type of variable has only two possible values.

2. From the **Toolbox** tab , drag a **Conditional Blocks** object to the work area.
3. Select the conditional block.
4. In the **Properties** pane, double-click the **Block Variable** property.
5. In the **Variable** box, click the variable you created and click **OK**.
6. Set the **Current Block** property to **Yes**.
7. From the content pane, drag the object to show or hide to the conditional block.
For example, drag a data item from the **Source** tab or from the **Data Items** tab.
You may need to link the report page to a query before you can add a data item to the block.

Results

When you run the report, the report objects to which you applied the variable are visible when the condition is satisfied and invisible when it is not.

Add Conditional Rendering


Add conditional rendering to specify which objects are rendered when a report is run. This is useful when your report contains sensitive data.

Conditional rendering is not the same as hiding objects. When you hide an object, the object exists but is transparent. If an object is not rendered, it is not in the report.

For a list of objects that can be rendered conditionally, see the Render Variable property in Appendix G, “Report Studio Object and Property Reference,” on page 771.

Procedure

1. Select the list column to be rendered conditionally.

Tip: You must select the list column, not the list column body or the list column title. If the body or title is selected, as indicated in the **Properties** pane, click the select ancestor button  and click the list column.

2. In the **Properties** pane, double-click the **Render Variable** property.
3. Click **Variable** and click the variable that will determine if the column will be rendered.
4. In the **Render for** box, select the values that the condition will support.









Tip: A default value exists for the variable, and it is always selected.




Example - Create a Conditional Report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report that shows orders after a date specified by the user. The report will prompt the user for a date and ask whether the user wants to see a description for each order.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.

3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **Sales and Marketing (query)**, and **Sales (query)** and add data items to the list:
 - Expand **Time dimension** and add **Date**.
 - Expand **Sales order** and add **Order number**.
 - Expand **Product** and add **Product name** and **Product description**.
 - Expand **Sales fact** and add **Quantity**, **Unit price**, and **Revenue**.
5. Click **Date**, and then click the section button .
6. Select the **Order Number** column and click the group button .
7. Click **Revenue**, and then click the summarize button  and click **Total**.
8. Change the title of the report to **New Orders**.
9. Pause the pointer over the page explorer button  and click **Prompt Pages**.
10. Create a new prompt page by double-clicking **Page** in the **Toolbox** tab .
11. Double-click the new prompt page.
12. From the **Toolbox** tab, double-click **Text Item** and type the following text:
Enter the start date, and select if descriptions will be shown.
13. Insert a 2 by 2 table into the prompt page by clicking the insert table button  and moving the pointer until four squares are highlighted in a 2 by 2 pattern.
14. From the **Toolbox** tab, drag a **Text Item** into the upper-left cell and type the following text:
Starting Date
15. From the **Toolbox** tab, drag a **Text Item** into the lower-left cell and type the following text:
Show Descriptions
16. From the **Toolbox** tab, drag a **Date Prompt** into the upper-right cell.
17. In the **Prompt Wizard** window, select **Create a new parameter**, type **p_Date** in the space provided, and then click **Next**.
18. In the **Create Filter** window, select **Create a parameterized filter** with the following entries:
 - For **Package item**, click the ellipsis (...) button and open **Sales (query)** and **Time dimension**, and then click **Date**.
 - For **Operator**, click **>**.
19. Click **Finish**.
20. From the **Toolbox** tab, drag a **Value Prompt** into the lower-right cell.
21. In the **Prompt Wizard**, in the **Choose Parameter** window, select **Create a new parameter**, type **p_ShowDesc** in the space provided, and then click **Finish**.
22. Select the **Value Prompt** and, in the **Properties** pane, double-click **Static Choices**.
23. Click the add button .
24. In the **Edit** dialog box, type **Yes** in both the **Use** and **Display** boxes.
25. Click the add button.

26. In the **Edit** dialog box, type **No** in both the **Use** and **Display** boxes.
27. Click **OK**.
28. Pause the pointer over the condition explorer button  and click **Variables**.
29. From the **Toolbox** tab, create a new Boolean variable by double-clicking **Boolean Variable**.
30. In the **Report Expression** dialog box, type the following in the **Expression Definition** window and click **OK**:
`ParamDisplayValue("p_ShowDesc") = 'Yes'`
31. In the **Properties** pane, set the **Name** property to **showDesc**.
32. Pause the pointer over the page explorer button  and click the report page.
33. Click the **Product descriptions** column.
34. In the **Properties** pane, click the select ancestor button  and click **List Column**.
35. In the **Properties** pane, set the **Render Variable** property to the **showDesc** Boolean variable you created.
36. Run the report.

Results

The report prompts you for a date. Orders that occur after the date you entered are shown. The report also asks whether to show the **Descriptions** column, and the column is rendered only if you choose **Yes**.

Add Multiple Layouts

Add multiple layouts to show a report in different ways. For example, you can define a different layout for each language in a multilingual report. This allows you to create a single report that can be viewed by report consumers that use different regional settings.

Procedure

1. Create a variable and define the condition that will be used for each layout.
For example, create a report language variable that includes each language that requires a conditional layout.
Note: Expressions used in a conditional layout cannot reference a query.
2. From the **File** menu, click **Conditional Layouts**.
3. Select a variable, and then select the values that require a separate layout.

Results

A layout is created for each value you selected. Use the page explorer to navigate the different layouts. For each layout, click **Report Pages** to create a report page or **Prompt Pages** to create a prompt page and add objects.

Tip: You can create new variables from the **Conditional Layouts** dialog. The variables are added to the condition explorer. For more information, see “Add a Variable from the Condition Explorer” on page 370.

Setting up a Multilingual Reporting Environment

You can create reports that show data in more than one language and use different regional settings. This means that you can create a single report that can be used by report consumers anywhere in the world.

The samples databases provided with IBM Cognos store a selection of text fields, such as names and descriptions, in more than 25 languages to demonstrate a multilingual reporting environment. For information about how data is stored in the samples databases and how the samples databases are set up to use multilingual data, see the *Administration and Security Guide*.

Here is the process for creating a multilingual reporting environment:

- Use multilingual metadata.

The data source administrator can store multilingual data in either individual tables, rows, or columns.

For more information about configuring your database for multilingual reporting, see the *Administration and Security Guide*.

- Create a multilingual model.

Modelers use IBM Cognos Framework Manager to add multilingual metadata to the model from any data source type except OLAP. They add multilingual metadata by defining which languages the model supports, translating text strings in the model for things such as object names and descriptions, and defining which languages are exported in each package. If the data source contains multilingual data, modelers can define queries that retrieve data in the default language for the report user.

For more information, see the Framework Manager *User Guide*.

- Create multilingual maps.

Administrators and modelers use a Microsoft Windows operating system utility named Map Manager to import maps and update labels for maps in IBM Cognos Report Studio. For map features such as country or region and city names, administrators and modelers can define alternative names to provide multilingual versions of text that appears on the map.

For more information, see the Map Manager *Installation and User Guide*.

- Create a multilingual report.

The report author uses Report Studio to create a report that can be viewed in different languages. For example, you can specify that text, such as the title, appears in German when the report is opened by a German user. You can also add translations for text objects, and create other language-dependent objects.

- Specify the language in which a report is viewed.

You can use IBM Cognos Connection to do the following:

- Define multilingual properties, such as a name, screen tip, and description, for each entry in the portal.
- Specify the default language to be used when a report is run.

Tip: You can specify the default language on the run options page, in the report properties, or in your preferences.

- Specify a language, other than the default, to be used when a report is run.

For more information, see the IBM Cognos Connection *User Guide*.

The data then appears in the language and with the regional settings specified in

- the user's Web browser options

- the run options
- the IBM Cognos Connection preferences

Any text that users or authors add appears in the language in which they typed it.

Create a Multilingual Report in Report Studio

You can create a report in IBM Cognos Report Studio that can be viewed in different languages. For example, you can specify that text such as the title appears in German when the report is opened by a German user. You can also add translations for text objects and create other language-dependent objects.


Before you begin

If you want the report to show data in different languages, the model must also be multilingual.

Procedure

1. Create a report language variable.
2. In the work area, select the object to modify based on a language.
3. In the **Properties** pane, double-click the **Style Variable** property.
If you are changing the language of a text string, click **Text Source Variable** instead.
4. Click **Variable** and click the language variable you created.
5. In the **Values** box, select the languages for the condition to support and click **OK**.

Tip: A default value exists for the variable, and it is always selected.

6. Pause the pointer over the condition explorer button  and a language for the variable.

Tip: When you select a value in the condition explorer, the Explorer bar becomes green to indicate that conditional formatting is turned on and that any changes you make to the report apply only to the variable value.

7. In the **Properties** pane, specify the formatting for the language.
For example, to change the language of a text string, double-click the **Text** property and select the new string.
8. Press Enter when you are done.
9. Repeat steps 6 to 8 for all other languages specified for the variable.

Tip: To view the report with no variables applied, pause the pointer over the condition explorer button and click **(No variable)** or triple-click the Explorer bar.

Results

When you run the report, the report objects to which you applied the variable are formatted according to the browser's language.

Chapter 15. Bursting Reports

Burst a report to distribute its contents to various recipients. Bursting is the process of running a report once and then dividing the results for recipients who each view a subset of the data. For example, salespeople in different regions each need a report showing the sales target for their country or region. You use burst reports to send each salesperson only the information they need. Burst reports can be distributed by email or saved to a folder for viewing in IBM Cognos Connection.

Tip: The Bursted Sales Performance Report sample report in the GO Data Warehouse (analysis) package includes bursting. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

To burst a report against a dimensional data source, see “Creating Burst Reports Using Dimensional Data Sources” on page 383.

You cannot burst crosstab or chart reports. However you can burst a report where a container includes a crosstab or chart that is part of a master detail relationship. In this situation, you can burst only HTML, PDF, and XLS output formats; you cannot burst CSV or XML output formats.

For information about avoiding disk space exhaustion when bursting charts or crosstabs, see “Master Detail or Burst Reports with Charts or Crosstabs May Result in Denial of Service” on page 499.

Procedure

1. define burst recipients
2. specify burst groups
3. set burst options
4. enable bursting

Defining Burst Recipients



Define the recipients who will receive data when the report is run. You can distribute burst reports to individual users, groups, roles, distribution lists, and contacts.

To define the recipients, you create a calculated field, create the burst table in the source database, and then import the table into a package.

Create a Calculated Field

You can use a calculated field to dynamically create burst report recipients.

Procedure

1. Pause the pointer over the query explorer button  and click the query that will produce the data to distribute.
2. From the **Toolbox** tab , drag **Data Item** to the **Data Items** pane.

3. In the **Expression Definition** box, type the expression that will generate the list of recipients and click **OK**.

For example, typing the following expression builds the list of the employees of The Samples Outdoors Company. The expression concatenates the first letter of each employee's first name with their last name.

lower(substring([Employee summary (query)].[Employee by organization].[First name],1,1) + [Employee summary (query)].[Employee by organization].[Last name])

4. To give the data item a more meaningful name, in the **Properties** pane, set the **Name** property to a different name and press the Enter key.

Creating the Burst Table in the Source Database

You can create a burst table in the source database for the list of recipients. The steps you must follow depend on the database system you are using. The burst table must contain the following columns:

- A unique identifier

Tip: Some database systems do not require a unique identifier for each table.

- A recipient column
- The data item on which to burst

You can also include other columns that provide additional information. For example, if you plan to distribute reports by email, you can add a column for the email address of each recipient.

After you create the table, add the recipients who will receive the report. You can create a mixed recipients list that includes individual users, groups, roles, contacts, distribution lists, or email addresses. For example, a burst table may contain the following recipients.

Recipient example	Recipient type
CAMID(":"Canada")	Group
CAMID(":")/contact[@name='Silvano Allessori']	Contact
CAMID(":")/distributionList[@name='European Partners']	Distribution list
CAMID("LDAP_Local_ID :u:uid=gbeliding,ou=people")	Authentication provider user or group, where LDAP_Local_ID is the name of an LDAP namespace ID, and people is the name of an organizational unit
c10@ibmcognos99.com	Email address

CAMID stands for Cognos Access Manager ID, and it represents an internal search path to the recipients. Specify search paths when you want to save burst reports in a folder. You can obtain the search path in IBM Cognos Connection by opening the **Set properties** page for each recipient and clicking **View the search path**. Ensure that you use the proper syntax when adding recipients to the burst table.

In the case of NTLM namespaces, user IDs in the search path use alphanumeric or numeric characters that make them difficult to read. You can use the following alternate search path syntax:

```
directory/namespace[@name="Local NT"]//account[@userName="gbeliding"]
```

where Local NT is the name of a namespace and gbelding is the name of a user. The double slash before the account element indicates that you are searching all accounts under the specified namespace.

Note: If you have a mixed recipients list, do not mix email address recipients and alternate path recipients. Because the alternate path syntax contains the @ symbol, it will be mistaken for an email address.

For more information about users, groups, roles, contacts, and distribution lists, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Importing the Table into a Package

After you create the burst table in the source database, you must add it to the package that you will use to create the report.

For more information about importing tables and creating relationships, see the Framework Manager *User Guide*.

Procedure

1. Open the package.
2. Import the table.
3. Define the relationship between the burst table and the table containing the data item on which to burst.


For example, you are bursting on country or region code. You define a relationship between country or region code in the burst table and country or region code in the Country or Region table.


4. Save and publish the package.

Specify a Burst Group

Specify burst groups to set how the report will be distributed. Burst groups are defined by a data item that you create in the report or that you add from the burst table.

Procedure

1. Pause the pointer over the query explorer button  and click the query that will produce the data to distribute.
2. If you are creating a data item, do the following:


- From the **Toolbox** tab , drag **Data Item** to the **Data Items** pane.
- In the **Expression Definition** box, type the expression that defines the burst key.

For example, the following expression builds an email address for each sales representative in The Sample Outdoors Company. The expression incorporates the calculated field that was previously created, which is named `userID` below, with `ibmcognos99.com` as the domain name.

```
[userID]+'@ibmcognos99.com'
```

Tip: To give the data item a more meaningful name, in the **Properties** pane, set the **Name** property to a different name and press Enter.

3. To specify a burst table column as the data item, do the following:

- From the **Source** tab , expand the burst table.
- Drag the data item to the **Data Items** pane.
For example, if you are bursting reports by email, drag the data item containing email addresses.

Set Burst Options

Set burst options for the report to indicate the data item on which to burst and the recipients.


Before you begin

Before you set burst options, ensure that the data item on which you intend to burst is in the report and is grouped. The grouped column will create the appropriate subsets of data. In addition, you must associate the burst key with this level of grouping.

Procedure

1. From the **File** menu, click **Burst Options**.
2. Select the **Make report available for bursting** check box.
3. Under **Burst Groups**, in the **Query** box, click the query that contains the data item on which to burst.

Tip: You can choose a query that does not appear in the layout. This is useful to distribute the same report to all burst recipients.

4. In the **Label** box, click the data item with which to label each burst report.
5. Click the edit button .
6. In the **Data Items** box, drag the data item on which to burst to the **Groups** folder and click **OK**.

Tip: You can specify the sort order of data within each group by dragging data items to the **Sort List** folder and then clicking the sort order button



7. Under **Burst Recipient**, in the **Query** box, click the query that contains the data item to be used as the distribution list.
8. In the **Data Item** box, click the data item that contains the recipients.
9. In the **Type** box, choose the method to burst the report:
 - Click **Automatic** to let IBM Cognos Business Intelligence determine from the data item whether to email reports or send them to folders in IBM Cognos Connection.
 - Click **Email addresses** to distribute reports by email.
 - Click **Directory entries** to distribute reports to folders that recipients can access in IBM Cognos Connection.

Note: To burst reports to multiple mobile device users, you must choose to distribute reports to folders. You can choose **Directory entries**, or you can choose **Automatic** if the data item returns directory entries instead of email addresses. To view the reports, the recipients must have IBM Cognos Mobile installed on their mobile devices. For more information about IBM Cognos Mobile, see the IBM Cognos Mobile *Installation and Administration Guide*.

When recipients log into IBM Cognos BI, they will see only the report that is specific to them.


10. If the report contains two nested data containers, such as a list and a chart, click the ellipsis (...) button beside **Master detail relationships** and define the relationship between the data containers.

For information about master detail relationships, see “Create a Master Detail Relationship” on page 292.

Enable Bursting

When the report is ready to be distributed, enable bursting for the report in IBM Cognos Connection.

Procedure

1. Locate the report in IBM Cognos Connection.
2. Under **Actions**, click the run with options button .
3. Click **advanced options** on the right of the screen.
4. Under **Time and mode**, click **Run in the background**.
5. Select the **Burst the report** check box.
6. If you are distributing reports by email, select the **Send the report by email** check box.

Tip: If you are bursting the report to a folder, you can also send the report by email if the **Send the report by email** check box is selected. Reports will be emailed if the recipient's email address is stored in the authentication source you are using or if they are entered in the recipient's personal information in IBM Cognos Connection.

7. If the burst report contains a drill-through link to another report and you are distributing the burst report by email, do the following:
 - Click **Edit the options**.
 - Select the **Include a link to the report** check box.

If you do not select the check box, the drill-through links in the burst report will not work.

8. Run the report.

Results

Allow a few moments for the report to run. If you are an administrator, you can view all outputs for the report. Under **Actions**, click **View the output versions for this report**. When burst recipients log into IBM Cognos Connection or access their email accounts, they will see only the data that is meant for them.

Creating Burst Reports Using Dimensional Data Sources

You can burst a report using a dimensional data source by using burst information that is stored in the data source. Because you do not want to append bursting information to existing dimensional data sources, you can create a relational data source that contains the burst information.

Report bursting is limited when the underlying data source is a cube (MOLAP data source such as IBM Cognos PowerCube, Microsoft Analysis Services, Oracle Essbase, or IBM DB2/OLAP). The burst report must be a grouped report, and the

burst is restricted to the outermost grouping in the report. For example, if you have a report grouped on Country or Region and State, then you can burst the report only on Country or Region.

Procedure

1. In IBM Cognos Framework Manager, include both the dimensional data source that is the basis for reporting and the relational burst table in the model.
For more information about models, see the Framework Manager *User Guide*.
2. In IBM Cognos Report Studio, create a master detail report in which the master query drives the report and the detail query contains the burst information.
You must group the master query on the data item on which you are bursting. This data item must have a corresponding data item in the relational burst table.
Author the detail query against the relational burst table. The burst table must contain two columns: the data item corresponding to the data item used in the master report for bursting and the data item that contains the recipient information. The recipient can be an email address or an expression that results in a search path to an object in IBM Content Manager, such as an account, group, role, contact, or distribution list.
For more information about master detail queries, see “Create a Master Detail Relationship” on page 292.
3. Ensure that the detail query, which must be evaluated by IBM Cognos Business Intelligence when the report is executed, is not visible:
 - Place a list that is based on the detail query in a conditional block with a box type of **None**.
 - Link the master and detail queries using the following expression:
[Master Burst Key] = [Detail Burst Key]


Results







When you set the burst options for the report, the master query provides the data items for the burst key and the detail report provides the data items for the burst recipients.

Example - Burst a Report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a report that lists product sales for each sales representative. The report is to be emailed to each sales representative, but they only need to see the data that pertains to them. You create a list report that you burst to each sales representative.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **Sales and marketing (query)** and **Sales (query)**. Add the following data items:
 - Expand **Employee by region** and add **Employee name**.
 - Expand **Products** and add **Product line**, **Product type**, and **Product**.

- Expand **Sales fact** and add **Quantity** and **Revenue**.
5. Group the **Employee name**, **Product line**, and **Product type** columns.
 6. Click the **Employee name** column, click the headers and footers button , and then click **Create Header**.
Employee name appears as a header in the list. You no longer need to keep the data item as a list column.
 7. In the list, click the **Employee name** column and click the delete button .
 8. Click **Revenue**, and then click the summarize button  and click **Total**.
 9. Pause the pointer over the query explorer button  and click **Query1**.
 10. From the **Source** tab, drag **Email** from the **Employee by region** folder to the **Data Items** pane.
 11. From the **File** menu, click **Burst Options**.
 12. Select the **Make report available for bursting** check box.
 13. Under **Burst Groups**, in the **Query** box, click **Query1**.
 14. In the **Label** box, click **Employee name**.
 15. Click the edit button .
 16. In the **Data items** box, drag **Employee name** to the **Groups** folder and click **OK**.
 17. Under **Burst Recipient**, in the **Query** box, click **Query1**.
 18. In the **Data Item** box, click **Email**.
 19. In the **Type** box, click **Email addresses**.
 20. Save the report.
 21. Locate the report in IBM Cognos Connection.
 22. Under **Actions**, click **Run with options** .
 23. Click **advanced options** on the right of the screen.
 24. Under **Time and mode**, click **Run in the background**.
 25. Select the **Burst the report** check box.
 26. Select the **Send the report by email** check box.
 27. Run the report.

Results

When sales representatives access their email accounts, they will see reports with only the data that is meant for them.

Chapter 16. Format Data

Format data in a report to improve readability. For example, you can show all date values in the order year, month, and day. If you do not set **Data Format** properties here, data is formatted according to the properties set in the model. If the properties were not set in the model, data is formatted according to the International Components for Unicode (ICU) formats.

Special cells, such as overflow or underflow, errors, or not applicable values, appear with two dash (--) characters unless you override them.


You can also format data based on a condition or specify the format for a particular object.

If you create a calculation that uses mixed currency values, an asterisk character (*) appears as the unit of measure. To remove the asterisk character, change the format of the corresponding row or column.

Set the Default Data Formats

Set the default data properties for each type of data, including text, number, currency, percent, date, time, date/time, and time interval.

Procedure

1. From the **Data** menu, click **Default Data Formats**.
2. In the **Format type** box, click a format type.
The properties that you can set for the selected format type appear in the **Properties** box.
3. If you clicked the **Currency** format type and require different currencies in the report, click the add button  and select currency check boxes.
For example, you may have one column with values are in euros and another column whose values are in US dollars.
4. Set the properties.

If you added currencies in step 3, click each one and set the properties. If you did not add any currencies, any properties you set will apply to all currencies.

For properties in which you type meta-characters that represent certain types of information, such as YYYY-MM-DD for dates, the meta-characters that are required depend on the authoring language specified for the report. For more information, see “Using Patterns to Format Data” on page 393.

If you set a value for the **Pattern** property, all other formatting properties are ignored with the following exceptions:

- **Missing Value Characters**
- **Zero Value Characters**
- **Negative Pattern**

Some properties are language-sensitive and should be changed only with caution.

Results

The data formatting properties you set are applied to objects only in the current layout. If a data item contains values in multiple currencies but only a subset of those currencies have defined formats, the default format for the locale in which you are working is applied to values with no specified format.

Specify the Data Format for an Object

Specify the format for a particular object if you are not getting the results you want.

For example, you add a measure to a report and you want to see two decimals when you run the report. You set the number of decimals to two for the **Number** format type for the current layout. However, when you run the report, you see more than two decimals for the measure. To get the results you want, you must map the measure to the **Number** format type.

Data formats are not applied in delimited text (CSV) and XML report outputs.

Procedure

1. Click the object.
2. In the **Properties** pane, double-click the **Data Format** property.
3. Under **Format type**, click the format type to apply to the object.
4. To override any of the properties of the format type that were defined for the current layout, in the **Properties** box, click the property and specify its value.

Specifying the Number of Decimals in Numbers

When specifying the number of decimals, IBM Cognos Business Intelligence uses the IEEE 754 default rounding mode known as half even. With half even rounding, numbers are rounded toward the nearest truncated value, unless both truncated values are equidistant, in which case the value ending in an even digit is chosen, as follows:

- If the digit immediately after the precision to be shown is greater than 5, the number is rounded up.
- If the digit immediately after the precision to be shown is less than 5, the number is rounded down.
- If the digit immediately after the precision is a 5, the number is rounded down when the preceding digit is even and rounded up when the preceding digit is odd.

For example, the number 78.5 is rounded to 78, while the number 73.5 is rounded to 74.

In addition, if the maximum number of decimals is lower than the actual number of decimals in the number, the number is rounded to the maximum number of decimals.

Digit shaping in charts and maps

When working with bidirectional content, you cannot specify digit shaping at the chart or map level. You can specify digit shaping for the objects in charts and maps.

To understand how digit shaping is applied to charts and maps, you must know which chart and map objects are considered text and which objects are considered numeric values.

The following table describes the chart and map objects that are considered text.

Table 1. Chart and map objects that are considered text

Container	Object
Chart	chart title, subtitle, footer, notes, legend item, legend title, regression label, marker label, background image label, axis titles, discrete axis label (for example, category axis label, x-axis), baseline labels
Map	map title, subtitle, footer, legend title, notes, axis labels

The following table describes the chart and map objects that are considered numeric values.

Table 2. Chart and map objects that are considered numeric values

Container	Object
Chart	numeric axis label (for example, measure axis label, y-axis), numeric values that appear in the legend (you can select to show the first, last, maximum, minimum value for each item in legends), numeric values that appear in the chart
Map	legend items

The following list describes the different digit shaping options and how digit shaping is applied to charts and maps.

- The digit shape options for text objects, which include titles, footers, and labels, are Default, None, National, and Contextual. Digit shape options for numeric values are Default, None, and National. There is no Contextual option for numeric values.
- By default, digit shaping is not applied to numbers that appear on an object that is considered text. For example, if a chart shows year data on the x-axis and the content language specified in IBM Cognos Connection is Arabic (Egypt), no digit shaping is applied because the x-axis label is considered a string.

The following list describes the default digit shaping behavior for charts and maps when the content language implies non-European digits, such as Arabic (Egypt).

- Numeric values that have a specific format, such as decimal or currency, are displayed as Arabic-Indic.
- Except for matrix charts, numeric axis labels for charts and maps are displayed in European digits.

This is due to the way that charts and maps are rendered. The engine used to render charts and maps does not perform any formatting for numeric axis labels. No locale information is passed, and consequently the labels are displayed as European digits. To display the labels as Arabic-Indic, select the digit shaping option National.

Matrix charts are rendered using International Components for Unicode (ICU) to format numbers. Locale information is passed and the numbers are shaped accordingly. For example, when the content language is Arabic (Egypt), ICU displays numbers as Arabic-Indic.

- Numbers within text labels are displayed as is. That is, no digit shaping is applied.

The following list describes the default digit shaping behavior for charts and maps when the content language is Thai.

- Numeric values that have a specific format, such as decimal or currency, are displayed as European digits.
- Numbers within text labels are displayed as is. That is, no digit shaping is applied.

Related concepts:

“Support for bidirectional languages” on page 56

You can author reports that support bidirectional languages. You can specify base text direction, digit shaping, and container direction.

Related information:

“Digit Shaping” on page 970

Specifies the digit shaping option to apply. When National is selected, digit shapes are determined from the user’s content language. When Contextual is selected, digit shapes are determined from adjoining characters in the value. For example, if the most recent strongly directional character before the numerical character is left-to-right, the number is displayed as a European number. If the most recent strongly directional character before the numerical character is right-to-left, the number is displayed in Arabic-Indic format. If there are no strongly directional characters before the numerical character, the number is displayed according to the base text direction of the field. When None is selected, no shaping is performed, and the value as it appears in the data source is shown. The default depends on the type of value. When the value is a string, the default is None.

Locale-sensitive Properties

IBM Cognos Report Studio contains an extensive library of customized properties adapted to users from different regions who speak different languages. For example, if a modeler specifies that a given data item is a currency, only the proper currency symbol must be specified. When reports are created, Report Studio automatically adapts the format of the currency numbers to each user according to the content language specified in IBM Cognos Connection.

When modelers or report authors specify properties, these properties override user preferences and risk creating inconsistent formatting for users of other cultures. It is usually much easier and safer to let Report Studio take care of formatting. For example, for the date format type, different regions use different characters to represent the date separator. If you specify a date separator, you may confuse users in other regions.

The following data formatting properties are locale-sensitive:

- **Currency Symbol Position**
- **Date Separator**
- **Date Ordering**
- **Calendar Type**
- **Time Separator**
- **Display AM/PM Symbols**
- **Clock**
- **Decimal Symbol**
- **Negative Sign Position**
- **Thousands Separator**
- **Group Size (digits)**

- **Secondary Group Size (digits)**
- **Missing Value Characters**
- **Zero Value Characters**
- **Pattern**
- **Negative Pattern**

Suppress Empty Cells

Sparse data may result in crosstabs showing empty cells. For example, a crosstab that matches employees with products results in many rows of empty values for the revenue measure if the employee does not sell those products.

You can suppress rows, columns, or rows and columns based on divide by zero, missing, and overflow values. Suppressing rows or columns without data gives you a more concise view of your report.


Calculations are performed before suppression is applied. If you have multiple crosstabs or charts, you must select one in order to access suppression options.

Within a list report, suppression applies only to rows and is based on non-grouped data items. If details of a group are null, then the header and footer are also suppressed.

Suppression can also be applied to charts, repeaters, and repeater tables.

Access to the suppression feature depends on the settings in your modeling component, IBM Cognos Transformer, IBM Cognos Framework Manager, and IBM Cognos Administration.

Procedure

1. From the **Data** menu, click **Suppress**  and click **Suppression Options**.
2. Under **Suppress**, choose what sections to suppress.
3. Under **Suppress the following**, choose which values to suppress.

Related concepts:

“Limitations When Formatting Empty Cells in SAP BW Data Sources” on page 548
 When working with SAP BW data sources, if the SAP BW server administrator configured custom formatting for empty cells on the SAP BW server, this custom format does not appear in IBM Cognos Business Intelligence reports. Ask your administrator to configure the formatting of empty cells in IBM Cognos BI.

Suppress Null Cells Using Filters

You can also use filters to suppress null cells in your reports. Using filters ensures that calculations take suppression into account. You may also obtain better report performance because the filtering is done at the data source.

If your report includes more than one measure or fact expression, it is best to base the filter on only one underlying fact or measure.

Relational-style Reports

In relational-style reports, you can use detail and summary filters.

Dimensional-style Reports

In dimensional-style reports, you can use the filter function.


For example, insert a set expression in your crosstab and use the expression filter (descendants ([Set]) is not null). If your crosstab includes three or more levels within the same dimension on an edge, use the expression filter (descendants (currentMember([Hierarchy]) is not null).

If your crosstab includes nested sets, filter the sets using a cascading approach to improve performance. For example, first filter the outermost (or highest nested level) set, and then filter the remaining sets proceeding inward.

Example - Suppress Zeros in Rows and Columns in an Existing Report

You are a report writer at The Sample Outdoors Company, which sells sporting equipment. You have a report that compares current year data to previous year data. You want to suppress zeros in the report to make the report more concise. You use the zero suppression tool to set the level of suppression.

Procedure

1. Open the GO Balance Sheet as at Dec. 31, 2012 report.
 2. From the **Data** menu, click **Suppress**  and click **Suppression Options**.
 3. Under **Suppress the following**, click **Rows and columns**.
 4. Under **Suppress the following type of values**, select the **Zero values** check box.
 5. Run the report.
- Rows and columns containing zeros are hidden.

Great Outdoors Company			
balance sheet as at Dec 31, 2012 (with prior year comparative data)			
Year to date (USD \$ 000's)	2012 Actual results in USD		2011 Actual results in USD
	December 2012		December 2011
Assets (total)	\$4,353,363,798		\$3,804,483,176
Current assets (total)	\$2,336,392,807		\$2,139,066,575
Operating assets (total)	\$1,778,012,688		\$1,484,257,572
Other assets (total)	\$238,958,303		\$181,159,029
Liabilities (total)	(\$1,602,289,213)		(\$1,754,874,006)
Current liabilities (total)	(\$1,144,967,294)		(\$1,206,574,775)
Long-term and other liabilities (total)	(\$457,321,919)		(\$548,299,231)
Equity (total)	(\$2,751,074,586)		(\$2,049,609,170)
Common stock	(\$719,183,000)		(\$749,178,000)
Other capital	(\$69,921,200)		(\$183,898,457)
Retained earnings - net	(\$1,961,541,522)		(\$1,116,128,225)
Currency translation gain (or loss)	(\$428,864)		(\$404,488)

Figure 49. Balance sheet with zero suppression applied in rows and columns

Specify what appears for data containers that contain no data

You can specify what appears in a data container when no data is available from the database.

When no data is available, you can show one of the following options:

- An empty data container, such as a blank list.


- Alternate content, such as another data container or an image. You can insert any object from the **Toolbox** tab.
- Text, such as *There is no data available for this month*. If you show text, you can format it. By default, the text **No Data Available** appears.

You can specify what appears when no data is available for the following data containers: lists, crosstabs, charts, maps, repeaters, repeater tables, and tables of contents.

If your report includes multiple data containers, you can specify different no data contents for each container.

Tip: The No Data sample report in the GO Sales (query) package includes data containers that have no data. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.


Procedure

1. Select a data container.
2. In the **Properties** pane, click the select ancestor icon  and click the data container type.
3. Click the ellipsis (...) button next to the **No Data Contents** property and select what should appear for data containers that contain no data:

- To show an empty data container, click **No Contents**.
- To show alternate content, click **Content specified in the No data tab**.

Two tabs appear at the top of the data container and the **No Data Contents**

tab  is selected automatically.

From the **Toolbox** tab , insert the objects to appear when there is no data available into the **No Data Contents** tab.

- To show text, click **Specified text** and type the text that you want to appear.

Using Patterns to Format Data

You can format data so that it matches any pattern of text and numbers when default formats are not appropriate. For example, you can format dates to use full text including the era, or you can format them to only use numbers and show the last two digits of years to save space.

Using symbols and patterns can provide similar results as basic data formatting tasks. For example, you can set how many digits appear after the decimal point. You can achieve these types of results with a pattern, or you can set the **No. of Decimal Places** property. Patterns allow flexibility for more complex requirements.

Each supported content language code requires a specific set of symbols to be used in patterns. For each language code, there are two tables you will need; one for date and time symbols, and one for decimal symbols. The decimal symbols are the same for all locales, however, date and time symbols are grouped into six locale groups. Check the Date and Time Symbol section to see which locale group is used for your locale.

To define patterns, open the **Data Format** dialog box, and edit the **Pattern** property for each format type. Use the symbols that are defined in the language code tables, and follow these guidelines.

Pattern Guidelines

When you define a pattern, the number of symbols you use affects how the data will be shown. There are different rules for text, numbers, and values that can take the form of text or numbers.

Text

You can specify whether text is produced in full or abbreviated form.

Number of symbols	Meaning	Example
4 or more	Full text form	EEEE produces Monday
Less than 4	Abbreviated form	EEE produces Mon

Numbers

The number of symbols you use in a pattern sets the minimum number of digits that are produced in a report. Numbers that have fewer digits than specified are zero-padded. For example, if you specify mm for minutes, and the database value is 6, the report will show 06.

Note: The year value is handled differently. If you specify two symbols for year, the last two digits of the year value is produced. For example, yyyy produces 2013, and yy produces 13.

Text and Numbers

For values that can produce text or numbers, such as months, you can specify whether text or numbers are produced, and whether words are abbreviated.

Number of symbols	Meaning	Example
3 or more	Text	MMMM produces January MMM produces Jan
Less than 3	Numbers	MM produces 01 M produces 1

Date and Time Symbols

Date and time symbols are divided into locales, each of which is detailed below.

Locale Group A

Locales: af-za, en, en-au, en-be, en-bw, en-ca, en-gb, en-hk, en-ie, en-in, en-mt, en-nz, en-ph, en-sg, en-us, en-vi, en-za, fo-fo, gl-es, id, id-id, is, is-is, it, it-ch, it-it, kk-kz, ms, ms-bn, ms-my, nb-no, nl, nl-be, nl-nl, no, no-no, om-et, om-so, pl, pl-pl, pt, pt-br, pt-pt, so-dj, so-et, so-ke, so-so, sv, sv-fi, sv-se, sw-ke, sw-tz

Meaning	Symbol	Presentation	Example
Era	G	Text	AD
Year	y	Number	2013
Year (of 'Week of Year')	Y	Number	2013
Month in year	M	Text and number	July and 07
Week in year	w	Number	27
Week in month	W	Number	2
Day in year	D	Number	189
Day in month	d	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	a	Text	pm
Hour in day (1 to 24)	k	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0
Hour in a.m. or p.m. (1 to 12)	h	Number	12
Hour in day (0 to 23)	H	Number	0
Minute in hour	m	Number	30
Second in minute	s	Number	55
Millisecond	S	Number	978
Time zone	z	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a
Single quote	"	n/a	'

Locale Group B

Locales: be-by, bg-bg, el, el-gr, fi, fi-fi, hr, hr-hr, hu, hu-hu, ja, ja-jp, ko, ko-kr, ro, ro-ro, ru, ru-ua, ru-ru, sh-yu, sk, sk-sk, sl-si, sq-al, sr-sp, th, tr, tr-tr, uk-ua, zh, zh-cn, zh-hk, zh-mo, zh-sg, zh-tw

Meaning	Symbol	Presentation	Example
Era	G	Text	AD
Year	a	Number	2013
Year (of 'Week of Year')	A	Number	2013
Month in year	n	Text and number	July and 07
Week in year	w	Number	27
Week in month	W	Number	2
Day in year	D	Number	189
Day in month	j	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	x	Text	pm
Hour in day (1 to 24)	h	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0
Hour in a.m. or p.m. (1 to 12)	k	Number	12
Hour in day (0 to 23)	H	Number	0
Minute in hour	m	Number	30
Second in minute	s	Number	55
Millisecond	S	Number	978
Time zone	z	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a

Meaning	Symbol	Presentation	Example
Single quote	"	n/a	'

Locale Group C

Locales: ca-es, cs, cs-cz, da, da-dk, es, es-ar, es-bo, es-cl, es-co, es-cr, es-do, es-ec, es-es, es-gt, es-hn, es-mx, es-ni, es-pa, es-pe, es-pr, es-py, es-sv, es-us, es-uy, es-ve, eu-es, mk-mk

Meaning	Symbol	Presentation	Example
Era	G	Text	AD
Year	u	Number	2013
Year (of 'Week of Year')	U	Number	2013
Month in year	M	Text and number	July and 07
Week in year	w	Number	27
Week in month	W	Number	2
Day in year	D	Number	189
Day in month	t	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	a	Text	pm
Hour in day (1 to 24)	h	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0
Hour in a.m. or p.m. (1 to 12)	k	Number	12
Hour in day (0 to 23)	H	Number	0
Minute in hour	m	Number	30
Second in minute	s	Number	55

Meaning	Symbol	Presentation	Example
Millisecond	S	Number	978
Time zone	z	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a
Single quote	"	n/a	'

Locale Group D

Locales: de, de-at, de-be, de-ch, de-de, de-lu

Meaning	Symbol	Presentation	Example
Era	G	Text	AD
Year	j	Number	2013
Year (of 'Week of Year')	J	Number	2013
Month in year	M	Text and number	July and 07
Week in year	w	Number	27
Week in month	W	Number	2
Day in year	D	Number	189
Day in month	t	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	a	Text	pm
Hour in day (1 to 24)	h	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0
Hour in a.m. or p.m. (1 to 12)	k	Number	12
Hour in day (0 to 23)	H	Number	0

Meaning	Symbol	Presentation	Example
Minute in hour	m	Number	30
Second in minute	s	Number	55
Millisecond	S	Number	978
Time zone	z	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a
Single quote	"	n/a	'

Locale Group E

Locales: fr, fr-be, fr-ca, fr-ch, fr-fr, fr-lu

Meaning	Symbol	Presentation	Example
Era	G	Text	AD
Year	a	Number	2013
Year (of 'Week of Year')	A	Number	2013
Month in year	M	Text and number	July and 07
Week in year	w	Number	27
Week in month	W	Number	2
Day in year	D	Number	189
Day in month	j	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	x	Text	pm
Hour in day (1 to 24)	h	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0

Meaning	Symbol	Presentation	Example
Hour in a.m. or p.m. (1 to 12)	k	Number	12
Hour in day (0 to 23)	H	Number	0
Minute in hour	m	Number	30
Second in minute	s	Number	55
Millisecond	S	Number	978
Time zone	z	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a
Single quote	"	n/a	'

Locale Group F

Locales: ga-ie

Meaning	Symbol	Presentation	Example
Era	R	Text	AD
Year	b	Number	2013
Year (of 'Week of Year')	B	Number	2013
Month in year	M	Text and number	July and 07
Week in year	t	Number	27
Week in month	T	Number	2
Day in year	l	Number	189
Day in month	L	Number	10
Day of week in month	F	Number	2 (2nd Wed in July)
Day of Week (1=first day)	e	Number	2
Day in week	E	Text	Tuesday
a.m. or p.m. marker	a	Text	pm

Meaning	Symbol	Presentation	Example
Hour in day (1 to 24)	u	Number	24
Hour in a.m. or p.m. (0 to 11)	K	Number	0
Hour in a.m. or p.m. (1 to 12)	k	Number	12
Hour in day (0 to 23)	U	Number	0
Minute in hour	n	Number	30
Second in minute	s	Number	55
Millisecond	S	Number	978
Time zone	c	Text	Pacific Standard Time
Escape used in text	'	n/a	n/a
Single quote	"	n/a	'

Decimal Format Symbols

All locales

Symbol	Meaning
0	A digit that is shown even if the value is zero.
#	A digit that is suppressed if the value is zero.
.	A placeholder for decimal separator.
,	A placeholder for thousands grouping separator.
E	Separates mantissa and exponent for exponential formats.
;	Separates formats for positive numbers and formats for negative numbers.
-	The default negative prefix.
%	Multiplied by 100, as percentage.
‰	Multiplied by 1000, as per mille.
¤	The currency symbol. If this symbol is present in a pattern, the monetary decimal separator is used instead of the decimal separator.

Symbol	Meaning
¤¤	The international currency sign. It will be replaced by an international currency symbol. If it is present in a pattern, the monetary decimal separator is used instead of the decimal separator.
X	Other characters that can be used in the prefix or suffix.
'	Used to quote special characters in a prefix or suffix.
/u221E	Infinity symbol.
/uFFFD	Not a Number symbol.

Chapter 17. Using Query Macros

A macro is a fragment of code that you can insert in the Select statement of a query or in an expression. For example, add a macro to insert a new data item containing the user's name.

You can include references to session parameters, parameter maps, and parameter map entries in macros. Parameter values are set when you run the query. For example, you can use the language session parameter to show only the data that matches the language setting for the current user.

Macros can be used in these different ways:

- They can be inserted in the SQL.
An example is `Select * from Country where Country.Name = #myMap{$runLocale}#`
- They can supply an argument to a stored procedure query subject.
If a value is not hard-coded for the argument, the stored procedure query subject can be used to return different data.
- They can be inserted in expressions, such as calculations and filters.
An example is a filter `[gosales].[Sales staff].[Staff name] = #UserLookUpMap{$UserId}#`
- They can be used as a parameter wizard.
Parameters can reference other parameters. An example is `Map1, Key = en-us, Value = #myMap{$UserId}#`

You can also add query macros to the IBM Cognos Framework Manager model. For more information, see the Framework Manager *User Guide*.

Support for query macros in IBM Cognos Report Studio includes the same capabilities as macros used in Framework Manager. However, Report Studio query macros do not extend to the layout. Therefore, when making changes to the query using macros, you must bear in mind the side-effects on the layout. For example, if a macro removes a column from the query that the layout refers to, a run-time error will occur.

Syntax

Use the following syntax to reference session parameter and parameter values.

Object	Syntax	Example
Session key	<code>\$session_key</code>	<code>#my_account#</code>
Parameter map key	<code>\$map{<key>}</code>	<code>#map_one{'abc'}#</code>
Parameter map entry whose key is defined by a session parameter	<code>\$map{\$session_key}</code>	<code>#map_one{my_account}#</code>

You can add the following elements to further define the macro expression.

Symbol	Purpose
Single quotation marks ' '	<p>Delineates a literal string that has a single quotation mark as part of the string.</p> <p>If the single quotation mark displays in a string, such as a query item, the string must be enclosed in a single quotation mark on both sides of the string and the single quotation mark must be doubled. For example, ab'c is written as 'ab''c'</p> <p>If the single quotation mark displays in a macro, the string must be enclosed in square brackets. For example, ab'c is written as [ab'c]</p> <p>If the single quotation mark displays in a prompt, there is no need to enclose the string.</p> <p>To escape a single quotation mark in an expression, use &apos;</p>
Square brackets []	Encloses model objects, such as a namespace or query subject and macro names that contain restricted characters, such as a number sign, hyphen, or space.
Curly brackets, also known as braces { }	<p>Calls a function that is unknown to the parser, such as dateadd in DB2, and whose first argument is a keyword.</p> <p>Example:</p> <pre>dateadd ({month},2,<date expression>)</pre>
+ operator	Concatenates two strings, such as 'abc' + 'xyz'
Single quote function (sq)	<p>Surrounds the result of a string expression with single quotation marks. If the single quotation mark displays in a string, such as a query item, the string must be enclosed in a single quotation mark on both sides of the string and the single quotation mark must be doubled. You can use this function to build clauses to test against literal parameter-driven values.</p> <p>Here is an example:</p> <pre>#sq(\$my_sp)#</pre> <p>If a session parameter (my_sp) has the value ab'cc, the result is</p> <pre>'ab"cc'</pre>

Symbol	Purpose
Double quote function (dq)	<p>Surrounds the result of a string expression with double quotation marks. You can use this function to refer to table and column names with non-identifier characters, such as a blank space or a percent sign (%).</p> <p>Here is an example:</p> <pre>#dq ('Column' + \$runLocale)#</pre> <p>If runLocale=en-us, the result is "Column en-us"</p>
Square bracket function (sb)	<p>Inserts a set of square brackets into the argument to build object references in a model query and model expressions, such as filters and calculations.</p> <p>Here is an example:</p> <pre>#sb ('my item in ' + \$runLocale)#</pre> <p>If runLocale=en-us, the result is [my item in en-us]</p>

For information about functions, see Appendix F, “Using the expression editor,” on page 555.

Add a Query Macro

Add a query macro to allow run-time changes to be made to SQL queries.

About this task

When you reference a parameter, you must do the following:

- Use a number sign (#) at the beginning and end of each set of one or more parameters.

Everything between the number signs is treated as a macro expression, which is processed at runtime. Framework Manager removes anything that is outside the number signs.

- Precede each parameter map entry with a dollar sign (\$)
- Use a name that starts with an alpha character (a..z, A..Z)


Do not insert macros between existing quotation marks or square brackets because IBM Cognos Report Studio does not execute anything within these elements.

Tip: For a list of supported macro functions, see Appendix F, “Using the expression editor,” on page 555.

Procedure

1. To add a macro to an expression, in the Expression Editor, click the macros tab



2. Pause the pointer over the query explorer button  and click **Queries**.
3. If the query to which you are adding a macro was built by using your own SQL, do the following:
 - Click the **SQL** object that is linked to the query.
 - In the **Properties** pane, double-click the **SQL** property.
 - In the **SQL** dialog box, type the macro.
4. If the query to which you are adding a macro was not built by using your own SQL, do the following:
 - Click the query.
 - In the **Properties** pane, double-click the **Generated SQL/MDX** property.
 - In the **Generated SQL/MDX** dialog box, click **Convert**.
 - In the **SQL** dialog box, type the macro.

Creating Prompts Using Query Macros

You can create mandatory and optional prompts in reports using query macros.

Use the prompt macro functions `prompt` and `promptmany` to create single-value and multiple-value prompts. You can use prompt macro functions when working with a relational data source or a dimensionally-modeled relational (DMR) data source.

If you want to use a prompt macro in an expression such as a calculation, you must specify the data type when using an overloaded operator, such as a plus sign (+). You can use the plus sign to concatenate two items and to add two items.

If you want to define a filter on a dimension level and have the filter use the `prompt` or `promptmany` macro, you must provide the data type as `memberuniqueName` and a default value.

Here is an example:

```
members( [MS_gosales].[New Dimension].[PRODUCTLINE].[PRODUCTLINE])
  in ( set( #promptmany('what', 'memberuniqueName',
' [MS_gosales].[PROD1].[PRODUCTLINE].[PRODUCTLINE]
->[a11].[1]')# ) )
```

Here is an example of a mandatory prompt:

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY = #prompt('CountryName')#
```

When default values are specified in the syntax of macro prompts, you may see an error. Use prompt syntax such as `where Country = ?Enter Country?`.

The `prompt` and `promptmany` functions have the following mandatory and optional parameters. All argument values must be specified as strings.

Name

This mandatory parameter is the name of the prompt. Name can also refer to the name of a parameter on a user-created prompt page, in which case the user-created prompt page appears when the report is run instead of the default prompt page that the macro would generate.

Datatype

This optional parameter is the prompt value data type. The default value is string. Prompt values are validated. In the case of strings, the provided value is enclosed in single quotation marks and embedded single quotation marks are doubled.

Values include the following:

- boolean
- date
- datetime
- decimal
- double
- float
- int
- integer
- interval
- long
- memberuniquename

Memberuniquename is not an actual data type. This value must be used when the data type of the parameter is member unique name (MUN).

- numeric
- real
- short
- string
- time
- timeinterval
- timestamp
- token

Token is not an actual data type. It is a way to pass SQL. A token does not pass values.

- xsddate
- xsddatetime
- xsddecimal
- xsddouble
- xsdduration
- xsdfloat
- xsdint
- xsdlong
- xsdshort
- xsdstring
- xsdtime

DefaultText

This optional parameter is the text to be used by default. If a value is specified, the prompt is optional.

If you use a space and no values are provided in the **Prompt Value** dialog box, a Where clause is usually not generated.

If you use text and no values are provided in the **Prompt Value** dialog box, a Where clause is usually generated using the default value.

Ensure that the text you provide results in a valid SQL statement.

Note: If the data type is memberuniquename, a value for the DefaultText parameter must be provided. For example:

```
(#prompt('WhichLevel', 'memberuniquename',  
'[goSalesAgain].[PRODUCT1].[PRODUCT].[PRODUCT(A11)]->[a11]')#)
```

Text

This optional parameter is text that precedes any user-provided values, such as 'and column1 = '.

QueryItem

This parameter is optional. The prompt engine can take advantage of the **Prompt Info** properties of the query item. Descriptive information can be shown, although the prompt value is a code.

TextFollowing

This optional parameter is the closing parenthesis that is used most often for the promptmany function. This parameter is also useful when the prompt is optional and is followed by hardcoded filters in the SQL statement.

Examples - selecting country or region prompts

When a report is run, you want your users to be prompted to choose the country or region for which they want to see data. The following code examples describe how you can use macros to create different prompts.

Mandatory prompt with no data type specified

Note the following:

- The Datatype argument is not specified. Therefore, it is a string, which is correct in this case.
- The DefaultText argument is not specified. Therefore, it is a mandatory prompt.

```
select  
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,  
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,  
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,  
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME  
from  
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL  
where COUNTRY_MULTILINGUAL.COUNTRY = #prompt('CountryName')#
```


Mandatory prompt with the data type specified

Note the following:

- This prompt requires a valid integer value as response.
- The `DefaultText` argument is not specified. Therefore, it is a mandatory prompt.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY_CODE >
  #prompt('Starting CountryCode',
    'integer',
    '',
    '',
    '10',
    '[gosales].[COUNTRY_MULTILINGUAL].[COUNTRY_CODE]')#
```

Optional prompt and mandatory filter with the data type and default value specified

Note the following:

- This prompt allows the user to supply a valid integer response.
- The `DefaultText` argument is specified. Therefore, the user may omit entering a value, in which case the value 10 is used. This makes it an optional prompt, but not an optional filter.

Example 1:

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY_CODE >
  #prompt('Starting CountryCode',
    'integer',
    '10'
  )#
```

Example 2:

```
[gosales].[COUNTRY].[COUNTRY] = #prompt('countryPrompt','string','''Canada''')#
Result 2:
[gosales].[COUNTRY].[COUNTRY] = 'Canada'
```

Note the following:

- The `defaultText` parameter must be specified such that is literally valid in the context of the macro, because no formatting takes place on this value. See details below.
- The default string Canada in Example 2 is specified as a string using single quotes, in which the embedded single quotes are doubled up, thus 3 quotes. This results in the string being properly displayed within single quotes in the expression.
- As a general rule for the string datatype, the `defaultText` should always be specified as in the previous note, except in the context of a stored procedure parameter.

- For the defaultText of types date or datetime, a special format should be used in the context of SQL. Examples of these formats are 'DATE ''2012-12-25'' and 'DATETIME ''2012-12-25 12:00:00''. In all other contexts, you use the date/datetime without the keyword and escaped single quotes (e.g., '2012-12-25').

Prompt that appends text to the value

Note the following:

- The DefaultText argument is specified as a space character. In this case, the generated text is just the space character, which eliminates the Where clause from the query.
- The Text argument is specified, which is written into the generated SQL before the user-provided prompt value.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
#prompt('Starting CountryCode',
  'integer',
  ' ', // < = = this is a space
  'where COUNTRY_MULTILINGUAL.COUNTRY_CODE >'
)#
```

Syntax substitution

Note the following:

- The Datatype argument is set to token, which means that the user-provided value is entered without any checking on the provided value.
Because checking is not performed on the value, the expression editor may indicate that the expression is not valid. When a valid user-provided value is supplied or if you provide a valid default value, expression editor will interpret the expression as valid.
- Token should be used only if there is a list of pick-values for the user.
- The DefaultText argument is specified. Therefore, this is an optional prompt and group by COUNTRY is used in the generated SQL.

```
Select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
#prompt('Sort column',
  'token',
  'group by COUNTRY',
  'group by '
)#
```

Examples - creating prompts that use parameter maps

When a report is run, you want your users to select a language for the data in the report. The following examples describe several ways you can do this.

Prompt that uses session variables

Note the following:

- The name of the prompt is specified using a lookup in the parameter map named PromptLabels. The key value is the session variable \$language.
- The Where clause is using a parameterized column.

```
select
  ORDER_METHOD.ORDER_METHOD_CODE as ORDER_METHOD_CODE,
  ORDER_METHOD.ORDER_METHOD_#$language#
  as ORDER_METHOD_EN
from
  gosales.gosales.dbo.ORDER_METHOD ORDER_METHOD
#prompt($PromptLabels{$language},
  ''
  ;
  'where ORDER_METHOD.ORDER_METHOD_' + $language + '
>'
)#
```

A parameter map that nests prompts

Note the following:

- In the model, there is a parameter map DynPromptLabels with
#\$PromptLabels{\$language}#
- Part of the prompt information is run from a parameter map instead of being coded directly inside the SQL.
- The whole macro containing the prompt can be a value in a parameter map.

```
select
  ORDER_METHOD.ORDER_METHOD_CODE as ORDER_METHOD_CODE,
  ORDER_METHOD.ORDER_METHOD_#$language#
  as ORDER_METHOD_EN
from
  gosales.gosales.dbo.ORDER_METHOD ORDER_METHOD
#prompt($DynPromptLabels{'ex9'},
  ''
  ;
  'where ORDER_METHOD.ORDER_METHOD_' + $language + '
>'
)#
```

Examples - creating a multiple value prompt

When a report is run, you want your users to select one or more values. The following examples describe several ways you can do this.

Prompt with a required minimum

Note the following:

- The user must enter at least a single value.
- This resembles the first example on prompting for a country or region
“Mandatory prompt with no data type specified” on page 408.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY IN (#promptmany('CountryName')#)
```

Prompt with a required minimum with the data type specified

Note the following:

- This resembles the second example on prompting for a country or region “Mandatory prompt with the data type specified” on page 409.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY_CODE IN (
  #promptmany('Selected CountryCodes',
    'integer',
    ', ',
    ', ',
    '[gosales].[COUNTRY_MULTILINGUAL].[COUNTRY_CODE]')#
)
```

Optional prompt with the data type and default value specified

The In clause and both parentheses are part of the SQL statement.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
where COUNTRY_MULTILINGUAL.COUNTRY_CODE IN (
  #promptmany('Selected CountryCodes',
    'integer',
    '10'
  )#
)
```

Prompt that adds text before the syntax

Note the following:

- This example uses the TextFollowing argument.

```
select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
  gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL
#promptmany('Selected CountryCodes',
  'integer',
  ' ', // < = = this
  is a space
  'where COUNTRY_MULTILINGUAL.COUNTRY_CODE IN
  ( ',
  ', ',
  ')',
  )#
```

Optional prompt that adds text before the syntax

```
Select
  COUNTRY_MULTILINGUAL.COUNTRY_CODE as COUNTRY_CODE,
  COUNTRY_MULTILINGUAL.COUNTRY as COUNTRY,
  COUNTRY_MULTILINGUAL."LANGUAGE" as LANGUAGE1,
  COUNTRY_MULTILINGUAL.CURRENCY_NAME as CURRENCY_NAME
from
```

```

gosales.gosales.dbo.COUNTRY_MULTILINGUAL COUNTRY_MULTILINGUAL,
gosales.gosales.dbo.COUNTRY_XX
where COUNTRY_MULTILINGUAL.COUNTRY_CODE = XX.COUNTRY_CODE
#promptmany('Selected CountryCodes',
            'integer',
            ' ',
            ' and COUNTRY_MULTILINGUAL.COUNTRY_CODE IN (' ,
            ' ',
            ') '
) #

```

Chapter 18. Using Drill-through Access

Using drill-through access, you can move from one report to another within a session while maintaining your focus on the same piece of data. For example, you select a product in a sales report and move to an inventory report about that product.

Drill-through access helps you to build business intelligence applications that are bigger than a single report. Drill-through applications are a network of linked reports that users can navigate, retaining their context and focus, to explore and analyze information.

Drill-through access works by defining the target report or object and then using information from the source report to filter the target. IBM Cognos BI can match data from the source to metadata in the target report, or you can define parameters in the target for greater control.

Note: In the dimensional reporting style, you can also enable drilling up and drilling down. For more information about drilling up and drilling down, see “Create a Drill-up and Drill-down Report” on page 308.

What You Should Know

For a drill-through link to work, it is necessary to know

- the source
- the target
- how the data in the packages that contain these objects is related

Depending on the underlying data, you may create a drill-through definition and have IBM Cognos BI match the data (dynamic drill-through) or create parameters in the target (parameterized drill-through).

- whether to run the target report or to open it

The target of drill-through access is usually a saved report definition. The report can be created in IBM Cognos Report Studio, IBM Cognos Query Studio, IBM Cognos PowerPlay Studio, or IBM Cognos Analysis Studio. The target of drill-through access can also be a package that contains an IBM Cognos PowerCube, in which case a default view of the PowerCube is created.

- whether the users of the drill-through link in the source report have the appropriate permissions to view or run the target report
- if the target is being run, in what format to run it, and what filters to use on the target

If you do not want to run the target report on demand, you may link to a bookmark in the saved output instead of running the report. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Sources and Targets

In IBM Cognos BI, there are many different examples of source and target. For example, you can drill through

- between reports created in different packages against different data source types, such as from an analysis against a package that contains a PowerCube to a detailed report against a package based on a relational data source
- from one existing report to another report using definitions created in Report Studio
- between IBM Cognos Viewer reports authored in Report Studio, Query Studio, and Analysis Studio
- to and from a package built on a PowerCube
- from IBM Cognos Series 7 to IBM Cognos BI reports
- from Metric Studio to other IBM Cognos BI reports by passing parameters using URLs

For more information, see the IBM Cognos Metric Studio *User Guide*.

Tip: In the GO Data Warehouse (analysis) package, the Positions to Fill sample report is a drill-through target report and the Recruitment Report sample report is a drill-through source report. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Understanding Drill-through Concepts

Before you set up drill-through access, you must understand the key concepts about drilling through. Knowing these concepts will help you to avoid errors so that report consumers drill through as efficiently as possible.

Drill-through Paths

You can create a drill-through path in a source report in IBM Cognos Report Studio, or using Drill-through Definitions in IBM Cognos Connection. A drill-through path is the definition of the path that is taken when moving from one report to another, including how the data values are passed between the reports.

Using **Drill-through Definitions**, you can create a drill-through path from any report in the source package to any target report in any other package in IBM Cognos Connection. This type of drill-through definition is stored in the source package. Users of any report in the package can use the drill-through definition to drill between any combination of IBM Cognos Analysis Studio, IBM Cognos Query Studio, IBM Cognos PowerPlay Studio, or IBM Cognos Viewer reports in any package.

For any target report that contains parameters, you should map the target parameters to the correct metadata in the drill-through path. This ensures that the values from the source report are passed to the correct parameter values, and that the target report is filtered correctly. If you do not map parameters, then the users may be prompted for values when the target report is run.

A report-based drill-through path refers to a path created and stored in a Report Studio source report. This type of drill-through path is also called authored drill through. The path is associated with a specific data column, chart, or cross tab in the source report, and is available only when users select that area of the report. If an authored drill-through definition is available, a hyperlink appears in the source report when it is run.

Report-based drill-through is limited to Report Studio source reports and any target reports. Use this type of drill-through access when you want to pass data

item values or parameter results from within a source report to the target report, pass the results of a report expression to a target report, or a use URL link as a part of the drill-through definition.

Selection Contexts

The selection context represents the structure of the values selected by the user in the source.

In IBM Cognos Analysis Studio, this includes the context area. When a package drill-through definition is used, the selection context is used to give values for mapped parameters (parameterized drill-through) or also to map the appropriate data items and values.

Drill-through links can also be defined to open the target object at a bookmark. The content of this bookmark may also specified by the selection context.

Drill-through access is possible between most combinations of the IBM Cognos Business Intelligence studios. Each studio is optimized for the goals and skills of the audience that uses it, and in some cases for the type of data source it is designed for. Therefore, you may need to consider how the various studios manage the selection context when you drill through between objects created in different studios, and how the data sources are conformed. During testing or debugging, you can see how source values are being mapped in different contexts using the drill-through assistant.

Drilling Through to Different Report Formats

The settings in the drill-through definition determine the format in which users see the report results.

For example, the users may see the reports in IBM Cognos Viewer as an HTML Web page, or the reports may open in IBM Cognos Query Studio, IBM Cognos PowerPlay Studio, or IBM Cognos Analysis Studio. If your users have PowerPlay Studio, then they may also see the default view of a PowerCube.

Reports can be opened as HTML pages, or as PDF, XML, CSV, or Microsoft Excel spreadsheet software formats. When you define a drill-through path, you can choose the output format. This can be useful if the expected use of the target report is something other than online viewing. If the report will be printed, output it as PDF; if it will be exported to Excel for further processing, output it as Excel or CSV, and so on.

If you define a drill-through path to a report that is created in Analysis Studio, PowerPlay Studio, or Query Studio, consumers can open the report in its studio instead of in IBM Cognos Viewer. This can be useful if you expect a consumer to use the drill-through target report as the start of an analysis or query session to find more information.

For example, if an application contains a dashboard style report of high-level data, you can define a drill-through link to Analysis Studio to investigate items of interest. The Analysis Studio view can then be drilled through to a PDF report for printing.

Note: IBM Cognos Report Studio does not display data results.

Drilling Through Between Packages

You can set up drill-through access between packages.

The two packages can be based on different types of data source, but there are some limits. The following table shows the data source mappings that support drill-through access.

Table 3. Data source mappings that support drill-through access

Source data source	Target data source
OLAP	OLAP Note: OLAP to OLAP drill through is supported only if the data source type is the same, for example, SSAS to SSAS.
OLAP	Dimensionally modeled relational
OLAP	Relational data Note: For more information, see “Business Keys” on page 421.
Dimensionally modeled relational	Dimensionally modeled relational
Dimensionally modeled relational	Relational
Relational	Relational

Bookmark References

When you drill through, the values that you pass are usually, but not always, used to filter the report. IBM Cognos Business Intelligence supports bookmarks within saved PDF and HTML reports so that a user can scroll a report to view the relevant part based on a URL parameter.

For example, you have a large inventory report scheduled to run daily or weekly during off hours because of resource considerations. Your users may want to view this report as a target because it contains detailed information, but you want them to view the saved output rather than run this large report. Using this Action option and bookmark settings, users can drill through from another source location based on products to open the saved report to the page that shows the product they want to focus on.

When a bookmark in the source report is used in a drill-through definition, it provides the value for the URL parameter. When report consumers drill through using this definition, they see the relevant section of the target report.

Bookmark references are limited to previously run reports that are output as PDF or HTML and contain bookmark objects.

Members and Values

Dimensionally modeled data, whether stored in cubes or stored as dimensionally modeled relational (DMR) data, organizes data into dimensions. These dimensions contain hierarchies. The hierarchies contain levels. And the levels contain members.

An example of a dimension is Locations. A Locations dimension may contain two hierarchies: Locations by Organization Structure and Locations by Geography. Either of these hierarchies may contain levels like Country or Region and City.

Members are the instances in a level. For example, New York and London are members in the City level. A member may have multiple properties, such as Population, Latitude, and Longitude. Internally, a member is identified by a Member Unique Name (MUN). The method by which a MUN is derived depends on the cube vendor.

Relational data models are made up of data subjects, such as Employees, which are made up of data items, such as Name or Extension. These data items have values, such as Peter Smith.

In IBM Cognos Business Intelligence, the methods of drilling through available are

- Dimensional (member) to Dimensional (member)
- Dimensional (member) to Relational (data item value)
- Relational (data item value) to Relational (data item value)

If the target parameter is a member, the source must be a member. The source and target should usually be from a conformed dimension. However, if the data supports it, you may also choose to define a mapping using different properties of the source metadata item.

If the target parameter is a value, the source can be either a value or a member. If the source is a dimensional member, you must ensure that the level or dimension is mapped to the target data item correctly in the drill-through definition. The business key from which the member is sourced should usually match the relational target value, which is most often the business key. However, if the data supports it, you may also choose to define a mapping from the caption of the source metadata item.

Member Unique Names

The member unique name (MUN) is a unique identifier for a member in IBM Cognos reports. It is stored in the report specification when the member is referenced in the report directly.

The MUN is used in drill-through between OLAP data sources. The member keys in the MUN for the different OLAP data sources must match.

The MUN is used to find the member in the data source, which is similar to how business keys are used to find records in a table. For example, when you create OLAP dimension Products, you use the Product Line database column as a label for the members in your Product Line level. However, you use the Product Line Code business key from the database table to ensure that all the Product lines are unique in that level. The source value that you used to create the members is used in combination with the data source name, hierarchy, and level information in the member unique name.

If the MUN changes, members that are directly referenced in expressions, filters, or reports are no longer found. Changes to the MUN may be related to other changes. For example, changes to the hierarchy and level structures may change the level unique name, and changes to the business key values may change the member key path. Other factors that can affect the MUN are application changes during the design stage or over time, IBM Cognos PowerCube category codes that are unpredictably unique, the production environment that has more members than the test environment, or removing the member from the data source.

To avoid potential problems, we recommend the following best practices when you build OLAP data sources:

- Use unique codes and keys within a dimension for the member keys.
- Define your OLAP and relational packages using unique conformed values for the source values (business keys) within similar dimensions or data values where drill-through between applications may be required.
- Ensure that the business keys and dimension metadata structure are the same in the production and test environments.
- Do not change the business keys in IBM Cognos Framework Manager in the production environment.
- Resolve the non-unique keys in a dimension in the data source before you build the cube.

Ensure that there are no duplicate source values in all levels of a dimension before you build a PowerCube. We do not recommend using the tilde character (~) in the category codes.

For more information, see the section about uniqueness in the IBM Cognos Series 7 *Step-by-Step Transformer*.

For information about PowerCubes migrated from IBM Cognos Series 7, see the IBM Cognos PowerPlay *Migration and Administration Guide*.

Conformed Dimensions

If you work with more than one dimensional data source, you may notice that some dimensions are structured the same, and some are not.

The reason that dimensions can be structured differently is that the data sources may serve different purposes.

For example, a Customer dimension appears in a Revenue data store, but not in an Inventory data store. However, the Products dimension and the Time dimension appear in both data stores.

Dimensions that appear in multiple data stores are conformed if their structure is identical for all of the following:

- hierarchy names
- level names
- level order
- internal keys

Drilling through is possible between different dimensional data stores only if the dimensions are conformed, and if the dimension data store is of the same vendor type, such as IBM Cognos PowerCube as the source and the target. For example, in two data stores for Revenue and Inventory that contain Products and Time dimensions, it is possible to define the Products and Time dimensions differently for each data store. However, for drill-through between the Products and Time dimensions to work, their structures must be identical in each data store.

If you are not sure whether your dimensions are conformed, then you should check with the data modeler to ensure that the drilling through will produce meaningful results.

IBM Cognos Business Intelligence does not support conformed dimensions generated by IBM Cognos Framework Manager for SAP BW data sources.

Dimensionally modeled Relational Data Sources

Ensure that each level contains a business key that has values that match your PowerCube or other DMR models. Also, you must also ensure that the **Root Business Key** property is set and uses the business key of the first level in the hierarchy. This helps to ensure that you have a conformed member unique name when attempting to drill through using members from this dimension.

Related concepts:

“Data Does Not Appear in a Target Report or the Wrong Data Appears” on page 496

If no data appears when you drill through to a target report or if the wrong data appears, the problem might be data source conformance. The business keys might be different or might be mismatched.

Related tasks:

“Unexpected or Empty Results When Drilling Through” on page 503

When you drill from a source report to a target report, there might be no data returned. This might be the correct result if there is no data that corresponds to the drill-through selections or if you do not have permission to view the data.

Business Keys

When drill-through access is defined from a member to a relational value, the business key of the member is passed by default.

This means that your relational target parameter must be set up using the data item with a matching value, which is most often the business key data item. You can also choose to pass the caption of the source metadata item.

For example, employees are usually uniquely identified by an employee number, not by their name, because their name is not necessarily unique. When you drill through from a dimensional member to a relational data item, the value provided is the business key. Therefore, the parameter in the target report must be defined to accept a business key value. The exact logic used to define the business key value supplied depends on the cube vendor. For IBM Cognos PowerCubes, the business key value is the **Source** property defined for the level in IBM Cognos Transformer. IBM Cognos Series 7 Transformer PowerCubes pass the source value if the drill-through flag was enabled before the cube was built. Otherwise, the category code is used.

In IBM Cognos Report Studio, you can determine what the member business key is using an expression such as `roleValue('_businessKey',[Camping Equipment])`. This expression is case-sensitive.

SSAS 2005 multipart business keys are not supported in drill-through operations.

Tip: When other users run your drill-through report, you may not want them to be prompted for a business key. In Report Studio, you can build a prompt page with a text that is familiar to the users, but filters on the business key. Your IBM Cognos Framework Manager modeler can also set the **Display Item Reference** option for the **Prompt Info** property to use the business key when the data item is used in a prompt.

Related concepts:

“Data Does Not Appear in a Target Report or the Wrong Data Appears” on page 496

If no data appears when you drill through to a target report or if the wrong data appears, the problem might be data source conformance. The business keys might be different or might be mismatched.

Related tasks:

“Unexpected or Empty Results When Drilling Through” on page 503

When you drill from a source report to a target report, there might be no data returned. This might be the correct result if there is no data that corresponds to the drill-through selections or if you do not have permission to view the data.

Scope

Scope is specific to drill-through definitions created using Drill-through Definitions in IBM Cognos Connection (package drill-through definitions). The scope you set defines when the target report is shown to the users, based on the items they have in the source report.

Usually, you define the scope of a drill-through path to match a parameter that it passes. For example, if a target report contains a list of employees, typically you want to display the report as an available drill-through choice only when a user is viewing employee names in a source report. If employee names are not in the source report and the scope was set on the employee name in the drill-through definition, the employee report does not appear on the list of available drill-through target reports in the **Go To** page. You can set the scope to a measure or to an item in the report.

In report-based drill-through access, where the drill-through path is associated with a specific report column, the column serves as the scope.

Mapped Parameters

Drill-through targets may contain existing parameters or you can add parameters to the target for greater control over the drill-through link.

You usually map all parameters in a drill-through target to items from the source.

When you map source items that are OLAP or DMR members to target parameters, you can select from a set of related member properties to satisfy the requirements of the target parameter. For a dimensional target, a dimensional source item uses the member unique name by default. For a relational target, a dimensional source item uses the business key by default.

For example, you could change the source member property that is used for a mapping to the member caption instead of the business key to match the parameter in a relational target. For a dimensional target, you could define a parameter that accepts a particular property (such as business key or parent unique name), then pass the appropriate source property to satisfy that target.

Note: If you define drill through between non-conformed dimensions, you should test carefully to ensure that the results behave as expected.

If you do not specify parameter mappings, then by default, you will be prompted for any parameters required in the target when you use the drill-through link. To customize this behavior, use the display prompt pages setting.

When the action is set to **Run using dynamic filtering**, then additional filtering is applied if names from the context in the source report match names of items in the target. Use this action as well when there are no parameters defined in the target.

If parameters are not mapped correctly, then you may receive an empty report, the wrong results, or an error message.

The source and target cannot contain identical parameter names when they are from different packages, even if the data structure is conformed. If the source and target are from the same package, there is no restriction.

If you have the necessary permissions, you can use the drill-through assistant to look at what source parameters are passed, and what target parameters are mapped for a given drill-through link.

You can change the dynamic drill-through filter behavior if you want drill-through to generate a filter using the Member Business Key instead of the default Member Caption. For more information, see *Changing Drill-Through Filter Behavior* in the *IBM Cognos Administration and Security Guide*.

Drilling Through on Dates Between PowerCubes and Relational Packages

The usual method of drilling through from OLAP to relational packages requires that the target report parameter is set using the business key in the relational data, which does not work well for dates.

OLAP data sources typically view dates as members, such as Quarter 1 2012, while relational data sources view dates as ranges, such as 1/Jan/2012 to 31/March/2012.

A special feature exists for drilling through between PowerCubes and relational packages. Ensure that the target report parameter is set up using `in_range`. The parameter must be of type date-time, and not integer.

An example follows:

```
[gosales_goretailers].[Orders].[Order date] in_range ?Date?
```

Also ensure that the drill-through definition maps the parameter at the dimension level and that the PowerCube date level is not set to suppress blank categories. Enabling the option to suppress blank categories in the Transformer model before you build the cube may cause the drill-through on dates to be unsuccessful. This happens because there are missing values in the range.

Set Up Drill-through Access in a Report

Set up drill-through access in a source report to link two reports containing related information.

You can then access related or more detailed information in one report (the target) by selecting one or more data item values from another report (the source). IBM Cognos passes values from the source to the target and uses the passed values to filter the target object. If the data in the source and target is conformed or if the data item names are the same, then the system may map the source values to filter the target (dynamic drill-through). If you require greater control, you may define parameters in the target object (parameterized drill-through).

For instructions about creating parameters in other kinds of targets, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

When you define the drill-through path in IBM Cognos Report Studio, you can pass a value from a different data item that is hidden from the user for display purposes but still in the query. For example, users see the Product Name data item and can drill through on that item, but the drill-through definition passes the Product Number value for the product name the user chose. You can also define the target parameter to accept multiple values or a range of values from the data item in the drill-through source report or to accept a value from a parameter in the source report.

Drill-through definitions that have been authored inside a Report Studio report appear in the source report as blue underlined links. Users click the hyperlink to select the value they want passed to the target and to drill through to the target report. If a user selects multiple items within a single column then when the drill-through target report is run, the values from each selected row are passed to the target parameters. This occurs as an *and* condition.

You can also drill through within the same report by creating bookmarks. As well, you can create drill-through definitions in the source package instead of the Report Studio report. Users can use package drill-through definitions to navigate to a target report from an IBM Cognos Analysis Studio analysis, an IBM Cognos Query Studio report, an IBM Cognos PowerPlay Studio report or IBM Cognos PowerCube package, or a Report Studio report. For more information, see the *Administration and Security Guide*.

If you have the IBM Cognos Software Development Kit, you can use URLs to set up drill-through access to and from third-party sources.

You can also drill through from a map.

Related concepts:

“Example - Creating Drill-through Access in a Legacy Chart” on page 154

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a chart that shows the revenue for each product line and allows the reader to drill through from the revenue chart to view the product details for any item selected. You create a drill-through report to link two reports containing related information. You can then access related or more detailed information in one report by selecting a value in the chart. You create two reports: a target list report that contains the details for the item and a source report that contains the chart that shows the product line revenue.

Create a parameter in the target

Set up drill-through access in a source report to link two reports containing related information. You can then access related or more detailed information in one report (the target) by selecting one or more data item values from another report (the source).

If you are using an SAP BW data source for the target report and the target report contains a variable for a hierarchy node, values from the source report can be values only of the data item representing the leaf-level identifier of the hierarchy.

Before you begin

Before you begin, ensure that you have a report that will serve as the source report and another report that will serve as the target report.

Procedure

1. In IBM Cognos Report Studio, open the target report.
2. Create a parameter that will serve as the drill-through column or that will filter the report.

For example, to drill through or filter Product line, create the following parameter:

```
[Product line]=?prodline_p?
```

Tip: Use the operators `in` or `in_range` to enable the target report to accept multiple values or a range of values.

3. In the **Usage** box, specify what to do when a value for the target parameter is not passed as part of a drill through:

- To specify that users must select a value, click **Required**.

If a value for the target parameter is not passed, users are prompted to choose a value.

- To specify that users do not need to select a value, click **Optional**.

Users are not prompted to choose a value and so the value is unfiltered.

- To specify not to use the parameter, click **Disabled**.

The parameter is not used during the drill-through. It will also not be used in the report for any other purposes.

Tip: If the parameter is needed in the report for other reasons, then you can also specify not to use it in the drill-through definition (**Parameters** table, **Method**, **Do not use parameter**).

Create a drill-through definition

Create a drill-through definition to link two reports containing related information (the source report and the target report).

Drill-through definitions that have been authored inside an IBM Cognos Report Studio report appear in the source report as blue underlined links. Users click the hyperlink to select the value they want passed to the target and to drill through to the target report. If a user selects multiple items within a single column then when the drill-through target report is run, the values from each selected row are passed to the target parameters. This occurs as an *and* condition.

Before you begin

Before you begin, ensure that you have a report that will serve as the source report and another report that will serve as the target report.

Procedure

1. Check the drill-through target:
 - Confirm that the drill-through users have access to the target.
 - If necessary, check what parameters exist in the target.
2. Open the source report.

3. Click the element in the report that will serve as the starting point for the drill-through link.

You can select a data item that your report users are likely to choose to drill on for more detailed information, such as an Employee Name data item.

Tip: If you are passing only parameter values to the target report, you do not have to drill on a data item. Instead, you can drill on any object in the report, such as the report title. Therefore, you can drill from outside the context of a query.

4. Click the drill-through definitions button, or, from the **Properties** pane, double-click the **Drill-Through Definitions** property.
5. Click the new drill-through definition button.

A drill-through definition is created.

Tip: To change the drill-through name, click the rename button, type the new name, and click **OK**.

6. On the **Target Report** tab, click the ellipsis (...) button next to the **Report** box and select the drill-through target report.
7. In the **Action** box, decide how users will view the target report when they click the drill-through link in the parent report:

- To view the latest data in IBM Cognos Viewer, select **Run the report**.
- To edit an IBM Cognos Query Studio, IBM Cognos Analysis Studio, or IBM Cognos PowerPlay Studio target, select **Edit the report**.
- To have IBM Cognos Business Intelligence match values from the selection context with data in the target (dynamic filtering), select **Run the report using dynamic filtering**.

Note: If you chose this option, any parameters in the target report are still used for the drill-through access.

- To view the most recently saved output version of the target report from IBM Cognos Connection, select **View the most recent report**.
 - To use the default action specified for the report in IBM Cognos Connection, select **(Default)**.
8. If the target report contains parameters, then, under the **Parameters** box, click the edit button.

Each required and optional parameter defined in the target report appears in the **Parameters** dialog box.

9. For each parameter, specify the **Method** of treatment:

- To specify not to pass any value, click **(Default)**.
- To specify not to use this parameter, click **Do not use parameter**.
The target report will not be filtered by this parameter.
- To pass values from a data item, click **Pass data item value**, click **Value**, and then click the data item.
Values for the selected data item are passed to the target report.
- To pass values from a source report parameter, click **Pass parameter value**, click **Value**, and then click the parameter.
Values for the selected parameter are passed to the target report.
- If you choose to pass parameters, and the source report is based on a dimensional package, then click an item from the drop-down list in the

Source metadata item properties column. You can pass the default property of the source metadata item (business key) or another property, such as the member caption.

10. Click **OK**.
11. If you chose to run the target report, in the **Format** box, click the output format for your report.

Tip: Click **(Default)** to run the report using the default format specified for the report in IBM Cognos Connection.

12. To open the target report in a new window, select the **Open in new window** check box.
13. In the **Display prompt pages** box, choose how to display prompt pages:
 - To always display prompt pages when the drill-through action occurs regardless of whether values were specified for the required parameter values, click **Always**.
 - To use the prompt settings of the target report (specified by the **Prompt for Values** check box in IBM Cognos Connection, **Report Properties**, **Report** tab) to determine whether to show the prompt pages, click **Based on the default prompt settings of the target report**.
 - To not display prompt pages when the required parameter values are provided by the drill-through definition, click **Only when required parameter values are missing**. This is the default setting.

Results

The drill-through text appears as a blue hyperlink in text items in the non-chart areas of the report. Report consumers can also start the drill-through action by clicking the **Go To** button or by right-clicking the item and clicking **Go To, Related links**. If you have the necessary permissions, you can view which parameters were passed from the source and how they are mapped in the target object from the **Go To** page using the drill-through assistant.


For more information, see the *Administration and Security Guide*.

Defining independent drill-through definitions for crosstabs


By default, you can create only one drill-through definition for fact cells in a crosstab, regardless of how many facts there are. This topic describes how to define different drill-through definitions for different measures in crosstab fact cells.

For example, a crosstab has Quantity and Revenue as measures. For the Quantity cells, you want to define a drill-through definition to a target report that contains more information about quantities sold. For the Revenue cells, you want to define a drill-through definition to a different target report that shows details about revenue generated.

Procedure

1. Open the source report.
2. On the toolbar, click the unlock icon .
3. In the crosstab, click the white space inside one of the fact cells of the measure for which you want to define a drill-through definition.

Do not click the measure text. You want to select the crosstab intersection and not the text item. In the **Properties** pane title bar, ensure that **Crosstab Intersection** appears.

4. In the **Properties** pane, set the **Define Contents** property to **Yes**. The text item in the crosstab intersection disappears.
5. Click the **Data Items** tab .
6. From the crosstab query, drag the measure that disappeared in step 4 to the empty crosstab intersection.
7. Right-click the measure in the crosstab intersection and then click **Drill-Through Definitions**.
8. Create the drill-through definition.

Results

A drill-through definition is defined for the selected measure. Repeat the steps to define different drill-through definitions for other measures in the crosstab. When users run the report, clicking values from different measures takes them to a different target report.

Specify the Drill-through Text

You can specify the drill-through text that appears when users can drill through to more than one target.

For example, if users from different regions view the report, you can show text in a different language for each region.

Procedure

1. Right-click the drill-through object and click **Drill-Through Definitions**.
2. If more than one drill-through definition exists for the object, in the **Drill-Through Definitions** box, click a drill-through definition.
3. Click the **Label** tab.
4. To link the label to a condition, in the **Condition** box, do the following:
 - Click **Variable** and click an existing variable or create a new one.
 - Click **Value** and click one of the possible values for the variable.
5. In the **Source type** box, click the source type to use.
6. If the source type is **Text**, click the ellipsis (...) button that corresponds to the **Text** box and type text.
7. If the source type is **Data Item Value** or **Data Item Label**, click **Data Item** and click a data item.
8. If the source type is **Report Expression**, click the ellipsis (...) button that corresponds to the **Report Expression** box and define the expression.
9. If the label is linked to a condition, repeat steps 5 to 8 for the remaining possible values.

Results

When users run the source report and click a drill-through link, the **Go to** page appears. The drill-through text you specified appears for each target. If you did not specify the drill-through text for a target, the drill-through name is used.

Example - Drill Through to a Hidden Report from a Report Studio Report

You want to set up a drill-through link from an employee satisfaction report created in IBM Cognos Report Studio to a hidden list report about compensation, also created in Report Studio.

The source report (**Employee Satisfaction 2012**) is based on the package GO Data Warehouse (analysis) which is modeled on a DMR data source. The target report (**Compensation (hidden)**) is based on the package GO Data Warehouse (query). You set up this drill-through connection from within Report Studio (report-based, or authored drill through) because you do not want to make a report about compensation available for drill through from any source report in the package. The target report is already hidden in the portal, so that it is unlikely to be run by anyone who does not use the drill through link.

You must have the IBM Cognos Business Intelligence samples from the deployment zip file IBM_Cognos_DrillThroughSamples installed to follow this exercise, and you must have access to Report Studio.

The **Compensation** report is a hidden report. You may be able to set whether hidden reports are visible (**My Preferences, General** tab) and whether you can hide reports. This capability is set by your administrator.

Check the Target Report

Check the target report to make sure the drill-through will work.

Procedure

1. Open the target report:
 - In IBM Cognos Connection, go to **Public Folders, Samples, Models, GO Data Warehouse (query), Report Studio Report Samples**.
 - Locate the report **Compensation (hidden)** and open it in Report Studio.

Tip: If you do not see the report, go to IBM Cognos Connection and confirm that you can view hidden reports (**My Preferences, General** tab).

2. In Report Studio, from the **Data** menu, click **Filters** and check what filter parameters are available.

You want to filter from the source report on department, not time, so you will only use the **pPosition** parameter in the drill-through definition.

3. In the report body, select the list column body **Position-department (level 3)** and review the data item properties.

Because the drill-through definition goes from DMR to relational, the data item values will need to match.

4. Close the **Compensation (hidden)** report.

Create and Test the Drill-Through Definition

Create and test the drill-through definition to make sure it works.

Procedure

1. Open the source report:
 - In IBM Cognos Connection, go to **Public Folders, Samples, Models, GO Data Warehouse (analysis), Report Studio Report Samples**.

- Locate the **Employee Satisfaction 2012** report and open it in Report Studio.
2. Save the **Employee Satisfaction 2012** report with a new name, such as **Employee Satisfaction 2012 New**.
This is to keep the original report and drill-through definition intact for comparison.
 3. In the table **Employee rankings and terminations by department**, select the column **Position-department (level 3)**.
 4. In the properties pane, review the data item properties, to confirm that the data item names match values in the target report.
 5. In the properties pane, under **Data**, double-click **Drill-through definitions**.
 6. Select the definition **DrilltoHiddenRep** and delete it.
Note: In the following steps, you recreate the drill-through definition. For comparison, use the original sample report.
 7. In the **Drill-through Definitions** box, click the new drill-through definition button.
 8. Click the rename button, and type a name for the drill-through definition.
Tip: This is the name that consumers see when they select from a list of possible drill-through definitions in the final report.
 9. In the **Target Report** tab, select the target report:
 - Under **Report**, click the ellipsis button (...).
 - Navigate to **GO Data Warehouse (query), Report Studio Report Samples**, and select the **Compensation (hidden)** report.
Tip: If you do not see the report, go to IBM Cognos Connection and confirm that you can see hidden reports (**My Preferences, General** tab).
 10. Under **Action**, select **Run the report**.
 11. Under **Parameters**, click the edit button.
A table of parameters available in the target report appears, showing the parameter **pPosition**.
 12. Map the parameter from the **Compensation (Hidden)** report to the metadata in the **Employee Satisfaction 2012** report:
 - In the **Method** column, select **Pass data item value**, because the target report is based on a relational data source.
 - In the **Value** column, select **Position-department (level 3)**.
Tip: In this report, you pass values from the column where the drill-through is defined. In other cases, you might pass a related parameter. For example, you could drill through on employee name, but pass the employee number.
 13. Save the report.
 14. Run the report, and click a department to test the drill-through definition.

Results

When you test the drill-through link, the **Compensation (hidden)** report appears, filtered by the department you selected. The report appears as a drill-through target whether or not it is hidden in IBM Cognos Connection.

If your administrator has given you the **Drill Through Assistant** capability, then you can see additional information you right-click on the link and select **Go To** to see a list of drill-through targets. From the **Go To** page, you can see what source

values are passed, and what target parameters are mapped.

Try it yourself - create a report with drill-through access to itself

You can create a report that drills through to itself so that users can view detailed information in the same report.

In this topic, you learn how to create a report that shows revenue by each retailer. Users can access detailed order information for a particular retailer.

It should take 20-25 minutes to complete this topic, and your report will look like this.

Retailer name	Revenue
1 for 1 Sports shop	6,432,250.32
4 Golf only	5,015,375.54
4 Your Eyes	873,022.36
Aarhus Sport	5,999,906.89
Accapamento	6,077,377.8
Accesorios Importados, S.A. de C.V.	7,945,373.51
AcquaVerde	12,696,927.89
ActiForme	2,005,590.67
Action Factory	8,613,520.15
Act'N'Up Fitness	13,661,733.09
Acute Sight	1,662,290.71
Advanced Climbing Ltd	1,008,869.51
Air frais	3,225,980.69
Air marin	8,248,477.5
Aktiv Markt	16,262,466.37
Aktive Freizeit	558,286.8
Aktive Markt	12,013,789.68
Algonquin Camping Supplies	12,105,107.18
All Season Camping Goods	6,133,822.91
All'aperto esperienza	6,756,555.8

Select a retailer in the Retailer list to view order details
No Data Available

Figure 50. A report with drill-through access to itself

Procedure

1. Create a new blank report that uses the **GO Data Warehouse (query)** package.
2. Add a table with two columns and one row.
3. Add a list object to each column in the table.
4. Open **Sales and Marketing (query)**, then open **Sales (query)**. Add these data items to the first list:
 - **Retailer name in Retailers**
 - **Revenue in Sales fact**

Tip: Use the **Source** tab .

5. Set the sort order for the **Retailer name** column to **Sort Ascending**.
 6. Add these data items to the second list:
 - **Retailer name** in **Retailers**
 - **Order number** in **Sales order**
 - **Date** in **Time**
 - **Product** in **Products**
 - **Quantity** in **Sales fact**
 - **Revenue** in **Sales fact**
- Tip:** To simultaneously add all the data items to the list, Ctrl+click the items before dragging them to the list.
7. In the second list, select the **Retailer name** list column and in the **Properties** pane, set its **Render** property to **No**.
 8. In the second list, create the following parameterized filter:
[**Retailer name**]=?**Selected retailer?**
 9. Save the report.
 10. In the left list, right-click the **Retailer name** column (and not the column title) and click **Drill-Through Definitions**.
 11. Create a new drill-through definition.
 12. Specify the report as the target report.
 13. Under **Parameters**, click the edit button.
 14. Set the **Selected retailer** parameter to pass data item values using the **Retailer name** data item.
 15. In the **Toolbox** tab, add a value prompt under the table.
Because you are setting up drill-through access to the same report, you must add a prompt with a default value so that users are not prompted when they run the report.
 16. In the **Prompt Wizard**, specify that the prompt is to use the existing parameter named **Selected retailer**, and click **Finish**.
 17. Click the value prompt.
 18. In the **Properties** pane, double-click the **Default Selections** property and add a simple selection named **NoRetailer**.
 19. Set the following properties:
 - **Required** to **No**
 - **Hide Adornments** to **Yes**
 - **Visible** to **No**
 20. Create a title for the report.
 - a. In the **Toolbox** tab, add a block above the table.
 - b. Click the block and, in the **Properties** pane, set the class to **Report title area**.
 - c. Insert a text item above the table. Type the following text, adding a blank space at the end:
Order Details:
 - d. In the **Toolbox** tab, add the following layout calculation immediately following the text item:


```
if(ParamDisplayValue('Selected retailer')='NoRetailer')
then 'All Retailers' else (ParamDisplayValue('Selected retailer'))
```

When the report runs, the report title changes to reflect the retailer selected by the user. If no retailer is selected, 'All Retailers' appears.

- e. Click the text item and the layout calculation and, in the **Properties** pane, set the class to **Report title text**.
21. Pause the pointer over the condition explorer button and click **Variables**. Use conditional formatting to show a message above the second list when users have not selected a retailer from the first list.
22. Create a Boolean variable named **HighLevel**:
ParamDisplayValue('Selected retailer')<>'NoRetailer'
23. Pause the pointer over the page explorer button and click **Page1**.
24. In the **Toolbox** tab, add a block above the second list.
25. Insert a text item in the block with the following text:
Select a retailer in the Retailer list to view order details
26. Set the font style for the text to bold.
27. Click the text item and, in the **Properties** pane, set the **Style Variable** property to the **HighLevel** variable.
28. Pause the pointer over the condition explorer and click the **Yes** value for the **HighLevel** variable.
29. Set the **Visible** property for the text item to **No**.
30. Triple-click the explorer bar to turn off conditional formatting.
31. Run the report to view what it will look like for your users.

Results

A list appears on the left that shows revenue for each retailer. When users click a retailer, order information for the selected retailer appears in the second list. To return to the original report, in IBM Cognos Viewer, click **Previous Report**.

For more information, see the following references:

- “Using a table to control where objects appear” on page 339
- Add Relational Data to a Report
- Create a Parameter to Produce a Prompt
- Set Up Drill-through Access in a Report
- Create a Prompt Directly in a Report Page
- Using Calculations
- Calculation Components
- Add a Variable
- Hide and Show Objects

Drilling Through from IBM Cognos Series 7 to IBM Cognos BI

You can set up drill-through access from IBM Cognos Series 7 to IBM Cognos Business Intelligence. Specifically, you can drill through to an IBM Cognos BI report from an IBM Cognos Series 7 PowerPlay Web report or IBM Cognos Series 7 Visualizer report. Drill through is supported for both PowerCubes and other cubes.

You must complete steps in both IBM Cognos Series 7 and IBM Cognos BI to enable drill through. Refer to the IBM Cognos Series 7 documentation for the

specific steps you must complete in the IBM Cognos Series 7 components. Cross references to the appropriate IBM Cognos Series 7 documents are included below.

Setting Up Drill-through Access from IBM Cognos Series 7 Visualizer

Setting up drill-through access from IBM Cognos Series 7 Visualizer to IBM Cognos Business Intelligence involves setting up the target report.

To set up drill-through access, you must do the following:

- Specify the IBM Cognos BI target and select the filters to add to the target report.

You must configure drill through to IBM Cognos BI for individual IBM Cognos Visualizer reports. For more information, see the IBM Cognos Visualizer *User Guide*.

- Create and test the target report.

Setting Up Drill-through Access from PowerPlay Web

Setting up drill-through access from IBM Cognos Series 7 PowerPlay Web to IBM Cognos Business Intelligence involves setting up target reports.

To set up drill-through access, you must do the following:

- For PowerCubes, specify drill-through targets for IBM Cognos BI reports in the Transformer model.

For more information, see the Transformer documentation.

- For other cubes, specify drill-through targets for IBM Cognos BI reports in IBM Cognos Series 7 PowerPlay Connect.

For more information, see the PowerPlay *OLAP Server Connection Guide*.

- Configure drill-through access in PowerPlay Server Administration.

In addition to enabling drill-through access to IBM Cognos BI, you must specify the location of the IBM Cognos BI server and the IBM Cognos BI folder that contains the target reports. For more information, see the PowerPlay *Enterprise Server Guide*.

- Select the filters to add to the target report.

In PowerPlay Enterprise Server Administration, enable and use IBM Cognos BI Assistance to identify the filter expressions required in the target report. For more information, see the PowerPlay *Enterprise Server Guide*.

- Create and test the target report.

Create and Test the Target for a Series 7 Report

You can create and test an IBM Cognos Series 7 report target to ensure the drill-through works properly.

When you create the target report, ensure that the names of the parameters you add are identical to the parameter names listed in the **Drill Through Assistant** page in IBM Cognos Series 7. However, the metadata item that you use in the target report for that parameter name does not have to be the identical label. The data values between the target parameter and the source value shown in the drill assistant must match. You may also need to change the type of operator in the target parameter from what is recommended in the **Drill Through Assistant**. For example, if the assistant recommends an = operator but you want to pass a date range, you should change the parameter operator in the target to in_range.

Before you begin

The target report must be based on a published package that contains the metadata items that you want to filter on, or contains items that are mapped to those metadata items.

Procedure

1. Start IBM Cognos Report Studio and create a new report.
2. Add the data items and other objects you want.
3. From the **Data** menu, click **Filters**.
4. In the **Detail Filters** tab, click the add button.
5. In the **Expression Definition** box, create the parameterized filter you want by typing the filter expression.
6. Click **OK**.
7. In the **Usage** box, click **Optional**.

If you do not make the filter optional, a prompt page appears when you drill through to the report.

8. Repeat steps 4 to 7 for other parameterized filters you want to add.
9. Save the report.
The report name must match what you specified as a target in the PowerCube, other cube, or IBM Cognos Series 7 Visualizer report.
10. Test the drill through in the IBM Cognos Series 7 PowerPlay report or IBM Cognos Visualizer report.

Chapter 19. Working with Multiple Pages

Divide a report into multiple pages and add navigation elements to make it easier to use.

Note: The pages that you see in the Page Explorer differ from physical, printed pages. For example, if you create page breaks in a long report, the Page Explorer could show only one page, but your report could include several physical pages when you print it.

Add a Page to a Report

Reports may contain pages with a variety of content. Pages may be added to create a multiple-page report. For example, you are creating a sales report and you want to include general information about the company. You decide to create an introduction page to show this information. When you run the report, page 1 of the report is the introduction page and the following pages contain data.


Tip: The TOC Report sample report in the GO Data Warehouse (query) package includes multiple pages. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

You can also create page sets to control the rendering of pages in a report.

Procedure

1. Pause the pointer over the page explorer button  and click **Report Pages**.

Tip: Click **Prompt Pages** to add a prompt page.

2. From the **Toolbox** tab , drag **Page** to the work area.
3. To change the order of pages, drag pages above or below other pages.
4. To associate a query to the page, in the **Properties** pane, set the **Query** property to the query.

Associate the page to a query to add data-related objects directly to the page header, body, or footer, such as data items and filters.

5. Double-click the page to open it in page design view.
6. Add objects to the page.

Create a Page Break or Page Set

You can create simple page breaks, or you can create advanced page sets to associate pages with a query structure to force page breaks.

For example, a query contains the data item Product line, which is grouped. Creating a page set that is associated with this query adds page breaks for each product line. When working with dimensional data, you can use the **Page layers** area to show values on a separate page for each member.

When you are working with dimensional data, IBM Cognos Report Studio does not support page breaks or page sets that are based on custom groups.

Tip: The Global Bonus Report sample report in the GO Data Warehouse (analysis) package includes page sets. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Create simple page breaks

Simple page breaks use data items to define where your report starts a new page.

Procedure

1. Click the data item at which the report should break to a new page.
2. From the **Structure** menu, do one of the following:
 - To create a page break without creating a master detail relationship, click **Set Page Break**.
This option only works if the data item is in a list or repeater. If the data item is in a crosstab or chart, IBM Cognos Report Studio creates a page break using a master detail relationship. Setting page breaks without using master detail relationships can improve performance when running the report.
 - To create a page break using a master detail relationship, click **Set Page Break Using Master/Detail**.

Report Studio confirms the page break setting.



Tip: To modify simple page break settings, pause the pointer over the page

explorer button  and click **Report Pages**, and then select and modify the page set.

Create advanced page sets

You can use advanced page sets to define sets of pages within your report, and then customize the grouping and sorting for each page set.


Procedure

1. Pause the pointer over the page explorer button  and click **Report Pages**.
2. Create the report pages.
3. From the **Toolbox** tab , drag the **Page Set** object to the **Report Pages** pane.
4. In the **Properties** pane, set the **Query** property to the query to associate with the page set.
5. Organize the pages in the report by dragging report pages to page sets.
6. Insert the page containing details in the **Detail Pages** folder.

Detail pages are the pages that repeat based on the items by which you group in the following step.

Tip: You can insert multiple detail pages into the same page set and link them using a master detail relationship.

7. Define the grouping structure for the page set:
 - Click the page set.
 - In the **Properties** pane, double-click the **Grouping & Sorting** property.
 - In the **Data Items** pane, drag the data item by which to group data items to the **Groups** folder in the **Groups** pane.
 - To sort the data within each group, in the **Data Items** pane, drag the data item by which to sort to the **Detail Sort List** folder, and then click the sort

order button  to specify the sort order. For more information about sorting data, see “Sorting Relational Data” on page 235 or “Sorting Dimensional Data” on page 281.

Note: Grouping an item for a page set is not the same as grouping a column in the layout. Grouping a column in the layout visually shows groups in a report. Grouping an item for a page set groups the item in the query. If you want to use an item that is already grouped in the layout, you must still perform step 7.

8. Repeat steps 3 to 7 to create other page sets.

Tip: You can nest page sets and join them by defining a master detail relationship. Create nested page sets to have pages occur within other pages. For example, you want pages containing product type information to occur within pages containing product line information.

Join Nested Page Sets

If you have nested page sets in your report, define a master detail relationship between them to see data in the nested page set that is related to the data in the parent page set.

For example, you have a page set that shows pages of product line information. The page set contains a nested page set that shows pages of product type information. For each product line page, you want to see the related product type pages, as shown below:

Product line_1


- Product type_1
- Product type_2
- Product type_3

Product line_2

- Product type_4
- Product type_5
- Product type_6

For more information about master detail relationships, see “Create a Master Detail Relationship” on page 292.

Procedure

1. Pause the pointer over the page explorer button  and click **Report Pages**.
2. In the **Report Pages** pane, click the nested page set.
3. In the **Properties** pane, double-click the **Master Detail Relationships** property.
4. Click the **New Link** button.
5. In the **Master Query** box, click the data item that provides the primary information.
6. Link the master data item to the details by doing one of the following:
 - To link to another data item in the detail query, in the **Detail Query** box, click the data item that provides the detailed information.




- To link to a parameter, in the **Parameters** box, click the parameter that provides the detailed information.
7. Repeat steps 4 to 6 to create other links.

Tip: To delete a link, select it and press the Delete key.

Example - Preparing a Product List Report

You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to create a multiple-page report showing all products sold by the company. You are asked to create title and end pages and to have each product line appear on a new page preceded by a header page and followed by a footer page.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (query)** package.
2. In the **Welcome** dialog box, click **Create a new report or template**.
3. In the **New** dialog box, click **List** and click **OK**.
4. From the **Source** tab , expand **Sales and Marketing (query)**, **Sales (query)**, and **Product**, and double-click the following:
 - **Product line**
 - **Product type**
 - **Product name**
5. Expand **Sales fact** and double-click **Product cost**.
6. Group the **Product line** and **Product type** columns.
7. Pause the pointer over the page explorer button  and click **Report Pages**.
8. From the **Toolbox** tab , drag **Page Set** to the work area and associate it to **Query1**.
9. From the **Toolbox** tab, drag **Page** to the work area four times to add four new pages.
10. For each page, click the page, and in the **Properties** pane, set the **Name** property as follows:
 - **Title page**
 - **End page**
 - **Product Line Header**
 - **Product Line Footer**
11. For each page you just created, add objects.
For example, add a text item to each page to uniquely identify it.
12. Rename the **Page1** page, which contains the list, to **List**.
13. Click the page set and, in the **Properties** pane, double-click the **Grouping & Sorting** property.
14. In the **Data Items** box, drag **Product line** to the **Groups** folder in the **Groups** box and click **OK**.
15. Organize the report pages into the following hierarchy by dragging them to the appropriate location.

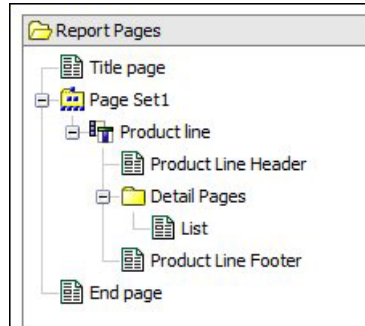


Figure 51. Page hierarchy showing title page, page set1, product line, product line header, detail pages, list, product line footer, and end page

Results

When you run the report, the following pages appear:

- Title page
- Product line header page
- A page for Product line_1
- Product line footer page
- Product line header
- A page for Product line_2
- Product line footer
- ...
- End page

Add a Bookmark

Add a bookmark so that users can quickly move from one part of a report to another. For example, a list report contains many rows of data. You add bookmarks so that users can move to specific rows.

You can also drill through to another report.

If you want to use page numbers to move from one part of a report to another, you can also create a table of contents.



Bookmarks work for reports produced in HTML format or PDF. In HTML format, they work best when viewing saved report outputs, as the entire report appears in a single HTML page. When reports are run interactively, more than one HTML page may be generated, and a bookmark works only if the target exists in the page currently being viewed.

If you run a saved report using a URL, and you specify a bookmark within the URL, you always go to the first page of the report. The bookmark defined in the URL is not honored. For more information about using URLs to run reports, see the *Administration and Security Guide*.

Tip: You can reduce the number of HTML pages generated when a report is run interactively by specifying a value for the **Rows Per Page** property for a data container in the report.

Tip: The Briefing Book sample report in the GO Sales (analysis) package includes bookmarks. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.


Procedure

1. From the **Toolbox** tab , drag a **Bookmark**  object to the report.
2. Click the bookmark and, in the **Properties** pane, set the **Source Type** property to a source type.

Source type	Description
Text	Creates a static bookmark using a text value. For example, a list has sections and you want users to jump from each section to the top of the report.
Report Expression	Creates a dynamic bookmark whose values are derived from an expression that you define.
Data Item Value	Creates a dynamic bookmark that has data as possible values. This is useful for creating a context-based bookmark. For example, a list has sections and you want users to jump from the top of the report to a specific section. Note: This source type appears only if the bookmark is inserted next to a data item.
Data Item Label	Creates a bookmark that has the label of a data item as its value. Use this source type to jump to the first occurrence of a data item label. For example, a list is divided into sections using Product line. You want users to jump to the first product line section that appears in the list rather than to a specific section, such as Camping Equipment. Note: This source type appears only if the bookmark is inserted next to a data item.
Member Caption	In a crosstab, creates a dynamic bookmark that uses member captions as possible values.
Cell Value	In a crosstab, creates a dynamic bookmark that uses cell values as possible values.

3. Set the property that appears under the source type you chose to the bookmark value.
For example, if the source type is **Data Item Value**, set the **Data Item Value** property to the data item.
4. Right-click the object that will jump to the bookmark and click **Drill-Through Definitions**.
For example, right-click a data item, image, chart, or text item.

Tip: The object can exist in a different report, so you can jump from one report to another.

5. Click the new drill-through definition button .
6. Click the **Bookmark** tab.
7. Click **Source type** and click one of the source types described in step 3.
Click the source type to use to produce the value needed to jump to the bookmark. For example, click **Data Item Values** if you want the value to come from a data item such as Product line.
8. If you clicked one of the following source types, specify the value to use to jump to the bookmark.
 - For **Text**, click the ellipsis (...) button next to **Text** and type a text value.
 - For **Data Item Value** or **Data Item Label**, in the **Data item** list, choose a data item.
 - For **Report Expression**, click the ellipsis (...) button next to **Report expression** and define the expression.

Create a Table of Contents

You can create a table of contents that appears in the rendered output of your report. A table of contents is useful for reports that include sectioned items, grouped items, or multiple pages in the layout. The report output indicates page numbers and allows for easy navigation.

You can include multiple tables of contents in your report, which are useful if your report contains grouped lists. You can also add section numbers in front of entries in the table of contents by modifying the heading level property.

Table of contents entries are logical markers placed anywhere in a report. For example, you can place entries at the top of a page or in a list group header to mark each grouped data value. Although table of contents entries are visible in IBM Cognos Report Studio, they cannot be seen when a report is run.

A table of contents works only for reports produced in PDF or non-interactive HTML format. In HTML format, they work best when viewing saved report outputs, as the entire report appears in a single HTML page. When reports are run interactively, more than one HTML page may be generated, and a table of contents works only if the target exists in the page currently being viewed.

Tip: You can reduce the number of HTML pages generated when a report is run interactively by specifying a value for the **Rows Per Page** property for a data container in the report.


If you want to quickly move from one part of a report to another without using page numbers, you can add bookmarks.

Tip: The Briefing Book sample report in the GO Sales (analysis) package includes a table of contents. For more information about The Sample Outdoors Company samples, see Appendix C, "Sample Reports and Packages," on page 507.

Before you begin

You must first create a table of contents before adding entries in the report. All entries must be inserted after the table of contents in the report layout.

Procedure

1. From the **Toolbox** tab , drag the **Table of Contents** object to the new location, which can be anywhere in the report.
A table of contents placeholder appears.
2. Drag the **Table of Contents Entry** object to the location of your first table of contents marker.

Tip: You can also click **Insert Table of Contents Entry** from the **Structure** menu.



The new entry appears in the table of contents.

3. Double-click the **Double click to edit text** box of the new marker.
4. In the **Text** box, type the text to appear in the table of contents and click **OK**.
5. To edit the heading level of a table of contents entry, click the entry and, in the **Properties** pane, set the **Heading Level** property to the level.
The heading level is used to insert section numbers in front of entries in the table of contents using layout calculations.
6. When you finish creating the table of contents, run the report. By clicking the arrow to the right of the run report button, you can specify whether to run the report as HTML or PDF.






Example - Add a Table of Contents to a Report


You are a report author at The Sample Outdoors Company, which sells sporting equipment. You are requested to add a table of contents to an existing report so that users can more easily navigate your report.

Procedure

1. Open IBM Cognos Report Studio with the **GO Data Warehouse (analysis)** package.
2. Open the **Budget vs. Actual** sample report from the **Report Studio Report Samples** folder.
3. Create the report pages:
 - Pause the pointer over the page explorer button  and click **Report Pages**.
 - Click **Page1**, and then, in the **Properties** pane, set the **Name** property to **Budget vs. Actual Sales**.
 - Click the **Budget vs. Actual Sales** page and, from the **Edit** menu, click **Copy**.
 - From the **Edit** menu, click **Paste** to paste the copy of the page in the **Report Pages** pane.
 - Select the new page, and in the **Properties** pane, set the **Name** property to **Table of Contents**.
 - In the **Report Pages** pane, drag the **Table of Contents** page to the top of the list.
4. Pause the pointer over the page explorer button and click **Table of Contents**.
5. Delete the crosstab object:
 - Click somewhere in the report page.
 - In the **Properties** pane, click the select ancestor button  and click **Crosstab**.

Tip: You can also click the container selector (three orange dots) of the crosstab to select it.

- Click the delete button .
6. Select the Camping Equipment block object and click the delete button.
 7. Double-click the report title, type **Table of Contents**, and click **OK**.
 8. From the **Toolbox** tab , drag a **Table of Contents** object onto the page.
 9. Pause the pointer over the page explorer button and click **Budget vs. Actual Sales**.
 10. From the **Toolbox** tab, drag a **Table of Contents Entry** object to the left of each region.
 11. Pause the pointer over the page explorer button and click **Table of Contents**.
 12. Double-click the first entry in the table of contents, type **Americas**, and click **OK**.
 13. Rename the other table of contents entries as Asia Pacific, Northern Europe, Central Europe, and Southern Europe.
 14. Save the report.
 15. Number the table of contents entries:
 - From the **Toolbox** tab, drag a **Layout Calculation** object to just before the word **Americas**.
 - In the **Report Expression** dialog box, on the **Functions** tab , expand the **Report Functions** folder and double-click the **TOCHeadingCount** expression.
 - At the end of the expression definition, type 1) and click **OK**.
 - Repeat the above three steps to add layout calculations before the other table of contents entries.
 - Ctrl+click only the five table of contents entries and not the five layout calculations.
 - In the **Properties** pane, double-click the **Padding** property and set the left padding to 10 px.
 16. Change the color of table of contents entries:
 - Ctrl+click the five layout calculations, the five table of contents entries, and the five page number calculations.
 - In the **Properties** pane, double-click the **Foreground Color** property and set the foreground color to blue.
 17. Add links to the table of contents from another page:
 - From the **Toolbox** tab, drag a **Bookmark** object to just before the title.
 - Select the bookmark and, in the **Properties** pane, double-click the **Label** property, type **TOC**, and click **OK**.
 - Pause the pointer over the page explorer button  and click **Budget vs. Actual Sales**.
 - From the **Toolbox** tab, drag a **Text Item** object to the right of the crosstab object.
 - In the **Text** dialog box, type **Return to the Table of Contents** and click **OK**.
 - Right-click the text object and click **Drill Through Definitions**.
 - Click the add button .

- On the **Bookmark** tab, in the **Source Type** list, click **Text**.
 - Click the ellipsis (...) button, type **TOC**, and then click **OK** twice.
18. Save the report.
 19. Click the arrow to the right of the run report button  and click **Run Report - PDF**.

Results

On the first page, the table of contents appears. Clicking a region brings you to the corresponding page in the report. You can return to the table of contents by clicking **Return to the Table of Contents** at the end of the last page.

<u>Table of Contents</u>	
1	Americas 2
2	Asia Pacific 2
3	Northern Europe 2
4	Central Europe 4
5	Southern Europe 4


Insert Page Numbers in a Report

You can insert page numbers in a report and specify the number style to use.

You can select a predefined page numbering scheme or create a custom scheme. You can easily insert page numbers using the **Page Number** object.

You can also manually create an expression to insert page numbers by inserting a layout calculation and using the different page report functions in the expression editor.

Procedure


1. From the **Toolbox** tab , drag **Page Number** to the report.

Tip: When you create a new report using one of the existing report layouts, **Page Number** is already inserted in the page footer.

2. Right-click the page number symbol and click **Edit Number Style**.
3. Choose the style to use.

The first three choices apply only to vertical page numbers. The remaining choices specify how vertical and horizontal page values appear.

Note: The 1 of 3 number style works only for reports produced in PDF or non-interactive HTML format. In HTML format, the 1 of 3 number style works when viewing saved report outputs, as the entire report appears in a single HTML page.

4. If you want to customize the choice that you made in the previous step, click the edit button , make your changes, and click **OK**.

A custom number style is created. If you later choose a different number style, the custom style is removed from the list.

Tip: In the **Custom Number Style** dialog box, when you pause the pointer over a box, a tooltip describes how that box affects page numbers. For example, the **Separator Text** box contains the text, such as a hyphen, that separates page values for both vertical and horizontal pages.

Control Page Breaks and Page Numbering

You can control page breaks and page numbering in a list, crosstab, table, or report page by choosing any of these options.

The options that are available depend on which object you have selected. All the options for all the objects are described in the following table.

Option	Description
Keep with header	Keeps all headers on the same page with the number of detail rows specified.
Keep with footer	Keeps all footers on the same page with the number of detail rows specified.
Keep with previous	Keeps the object with the specified number of preceding objects on the same page, if space permits.
Keep with next	Keeps the object with the specified number of subsequent objects on the same page, if space permits.
Reset page count	Resets the page count after a page break to the value specified.
Reset page number	Resets the page number after a page break to the value specified.
Repeat every page	If the report renders multiple pages, this object is repeated on every page.
Allow contents to break across pages	Allows contents to break across pages. In lists and crosstabs, controls whether a cell is broken across pages, which is useful when there is a lot of text.

Option	Description
<p>Allow horizontal pagination</p>	<p>In PDF output, allows the columns of a list or crosstab to break across horizontal pages if they do not fit on a single page.</p> <p>Tip: In lists, you can select the Repeat every page option for list columns that show on every horizontal page.</p> <p>If the Allow horizontal pagination option is not selected, the size of the list or crosstab is scaled down when necessary so that it fits on a single page.</p> <p>Tip: The Horizontal Pagination sample report in the GO Sales (analysis) package includes horizontal pagination. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.</p> <p>If your report includes nested data frames such as a list within a list, horizontal pagination is supported on either the parent or child frame, but not both. If horizontal pagination is enabled on both the parent and child frame, it will be ignored on the child frame when the report runs. We recommend that you do not enable horizontal pagination on both the parent and child frames.</p> <p>Horizontal pagination is not supported for data containers, such as a list or crosstab, that are nested in repeater tables.</p> <p>You can also specify page number options that use compound numbering schemes. For example, you can use the numbering scheme 1-1, 1-2, 2-1, 2-2, and so on. For more information, see “Insert Page Numbers in a Report” on page 446.</p>
<p>Enable horizontal page numbering</p>	<p>Increments page numbers of horizontal pages separately from the main page numbers when you select a page numbering style that includes horizontal pages. For example, if a page has three page breaks horizontally and you selected the page number style 1a, the horizontal pages are numbered 1a, 1b, and 1c. If you did not select a numbering style that includes horizontal pages, the horizontal pages are all numbered 1 for the first vertical page, 2 for the second vertical page, and so on.</p> <p>If this option is not selected and there are horizontal pages, all pages are numbered sequentially. For example, if a report has two vertical pages and three horizontal pages, the PDF pages are numbered from 1 to 6. Pages 1 to 3 are the three horizontal pages for the first vertical page and pages 4 to 6 are the three horizontal pages for the second vertical page.</p>

Option	Description
Allow row contents to break across pages	In tables, allows the contents of a row to break across pages. For example, if a row contains four lines of text, the first two lines from the row appear on the first page, and the last two lines appear on the next page.
Repeat table rows on page break	In tables, if a row breaks across pages, repeats the rows that were previously rendered on each page. By default, table rows are repeated. Note: This option applies to saved reports only. In interactive HTML reports, table rows are always repeated even if this option is not selected.

You can also specify the style to use for page numbers.

Procedure

1. Click an object.
2. In the **Properties** pane, double-click the **Pagination** property.
3. Specify the page break and numbering options.

Create Page Layers

When working with dimensional data, you can create page layers in a report to show values for each member on a separate page. For example, your report contains payroll information for the entire company. You want to view values for each department on a separate page.

After you create page layers, a caption appears in the header to indicate the contents of each page. You can navigate between the different pages using links below the report.

Creating page layers is similar to filtering using context. However, with context filters, values are filtered according to the member you add to the **Context filter** area. With page layers, the report is split into a separate page for each child of the member you add to the **Page layers** area.

To create more complex page layers in your reports, such as a report book with title and end pages, create page sets.

Procedure

1. In the source tree, select or search for one or more items on which to filter.
2. Drag the item into the **Page layers** section of the overview area.
The crosstab shows the results for the children of the selected item on separate pages, and a list appears under **Page layers**.

Tip: To navigate between pages, click **Page down** and **Page up** below the report.

3. To replace the page breaks with items from the same dimension, select an item from the list. To delete the page breaks, from the list, click **Delete**. To delete all the page breaks, right-click the **Page layers** area and click **Delete All**.

Chapter 20. Creating Report Templates

A report template is a pattern you use to build reports. Create your own report templates when you frequently produce the same type of report.

Tip: You can add your own report templates to the **New** dialog box that appears when you open IBM Cognos Report Studio. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Convert a Report to a Template

Convert a new or existing report to a template so it can be reused. You can use sample reports provided with IBM Cognos Report Studio.

Procedure


1. Create a new report or open an existing report.
2. Add objects to the work area.
3. From the **File** menu, click **Convert To Template**.
Any query-related information in the original report, such as data items, calculations, and filters, is removed from the template.
4. From the **File** menu, click **Save As** to save the template as a new file and keep the original report intact.

Create a New Template

Create a new template to provide report authors with a layout that they can use to create reports or they can apply to existing reports. IBM Cognos Query Studio and IBM Cognos Analysis Studio users can also use these templates. You can also use the template in Query Studio to define a layout for prompt pages.

When you create a new template, the **Source** tab  is empty; you can add only report objects.

Procedure

1. From the **File** menu, click **New**.
2. Click **Report Template** and click **OK**.
3. Pause the pointer over the page explorer button  and click the report page or prompt page to format.

Tip: To create a new report page or prompt page, click the **Report Pages** or **Prompt Pages** folder and drag the page to the **Report Pages** or **Prompt Pages** pane.

4. From the **Toolbox** tab , add the objects to the work area.

Note: If you add objects that are not supported by Query Studio, the objects will be ignored when you apply the template.

5. Save the template.

Chapter 21. Managing Existing Reports

After you have created a report, you can make changes or enhancements, such as setting up the report for bursting.

Before you modify an existing report, ensure that you have the proper security permissions. For more information, see the IBM Cognos Business Intelligence *Administration and Security Guide*.

Copy a Report to the Clipboard

You can copy a report specification to the clipboard so you can open it from the clipboard later.

This process is different for the Microsoft Internet Explorer and Mozilla Firefox Web browsers because the clipboard works differently in each Web browser.

Copy a Report to the Clipboard in Internet Explorer

This process is different for the Microsoft Internet Explorer and Mozilla Firefox Web browsers because the clipboard works differently in each Web browser.

Procedure

From the **Tools** menu, click **Copy To Clipboard**.

Copy a Report to the Clipboard in Firefox

This process is different for the Microsoft Internet Explorer and Mozilla Firefox Web browsers because the clipboard works differently in each Web browser.

Procedure

1. From the **Tools** menu, click **Copy To Clipboard**.
2. In the **Copy Report to Clipboard** dialog box, copy the entire report specification.
3. Open a text editor and paste the report specification.
4. Copy all the text from the text editor report specification.

Now the text is saved on your computer's clipboard.

Open a Report from the Clipboard

You can open a report specification that was previously copied to the clipboard.

To copy a report to the clipboard, see "Copy a Report to the Clipboard." This is useful for importing an XML report specification from outside the IBM Cognos Business Intelligence environment.

Although IBM Cognos Report Studio attempts to validate the report specification, it is your responsibility to ensure that it is correct. For more information, see the IBM Cognos Software Developer Kit *Developer Guide*.

Procedure

From the **Tools** menu, click **Open Report from Clipboard**.

Open a File from Another Studio

You can open reports, templates, or analyses that were created in IBM Cognos Query Studio or IBM Cognos Analysis Studio in IBM Cognos Report Studio. All the capabilities of Report Studio are available to you so you can change formatting, layout, calculations, and queries.

You can also open a report, template, or analysis in Report Studio from IBM

Cognos Connection with the **Open with Report Studio** action .

Note: If you make and save changes to a Query Studio report or an Analysis Studio analysis in Report Studio, the report or analysis can no longer be opened in Query Studio and Analysis Studio.

Procedure

1. From the **File** menu, click **Open**.
2. Click the report, template, or analysis.
3. Click **Open**.

Analysis Studio Query Specification

IBM Cognos Analysis Studio defines each group of rows and columns as a set. When you import an analysis into IBM Cognos Report Studio, the report will have one query that processes all the sets found on the crosstab. Each set is defined by data items that segment and summarize the base set definition. To maintain reports converted from Cognos Analysis Studio, you must understand what each of these items represents and how they relate to each other.

Before you modify any of the data items in the Cognos Analysis Studio set definitions, we recommend that you fully understand each data item and its dependencies. Modifying the data items may cause unpredictable results and may slow the performance of your report.

The data items for a set specify the following:

- the set definition
- set segments, including which members were excluded and hidden individually
- filter rules for defining which members are to be retrieved
- calculations for Subtotal (N items), More & Hidden, Subtotal (included), Subtotal (excluded), and the total

For more information, see the *IBM Cognos Analysis Studio User Guide*.

- which subtotals should appear
- any user-defined calculations

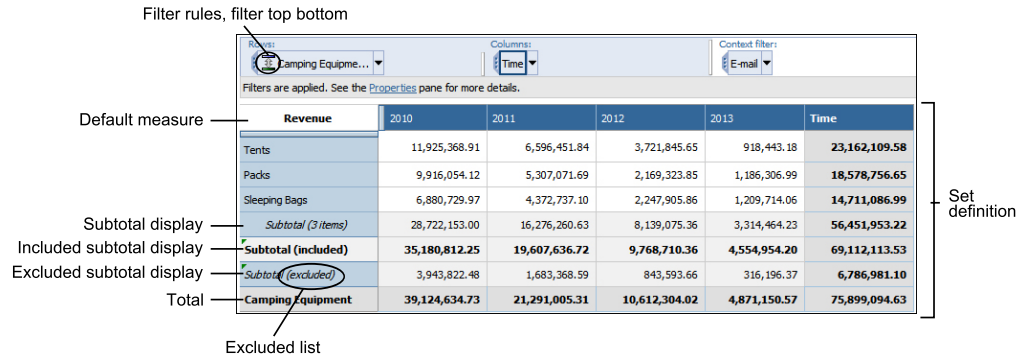


Figure 52. Components of a Cognos Analysis Studio crosstab

The default measure identifies which measure is the default for the crosstab or chart. If no default measure is specified, the default measure may be empty.

Set Definitions

The following table shows the definitions and dependencies for the data items in the set definition.

Data item	Definition	Dependencies
<set name> (base)	Defines the set of members to be used for sorting, filtering, and summary operations. This data item provides a generic reference for all other data items and may reference one of the other set definitions.	None
<set name> (level)	Identifies the level for a level-based set.	None
<set name> (list)	Defines the list of members in a selection-based set.	None
<set name> (depth N)	Defines the set of members at N, number of levels down.	None
<set name> (named set)	References a predefined set.	None

Set Segments Definitions

The following table shows the definitions and dependencies for the data items in the set segment definition.

Data item	Definition	Dependencies
<set definition> (hidden list)	Lists the members that are manually hidden using the Hide command in Cognos Analysis Studio. This set appears when you try to unhide a member.	<set definition>
<set definition> (included set)	Lists the set of members after filters are applied and hidden items are excluded, but before the More limit is applied. Sort or order operations, if any, are defined in this data item.	<set definition> (hidden list)
<set definition> (visible items set)	Limits the set to show the number of members according to the More limit with a small tolerance. The tolerance allows showing the last two members if they are all that remain in the More portion of the set. The choice of visible members can be based on a sort order.	<set definition> (included set)
<set definition> (excluded list)	Identifies members that were manually excluded from the analysis. If no members were manually excluded, the expression defines an emptySet. This set appears when you try to remove a member from the Excluded items list in the Properties pane.	<set definition>

Filters

The following table shows the definitions and dependencies for the data items in the filter.

Data item	Definition	Dependencies
<set definition> (filter rules)	Specifies the user-defined filter rules to reduce the set definition using operators such as greater than or less than based on measures, calculations, or attributes.	<set definition>

Data item	Definition	Dependencies
<set definition> (excluded filters)	Removes members that were manually excluded from the results after applying the user-defined rules.	<set definition> (excluded list), <set definition> (filter rules)
<set definition> (filter top bottom)	Focuses on the members based on top / bottom / first <i>n</i> where <i>n</i> can be a count or a percentile. For more information about Top/Bottom filters, see the <i>IBM Cognos Analysis Studio User Guide</i> .	<set definition> (excluded filters) and totals for sets on the opposite axis
<set definition> (filter rules)	Specifies the user-defined filter rules to reduce the set definition using operators such as greater than or less than based on measures, calculations, or attributes.	<set definition>

Subtotals and Related Conditions

The following table shows the definitions and dependencies for the data items in the subtotals and related conditions.

Data item	Definition	Dependencies
<set definition> (subtotal)	Aggregates the visible items in the set.	<set definition> (visible items set)
<set definition> (subtotal display)	Shows the subtotal if the number of included items is greater than the number of visible items.	<set definition> (visible items set), <set definition> (included set), <set definition> (subtotal)
<set definition> (more and hidden subtotal)	Calculates the More & hidden subtotal by subtracting the aggregation of the included members from the aggregation of those members that were manually hidden or hidden by exceeding the maximum display limit. Not available for selection-based sets.	<set definition> (included set), <set definition> (visible items set), <set definition>
<set definition> (more and hidden subtotal as set)	Converts the More & hidden subtotal member to a set for use in set operations.	<set definition> (more and hidden subtotal)
<set definition> (more and hidden subtotal as member)	Generically references the More & hidden subtotal.	<set definition> (more and hidden subtotal)

Data item	Definition	Dependencies
<set definition> (more and hidden subtotal display)	Shows the More & hidden subtotal if the number of items hidden or clipped is greater than zero.	<set definition> (more and hidden subtotal)
<set definition> (included subtotal)	Calculates the Subtotal (included) . For selection-based sets, this data item references the summary data item for the set.	<set definition> (included set)
<set definition> (included subtotal display)	Shows the Subtotal (included) if any members passed the filter criteria.	<set definition> (included set)
<set definition> (excluded subtotal)	Calculates the value for Subtotal (excluded) . This data item is not available for selection-based sets.	<set definition> (total), <set definition> (included subtotal), <set definition>
<set definition> (excluded subtotal display)	Shows Subtotal (excluded) if the number of members in the filtered set is less than the base set. This means that the filter rule is filtering out something.	<set definition> (excluded subtotal), <set definition>
<set definition> (total)	Identifies the total for the set. This value is calculated directly from the data store. The expression used to calculate the summary depends on the set type: <ul style="list-style-type: none"> • Details-based set: The selected member. • Level-based and depth-based sets: The root member for the hierarchy. • Selection-based set: The aggregate, typically the sum, of the selected members. 	<set definition>

Managing Changes in the Package

If changes were made to the package that was used to create a report, the report must be updated.

When you open a report, IBM Cognos Report Studio automatically checks to see if the package has changed. If it has, a message appears indicating that the report will be updated to the latest version of the package. However, you may need to make additional changes to the report if


- the namespace name or query subject and data item names in the package have changed
- the name of the package has changed

Update a Name Reference

If the namespace name or query subject and data item names in the package have changed, you must update reports that were created with the package to reflect the change.

The names of data items in a report are a concatenation of the namespace name, the query subject name, and the data item name. For example, if you add Order number from the GO Data Warehouse (query) sample package to a filter expression, you will see [Sales (query)].[Sales order].[Order number] in the expression. Similarly, package filter names are a concatenation of the namespace name and the filter name.

Procedure

1. To update a data item name reference:
 - Click the data item.
 - In the **Properties** pane, double-click the **Expression** property.
 - In the **Expression Definition** box, update the data item name reference.
2. To update a package filter name reference:
 - From the **Data** menu, click **Filters** .
 - Double-click the package filter.
 - In the **Expression Definition** box, update the namespace name.

Change the Package

If the name of the package that were used to create a report has changed, you must change the package connection to update the report.

At the same time, you can also change the authoring language for the report.

Procedure

1. From the **File** menu, click **Report Package**.
2. Click **Another package** and choose the new package.
3. To change the authoring language, click the ellipsis (...) button beside the **Language** box and choose a different report language.

You may need to update the report to reflect the change. For example, any filter expressions in the report must be modified to reflect the syntax rules of the new language.



4. Click **OK**.
The new package is loaded and the report is validated. If errors are found, the **Validation Errors** dialog box appears, showing the elements that must be updated to reflect the package change.
5. Click **Close**.
6. Make any required changes in the report to support the new package.
For example, you may need to link the data items in the report to the new package.

Tip: You can use Query Explorer to make the changes.

Chapter 22. Upgrading Reports

When you open a report that was created in a previous version of IBM Cognos Business Intelligence, it is automatically upgraded.

Any problems detected during the upgrade process appear as information

messages  and error messages  in the **Upgrade Information** dialog box. You must fix any errors in the report and then validate the report before you can run it. In some cases, the information or error message is linked to the location of the issue in your report. To go to the location of the issue, click the message, and then click **Select**. If only warnings and information appear in the dialog box, these will disappear when you click **OK**.

Tip: To view this dialog box again, from the **File** menu, click **Upgrade Information**.

After you upgrade a report to the most recent version of IBM Cognos BI, you can no longer open it with a previous version.

Lifecycle Manager

You can download IBM Cognos Lifecycle Manager from <http://www.ibm.com/> to help you test your reports. Lifecycle Manager is a verification tool that checks that your reports run and produce the same results in the new environment.

Lifecycle Manager is a Microsoft Windows operating system-based application for auditing upgrades to the latest version of IBM Cognos BI from IBM Cognos ReportNet 1.1 MR3 or MR4, and from IBM Cognos 8 versions 8.2, 8.3, or 8.4.

It provides a verification feature that validates, executes, and compares report results from two different IBM Cognos BI releases. This helps to identify upgrade and compatibility issues between releases. User interface design and status reporting functionality provide both a proven practice process and support for upgrade project planning and status reporting. Lifecycle Manager also automates much of the process of bundling the required files, such as reports and models, for the test case. For more information, see the Lifecycle Manager *User Guide*.

Upgrading Reports from IBM Cognos BI Version 8.4

When you upgrade to IBM Cognos Business Intelligence version 10 from IBM Cognos 8 BI version 8.4, some reports may look or behave differently after the upgrade. This section describes changes that you may encounter in your reports.

Upgrading Report Styles

IBM Cognos Business Intelligence includes a new default report style with updated colors and gradients. If your report uses a custom report template, your report will appear the same in this version of IBM Cognos Report Studio as it did in previous versions. By default, new reports and new report objects, such as lists and crosstabs, appear in the new report style.

If you want to continue to work with the previous 8.x report style, set the **Override 10.x styles with 8.x styles on new reports** option (**Tools, Options, Advanced** tab).

You can update the style of an upgraded report to use the new 10.x style (**File, Report Properties, Report styles, 10.x styles**).

For more information about report styles, see “Create and Modify Report and Object Styles” on page 350.

Upgrading Legacy Charts

IBM Cognos Report Studio version 10.1.0 includes a new default chart technology. You can continue to use and work with the legacy charts or upgrade your legacy charts to the current default charts.

When you open a report that uses the legacy charts, the legacy charts is not upgraded to the current default charts automatically. You can upgrade your legacy charts one at a time to the current default chart. For more information, see “Convert Charts From One Type to Another” on page 102.

When you add a new chart to a report, Report Studio adds the current default charts. If you want to add new legacy charts or continue to work with existing legacy charts, set the **Use legacy chart authoring** option (**Tools, Options, Advanced** tab).

New Default for Hidden or Deleted Axis Titles

The default for rendering hidden or deleted axis titles has changed. This can change the size or placement of chart elements in your chart report output.

In previous versions of IBM Cognos Report Studio, hidden or deleted axis titles were defined and rendered as empty spaces in the report.

In Report Studio, Version 10.1.0, hidden or deleted axis titles are not rendered at all, so the space that was reserved for the title is available for other chart elements. This can affect the placement or size of chart elements, such as labels, the chart body, or the bars in a bar chart.

To make the charts appear the way they did in the previous version, set the x-axis' **Title** property to **Show** and then set the x-axis title's **Default Title** property to **No**. This adds the space for a custom axis title to the report specification but leaves the title blank.

Upgrading Reports with SAP BW Prompt Variables

When you upgrade reports that use SAP BW data sources and contain variables as prompts from version 8.3 SP2 to version 8.4 or 10.1.0, the upgrade may fail. Prompts that contained SAP BW variables are now empty. This occurs because a default setting in an IBM Cognos configuration file changed in version 8.4.

To successfully upgrade these reports, do one of the following:

1. Fully qualify all of the variables in the report by changing `[variable_name]` to `[infoquery].[variable_name]`.
2. Ask your IBM Cognos administrator to change the value for the `DetectSAPVariableUniqueness` parameter in the configuration file, as follows:
 - In the `c10_location\configuration` directory, locate the `qfs_config.xml` file.

- Find the DetectSAPVariableUniqueness parameter and change its value to false.
- Save the qfs_config.xml file.
- Restart the IBM Cognos service.

If more than one variable with the same name exists in the package, this change may cause problems.

Upgrading Reports from IBM Cognos BI Version 8.1 or 8.2

When you upgrade IBM Cognos Business Intelligence, some features in IBM Cognos BI may behave differently after the upgrade. When you upgrade reports, for example, changes in behavior may cause validation errors.

Members Containing No Data Are Not Suppressed for SAP BW

If you upgrade a crosstab report that uses a SAP BW data source and includes calculations, filters, or nesting, the suppression of null values may not occur as expected. You may see additional empty rows and columns.

By default, null values are suppressed for list and grouped list reports.

To effectively remove null values in crosstabs that use a SAP BW data source, insert individual members to create the report. You can also ensure that SAP BW members are assigned to proper dimension hierarchies and levels within the BW cube.

Thousands Separators Missing

You may encounter missing thousands separators in your reports in the following circumstances:

- The report contains an item that does not specify an explicit data format.
- The report item refers to another item in the same report.
- That second report item refers to an item in the IBM Cognos Framework Manager model with **Usage** property set to **Identifier** or **Attribute**.
- The model item does not specify an explicit format.

To restore the data formats, specify an explicit format either in the report item properties or in the model item properties.

RQP-DEF-0177 Error When Upgrading Reports


When you upgrade your report from IBM Cognos Business Intelligence, version 8.2, you encounter the following errors:

RQP-DEF-0177 An error occurred while performing operation 'sqlPrepareWithOptions' status='-120'.

UDA-SQL-0458 PREPARE failed because the query requires local processing of the data. The option to allow local processing has not been enabled.

This error occurs when the query requires local processing because some or all of its constructs are not supported by the database vendor. In IBM Cognos BI, version 8.2 and earlier, IBM Cognos BI proceeded with local processing. In version 8.3 and later versions, you must explicitly set the query Processing property to **Limited Local** in order to enable local processing.

Procedure

1. In IBM Cognos Report Studio, pause the pointer over the query explorer button  and click the query.
2. In the **Properties** pane, set the **Processing** property to **Limited Local**.

Upgrading Reports from IBM Cognos ReportNet

When you upgrade from IBM Cognos ReportNet, some reports may look or behave differently after the upgrade. The upgrade does not account for the following issues.

Undocumented and Unsupported Features

If advanced report authors used undocumented and unsupported features such as JavaScript that refer to IBM Cognos HTML objects, they may have to recreate the features to complete the upgrade of the report.

No Sort Order

Data may appear in a different order after upgrading. If sort order is important, ensure that the report or model specifies a sort order before upgrading.

Layout Errors

Layout errors are suppressed by default in ReportNet. IBM Cognos Business Intelligence does not suppress layout errors. Users may have to correct or remove report layout expressions that cause errors.

Report Format

If you used the default format in ReportNet, upgraded reports will retain that format. However, new reports in IBM Cognos Business Intelligence will use the IBM Cognos BI format. If you want a consistent style across all reports, you must edit the styles property in each report and select or deselect the **Use 1.x report styles** option.

Customized Style Sheets

If you edited the ReportNet style sheet (default_layout.css) or the IBM Cognos Business Intelligence stylesheet (globalreportstyles.css), reports will lose the formatting after upgrading. You must reapply the changes to the IBM Cognos BI stylesheets and copy the stylesheets to the IBM Cognos BI server and the Web server.

PDF Reports

PDF rendering in IBM Cognos Business Intelligence behaves like HTML rendering. After upgrading, PDF reports may have different font size, column wrapping, or word wrapping. You may have to change each affected report or change the default font in the IBM Cognos BI style sheet.

IF-THEN-ELSE Statements

If you use assignments of different data types after THEN and ELSE in ReportNet, the reports will generate invalid coercion errors after upgrading. You may have to recast the variables or change the assignments in the affected reports.

Solve Order

In previous versions of IBM Cognos Business Intelligence, you could specify the solve order for objects such as crosstab node members. Solve order is now specified for data items. When you upgrade a report, solve orders specified in the report are moved to data items.

For more information about solve order, see “Resolve Multiple Calculations for Crosstabs and Charts” on page 540.

Chart Behavior

In ReportNet, if a chart is created with a user-specified minimum value and all data values are below the minimum value, the chart starts at the user-specified minimum value and contains no data.

In IBM Cognos Business Intelligence, the same parameters result in a chart that ignores the user-specified minimum value and uses a range that includes all of the data values for the chart.

Database Only Processing of Queries

If you specified in ReportNet that the processing for a query should be Database Only, when you upgrade your report to IBM Cognos Business Intelligence, some processing may now occur locally.

Changes in the Behavior of Functions Between ReportNet 1.1 and IBM Cognos BI

In ReportNet 1.1, double counting could occur when applying count or count distinct to a query item. This occurred primarily when querying multiple query subjects that were joined 1-to-N in the model if the counted item existed in the query subject on the 1 side of the join. The explanation is that count or count distinct was applied after the join operation.

Count distinct worked only when the item to which count distinct was applied was the column used in the join. In this case, the column to be counted could have identical values for the different values used in the join condition.

In IBM Cognos Business Intelligence, improvements to the count functionality cannot be handled through an automatic upgrade. The new approach avoids double counting on the 1 side of a 1-to-N join. The explanation is that count or count distinct is now applied before the join operation.

There is now a lesser need to use count distinct and, when used, it will be successful more often. Count distinct is no longer required to overcome double counting. Instead, it can be used as intended to select distinct values that exist in a query subject.

When you want to count repeated occurrences of a value, we recommend that you do one of the following:

- Apply a count operation on a column based on a query in which an explicit join occurs.

This applies the count after the join.

- Count rows in a report by using a layout calculation object or by counting the literal value 1.

Appendix A. Accessibility Features

Accessibility features help users who have a physical disability, such as restricted mobility or limited vision, to use information technology products.

See the IBM Accessibility Center (<http://www.ibm.com/able>) for more information about the commitment that IBM has to accessibility.

Accessibility features in IBM Cognos Report Studio

There are several accessibility features in IBM Cognos Report Studio.

The major accessibility features are described in the following list:

- You can use command keys, or shortcut keys, to navigate through Report Studio. Shortcut keys directly trigger an action and usually make use of the Ctrl keys.
- Report Studio uses Web Accessibility Initiative—Accessible Rich Internet Applications (WAI-ARIA). This means that people with limited vision can use screen-reader software, along with a digital speech synthesizer, to listen to what is displayed on the screen.

Note: To take full advantage of the accessible features of Report Studio, use Mozilla Firefox version 4.0 or higher and Freedom Scientific JAWS version 12.0.

Keyboard Shortcuts

This product uses some standard Microsoft Windows and accessibility shortcut keys.

Action	Shortcut keys
Enables or disables the accessibility feature - an IBM Cognos Report Studio restart is required. The default is disabled .	Ctrl+Shift+Tab
Opens the context menu for the selected item, if available.	Shift+F10
Switches focus from or to the main menu bar and the main worksheet.	Ctrl+F10
Opens the online help.	F1
Closes the Web browser window.	Alt+F4
Copies objects.	Ctrl+C
Pastes objects.	Ctrl+V
Closes objects, such as a dialog box, menu, drop-down list, or page.	Esc
Cycles through objects, such as the tabs in a dialog, the objects in a page, the cells in a list, the rows in a crosstab, or check boxes.	Tab, Shift+Tab, Arrow keys
Selects the first or last item in a list.	Home/Pg Up or End/Pg Dn keys

Action	Shortcut keys
<p>Selects or clicks one or multiple objects, such as a radio button, menu or toolbar item, or node in a tree widget.</p> <p>In the Properties pane, expands or collapses a property group.</p>	<p>Space or Enter, Ctrl+space or Shift+space, Ctrl+Enter or Shift+Enter</p>

Considerations to Improve Report Accessibility

Creating accessible reports ensures access of information to all users, with all levels of ability.

For example, people with a visual impairment may use screen reading technology to access the information in a report.

The following are some design considerations for creating accessible reports:

- Avoid using visual cues, such as bold text or color, to convey important information.
- Avoid using pictures and OLE Objects in PDF documents, as these items are tagged as artifacts and ignored by the screen reader.
- Avoid using conditional formatting to convey important information.
- When selecting color palettes for report objects, choose patterns or shades of gray.
- Ensure that there is a table corresponding to chart types that are rendered as images because the screen reader ignores this information.
- Deliver reports in HTML format, which is the most supported output format for most screen readers.
- Ensure that the report has a title.
- Gain an understanding for screen reading technology.
- Avoid spelling and grammatical errors, as they cause the screen reading software to misinterpret the information.
- Avoid using features like calendar boxes and up and down selections on time controls. Instead use prompts such as check boxes, radio buttons, combo boxes, and multi-select boxes.
- Ensure that the target application is accessible when using embedded Web applications or drill-through paths.
- Avoid using large, complex list or crosstab reports.
 Displaying the information in multiple simple lists or crosstab reports is more manageable for assistive technology users.
- Add alternate text to images, charts, and other visual objects so that screen readers can provide context for them.
- When using tables, add summary text to provide context for the table content. If the top cells in a table behave as headers, designate these cells as headers so that screen readers can identify the relationships.
- Avoid using range prompt controls that contain radio buttons.

The image shows a form with two sections: 'From:' and 'To:'. Each section contains a radio button next to the text 'Quantity' and a dropdown arrow. Below the 'From:' section, there is a radio button that is selected (indicated by a filled circle) next to the text 'Lowest value'. Below the 'To:' section, there is a radio button that is selected next to the text 'Highest value'.

Figure 53. Range prompt with From and To sections

When users tab to a radio group, the focus should be in the selected radio button. In the case of range prompts, for both the From and To sections, the radio button groups start first in the tab order. However, the secondary input elements, which can be text boxes, drop-down lists, date edit boxes, and so on, are located before the selected radio button in the tab order. Instead of going to the selected radio button, the focus goes to the secondary input element. As a result, users using a screen reader do not know that the input element is one of two options.

Enable Accessible Report Outputs

If you want to include accessibility features, such as alternate text, summary text, designated cell headers in tables and accessible conditional layouts, you must enable these accessibility features in the report output.

You can enable accessible report outputs in one of the following ways:

- in the IBM Cognos Report Studio run options, so that the report has accessibility features enabled when you run the report from within Report Studio.
- in IBM Cognos Connection as a run option (**Run with options, Enable accessibility support**), so that report consumers can run the report once with accessibility features.
- in IBM Cognos Connection as a property (**Set properties, Report tab**), so that report consumers can always run the report with accessibility features.
- in IBM Cognos Connection, as a user preference (**My area, My preferences**), so that report consumers can enable accessibility features for all of their reports. Accessibility settings in the report properties overwrite this setting.
- in IBM Cognos Administration, as a server-wide option, so that all reports for all IBM Cognos users have accessibility features enabled. Accessibility settings in the user preferences and report properties overwrite this setting.

Administrators can also change a system-level setting that forces the accessibility features on or off regardless of any other settings.

For information about the last four options, see the IBM Cognos Connection *User Guide* or the IBM Cognos *Administration and Security Guide*.

Procedure

In Report Studio, from the **Run** menu, click **Run Options** and select the **Include accessibility features** check box.

Alternate text and summary text

To make reports accessible, you can add alternate text or summary text to objects such as images, charts, and tables. When a screen reader encounters one of these objects, it reads the text that you added to the object.

Related tasks:

“Customize Prompt Text” on page 323

You can customize the instructional text that appears around prompts. For example, a value prompt with multiple selections includes a **Select all** link below the choices that you can customize to text other than **Select all**. You can also specify translated text in many languages for international report users.

Add Alternate Text to Images and Charts

You can add alternate text for images, maps, and charts to make your reports accessible. When a screen reader encounters one of these objects, it reads the alternate text that you added to the object.



You can add translations for the text to support users in multiple languages. When users run a report, IBM Cognos Business Intelligence uses the alternate text in the appropriate language.

If you use images only for visual spacing in your report, leave the **Alternate Text** property empty.

Before you begin

For the report output to contain the alternate text, you must enable the accessibility features for the report. For more information, see “Enable Accessible Report Outputs” on page 469.

Procedure

1. Select the image or chart object.
2. In the **Properties** pane, click the select ancestor button  and select the **Image, Map**, or chart object.
3. Double-click the **Alternate Text** property.
4. Select **Specified text** and click the ellipsis (...) button.
5. In the **Default text** box, type a description for the object, and click the add icon .
6. In the **Languages** dialog box, select the languages that apply to your text.
7. Double-click a language and type the translation of the text for each language and click **OK**.

Add Summary Text to Tables

You can provide summary text for crosstabs, lists, repeater tables, and table objects. This text provides context for the entire object to make your reports accessible. When a screen reader encounters one of these objects in HTML report outputs, it reads the description that you added to the object.

The table summary is not displayed in visual Web browsers. Only screen readers and speech browsers use the summary text. The summary text is usually read immediately before the table caption.


You can add translations for the text to support users in multiple languages. When users run a report, IBM Cognos Business Intelligence uses the summary text in the appropriate language.

If you use tables for report layout, leave the summary empty to indicate to screen readers that the table is used exclusively for visual layout and not for presenting tabular data.


Before you begin

For the report output to contain the summary text, you must enable the accessibility features for the report. For more information, see “Enable Accessible Report Outputs” on page 469.

Procedure

1. Select the crosstab, list, or table.
2. In the **Properties** pane, click the select ancestor button  and select the **Crosstab, List, Repeater Table, or Table** object.

Tip: You can also click the container selector (three orange dots) of the container to select it.

3. Double-click the **Summary Text** property.
4. Select **Specified text** and click the ellipsis (...) button.
5. In the **Default text** box, type a description for the object, and click the add icon .
6. In the **Languages** dialog box, select the languages that apply to your text.
7. Double-click a language and type the translation of the text for each language.

Designate Cells Headers in Tables

You can specify whether specific table cells are table headers. This allows screen readers and speech browsers to identify the relationships between the cells in your tables.

Before you begin

For the report output to contain the cell headers, you must enable the accessibility features for the report. For more information, see “Enable Accessible Report Outputs” on page 469.

Procedure

1. Select the table cells.
2. In the **Properties** pane, set the **Table Header** property to **Yes**.

Headings and emphasis

You can apply certain global classes to text objects to make the text easier to read for visually impaired users.

The following global classes are available to improve text readability for headings and blocks of text:

- Heading 1 through 6

Tip: In HTML output, these classes are converted to <h1> to <h6> tags.

- Emphasize Text and Strong Text

Tip: In HTML output, these classes are converted to and tags.

You apply one of these global classes to text by accessing the **Classes** property of the text and choosing the class that you want to apply.

Prompt control labels

You can associate labels to prompt controls to make the prompts accessible.

There are several methods that you can use to associate a label to a prompt control:

- Associate a text item to the prompt control.
- Insert the prompt control in a field set and use the caption of the field set to specify the label.
- Use HTML items to define a field set.

When a text item is associated to a prompt control, the text is read by screen readers when users tab to the control. When a prompt control is inserted in a field set, screen readers read the label of the field set when the focus moves to any input element within the field set.

Associating a text item to a prompt control in IBM Cognos Report Studio

Associate a text item to a prompt control to create a label for the prompt.

Before you begin

You must specify a name for the prompt control before you can associate a text item to the control.




Procedure

1. To specify a name for the prompt control, select the control, and in the Properties pane, type the name in the **Name** property.
2. Create a text item or select an existing text item.
3. In the Properties pane, in the **Label For** property, type the name of the prompt control.

Associating labels with prompt controls using field sets

You can associate labels with prompt controls using field sets.


Procedure


1. From the **Toolbox** tab , drag **Field Set** to the report.
2. Double-click the caption of the field set and type the text that you want to appear as the prompt control label.
3. From the **Toolbox** tab , drag a prompt control to the field set.
4. Optional: To hide the field set border so that only the prompt control border appears in the prompt page, set the border to none.
 - a. Select the field set.
 - b. In the **Properties** pane, click the **Border** property.
 - c. In the **Style** box, click **None**.
 - d. Under **Preview**, click the apply all borders icon  and click **OK**.

Associating labels with prompt controls using HTML items

Instead of using the field set object, you can associate labels with prompt controls using HTML items. You use the HTML items to create the field sets.

Procedure

1. From the **Toolbox** tab , drag **HTML Item** to the left of the prompt.
2. Click the HTML item.
3. In the **Properties** pane, double-click the **HTML** property.
4. In the **HTML** window, type the following text and click **OK**.

```
<fieldset style="border:0;">
<legend>Prompt label</legend>
```
5. From the **Toolbox** tab , drag **HTML Item** to the right of the prompt.
6. Click the HTML item.
7. In the **Properties** pane, double-click the **HTML** property.
8. In the **HTML** window, type the following text and click **OK**.

```
</fieldset>
```


Example - Conditionally Show a List Below a Chart for an Accessible Report







Charts are rendered as images in report outputs, such as HTML and PDF. As a result, they are difficult to navigate for visually impaired users and screen readers cannot convey the information shown in charts. To make your reports accessible, you can add a conditional layout that shows list or crosstab equivalents of the chart when the accessibility features are enabled for the report output.

To set up this conditional layout, use a conditional block that contains the list or crosstab and the report function **IsAccessible**. The **IsAccessible** function is a Boolean function that returns **Yes** (or true) when the accessibility features are enabled for the report output and **No** (or false) when the accessibility features are not enabled.

Therefore, the list or crosstab becomes conditional and appears only when the accessible report output option is enabled. In addition, you should add alternate text for the chart object so that screen readers can let users know that an accessible list or crosstab follows.

Procedure

1. Open IBM Cognos Report Studio with the sample GO Sales (query) package.
2. Create a new report with a pie chart.
3. Add data items to the chart. From the **Source** tab , do the following:
 - Expand **Sales (query)** and **Sales** and then insert **Quantity** in the **Default measure** area.
 - Expand **Products** and insert **Product line** in the **Series (Pie Slices)** area.
4. Run the report to see your chart.
5. Add alternate text for the pie chart:
 - Select the chart and, in the **Properties** pane, double-click the **Alternate Text** property.

- Select **Specified text** and click the ellipsis (...) button.
 - Type default text for the chart, such as
A pie chart shows the quantity of sales by product line as a percentage of total sales. An equivalent list is below.
 If you want to add the alternate text in additional languages, click the add button .
6. From the **Toolbox** tab , insert a **Conditional Blocks** object below the chart.
 7. Select the conditional block and, from the **Properties** pane, double-click the **Block Variable** property.
 8. Under **Variable**, select **New boolean variable** and type a name for the variable, such as **accessibility_condition**.
 9. In the **Report Expression** dialog box, specify the expression that defines the variable:
 - From the **Functions** tab , expand **Report Functions** and insert the **IsAccessible** function to the **Expression Definition** box.
 - Type a closing bracket at the end of the function **IsAccessible ()** and click **OK**.
 10. Select the conditional block and in the **Properties** pane, change the **Current Block** property to **Yes**.
 11. From the **Toolbox** tab , add a list inside the conditional block.
 12. Add the same data items from the chart to the list. From the **Source** tab , do the following:
 - Expand **Sales (query)** and **Products** and insert **Product line** in the list.
 - Expand **Sales** and insert **Quantity** as the second column in the list.
 13. Add summary text for the list
 - Select the list and in the **Properties** pane, double-click the **Summary Text** property.
 - Select **Specified text** and click the ellipsis (...) button.
 - Type default text for the list, such as
The first column lists all product lines and the second column lists sales quantities.
 If you want to add the alternate text in additional languages, click the add button .
 14. Select the conditional block and in the **Properties** pane, change the **Current Block** property to **No**.
 15. From the **Run** menu, click **Run Options** and select the **Include accessibility features** check box.
 16. Run the report.

Results

Because we just chose to include the accessibility features, you see both the chart and the list. Also, when a screen reader encounters the image for the chart, it reads the alternate text that you added.

If you clear the **Include accessibility features** check box and run the report again, you see only the chart.

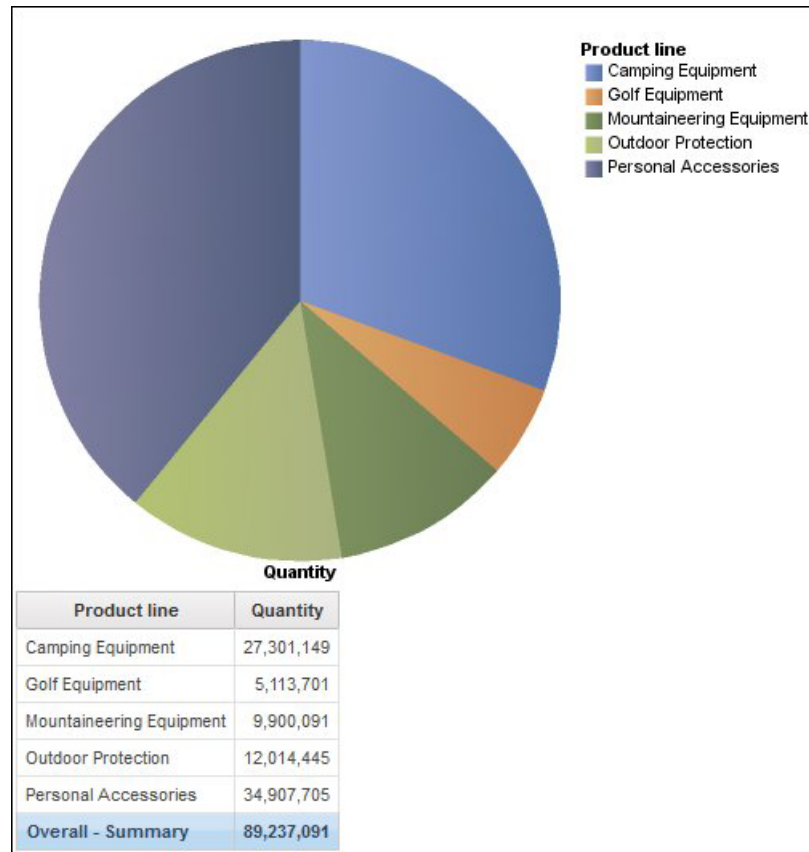


Figure 54. Report showing both a pie chart and a list

IBM and accessibility

See the IBM Accessibility Center for more information about the commitment that IBM has to accessibility.

The IBM Accessibility Center is available online at <http://www.ibm.com/able>.

Appendix B. Troubleshooting

This appendix describes some common problems you may encounter.

For more troubleshooting problems, see the *IBM Cognos Business Intelligence Troubleshooting Guide*.

Problems Creating Reports

The topics in this section document problems you may encounter when creating reports.

Division by Zero Operation Appears Differently in Lists and Crosstabs

If you have a list that accesses a relational data source, a calculation containing a division by zero operation appears as a null value, such as an empty cell. In a crosstab, the division by zero operation appears as /0. This happens when the **Avoid Division by Zero** property is set to **Yes**, which is the default.

To have a consistent display of null values in lists and crosstabs, define an if-then-else statement in the expression in the crosstab cell that changes the value /0 to the value null.

Application Error Appears When Upgrading a Report

When upgrading a report, the following error appears if the report contains data items in the page layout that are not in a data container:

RSV-SRV-0040 An application error has occurred. Please contact your Administrator.

This error occurs when IBM Cognos BI cannot determine the query reference for a data item. Such data items are identified by a small red circle with a white x icon that appears in the lower left corner.

To correct the error, drag the data items into a container. If the container is a list, we recommend that you drag the data items into the list page header or footer, or the overall header or footer. If you want to see the first row of the item on each page or in the overall report, drag the item to the list page header or overall header. If you want to see the item's last row on each page or in the overall report, drag the item to the list page footer or overall footer.

Tip: If a header or footer does not exist, create it.

Nested List Report Containing a Data Item That is Grouped More Than Once Does Not Run After Upgrade

When you upgrade a nested list report that contains a data item that is grouped in both lists, the report does not run.

The following error occurs when the report is run against a dimensional data source and both lists are using the same query. This error does not occur if the report is run against a relational data source.

OP-ERR-0199: The query is not supported. The dimensions on the edge are inconsistent. The dataItems from dimension="[Product line]" must be adjacent.

For example, you have a list that contains the grouped items Product line and Product type and a nested list that contains the data items Year, Quarter, Product line, and Unit sale price. Year, Quarter, and Product line are grouped items in the nested list.

To resolve the issue, delete the data item that is grouped in both lists from the inner list.

Procedure

1. Click anywhere in the report.
2. In the **Properties** pane, click the select ancestor button and click the **List** link that represents the inner list.
3. Double-click the **Grouping & Sorting** property.
4. In the **Groups** pane, select the data item that you want and click the delete button.

Background Color in Template Does not Appear

When creating a Query Studio template in Report Studio, if you add a list object and change its background color, the color change does not appear when you apply the template to a Query Studio report.

To work around this issue, do one of the following:

- Edit the style sheet (CSS) classes for lists in Report Studio.
- Do not add any objects to the page body when you are creating a Query Studio template.
- Leave the page body blank.

Subtotals in Grouped Lists

When using an IBM Cognos PowerCube that contains a ragged hierarchy, if you group on the first level in the hierarchy, subtotals may appear in the wrong place or show wrong values.

To resolve the issue, group on the second level.

Chart Labels Overwrite One Another

In Report Studio and Query Studio, if you define a chart and render it in HTML or PDF format using the default sizes, the axis labels of the chart may overwrite each other.

To avoid this problem, make the chart wider or taller by modifying the height and width properties of the chart or enable the **Allow Skip** property.

Chart Shows Only Every Second Label

You create a report that includes a chart. The **Allow Skip** option is set to false, but when you run the report, labels are skipped.

This can occur if there is not enough room for all labels and the options **Allow 45 Degree Rotation**, **Allow 90 Degree Rotation**, and **Allow Stagger** are also set to false. IBM Cognos BI has no options for making the labels fit, so it skips every second label.

The solution is to select either **Allow 45 Degree Rotation**, **Allow 90 Degree Rotation**, or **Allow Stagger**.

Chart Gradient Backgrounds Appear Gray in Internet Explorer

In Report Studio, you can define a custom palette for a chart that includes a gradient. When the chart is rendered in HTML format in Microsoft Internet Explorer, the chart background appears gray. This is an Internet Explorer issue.

To avoid this problem, select the chart and define the color white as the chart background.

For more information, see the Microsoft Knowledge Base article # 294714 at <http://support.microsoft.com>.

Metadata Change in Oracle Essbase Not Reflected in Reports and in the Studios

When there is a metadata change on the Oracle Essbase server, the change is not immediately reflected in the metadata tree in the studios. In addition, when a report is run, the report does not pick up the republished changes.

To view the new structure, you must restart the IBM Cognos Content Manager server.

Relationships Not Maintained in a Report With Overlapping Set Levels

In a report, the relationship between nested or parallel member sets at overlapping levels in the same dimension may not always be maintained.

For example, a named set in the data source that contains members from both a Year and Month member is nested under Year, but is not properly grouped by year.

In another example, an error message such as this appears:

OP-ERR-0201 Values cannot be computed correctly in the presence of multiple hierarchies ([Product].[B1], [Product].[Product]) that each have a level based on the same attribute (Product).

This problem occurs in the following scenarios involving non-measure data items X and Y, which overlap in the same dimension:

- X and Y together as ungrouped report details
- Y nested under X
- Y appended as an attribute of a group based on X

When using named sets, or sets that cover more than one level of a hierarchy, do not use sets from the same dimension in more than one place in the same report. They should appear on only one level of one edge.

Summaries in Query Calculations Include Nulls with SAP BW Data Sources

When using an SAP BW data source in IBM Cognos Report Studio, null values in the database are returned in the result set and the count summary function includes the empty cells in the following scenarios:

- A query calculation includes an arithmetic calculation where one or more NULL operands and an aggregation is performed on the calculation.
- The result of a query calculation is a constant, such as `current_time` and `current_date`.

The count summary function should normally exclude null values.

To avoid this problem, for the first scenario, ensure that both operands do not return null values. For example, the original expression is `[num1]+[num2]`. Instead, use the following expression:

```
if ([num1] is null) then ( 0 ) else ([num1])
```

```
if ([num2] is null) then ( 0 ) else ([num2])
```

There is no workaround for the second scenario.

Creating Sections on Reports That Access SAP BW Data Sources

SAP BW data sources may have problems with sections in reports under different circumstances:

If a section in a report uses the lowest-level query item in a ragged hierarchy, such as the children of the not assigned node, the following BAPI error may appear:

```
BAPI error occurred in function module BAPI_MDDATASET_SELECT_DATA. Value <valueName> for characteristic <cubeName> unknown
```

Lowest-level Query Item in a Ragged Hierarchy

The solution is to remove the section from the lowest-level query item.

Several Multicubes with SAP Variables

The solution is to use one SAP multicube when creating sections in reports.

Related concepts:

“Tips for Working with Ragged or Unbalanced Hierarchies” on page 264

In ragged or unbalanced hierarchies, some members that are not at the lowest level of the hierarchy may have no descendants at one or more lower levels. Support for these hierarchy gaps in relational data sources is limited. More complete support is provided for OLAP data sources, but some reports may still result in unexpected behavior.

Error Characters (--) Appear in Reports

When you run a report, you see two dash (--) characters in your report instead of values.

These characters may appear if you use an OLAP data sources other than PowerCube and Microsoft SQL Server 2005 Analysis Services (SSAS), and you apply aggregation to calculations and measures that use rollups other than Sum (Total), Maximum, Minimum, First, Last, and Count.

All other types of rollup either fail or return error cells, which typically display as two dash characters (--).

This problem occurs in, but is not limited to, the following:

- footers
- aggregate function
- summary filters and detail filters that use a summary
- detail, summary, and context filters that select more than one member of a hierarchy that is used elsewhere on the report

If you are working with a SSAS 2005 data source, these characters may also appear in summary cells if you use an OR filter in the summary. To avoid this problem, do not use OR filters in summaries.

Columns, Rows, or Data Disappear With SSAS 2005 Cubes

Microsoft SQL Server 2005 Analysis Services (SSAS) has a feature called AutoExists that removes tuples that have no facts at the intersection of two hierarchies of the same dimension.

Columns, rows, or data can disappear if you set the default member of a hierarchy to a member that does not exist with every other member in the dimension. To avoid this problem, change the default member that caused the disappearance to a member that exists with all other members in the dimension.

Columns, rows, or data can also disappear if members are specified that result in one or more non-existent tuples. There is currently no workaround for this scenario. For more information, see Microsoft Knowledge Base article #944527 at <http://support.microsoft.com>.

You may also encounter unexpected results if the default member of a hierarchy is a member that doesn't also exist in all other hierarchies in the dimension, and if you query members from different hierarchies in the same dimension.

For example a crosstab includes the following (using the Adventure Works cube):

- Rows: Generate([Adventure_Works].[Account].[Accounts],set([Balance Sheet],[Units])) nested with children([Adventure_Works].[Department].[Departments]->:[YK].[Department].[Departments].&[1]])
- Column: [Adventure_Works].[Account].[Account Number].[Account Number]
- Measure: [Adventure_Works].[Measures].[Amount]

You run the report and notice that the query renders with some blanks cells. You then apply the simple detail filter [Amount]>1 and run the report. Only row labels are displayed and all data and columns are missing.

In the Adventure Works cube, the [Account].[Accounts] attribute has a default member set to [Net Income]. When evaluating the GENERATE set expression, SSAS looks in the entire cube space and looks at all coordinates for the [Account]

dimension. These coordinates include both [Account][Account Type].&[] and [Account].[Accounts].[Net Income]. Because these two coordinates don't exist within the same hierarchy, SSAS returns an empty set.

To avoid this problem the SSAS administrator must set the default member in the cube to a member that exists in all other hierarchies.

Function Unreliable with Sets

If you create an expression that uses the descendants function with sets, you may encounter unpredictable results. Some expected members may be missing or may have blank captions or labels.

This problem occurs if the descendants function uses a set as its first parameter instead of a single member and if the descendants function is nested under another data item from the same hierarchy.

To avoid this problem, replace the first parameter in the descendants function with the function `currentmember(H)`, where H is the hierarchy of the desired set and under which the expression is nested. For example, use `descendants(currentmember(H))`.

Searching for values might return unexpected results

In the expression editor, when searching for values for a data item, the results you obtain might contain unexpected results if the data item is not a string data type. Because you can edit the expression for a data item, IBM Cognos Business Intelligence cannot determine with certainty what the data type is.

Therefore, IBM Cognos Business Intelligence guesses the data type of the data item by looking at its aggregate and rollup aggregate set.

Related tasks:

“Browse or Search the Values of a Data Item” on page 233

When building expressions in the expression editor, you can browse the data of a data item. This is useful when you do not know how a particular value is stored in the database. For example, you want to filter a report so that it shows data for only New South Wales. The actual value in the database for New South Wales is NSW, and this is what you must insert in the filter expression to obtain the correct results.

Report Differences Between TM1 Executive Viewer and IBM Cognos Business Intelligence with TM1 Data Sources

When using an IBM Cognos TM1 data source, comparable reports created in an IBM Cognos Business Intelligence studio and in TM1 Executive Viewer may contain different cell values. This occurs because the TM1 Executive Viewer product uses an algorithm for selecting default members for non-projected dimensions that differs slightly from traditional OLAP clients.

To avoid this problem, when filtering your reports in the IBM Cognos Business Intelligence studios, use context filters that match the default selections shown in the Executive Viewer user interface. This ensures that the cell values in IBM Cognos Business Intelligence match the values in Executive Viewer.

Order of Metadata Tree Differs for TM1 Data Sources

When using an IBM Cognos TM1 data source, the order of members in the metadata tree of the **Source** tab of an IBM Cognos Business Intelligence studio may differ from the order shown in TM1 Architect.

By default, TM1 Architect renders members of hierarchies using a slightly different algorithm than does IBM Cognos BI. IBM Cognos BI automatically renders member metadata from TM1 data sources in hierarchical order.

From within TM1 Architect, if you want to see how an IBM Cognos BI studio will render a hierarchy, click the **Hierarchy Sort** button.

MSR-PD-0012 error when importing external data

When you try to import an external data file, you receive an MSR-PD-0012 error.

MSR-PD-0012: Unable to upload the specified external data file. It exceeds the permitted file size of "0(KB)", as specified by your system administrator.

This error occurs when the size of the file you are trying to import is greater than the value specified for the **Maximum external data file size (KB)** governor in the Framework Manager model.

To resolve the issue, the modeler must update the governor, save the model, and republish the package.

MSR-PD-0013 error when importing external data

When you try to import an external data file, you receive an MSR-PD-0013 error.

MSR-PD-0013: Unable to upload the specified external data file. It exceeds the permitted maximum number of rows "0", as specified by your system administrator.

This error occurs when the number of lines in the file you are trying to import is greater than the value specified for the **Maximum external data row count** governor in the Framework Manager model.

To resolve the issue, the modeler must update the governor, save the model, and republish the package.

Problems Calculating Data

The topics in this section document problems you may encounter when calculating or summarizing data.

Unexpected Summary Values in Nested Sets

If a report contains nested sets, summaries other than the inner set summaries may contain unexpected values. For example, you insert a summary in a crosstab that contains a set with years in the rows.

	Revenue
2012	1,495,891,100.9
2013	1,117,336,274.07
Total	2,613,227,374.97

Figure 55. Example of revenue numbers for the years 2012 and 2013

You then nest a product line set within years.

		Revenue
2012	Camping Equipment	500,382,422.83
	Golf Equipment	230,110,270.55
2013	Camping Equipment	352,910,329.97
	Golf Equipment	174,740,819.29
Total		2,613,227,374.97

Figure 56. Example of revenue numbers for the listed products for the years 2012 and 2013

Notice that the summary value does not change to represent the total of the new values. This occurs because the within set aggregation used with dimensional packages does not take into account sets that are nested below the set that is summarized.

To show the correct summary values, if the inner and outer sets do not belong to the same dimension, you can nest a copy of the inner summary item under the outer summary item, as follows.

		Revenue
2012	Camping Equipment	500,382,422.83
	Golf Equipment	230,110,270.55
	Total	730,492,693.38
2013	Camping Equipment	352,910,329.97
	Golf Equipment	174,740,819.29
	Total	527,651,149.26
Total	Total	1,258,143,842.64

Figure 57. Example of the combined aggregate set for the years 2012 and 2013

Null Results for Calculations Using SAP BW Data Sources

When using a SAP BW data source, the expression you use in your calculation is evaluated as a null value if your expression contains a null item. For example, in the calculation `some_expression = result`, the result is null if a row or column that the expression references includes a null value.

To avoid obtaining null values as the result of your calculations, suppress null values before you create the calculation.

Incorrect Results with IBM Cognos PowerCubes and Time Measures

If a report uses an IBM Cognos PowerCube data source and a combination of data items, you will encounter incorrect results.

The following combination of data items in a report that uses an IBM Cognos PowerCube data source will give incorrect results.

- a measure with a **Time State Rollup** set to **Average** or **Weighted Average**
- an aggregate (*members from time dimension*) expression
- an intersection with a member in a relative time hierarchy

To avoid incorrect results, do not use this combination in your reports.

Incorrect Results in Summaries When Using OLAP Data Sources

When using an OLAP data source, summaries that use for clauses give incorrect results.

This occurs because for clauses require access to the detail rows of the fact table. OLAP data sources do not have detail rows.

For example, this report uses a dimensionally-modeled relational (DMR) data source and contains the following summaries:

- mx: maximum ([Revenue] for [Year (ship date)])
- mx2: maximum (Aggregate([Revenue]) for [Year (ship date)])

Year	Quarter	Revenue	mx	mx2
2010	Q1 2010	221,704,705.31	252,408.9	235,750,316.25
	Q2 2010	222,143,384.57	252,408.9	235,750,316.25
	Q3 2010	235,750,316.25	252,408.9	235,750,316.25
	Q4 2010	234,754,397.59	252,408.9	235,750,316.25
2010 - Summary		914,352,803.72		
2011	Q1 2011	293,228,460.53	292,402.7	306,706,702.72
	Q2 2011	278,180,759.96	292,402.7	306,706,702.72
	Q3 2011	281,079,666.95	292,402.7	306,706,702.72
	Q4 2011	306,706,702.72	292,402.7	306,706,702.72
2011 - Summary		1,159,195,590.16		
2012	Q1 2012	344,124,267.07	363,575.08	391,874,462.51
	Q2 2012	391,874,462.51	363,575.08	391,874,462.51
	Q3 2012	378,118,012.54	363,575.08	391,874,462.51
	Q4 2012	381,774,358.78	363,575.08	391,874,462.51
2012 - Summary		1,495,891,100.9		
2013	Q1 2013	471,624,367.69	349,132.3	479,269,923.82
	Q2 2013	479,269,923.82	349,132.3	479,269,923.82
	Q3 2013	166,441,982.56	349,132.3	479,269,923.82
2013 - Summary		1,117,336,274.07		
Overall - Summary		4,686,775,768.85		

Figure 58. Example list report that uses a dimensionally-modeled relational data source and revenue for four years

Notice that the mx and mx2 values are different, where mx2 is based on visible data, but mx is not. This result is correct.

The following report uses an OLAP data source and contains the same summaries.

Year	Quarter	Revenue	mx	mx2
2010	2010 Q 1	221,704,705.31	235,750,316.25	235,750,316.25
	2010 Q 2	222,143,384.57	235,750,316.25	235,750,316.25
	2010 Q 3	235,750,316.25	235,750,316.25	235,750,316.25
	2010 Q 4	234,754,397.59	235,750,316.25	235,750,316.25
2010 - Summary		914,352,803.72		
2011	2011 Q 1	293,228,460.53	306,706,702.72	306,706,702.72
	2011 Q 2	278,180,759.96	306,706,702.72	306,706,702.72
	2011 Q 3	281,079,666.95	306,706,702.72	306,706,702.72
	2011 Q 4	306,706,702.72	306,706,702.72	306,706,702.72
2011 - Summary		1,159,195,590.16		
2012	2012 Q 1	344,124,267.07	391,874,462.51	391,874,462.51
	2012 Q 2	391,874,462.51	391,874,462.51	391,874,462.51
	2012 Q 3	378,118,012.54	391,874,462.51	391,874,462.51
	2012 Q 4	381,774,358.78	391,874,462.51	391,874,462.51
2012 - Summary		1,495,891,100.90		
2013	2013 Q 1	471,624,367.69	479,269,923.82	479,269,923.82
	2013 Q 2	479,269,923.82	479,269,923.82	479,269,923.82
	2013 Q 3	166,441,982.56	479,269,923.82	479,269,923.82
	2013 Q 4		479,269,923.82	479,269,923.82
2013 - Summary		1,117,336,274.07		
Overall - Summary		4,686,775,768.85		

Figure 59. Example list report that uses a dimensional data source and revenue for four years

In the example report, mx and mx2 values are now the same. Both summaries are based on visible data. The mx value is incorrect.

Incorrect results also appear for footer summaries.

To avoid this problem, when using OLAP data sources, ensure that the parameter that precedes the for clause is an aggregate function.

Problems Filtering Data

The topics in this section document problems you may encounter when filtering data.

Unexplained Discrepancies in Number Calculations

You might find unexplained discrepancies in number calculations due to round-off errors.

For example:

- You run regression tests and find differences in numbers. They are different only because of the rounding off of decimal places.
- You choose not display zeros in reports, but the zeros are displayed anyway because there are decimal places (0.00000000000000426, for example) that are rounded off to zero in reports.

Round-off problems are not specific to IBM Cognos software. They can occur in any environment where rounding off occurs.

Binary Round-Off Errors

Discrepancies in calculations might occur due to binary round-off errors. For example, if the number 1.1 is represented as a binary floating point number and your report format includes a large number of decimal places, the number 1.1 might actually be something like 1.09999999999997.

If your report is formatted to use only one decimal point, decimal round-off takes place, compensating for the binary round-off. So the number appears to be 1.1 when it is really 1.09999999999997. When the number is used in calculations, you might get round-off errors. For example, Microsoft Excel calculations use binary numbers (without rounding off decimal places) but formatting in reports shows rounded off decimal places, which can create small discrepancies.

Division Round-Off Errors

Calculations that involve division typically incur round-off errors, regardless of how the numbers are represented. Examples of such calculations are Average and Percent of Base.

Design Guidelines to Minimize Round-Off Effect

The best solution is to change the underlying database schema or cube model but that may not always be possible. Another solution is to minimize the round-off effect by following these guidelines when authoring reports and creating models in IBM Cognos Framework Manager and external OLAP cubes:

- Avoid storing data in floating point format whenever possible. This is especially true for currency values, which should be stored as either fixed-point decimals or as integers with a scale value such as 2.

For example, in a cube, the Revenue for Camping Equipment in 2012 is \$20,471,328.88. If revenue details are stored as floating point numbers, round-off errors might occur when revenue is calculated.

The round up errors might have slight differences, depending on the order of calculation. If revenue for Products is calculated first and revenue for Time is calculated second, you might get a different round-off error than if Time is calculated first and Products is calculated second.

Total revenue might be calculated as the number above. Or there might be slight discrepancies, for example, \$20,471,328.8800001 as opposed to \$20,471,328.88. The internal number might be slightly different than what is displayed. The number might even be for different runs of the same report, depending on the order that the OLAP engine uses for calculation.

- In reports, avoid division whenever possible. When division is unavoidable, try to do it as late as possible in the calculation process. For example, instead of `Total([Revenue]/1000)`, use `Total([Revenue])/1000`.
- When doing comparisons, add a margin to allow for round-off. For example, you may want `[Profit %]` to be a fractional value formatted as a percentage with no decimals. However, the filter `[Profit %]<>0` (or `[Profit %] NOT BETWEEN 0 and 0`) rejects zero values and may still return values that appear to be 0% after formatting.

To avoid this, filter in one of these two ways:

- `[Profit %] NOT BETWEEN -0.005 and 0.005`

– ([Profit %] <- 0.005) OR ([Profit %]> 0.005)

Note that 0.005 is equivalent to 0.5%, which displays as either 0% or 1%, depending on floating point precision losses.

In some cases, you may prefer control round-off errors by rounding values explicitly. For example, instead of [Profit %], use round([Profit %],2).

- Recalculate numbers every time instead of reusing calculations that might contain rounded off decimals.

There might be additional considerations for Microsoft Analysis Services 2005/2008, especially when comparing report results from different runs (as happens in Lifecycle Manager). Refer to Microsoft documentation for more information.

HRESULT= DB_E_CANTCONVERTVALUE Error When Filtering on a `_make_timestamp` Column

You cannot filter on a `_make_timestamp` column, and the following error messages appear:

UDA-SQL-0114 The cursor supplied to the operation "sqlOpenResult" is inactive

UDA-SQL-0206 The OLEDB driver returned the following value: HRESULT= DB_E_CANTCONVERTVALUE

RSV-SRV-0025 Unable to execute this request

The solution is to apply the filter after aggregation and not before.

Problems Running Reports

The topics in this section document problems you may encounter when viewing or running reports.

Report Runs Slowly

The following is a list of questions that will help you to troubleshoot a slow report.

- Does your IBM Cognos environment conform with the supported environments?
- Has the report always been slow or did it recently become slow?

If it recently became slow, can you identify an event that occurred just before the report began to run slowly? Events could include changes to configuration settings, changes to tuning settings, a recent upgrade where your previous settings have not been applied, an introduction of firewalls or proxies, changes to existing firewalls or proxies, changes to virus scans on temp directories, or temporary table space restrictions on the database. This event could have caused the change in report performance.

- Is the performance slow for all reports or just one report?

If all reports are slow, the issue may be due to your environment or database. If all reports from a specific package are slow, the issue may be due to the model design. If just one report is slow, the issue may be due to a specific report element.

- How many queries does your report contain?

The number of queries on the report will proportionally affect the report execution time.

- Does the report run slowly for everyone, or just for one user?

If the report runs slowly for just one user, the issue may be due to something in that user's environment, such as virus scanning, page file size or location settings, or their location on the network.

- Is the report burst or run often by many people?

If many people are running the same report at the same time, you may need to scale your environment or consider using dispatcher routing rules to direct all requests for a specific package or group of users to a specific server or server group. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

- Do your queries require local processing?

The following report elements require local processing: crosstabs and charts, master relationships, unions or joins, multiple fact queries, bursting, and non-vendor specific functions. Local processing requires the IBM Cognos server to compute operations on the result set returned by the database, which can impact the SQL execution time.

- Does your environment use a Custom Authentication Provider?

Using a Custom Authentication Provider could cause a memory leak if the code is not destroying objects correctly.

- Have you reviewed the logs in the *c10_location/logs* directory and the audit logs?

They may help you identify the source of the problem. Monitoring your processes, such as the Java and Business Intelligence bus processes could also identify excessive memory use.

- Is your environment tuned correctly?

For more information, see the Performance Tuning Settings for IBM Cognos 8 Business Intelligence and the IBM Cognos 8 Business Intelligence Performance Tuning Cheat Sheet documents.

- Have you recently upgraded?

Ensure that any tuning settings that were applied to your previous installation are applied to the new environment. Ensure that your models have been verified, upgraded, and republished. Verify that the IBM Cognos Framework Manager governor that allows enhanced model portability at runtime is not enabled. Depending on your upgrade method, you may also need to open and save the reports again after upgrading.

The following tips may help you improve report performance.

- Change the order in which items are queried from the database. For more information, see “Working with Relational Queries” on page 236 or “Working with Dimensional Queries” on page 283.

- Create sections without creating master detail relationships. For more information, see “Divide Data into Sections” on page 218.

- Share queries between lists and repeaters.

You can share an identical query between data containers that use it. To share a query, data containers must be lists, repeaters, or repeater tables and must use the same grouping structure and list of properties. The data containers cannot be part of a master detail relationship. Sharing queries improves performance by minimizing the number of queries executed against the database.

To share a query, set the **Share Result Set** property for the data container to **Yes**.

- Convert queries to SQL. For more information, see “Convert a Query to SQL” on page 247 for relational reporting or “Convert a Query to SQL” on page 297 for dimensional reporting.

- Avoid using functions with limited support, as indicated by the quality of service indicators. For more information, see “Insert a Query Calculation” on page 250 for relational reporting or “Quality of Service Indicators” on page 537 for dimensional reporting.
- Be aware of the limitations of creating expressions with SAP BW data sources. For more information, see “Using Microsoft Excel Functions with SSAS 2005 Data Sources” on page 539.
- Use Select & Search prompts instead of value prompts if your list of prompts is long. For more information, see “Build Your Own Prompt and Prompt Page” on page 315.
- Provide your own prompt values in a prompt to avoid accessing the database. For more information, see “Specify Prompt Values” on page 324.
- Suppress null cells using filters. For more information, see “Suppress Null Cells Using Filters” on page 391.
- Set page breaks without creating master detail relationships. For more information, see “Create a Page Break or Page Set” on page 437.
- Do not modify IBM Cognos Analysis Studio set definitions. For more information, see “Analysis Studio Query Specification” on page 454.
- Do not put filters on non-identifiers.
- Avoid combining large hierarchy levels and sets in a drill-through report in a way that creates large queries. For more information, see “Recommendation - Drilling Down in Very Large Data Sources” on page 310.
- Use database functions when possible. For more information, see Appendix F, “Using the expression editor,” on page 555.
- Use fixed width objects in PDF reports by setting their **Size & Overflow** properties. For more information, see “Set List Properties” on page 63, “Set Crosstab Properties” on page 69, “Customizing Chart Properties” on page 104, or “Set Map Properties” on page 163.

The following are Proven Practices (www.ibm.com) documents that may help you improve your report performance.

- Performance Tuning Settings for IBM Cognos 8 Business Intelligence
- IBM Cognos 8 Business Intelligence Performance Tuning Cheat Sheet
- Writing Efficient OLAP Queries
- Cognos 8 Business Intelligence (BI) on IBM AIX® best practices
- IBM Cognos ReportNet and Java Heap

The *IBM Cognos Business Intelligence Installation and Configuration Guide* also includes a section on performance maintenance.

Summaries in a report do not correspond to the visible members

If a crosstab or chart created in IBM Cognos Report Studio using a dimensional data source has a context-dependent set function such as filter or topCount on an edge, summaries do not correspond to the visible members.

This problem occurs because a summary that has the **Use Set Aggregation** set to **Yes**, which produces an expression that contains the within set clause, uses a set that is dependent on the members that it intersects with on the opposite edge. For example, the following crosstab has the top three products returned as columns. The expression used to generate the columns is

topCount ([Product],3,[Return quantity])

where [Product] is the level.

Return quantity	BugShield Lotion	BugShield Extreme	Sun Shelter 30	Total	Minimum
Americas	25,219	19,870	13,814	62,392	17,303
Asia Pacific	22,822	19,171	6,389	54,758	12,765
Northern Europe	8,325	14,634	4,065	32,936	8,325
Central Europe	17,627	13,854	14,089	45,570	13,854
Southern Europe	7,196	4,726	5,401	20,220	5,790
Total	81,189	72,255	43,758	215,876	58,037
Minimum	7,196	4,726	4,065	20,220	5,790

Figure 60. A crosstab showing that the summary values for all rows do not correspond to the visible members.

The summary values for **Total** and **Minimum** for all rows except **Central Europe** do not correspond to the member values in the crosstab. This means that the top three products returned in all regions except for Central Europe are not Bug Shield Lotion, Bug Shield Extreme, and Sun Shelter 30. Note that the summary values for **Total** and **Minimum** for all columns do correspond to the visible member values. That is because those summary values represent the total and minimum quantities returned for those three products in each region.

You can see what the top three products returned in each region are by dragging the columns to the right of the rows.

Americas	BugShield Lotion	25,219
	BugShield Extreme	19,870
	TrailChef Water Bag	17,303
	Minimum	17,303
	Total	62,392
Asia Pacific	BugShield Lotion	22,822
	BugShield Extreme	19,171
	Single Edge	12,765
	Minimum	12,765
	Total	54,758
Northern Europe	BugShield Extreme	14,634
	Star Peg	9,977
	BugShield Lotion	8,325
	Minimum	8,325
	Total	32,936
Central Europe	BugShield Lotion	17,627
	Sun Shelter 30	14,089
	BugShield Extreme	13,854
	Minimum	13,854
	Total	45,570

Figure 61. A single-edge crosstab showing the Total Returned Products and Minimum Returned Products for each region

To obtain summary values that reflect the visible members, modify the expression of the data item containing the context-dependent set function so that it includes a tuple that is locked to the default member of every hierarchy that appears on the opposite edge. For this example, modify the expression to the following:

```
topCount ([Product],3,tuple([Return quantity], defaultMember([Retailer site])))
```

where [Product] is the level and [Retailer site] is the hierarchy.

When you run the report, all summary values reflect the visible members in the crosstab.

Return quantity	BugShield Lotion	BugShield Extreme	Sun Shelter 30	Total	Minimum
Americas	25,219	19,870	13,814	58,903	13,814
Asia Pacific	22,822	19,171	6,389	48,382	6,389
Northern Europe	8,325	14,634	4,065	27,024	4,065
Central Europe	17,627	13,854	14,089	45,570	13,854
Southern Europe	7,196	4,726	5,401	17,323	4,726
Total	81,189	72,255	43,758	197,202	42,848
Minimum	7,196	4,726	4,065	17,323	4,065

Figure 62. A crosstab showing the return quantity of products in different regions of the world

Cannot Find the Database in the Content Store (Error QE-DEF-0288)

You cannot retrieve data from the selected database when running a report from IBM Cognos Query Studio, IBM Cognos Connection, or Report Studio.

The following error message appears:

QE-DEF-0288 Unable to find the database...

If this error does not occur when you are logged on as an administrator, then to solve the problem, ensure that the user has permissions to the signon embedded. If this error always occurs, the data source has not been created. Create the data source with the name mentioned in the error message.

Parse Errors When Opening or Running an Upgraded Report

Earlier versions of ReportNet and IBM Cognos Business Intelligence included the `cast_date` function for reports that run on an Oracle database. This function does not exist for Oracle in IBM Cognos 8.1.2 MR1 and later versions. If a report that uses an Oracle database includes the `cast_date` function, parse errors will be received when you try to open or run the report.

Overflow Error Occurs When a Value in a Crosstab Is More Than 19 Characters

In a crosstab report, values support a maximum of 19 characters, including the decimal point. If a value exceeds 19 digits, an overflow error occurs. By default, the decimal precision is set to 7 digits, which restricts the number of integers to 11 digits.

To use more than 11 integers, you must edit the `qfs_config.xml` file in the `c10_location\configuration` directory. For more information, see the section about reducing decimal precision in the *IBM Cognos Business Intelligence Administration and Security Guide*.

The ORA-00907 Error Appears When Running a Report


When using an Oracle 9.2 data source, under certain circumstances, multiple or nested join operations may fail and produce the following error.

ORA-00907: missing right parenthesis

A query that uses both a left outer join and an ON clause condition returns zero values instead of null values.

A Report or Analysis Does Not Run Because of Missing Items

You attempt to run a report or analysis and a message indicates that one or more items are missing or changed. Each missing item is listed by its MUN (member unique name). The MUN includes the complete path within the hierarchy for the

item. When you place your cursor on an item in the **Source** tab , the MUN for that item is displayed in a tooltip. This situation may occur if members have been removed from or changed in the data source. It may also occur when you attempt to run a report that uses items to which you do not have access. For example, an administrator may create an analysis that includes items that you do not have the correct permission to access.

The solution is to find a suitable replacement in the **Source** tab, and drag it to the **New Item** column. The report or analysis will then run.

Cannot View Burst Report

When you burst a report, each burst output is sent to the associated list of recipients.

If a list of recipients contains invalid entries, the following occurs:

- The burst output is not saved to IBM Cognos Content Manager. Consequently, you cannot view the burst output in IBM Cognos Connection.
- If you choose to send the output by email, only valid recipients will receive an email. Although the output is sent as an attachment if you select the **Attach the report** check box, no link is generated if you select the **Include a link to the report** check box.
- The following error message appears in the run history for the report, where parameter 1 is the burst key, parameter 2 is the list of recipients, and parameter 3 contains the error messages returned by Content Manager:

An error occurred while saving the output for the burst instance <param type="string" index="1"/> with the recipients (<param type="string" index="2"/>). Here are the details: <param type="string" index="3"/>

Note: The list of recipients includes both the valid and invalid recipients.

For example, a report is set up to burst on Country or Region, and the recipients are managers. Running the report produces the following countries and regions and recipients:

- Canada: John, Mary
- US: Peter, Frank
- France: Danielle, Maryse

Frank is an invalid recipient. The burst outputs for Canada and France are saved to Content Manager, but not the U.S. output. If you choose to send an e-mail to each recipient and you selected the **Include a link to the report** check box, the e-mail to Peter will not contain a link to the output for US. The error message that is generated will contain Peter and Frank as values for parameter 2 with no indication as to which is invalid.

Procedure

1. View the error message in the run history for the report.
2. From the list of recipients, determine which recipients are invalid.
You may need to consult with your administrator to find out which recipients are invalid.
3. Correct or remove the invalid recipients.
Correcting or removing invalid recipients will depend on how the list of recipients was defined, such as through a calculated field or a burst table.
4. Run the report again.

A report upgraded from ReportNet does not retain its original look

When you upgrade a report to IBM Cognos Business Intelligence, a new style sheet is applied that changes the look of the report.

To preserve the formatting that was used in the original report, you can select a different style sheet. This retains the original look of the report and specifies that any new items added to the report, such as list columns or crosstab levels, have the original formatting applied to them.

Procedure

1. In IBM Cognos Report Studio, from the **File** menu, click **Report Properties**.
2. Click **Report styles** and select **1.x styles**.

Measure Format Disappears in SSAS 2005

Microsoft SQL Server 2005 Analysis Services (SSAS) does not propagate formatting through calculations. IBM Cognos compensates for this whenever possible, but cannot guarantee to do so in all cases. As a result, if you are working with a Microsoft SSAS cube, any calculation (other than a non-count summary) that is based on or intersects with a formatted measure, such as a currency, may lose the measure format. This may also happen if you use a detail filter or context filter (slicer).

For example, a crosstab includes members on one edge and a measure with formatting, such as a currency symbol and decimal places, applied on the other edge. When you run the report, you see the formatting for each cell. However, if you add a detail filter, such as `measure > 1` and run the report, all the formatting disappears.

Additionally, the fine details of the MDX generated by IBM Cognos Business Intelligence can change from release to release. As the SSAS behavior depends on the MDX generated, the loss of formatting in reports might not occur in a future release.

To avoid this problem, specify explicit formatting for the affected row, column, or cell.

Drill-through Links are Not Active in the Safari Browser

When viewing a PDF report in the Macintosh Safari browser, you cannot open hyperlinks. This is because the Macintosh Safari browser does not have the necessary Adobe Acrobat plug-in.

To avoid this problem, use the HTML format when creating drill-through reports that may be viewed in Safari.

Data Does Not Appear in a Target Report or the Wrong Data Appears

If no data appears when you drill through to a target report or if the wrong data appears, the problem might be data source conformance. The business keys might be different or might be mismatched.

For example, the business key for Camping Equipment might be 100 in the data source for the source report and 1 in the data source for the target report, in which case no data appears in the target report. Another example might be that the business key for Camping Equipment is 100 in the data source for the source report but, in the data source for the target report, 100 is the business key for Golf Equipment, in which case the wrong data appears in the target report.

To solve the problem, ensure that business keys have the same value in both data sources. If there are cases where data does not appear to match, contact your database administrator or data modeler.

For more information about data source conformance, search for "conformed dimensions" and "business keys" in the *IBM Cognos Transformer User Guide*.

You might also want to see "Unexpected or Empty Results When Drilling Through" on page 503.

Related concepts:

"Conformed Dimensions" on page 420

If you work with more than one dimensional data source, you may notice that some dimensions are structured the same, and some are not.

"Business Keys" on page 421

When drill-through access is defined from a member to a relational value, the business key of the member is passed by default.

A Running Total in Grouped Reports Gives Unexpected Results

You have a running total calculation in a grouped report that returns unexpected values.

Because tabulation of the running total calculation depends on the order in which the grouping is executed, you must ensure that the grouped totals are tabulated before applying the running total.

To ensure that the grouping is executed in correct order, define a running total calculation as a freestanding calculation outside the query subject in IBM Cognos Framework Manager, and ensure that the Regular Aggregate property is set to Automatic.

This may also be an issue with other running, moving, and ranking aggregations.

PCA-ERR-0057 Recursive Evaluation Error

You run a report and encounter the following error.

PCA-ERR-0057 Recursive evaluation has exceeded limit. Calculated member trace:
COG_OQP_USR_Aggregate(Retailer Type): COG_OQP_INT_m2: COG_OQP_INT_m1:
COG_OQP_USR_Aggregate(Retailer Type): COG_OQP_INT_m2: COG_OQP_INT_m1:
COG_OQP_USR_Aggregate(Retailer Type): COG_OQP_INT_m2: COG_OQP_INT_m1:
COG_OQP_USR_Aggregate(Retailer Type): COG_OQP_INT_m2: COG_OQP_INT_m1

You may encounter this error when two or more data items form a recursive evaluation. For example, in the above error, the calculation of Aggregate(Retailer Type) is dependent on a column expression while at the same time the column expression is dependent on Aggregate(Retailer Type). Therefore, the cyclic relationship cannot be resolved.

To avoid this problem, ensure that calculations do not have cyclic relationships.

Arithmetic Overflow Error When Running a Report in PDF Format

If you use a Microsoft SQL Server 2005 data source and your report includes aggregations, you may encounter the following error when you run your report in PDF format:

RQP-DEF-0177 An error occurred while performing operation 'sqlOpenResult' status='-28'. UDA-SQL-0114 The cursor supplied to the operation "sqlOpenResult" is inactive. UDA-SQL-0564 [Microsoft OLE DB Provider for SQL Server] Arithmetic overflow error converting expression to data type int. (SQLSTATE=22003, SQLERRCODE=8115)

This error occurs because the action is performed in the database, and the database data type is too small.

This error did not occur in IBM Cognos Business Intelligence version 8.3 or earlier because aggregation was processed locally, by the Business Intelligence server. In version 8.4 or later, aggregation is processed at the database level.

To avoid this problem, increase the size of the the database data type.

RQP-DEF-0177 An error occurred while performing operation 'sqlPrepareWithOptions' status='-69' UDA-SQL-0043 Error

You cannot run a report in IBM Cognos Report Studio or IBM Cognos Query Studio, and the following error messages appear.

RQP-DEF-0177 An error occurred while performing operation 'sqlPrepareWithOptions' status='-69' UDA-SQL-0043 The underlying database detected an error during processing the SQL request.[NCR][ODBC Teradata Driver][Teradata Database] Partial string matching requires character operands

These error messages do not indicate an IBM Cognos Application Firewall problem.

There is a problem with your data source not converting numeric data items. Ask your administrator to consult the topic *Enable Conversion of Numeric Search Keys to Strings in Queries* in the *IBM Cognos Business Intelligence Administration and Security Guide*.

Unable to View Active Reports in Mozilla Firefox

When you try to view an active report in the Mozilla Firefox browser, you may see a blank page or a message such as the one below appears.

Your report is ready and will download to your Web browser in a few moments.

However, the report never appears. This problem occurs in the following scenarios:

- You try to open the saved output of an active report in IBM Cognos Connection.
- You try to run an active report from within IBM Cognos Report Studio.

The issue is with the UnMHT add-on, and was reported on the UnMHT Warehouse Web site.

A solution was implemented for each scenario above to work around the issue when using the Mozilla Firefox browser.

- When you try to view an active report in IBM Cognos Connection, instead of opening directly, the download dialog box appears, prompting you to open or save the report.
- In Report Studio, the default action is **Download Active Report** when clicking

the run report button .

Note that if you click the drop-down arrow and choose **Run Active Report**, the report will not render.

Problems with viewing saved Active Report output in Mozilla Firefox 8 or later versions

When you try to view saved Active Report output in Mozilla Firefox 8 or later, you receive errors. The problem also occurs when you try to insert a saved active report in a workspace in IBM Cognos Workspace.

No problems occur when you use an earlier version of Firefox. In Firefox 8 and above, you see the following errors:

Error: ReferenceError: HTMLIsIndexElement is not defined

Error: TypeError: _IS1 is undefined

The problem occurs because HTMLIsIndexElement was deprecated as of Firefox 8. To resolve the problem, rerun the active report and create a new saved output version using IBM Cognos Business Intelligence 10.2.1 or later.

Tip: If you must rerun many active reports, you can create a job in IBM Cognos Connection to run multiple reports. For more information, see the *IBM Cognos Connection User Guide*.

Problems with large SAP BW queries

When you are working with an SAP BW data source, if your report includes a data set greater than 1,000,000 cells, you might encounter an XQE error.

XQE-CON-0007 XQE error encountered: XSB-ERR-0022 Execution of MDX failed: XSB-ERR-0038 SAP Error executing BAPI BAPI_MDDATASET_SELECT_DATA: com.cognos.xqe.data.providers.olap.sbwodp.bapi.JBapiSAPException: RFC Error: MDX result contains too many cells (more than 1 million).

To avoid this error, set the **Processing** property for the query to **Limited Local**. This option allows the report to process locally.

Master Detail or Burst Reports with Charts or Crosstabs May Result in Denial of Service

When running a master detail or burst report that includes a chart or crosstab, disk space exhaustion may cause the report or other requests to fail. A large set of burst keys or master rows may produce one or more charts per detail, resulting in many master detail executions. This may cause the temp folder to accumulate many gigabytes of temporary files containing data required for successful chart rendering.

To avoid this issue, we recommend that you test large master detail or burst reports that include charts or crosstabs to determine the potential peak disk requirements for the report.

PCA-ERR-0087 error when you run a large report

You run a large report and you receive a PCA-ERR-0087 error that indicates that the report exceeds the maximum number of tuples allowed.

PCA-ERR-0087 The "crossJoinSet" operator is not applicable. The limit on the number of tuples per edge has been exceeded (<value>).

This error appears when there is an item in a query that has no relationship to the rest of the data or does not make sense in the query.

To resolve the problem, review the query for unrelated items. If an item is found, redesign the query or apply a filter on the item to reduce the number of results returned.

If you still receive the error, ask your administrator to modify the maximum number of tuples setting in IBM Cognos Business Intelligence. The setting is an XML attribute named `maxTuplesPerEdge`. For more information, see the *IBM Cognos Business Intelligence Administration and Security Guide*.

Differences in the appearance of charts that are run in different formats or on different operating systems

IBM Cognos Report Studio charts can appear differently when reports are run in different formats or on different operating systems. For example, donut and pie charts can appear smaller in reports that are run on the Linux on System z[®] operating system compared to the Windows operating system.

The differences in appearance occur only with Report Studio default charts. Report Studio legacy charts are not affected. When default charts are rendered in HTML or PDF, the following font-related problems might occur.

- The font that is used in HTML output is different than the font used in PDF output.
- Some chart items appear misaligned. For example, a pie chart might show smaller pies in PDF output than in HTML output.
- The font that is used in the chart is different from the expected font.
- The font that is used in the chart is different when you run the chart in different operating systems.

There are two possible causes to the font-related problems.

- The Java Runtime Environment (JRE) used by IBM Cognos Business Intelligence did not find the font that is specified in the chart, and substituted the font with a different font.
- An unknown default font is specified.

To resolve the problem, ask your administrator to configure JRE to find the installed fonts on the Cognos BI server. There are two ways that you can configure JRE to find the installed fonts:

- Copy the installed fonts to the `jre/lib/fonts` folder.
For example, to use the Cognos BI default font Andale WT, copy `Andalewt.ttf` from the `c10_location/bin/fonts` folder to `jre/lib/fonts`.
- Configure the JRE font search path to point to the location where the fonts are installed.

On AIX, set the shell environment variable `JAVA_FONTS=<list of directories>`

Tip: Setting this variable is equivalent to setting the properties `java.awt.fonts` and `sun.java2d.fontpath`.

The default fonts configuration in your Cognos BI server default style sheet can also cause font-related problems, particularly when the operating system is UNIX. On UNIX systems, fonts must be purchased and installed. To ensure that a specific font is used, perform one of the following tasks:

- Ask your administrator to update the Cognos BI server default style sheet to reflect the fonts that are installed on the server.
- Update the chart fonts that are used in your report to use that font, and do not rely on any default fonts.

Tip: For information about changing the default font for reports, see the technote *How to change the default font for reports in Cognos 8 BI* in the IBM Cognos Customer Center (<http://www.ibm.com/software/data/cognos/customercenter/>).

Out-of-memory errors with reports that are run in interactive HTML format

Out-of-memory errors occur when you run a report in interactive HTML format. The errors do not occur when you run the report in other formats, such as PDF or saved HTML.

Out-of-memory errors occur in reports that contain many objects that require memory intensive processing, such as crosstabs and charts that are linked together with master-detail relationships. Running reports in interactive HTML can consume more memory than running reports in other formats. When a report is run in interactive HTML, data sets are kept in memory for all pages in the report. For report formats like PDF, data sets are released from memory after the report is rendered.

Under certain conditions, you can exceed the memory limitations of a 32-bit configuration of the Cognos BI server report server component when you interact with an interactive HTML report. For example, scrolling through a report page by page or drilling up or drilling down can consume more memory and processing capacity in interactive HTML than in other output formats.

Charts in PDF Output Show Unexpected Results

Charts, when viewed in PDF output, have different levels of interaction support, depending on the version of Adobe Acrobat Reader and the style of chart element.

Adobe Reader version 5 does not support tooltips. Drill up and down and Go to links have limited support, due to technical limitations. Only rectangular areas in charts, such as bars, columns, horizontal labels on the axis, or legend labels can be enabled for drill or Go to interaction. Non-rectangular areas, such as pie slices in pie charts, cannot be enabled for drill or Go to interactions.

Adobe Reader version 6 and 7 supports tooltips, drill up and down, and Go to links for all chart types. When chart elements overlap or are separated by only a few pixels, the interactive region may be smaller than the area shown.

Result set of a multi-fact query contains blanks

The result set of a multi-fact query contains blanks in some columns, even though there is a conformed dimension that should join the records from both fact tables.

When IBM Cognos Business Intelligence processes a multi-fact query, it breaks it up into two single fact queries (each with items from a single star in the star schema), then stitches the results of both of those queries together to create a single result set. You can see the two queries and stitching in the native SQL generated for the multi-fact query in Report Studio.

Stitching these queries together is not the same as joining tables in the model. Stitching the two sides together requires a stitch key that exists in each single fact query as a unique value for the row. The rows from the two single fact queries are then matched 1:0, based on the stitch key values. The stitching must be 1:0. Otherwise, you can get double counting of measure data, or exclude rows that should be included. The stitching also means that it is possible for a row from one of the single fact queries to not have a corresponding row from the other single fact query, leading to blanks in the result set.

When the fact tables contain non-conformed dimensions between them, there is not a suitable stitch key among the query items selected. As a result, IBM Cognos BI creates one using RSUM, and joins the results of the two queries. For more information, see the topic Multiple-fact, Multiple-grain Query on Non-Conformed Dimensions in *Guidelines for Modeling Metadata Guide*.

When there is a conformed dimension, it is still possible to not have a suitable stitch key, depending on what items are used in the query and other model design factors. In such cases, IBM Cognos BI uses the conformed dimensions and the row numbers from the results of each query to create a stitch key. If one single fact query returns more rows than the other, there are blanks in the result.

To resolve the problem, it might be possible to avoid splitting the query by changing the model. For more information, see Resolving Queries That Should Not Have Been Split in the *Framework Manager User Guide*. If you cannot avoid splitting the query and the report needs these two result sets to be joined differently, create two separate, single-fact queries in Report Studio, create a join between them, and define the join links and cardinality as needed.

Cognos Statistics object is not displayed in a report

An IBM Cognos Statistics object is not displayed in a report.

Each removed statistical object is replaced with an image in the report:



Figure 63. Image that replaces statistical objects in upgraded reports

A warning also is displayed in the Upgrade Information window for each statistical object that is replaced with the image.

Beginning with IBM Cognos Business Intelligence version 10.2.1, IBM Cognos Statistics is no longer available.

To ensure that reports that were created in previous releases and that contain statistical objects run, statistical objects are removed when the reports are upgraded.

Tip: Queries, and their data items, that are associated to statistical objects are not removed from upgraded reports.

You can use IBM SPSS Statistics to perform statistical reporting and analysis.

Problems When Drilling Through

The topics in this section document problems you may encounter when drilling through reports.

Cannot Drill Through Between PowerCubes Because MUNs Do Not Match

We recommend that business keys be unique throughout the dimension for PowerCubes. These keys are used as the source value for levels in a hierarchy of a dimension. If the values are not unique throughout the dimension, the corresponding Category Code values may be generated with tildes.

For example, if a category for the Product Line level has a source value of 101 and a category in the Product Type level has a source value of 101, the Category Code value for the Product Type level is automatically generated with a unique value such as 101~245. The Category Code values are used in the Member Unique Name (MUN) for each member, for example, **[Sales and Marketing].[Products].[Products].[Product type]->:[PC].[@MEMBER].[101~245]**.

Because these values are generated automatically, they cannot be guaranteed from one cube build to the next or in a build for another cube with the same dimension structure using the same source values. Therefore, drilling from one PowerCube to another on what appears to be the same member might not work since the MUNs might not match.

If the MUNs do not match, consult the cube modellers to see if the business keys can be made unique throughout the dimension. If this is not likely, or might take some time to resolve, you can use calculations to pass the source value from one PowerCube to another for drill-through.

For more information about drill-through access, see the Drill-Through Access chapter in the *IBM Cognos Business Intelligence Administration and Security Guide*.

Procedure

1. In the target report, create a filter with the following syntax: `filter([Hierarchy or Level], roleValue('_businessKey', [Hierarchy or Level]) = ?Parameter?)`

For example: `filter([Sales Cube].[Products].[Products].[Product type], roleValue('_businessKey', [Sales Cube].[Products].[Products].[Product type]) = ?Prod Type?)`

2. In the source report, create a Query Calculation which is used to pass the business key (source value) to the target report by mapping it to the target parameter in the drill-through definition. Use the following syntax:

`roleValue('_businessKey', [Hierarchy or Level])`

For example:

`roleValue('_businessKey', [sales_and_marketing].[Products].[Products].[Product type])`

Unexpected or Empty Results When Drilling Through

When you drill from a source report to a target report, there might be no data returned. This might be the correct result if there is no data that corresponds to the drill-through selections or if you do not have permission to view the data.

In other cases, if no data or the wrong data appears, the source item might not be mapped to the target correctly or the values in the data sources might not be conformed (the values do not match in both data sources).

If you have the necessary permissions, you can debug drill-through definitions by using the drill-through assistant from the **Go To** page (right-click the selection in the source report and select **Go To**). You can view the passed source values and the mapping to the target report parameters. You can use this tool for both authored and package drill-through definitions.

You might be able to correct the problem by modifying the parameter mapping in the drill-through definition. For example, when you drill from a cube to a relational data source, sometimes no data is returned or the wrong data is returned because the business key values in the two data sources do not match. You can change the drill-through definition to pass the caption of the IBM Cognos PowerCube member instead of the business key, but you must also change the target report to filter on the corresponding string value and not the business key value.

However, it is best to ensure the data sources are conformed. In this example, the business keys in the cube should match the business keys in the relational source. Filtering on a key is more efficient than filtering on a larger string that may or may not be indexed in the database.

For more information on data source conformance, search for "conformed dimensions" and "business keys" in the *IBM Cognos Business Intelligence Transformer User Guide*.

Procedure

1. Ensure that the target report filters on a string value that matches the caption being passed from the PowerCube.

2. Edit the drill-through definition as follows:
 - If the drill-through definition was created in IBM Cognos Report Studio, open the report, and go to the drill-through definition associated with the drill-through source object. On the parameter mapping page, select **Member Caption** in the **Property to pass** column.
 - If the drill-through definition was created in the source package, go to IBM Cognos Connection, **Drill-Through Definitions**, and open the package drill-through definition. On the **Target** tab of the drill-through definition, select **Member Caption** in the **Property to pass** column for the appropriate parameter.

Results

When you drill through, instead of the business key, the caption is passed to the target.

You might also want to see “Data Does Not Appear in a Target Report or the Wrong Data Appears” on page 496. For more information about drill-through access, see the Drill-Through Access chapter in the *IBM Cognos Business Intelligence Administration and Security Guide*.

Related concepts:

“Conformed Dimensions” on page 420

If you work with more than one dimensional data source, you may notice that some dimensions are structured the same, and some are not.

“Business Keys” on page 421

When drill-through access is defined from a member to a relational value, the business key of the member is passed by default.

Cannot Drill Through From a Relational Source to a Cube

By default, you cannot drill through from a relational data source to a cube. This is because a cube expects a Member Unique Name (MUN) as a parameter value and relational sources do not use MUNs.

Members have properties which include a business key and a caption. If either of these match data items within the relational source, drilling through can be performed as long as the cube target report is authored in Report Studio.

If the source data source has a query item, for example display name, that corresponds to a member property in the target cube, for example caption, you must create the parameter on the caption in the target report.

To pass the data item to the cube target, do the following:

- In the cube target report, create a parameter that accepts the caption of the member. This parameter should be created in a Query Calculation object from the **Toolbox** tab with the following syntax. Type the following

```
filter([ Hierarchy or Level],caption([Hierarchy of Level]) = ?Parameter?)
```

For example:

```
filter([sales_and_marketing].[Products].[Products].[Product line],  
caption([sales_and_marketing].[Products].[Products].[Product line])  
= ?Product Line?)
```

For more information about drill-through access, see the Drill-Through Access chapter in the *IBM Cognos Business Intelligence Administration and Security Guide*.

Calculations Do Not Appear in the Target Report

If you drill through to PowerPlay Studio from a report in Report Studio, Analysis Studio, or PowerPlay Studio, calculations on the edges in the target report might not appear.

For example, you have a target report with the calculation Personal Accessories+100 as a column in a crosstab report. When you drill through from a source report to the target report, if Personal Accessories is filtered out of the target report (Personal Accessories is not one of the items that is returned on the column edge), then the Personal Accessories+100 calculation does not appear. Personal Accessories has been filtered out of the target report and is not available to fulfill the calculation.

To see the calculations in the target report, ensure the items used in the calculations are returned in the result set (not filtered out). For more information and examples, see *Understanding Drill-Through Behavior in IBM Cognos 8* at developerWorks (<http://www.ibm.com/developerworks/>).

Nested Crosstab Only Filters on Some Items

If you perform a parameter-based drill-through from a source report to a Report Studio target report with two or more dimensions nested on a row or column, you may encounter unexpected results depending on the filters applied to the target report.

For example, a target Report Studio report has the following two filters:

- [sales_and_marketing_mdc].[Order method].[Order method].[Order method type]=?Order Method Type?
- [sales_and_marketing_mdc].[Retailers].[Retailers].[Region]=?Region?

Order method type and Region both have filters, but Product line does not. A drill-through definition mapped to the appropriate parameters, in this case Order method type and Region, is created.

When the source report is run and the intersection of Outdoor protection, Northern Europe, and Telephone is selected to drill through to the target report, the order method type and region display as expected, but all product lines are returned. This is because there are filters on Order method type and Region but not Product line.

For more information and examples, see *Understanding Drill-Through Behavior in IBM Cognos 8* at developerWorks (<http://www.ibm.com/developerworks/>).

Data is Not Filtered in the Target Report After Drill-Through

You drill through to a target report, but no filtering occurs in the target report. For example, you drill through on a crosstab intersection of Camping Equipment and 2010 and expect to see only data for Camping Equipment for 2010 in the target report. Instead you see all products for all years. This occurs because the target report has no filters for the parameters that were passed.

To solve the problem, ensure that the target report has the correct filters. In the above example, the correct filters in the target report are Product line and Year. Alternatively, you can enable Dynamic Drill-Through in a package-based drill-through definition.

Drill-through links in active reports do not work

When viewing an active report that contains drill-through links in Microsoft Internet Explorer 8 and later, the links do not work.

Clicking on a drill-through link produces an error like the following:

The search path "<drill_through_target_search_path>" is invalid. An object may contain invalid syntax, or an unsupported character, or the user account in the namespace may not have sufficient privileges. Check the object to ensure that the target destination location does not contain special characters.

Details

CM-REQ-4069 The property "na" is unknown. Replace it with a valid property.

When clicking a link in an active report, you are attempting to move from a local domain (the active report MHT file on your computer) to the IBM Cognos Business Intelligence server's domain. Internet Explorer views this as a potential risk. To resolve the problem, make the following changes to the security settings in Internet Explorer.

Procedure

1. Click **Tools, Internet Options**.
2. Click the **Security** tab.
3. Click **Trusted sites** and then click **Sites**.
4. In the **Add this website to the zone** box, type the IBM Cognos BI server's domain.
5. Click **Add** and then **Close**.
6. Click **Custom level**.
7. In the **Scripting** section, under **Enable XSS filter**, click **Disable** and then click **OK** twice.

Appendix C. Sample Reports and Packages

Sample reports are included with IBM Cognos Business Intelligence. When installed, you can find them in the **Public Folders** tab in IBM Cognos Connection.

The Sample Outdoors Company

The Sample Outdoors Company samples illustrate product features and technical and business best practices.

You can also use them for experimenting with and sharing report design techniques and for troubleshooting. As you use the samples, you can connect to features in the product.

For examples related to different kinds of businesses, see the product blueprints on the IBM Cognos Information Centers (<http://pic.dhe.ibm.com/infocenter/cogic/v1r0m0/index.jsp>).

The Sample Outdoors Company, or GO Sales, or any variation of the Sample Outdoors name, is the name of a fictitious business operation whose sample data is used to develop sample applications for IBM and IBM customers. Its fictitious records include sample data for sales transactions, product distribution, finance, and human resources. Any resemblance to actual names, addresses, contact numbers, or transaction values, is coincidental. Unauthorized duplication is prohibited.

Samples outline

The samples consist of the following:

- Two databases that contain all corporate data, and the related sample models for query and analysis
- Sample cubes and the related models
- A metrics data source including associated metrics and a strategy map for the consolidated company, and a model for Metric extracts.
- Reports, queries, query templates, and workspaces

To run interactive reports, scripts are required. To see all the reports included in the samples packages, copy the files from the samples content installation into deployment folder and then import the deployments into the IBM Cognos Business Intelligence product.

Security

Samples are available to all users.

The Sample Outdoors Group of Companies

To make designing examples faster, especially financial examples, some general information about The Sample Outdoors Company is useful.

To look for samples that use particular product features, see the individual sample descriptions in this section.

Revenue for The Sample Outdoors Company comes from corporate stores and from franchise operations. The revenues are consolidated from the wholly-owned subsidiaries. There are six distinct organizations, each with its own departments and sales branches. Five of these are regionally-based companies.

The sixth company, GO Accessories:

- Has its own collection of products, differentiated from the other GO companies by brand, name, price, color and size.
- Sells from a single branch to all regions and retailers.
- Functions both as an operating company based in Geneva, and as a part owner of the three GO subsidiaries in Europe.

The diagram illustrates the consolidated corporate structure, including the percentage changes in ownership for GO Central Europe, and shows the reporting currency and GL prefix for each subsidiary.

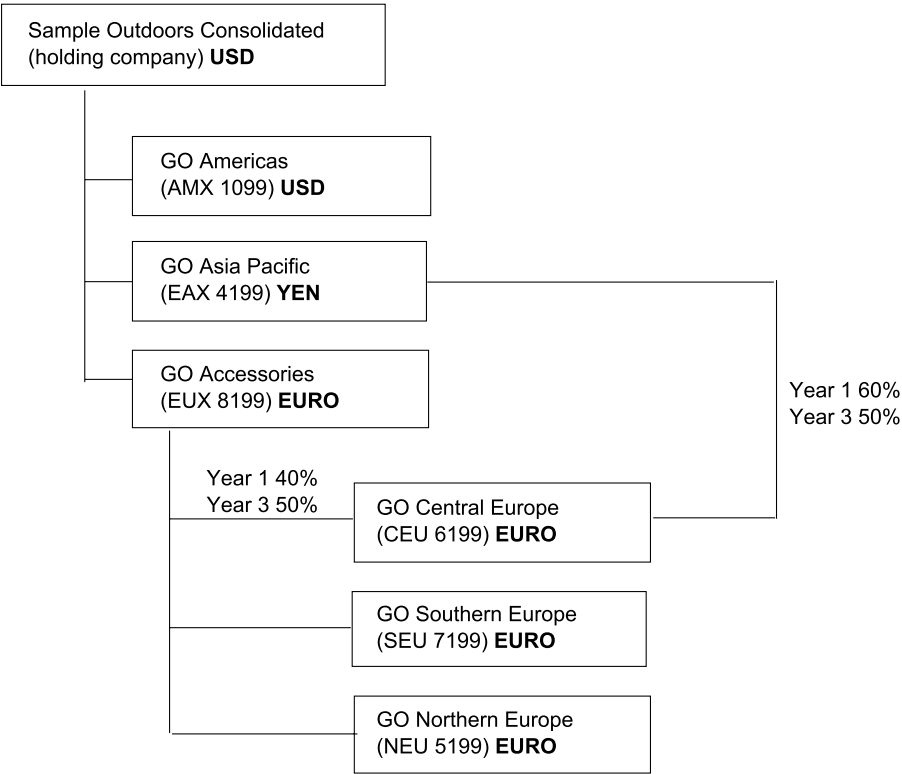


Figure 64. Consolidated corporate structure

Each corporation has the same departmental structure and the same GL structure, shown in the table. Divisions may not report in the same currencies. For example, the Americas subsidiary reports in US dollars, but the Corporate division local currency is Canadian dollars, and the Operations division local currency is pesos.

Table 4. Departmental structure

Division (GL)	Department (GL)
Corporate (1700)	Sales (1720)
	Marketing (1750)
	IS&T (1760)
	Human Resources (1730)
	Finance (1740)
	Procurement (1710)
Operations (1800)	Production and Distribution (1820)
	Customer Service (1820)

Each corporation has a complete chart of accounts. Most of the accounts, such as those under non-personnel expenses, are at the department level, and contain only summary amounts. For example, although each marketing department has expenses, the cost is unspecified at the transaction level where marketing promotions occur.

Employees

The Sample Outdoors data contains a full list of employees in all divisions, departments, and locations.

Data is available for reports about bonuses (Global Bonus report) and sales commissions (Sales Commissions for Central Europe report), training (Employee Training by Year report), and performance reviews and employee satisfaction surveys (Employee Satisfaction 2012). If you use Metric Studio, sample metrics for human resources are also available.

In the GO Data Warehouse (analysis) package, groups of measures and the related dimensions are organized into folders. The employees are organized in hierarchies for region and manager, to make different kinds of aggregation easy to report on. Aggregation has been defined for the Employee Position Summary measures, so that Position count and Planned position count aggregate correctly at each level of time: monthly, quarterly, or yearly. For example, see the Planned Headcount report.

The employees are also listed in a sample LDIF file which could be used for any LDAP IBM product authentication including Tivoli[®]. This authentication directory is necessary for IBM Cognos Planning samples. No other samples depend on security profiles.

Sales and marketing

Data about sales and marketing is available for all of the companies in the Sample Outdoors group.

GO Accessories has richer details to support analysis examples. For example, see the Revenue vs % Profit Margin by Product Brand analysis, based on the Sales and Marketing cube. Marketing and sales campaigns are tied to the Sample Outdoors regional companies.

Overall, the GO companies have experienced solid growth across most product lines (Sales Growth Year Over Year), in all regions (Revenue by GO Subsidiary 2011), because of factors like an increase in repeat business and new or improved products, such as the high margin sunglasses product line. In the product lines sold by the five regional companies (all but GO Accessories) promotions have had mixed success (Promotion Success by Campaign, Bundle and Quarter). If you use Metric Studio, this can also be seen in the sample metrics.

Customer surveys

The data also contains information from customer surveys. For example, the product line that includes bug spray, sun screen, and so on has not been successful (Product Satisfaction - Outdoor Protection 2011) and a source of retailer dissatisfaction may be the level of customer service rather than the returns (Customer Returns and Satisfaction). If you use Metric Studio, this information can also be monitored in metrics.

Sales outlets

Revenue from the corporate outlets is available at the transaction level. Revenue from the franchise outlets is available at the consolidated level only (Sales and Marketing cube). Metrics about retailers show that the number of new retail outlets has dropped over the time period covered by this data.

GO Accessories sells worldwide, and sells only accessories. Transaction data for GO Accessories is the primary source for analysis of product by brand, color and size. The other five subsidiaries in the group of companies are regional and sell all product lines for retailers in their region. For example, the report Top 10 Retailers in 2011 uses sparklines and list data to review revenues at the retailer level.

Sample Outdoors database, models, and packages

The Sample Outdoors Framework Manager models illustrate modeling techniques and support the samples.

The models are based on the GO data warehouse and the GO sales transactional database and are the basis for the sample reports and queries. Each model contains two packages for publishing analysis (dimensional) and query views of the data.

You must have access to Framework Manager, the modeling tool in IBM Cognos Business Intelligence, to look at the sample models. You may also need to set up the sample databases and connections.

GO Data Warehouse

The GO Data Warehouse model, `great_outdoors_data_warehouse.cpf`, is based on the database GOSALESDW. It contains data about human resources, sales and marketing, and finance, grouped into business areas. In the Database view, the three business areas are grouped into separate namespaces. The Database view contains a fourth namespace (GO Data) for the common information.

The Database view is very similar to the structure of the underlying database. All tables (database query subjects) are unchanged. This enables IBM Cognos BI to retrieve metadata directly from the package in most cases, instead of using a metadata call to the database. The following changes and additions have been made in the Database view:

- Joins have been added as necessary.
- To allow for aggregation at different levels of granularity, some model query subjects have been created. For example, see the relationships between Time and Sales or Sales fact.
- To allow single joins to be made between the lookup tables and each level in a dimension, lookup tables have been copied. For example, see the Products lookup tables.

The Business view contains only model query subjects, with no joins. The following changes and additions have been made in the Business view:

- Calculations were added to the model query subjects. For example, the time dimension contains language calculations.
- Where the database has multiple hierarchies, new dimensions have been created to organize each hierarchy. For example, the employee hierarchies are organized into several categories, such as manager and region.

The GO Sales transactional database

The GO Sales model, `great_outdoors_sales.cpf`, is based on the GOSALES database, which is structured as a transactional database. It contains principally sales data.

The Database view is very similar to the underlying database structure. The following changes and additions have been made in the Database view:

- To make it possible to join the fact tables to the time dimension, model query subjects and multipart joins have been used.
- Other joins have been added as necessary.

The Business view contains only model query subjects, with no joins. The following changes and additions have been made in the Business view:

- Calculations were added to the model query subjects.
- Model query subjects that were created in the Database view to enable joins on the time dimension have been linked as reference shortcuts.
- Where the database has multiple hierarchies, new dimensions have been created to organize each hierarchy.
- Sales Staff is a subset of the slowly changing Employee dimension. There is no unique Employee key in GO Sales, so a filter retrieves the current record only. This model does not use historical data.

The samples PowerCubes

The following cubes are delivered with the Sample Outdoors samples in English, French, German, Japanese and Chinese:

- `sales_and_marketing.mdc`
- `employee_expenses.mdc`
- `go_accessories.mdc`
- `go_americas.mdc`
- `go_asia_pacific.mdc`
- `great_outdoors_sales_en.mdc`
- `great_outdoors_7.mdc`

The samples packages

The Sample Outdoors samples include six packages. A brief description of each available package is provided.

Go Data Warehouse (analysis) is a dimensionally modeled view of the GOSALESDW database. This package can be used in all studios, including IBM Cognos Analysis Studio. Using this package you can drill up and down.

Go Sales (analysis) is a dimensionally modeled view of the GOSALES database. This package can be used in all studios, including Analysis Studio. Using this package you can drill up and down.

Go Data Warehouse (query) is a non-dimensional view of the GOSALESDW database. This package can be used in all studios except Analysis Studio, and is useful for reporting when there is no need for drilling up and down.

Go Sales (query) is a non-dimension view of the GOSALES database. This package can be used in all studios except Analysis Studio, and is useful for reporting when there is no need for drilling up and down.

Sales and Marketing (cube) is an OLAP package, based on the sales_and_marketing.mdc cube.

Great Outdoor Sales (cube) is an OLAP package, based on the great_outdoors_sales_en.mdc cube.

Note: The OLAP packages, Great Outdoor Sales (cube) and Sales and Marketing (cube), are not multilingual. The IBM_Cognos_PowerCube.zip archive contains five versions of each package; one in English, French, German, Japanese and Chinese.

Samples in the Sample Outdoors Sales (cube) package

The following report is found in the Sample Outdoors Sales (cube) package.

Consecutive Periods Comparison

This report shows the revenue and gross profit for Camping Equipment and Personal Accessories, as well as quantity for Camping Equipment, in two consecutive periods selected by the user.

Samples in the Sales and Marketing (Cube) Package

The following reports are some of the reports found in the Sales and Marketing (Cube) package.

Actual vs. Planned Revenue

This report shows the actual revenue versus planned revenue by order method and year. This report is also a target for the measure based scope drill-through from other reports in the same package.

This report uses the following features:

- lists
- filters
- multiple prompts

- grouping
- sorting
- summarizing

Historical Revenue

This prompted report shows a 13-month rolling forecast of monthly and year-to-date revenue.

This report uses the following features:

- filters
- cascading prompts
- combination charts
- axis titles

Revenue by Date Range

This report shows revenue for a date range that is specified on a prompt page.

This report uses the following features:

- lists
- crosstabs
- context filters
- custom headers and footers
- multiple prompts
- calculations

Revenue by Product Brand (2011)

This report shows the revenue and gross profit by product filtered by the product brand. There is always product turnover, so the report conditionally highlights products that are discontinued.

This report uses the following features:

- lists
- filters
- prompts
- combination charts
- bar charts
- HTML items
- grouping
- sorting
- axis titles

Same Month Prior Year

This report shows sales volume by product line in one or more months. The report is filtered by a prompt for month. The report generates totals for the selected months and for the same months in the prior year.

This report uses the following features:

- crosstabs

- prompts
- custom headers and footers

Selected Retailer Country or Region

This report uses the revenue from a selected country or region as a baseline value for a set of countries or regions. A chart shows the difference in revenue for each country and region as it compares to the base country and region. The report is filtered by a prompt for country and region.

This report uses the following features:

- crosstabs
- bar charts
- tables to control where objects appear

Top Retailers by Country or Region

This report shows the top 10 retailers by country or region. It is used as source for drill-through to the Total Revenue by Country or Region report.

This report uses the following features:

- crosstabs
- prompts
- filters
- line charts
- prompt pages
- query calculations
- calculations
- singletons
- bar charts
- custom headers and footers

Samples in the GO Data Warehouse (analysis) Package

The following reports are some of the reports found in the GO Data Warehouse (analysis) package.

Sample reports that were created in Report Studio are located in the Active Report folder and the Report Studio Report Samples folder.

Budget vs. Actual

This report shows three years of data by retailer and retailer site for the camping equipment product line. Each year includes budget and actual data.

This report uses the following features:

- summarizing
- crosstabs
- context filters

Core products results

This active report shows revenue data for the core products Camping Equipment and Golf Equipment.

This list report uses two drop-down list controls to filter data by the following criteria:

- core product
- country or region

Customer Returns and Satisfaction

This report shows the customer satisfaction survey results for Asia Pacific in 2013. It highlights the customers who are the least satisfied. It also provides information about customers with the highest number of product returns.

This report uses the following features:

- combination charts
- customizing the color and size of a chart
- lists
- formatting a list
- conditional highlighting
- filters
- custom headers and footers
- colors
- lineage
- text items
- grouping
- baselines
- summarizing
- calculations
- drilling through

Employee Satisfaction 2012

This report shows employee satisfaction survey results by department, compared to targets and industry standards. It also shows employee rankings and terminations.

This report uses the following features:

- crosstabs
- conditional highlighting
- combination charts
- lineage
- text items
- calculations

Employee Training by Year

This report shows employee training data for the selected year and quarter(s). A bar chart shows training costs by region and a crosstab shows data for the selected quarter(s).

This report uses the following features:

- context filters
- cascading prompts

- bar charts
- customizing the color of a chart
- crosstabs
- calculations

Eyewear Revenue by Brand and Size

This report shows a summary of eyewear revenue by brand and compares two prompted retailer sites. The report is filtered by prompts for region, retailer type, and year.

This report uses the following features:

- prompts
- bar charts
- lists
- conditional styles
- calculations
- text items
- custom headers and footers
- combination charts
- axis titles
- crosstabs
- grouping

Global Bonus Report

This list report shows employees who received more than \$2,500 bonus in a year by region. It is grouped by country or region. It also shows how much the sales target was exceeded for each region.

This report uses the following features:

- lists
- page sets (page breaks by country or region with different sorting and grouping)
- multiple prompts and parameters
- calculations
- filters
- conditional highlighting
- hidden objects
- lineage

GO Balance Sheet as at Dec 31 2012

This is the Balance sheet report for Americas where current year data is compared to the previous year data. Analysts can see negative trends under Variance where negative percentages are highlighted.

This report uses the following features:

- conditional highlighting
- padding
- crosstabs
- text items

- context filters

Sample Outdoors Company Balance Sheet as at Dec 31 2012

This report shows a simple balance sheet with assets, liabilities, and equity for 2012 with a 2011 comparative. It uses IBM Cognos Workspace Advanced. The IBM Cognos Business Intelligence Getting Started guide provides a step-by-step example of how to create this report.

This report uses the following feature:

- crosstabs

Manager Profile

This report shows information about managers, including salary, bonuses, and all compensations grouped by year.

This report uses the following features:

- column charts
- lists
- grouping
- summarizing
- custom chart palette
- prompts

New order methods

This active report shows revenue by order method, with focus on the new order methods.

This list report has the following features:

- check box control that allows you to filter data by new order method
- sorting by year or new order method

Planned Headcount

This chart report shows headcount variance compared to the plan for each organization for 2013.

This report uses the following features:

- progressive column charts
- templates
- hidden objects
- custom headers and footers
- lists
- baselines

Positions to Fill

This report shows a list of department names, positions, longest days to fill the positions, and ranking. The report uses a prompt for the year and is a drill-through target for the Recruitment report.

This report uses the following features:

- combination charts
- lists
- prompts
- baselines

Promotion Plan Revenue

This report shows the planned revenue for all the promotions of a selected campaign. It is a drill-through target for the Top 10 Promotions by Retailer report that is based on the Sales and Marketing (cube) package.

This report uses the following features:

- prompts
- bar charts
- crosstabs
- axis titles

Promotion Success

This report shows the financial results of the company's promotions. It shows how much of the company's total revenue is attributable to each promotional campaign.

This report uses the following features:

- prompt pages
- HTML items
- summarizing
- axis titles
- bar charts
- lists
- grouping

Quantity Sold vs. Shipped and Inventory

This report compares the quantity of goods sold and shipped with the opening and closing inventory levels.

This report uses the following features:

- filters
- combination charts
- defined y-axes
- custom headers and footers

Recruitment Report

This report shows a variety of recruitment techniques for certain positions or organizations.

This report uses the following features:

- drilling through
- crosstabs
- prompt pages
- colors

- floating object adjustment
- custom headers and footers

Return Quantity by Order Method

This report shows quantity sold, number of returns, and percentage of returns (with those greater than 5% highlighted) by return reason for each product in the Outdoor Protection product line.

This report uses the following features:

- filters
- lists
- conditional highlighting
- grouping

Returned Items

This report shows the number of returned items by return reason and retailer type. A column chart shows returned items by product line and region for the selected date range.

This report uses the following features:

- date and time prompts
- crosstabs
- bar charts
- drilling down
- text items
- sorting

Returns by Damage, Failed Orders and Complaints in 2012

This report shows quality measures based on product returns.

This report uses the following features:

- pie charts
- crosstabs
- indented text
- singletons
- calculations
- drilling through
- text items
- custom headers and footers

Returns by Failed Orders in 2012

This report shows quality measures based on product returns and focuses on failed orders.

This report uses the following features:

- pie charts
- crosstabs
- indented text

- singletons
- drilling through
- calculations, including the tuple function

Returns by Order Method

This report shows product returns and reasons filtered on the order method. The Getting Started guide provides a step-by-step example of how to create this report.

This report uses the following features:

- bar charts
- prompts
- crosstabs
- filters
- custom headers and footers

Returns by Order Method - Prompted Chart

This prompted chart report shows product returns and reasons filtered on a prompted order method.

This report uses the following features:

- bar charts
- prompts
- crosstabs
- filters
- custom headers and footers

Revenue by GO Subsidiary 2011

This prompted chart report shows 2011 quarterly revenues for each GO subsidiary.

This report uses the following features:

- templates
- colors
- prompts
- hyperlinks
- customizing charts
- singletons
- bar charts
- drilling through
- layout calculations
- pie charts
- calculations
- combination charts
- text items
- blocks
- sorting

Sales Commissions for Central Europe

This report shows an annual summary of sales commissions, revenues, and gross profit for each branch in Central Europe. It also compares actual commission expenses with planned commission expenses.

This report uses the following features:

- prompts
- calculations
- bar charts
- lists
- conditional highlighting
- drilling through
- custom headers and footers
- axis titles

Sales Growth Year Over Year

This report shows annual sales growth in both percentage and dollar amounts.

This report uses the following features:

- bar charts
- lists
- filters
- sorting
- baselines
- axis titles

Sales target by region

This active report shows sales target by region, including the percentage differences between planned and actual revenue.

Succession Report

This report shows the succession data by department and status for percent ready in a column chart. It also contains a detailed crosstab for the managers associated with the possible successors.

This report uses the following features:

- drilling through to the Manager Profile report
- filters
- lists
- grouping

Top 10 Retailers for 2011

This report shows the top 10 retailers for 2011 by revenue and sales target.

This report uses the following features:

- bar charts
- lists
- filters

- multiple queries
- combination charts
- line charts
- notes
- axis titles
- text items
- custom headers and footers

Samples in the GO Data Warehouse (query) Package

The following reports are some of the reports found in the GO Data Warehouse (query) package.

Sample reports that were created in Report Studio are located in the Active Report folder and the Report Studio Report Samples folder.

Advertising-cost vs revenue

This active report shows the advertising cost vs revenue by year. Tab controls are used for grouping similar report items.

Bursted Sales Performance Report

This list report shows how to burst a product sales report to a sales manager for Northern Europe sales staff. To successfully burst this report, IBM Cognos Business Intelligence must be configured to use an email server.

This report uses the following features:

- lists
- bursting
- conditional highlighting
- filters
- calculations
- summarizing
- blocks
- custom headers and footers
- sorting
- grouping

Employee Expenses (report)

This report is used as a data source for the Employee Expenses Power Cube.

This report uses the following feature:

- lists

Health Insurance

This report is used as a data source for the Employee Expenses Power Cube.

This report uses the following features:

- lists
- filters

Pension Plan

This report is used as a data source for the Employee Expenses Power Cube.

This report uses the following features:

- lists
- filters

Regular Salary

This report is used as a data source for the Employee Expenses Power Cube.

This report uses the following features:

- lists
- filters

TOC Report

This report takes advantage of the bookmark object to allow a user to navigate through this report easily. This report should be run in PDF or saved HTML format. The report contents show a product order table and an expected volume fact table.

This report uses the following features:

- lists
- bookmarks
- background color
- multiple pages
- grouping

Total Revenue by Country or Region

This report summarizes revenue for Retailer Country or Region and Product Line. It is also a drill-through target for the Top Retailers by Country or Region and Revenue by Order Method reports.

This report uses the following features:

- crosstabs
- combination charts
- summarizing
- tables to control where objects appear

Samples in the GO Sales (analysis) Package

The following reports are some of the reports found in the GO Sales (analysis) package.

2011 Quarterly Sales Forecast

This report shows the sales forecast by product line and region for each quarter in 2011.

This report uses the following features:

- lists
- summarizing

- grouping
- sorting

2011 Sales Summary

This report summarizes revenue and gross profit for 2011 and shows the top sales representatives by revenue and quantity sold.

This report uses the following features:

- lists
- filters
- combination charts
- axis titles
- custom headers and footers
- conditions

Samples in the GO Sales (query) Package

The following reports are some of the reports found in the GO Sales (query) package.

Sample reports that were created in Report Studio are located in the Active Report folder and the Report Studio Report Samples folder.

Active Report Techniques

This report demonstrates common active report and dashboard features and functionality.

Briefing Book

This report shows a Briefing Book style of report.

This report uses the following features:

- multiple pages
- crosstabs
- multiple queries
- filters
- pie charts
- singletons
- tables of contents
- bookmarks
- PDF options
- horizontal pagination
- sorting
- custom headers and footers
- text items

Film strip

This active report shows detailed sales facts in different charts. Deck controls are used for navigation.

Horizontal Pagination

This report shows crosstabs rendered across several horizontal pages. The first crosstab shows the fit-to-page behavior while the second crosstab shows the horizontal pagination.

This report uses the following features:

- multiple pages
- horizontal pagination
- crosstabs
- custom headers and footers

Matrix-chart and graph

This active report shows a summary of sales facts for each province or state in the Americas. Clicking a category in the map displays the data in a list.

Order Invoices - Donald Chow, Sales Person

This report generates invoices for all the sales by Donald Chow.

This report uses the following features:

- lists
- adding list row cells
- calculations
- formatting tables
- calculations
- filters
- grouping
- tables to control where objects appear

No Data

Each page of this report presents a different option for dealing with a No Data condition. It also generates invoices of sales for the Order Invoices - Donald Chow, Sales Person report in the GO Sales (query) package.

This report uses the following features:

- crosstabs
- custom headers and footers
- no data
- lists

PDF Page Properties

The two pages of this report appear with different Page Orientation (portrait and landscape) when the report is run in PDF format.

This report uses the following features:

- crosstabs
- lists
- page orientation
- PDF options

- custom headers and footers

Product details

This active report shows attributes as color, size, and description for products.

Sales analysis

This active report shows interactions with charts. Clicking a pie series in a chart filters the product line selected.

Sales Dashboard

This active report focuses on sales details by region and product brand. Describes the top performers and the best performance by region.

Singletons on Page Body

This report uses singleton results to display information with no data relationship in the same layout context.

This report uses the following features:

- singletons
- tables
- custom headers and footers

Table of Contents

This report shows two Tables of Contents: one for the main pages and another for the appendices.

This report uses the following features:

- crosstabs
- pie charts
- bookmarks
- tables
- tables of contents
- custom headers and footers
- hyperlinks

Interactive Samples

The following reports are some of the reports found in the Interactive Samples folder.

Bursted Sales Performance Report

This list report shows how to burst a product sales report to a sales manager for Northern Europe sales staff. To successfully burst this report, IBM Cognos Business Intelligence must be configured to use an email server.

This report uses the following features:

- lists
- bursting
- conditional highlighting

- filters
- calculations
- summarizing
- blocks
- custom headers and footers
- sorting
- grouping

Percentage Calculation (by year)

This prompted report shows a percentage calculation based on a particular year.

This report uses the following features:

- lists
- pie charts

Recruitment Report

This report shows a variety of recruitment techniques for certain positions or organizations.

This report uses the following features:

- drilling through
- crosstabs
- prompt pages
- colors
- floating object adjustment
- custom headers and footers

Revenue by GO Subsidiary 2011

This prompted chart report shows 2011 quarterly revenues for each GO subsidiary.

This report uses the following features:

- templates
- colors
- prompts
- hyperlinks
- customizing charts
- singletons
- bar charts
- drilling through
- layout calculations
- pie charts
- calculations
- combination charts
- text items
- blocks
- sorting

Rolling and Moving Averages

This report shows the rolling and moving average count for the return quantity. A prompt uses a macro to provide static choices within a time dimension.

This report uses the following features:

- prompts
- calculations
- crosstabs
- combination charts

Top 10 Retailers for 2011

This report shows the top 10 retailers for 2011 by revenue and sales target.

This report uses the following features:

- bar charts
- lists
- filters
- multiple queries
- combination charts
- line charts
- notes
- axis titles
- text items
- custom headers and footers

Prompt API samples

The following reports are some of the reports found in the Samples_Prompt_API folder.

Related reference:

Appendix H, "Prompt API for IBM Cognos BI," on page 975

The JavaScript Prompt API provides report authors with a method of customizing prompt interaction in the reports they author.

Clear prompt selections

This report demonstrates using the prompt API to clear selections from all prompts.

Date prompt presets

This report uses the prompt API to provide the user with a set of prompt selection presets based on today's date.

Display all prompt values ignoring user selections

This report uses the prompt API to display all the values in the prompt, whether they are selected or not.

Display user selected prompt values

This report uses the prompt API to display the prompt values selected by the user.

Filter country by letter

This report uses a custom prompt control to provide parameters to filter the report.

Limit date prompt selection by database value

This report demonstrates limiting the selection of a date to a value less than or equal to a latest date value in a query item.

Limit numeric prompt selection by database value

This report demonstrates limiting the selection of a value less than or equal to a largest value in a query item.

Limit time between two dates

This report demonstrates preventing the user from selecting a date range greater than 10 days.

Limit user selection to two items

This report shows how to validate prompt values to stop the user from selecting more than two items.

Pass parameter via hidden prompt

This report demonstrates setting the value of a hidden prompt.

Personal default prompt selections - set selections

This report allows the user to save a set of default prompt selections for use in subsequent reports. The prompt selections are saved to browser cookies for reuse in other reports.

Personal default prompt selections - use selections

This report shows how to use the personal default prompt selections.

Validate prompt values when button pushed

This sample shows how to validate prompt values when a prompt button is clicked.

Validate type-in postal code values

The report uses the prompt API to validate user input as the user types.

Validate type-in product line code

The report uses the prompt API to validate user input as the user types.

Appendix D. Limitations when using dimensional data sources

There are limitations when authoring or running reports against dimensional data sources.

Running a Report Against a Dimensional Data Source

You can cancel a report that is running against Microsoft SQL Server Analysis Services only during the initial portion of its execution. After this time, the report runs to completion.

The same behavior applies to SAP BW data sources.

In IBM Cognos Framework Manager, you can also control the number of levels within a hierarchy from which members, or values, are extracted from the hierarchy to populate a tree prompt.

For SAP BW, you can reduce the number of hierarchy levels to limit the number of nodes by setting the SAP BW variable property `trimHierarchyLevels` to 1. This removes the lowest level from the hierarchy prior to creating the list of nodes.

Units of Measure Notation

When running a report against an SAP BW data source, units of measure are included in the same column as the data values, separated by one space. For example, Celsius and Fahrenheit notations are appended to the end of the value.

If you see an asterisk character (*), one of the following was detected:

- an unknown currency
- a value with an unknown or questionable unit of measure, such as a mixed currency calculation or rollup

Mixed currency values occur when you calculate values with different currencies.

This behavior occurs when you are using an IBM Cognos cube as a data source.

This behavior also occurs for SAP BW data sources.

Unsupported SAP Variable Properties

The following SAP variable properties are not supported:

- Exclusionary ranges appear as an inclusionary prompt.
- Mandatory not initial appears as a mandatory prompt.

When using Business Explorer (BEx) to define variables in your SAP data source, avoid using exclusionary ranges and the mandatory not initial property.

Limitations When Using Set Expressions in List Reports

In list reports, we recommend that you avoid using set expressions. When in a list, set expressions, such as TopCount, may produce fewer rows than in the corresponding crosstab.

For example, the following list report includes Year in the first column, followed by a column containing an expression that returns the top three months by revenue. Only three rows appear in the report and they correspond to the top three months across all years. If you group by Year, the report still shows only three months. However, the corresponding crosstab report, you see three months for each year.

Year	Top 3 Months	Revenue
2013	March 2013	171,457,960.73
2013	July 2013	166,441,982.56
2013	June 2013	161,995,729.54

	Revenue	Revenue
2010	December 2010	84,197,463.09
	June 2010	82,169,806.98
	July 2010	80,723,457.3
2011	December 2011	109,868,142.48
	November 2011	103,650,656.99
	June 2011	100,066,807.17
2012	June 2012	141,875,242.63
	December 2012	130,525,197.76
	August 2012	129,235,970.16
2013	March 2013	171,457,960.73
	July 2013	166,441,982.56
	June 2013	161,995,729.54

Figure 65. a list showing the top three revenue months in 2013 and a crosstab showing the top three revenue months for each year

In crosstab reports in IBM Cognos Business Intelligence, set evaluation is always done in the context of what the set is nested under in the report. However, in list reports set evaluation is done independently of the grouping. For example, if the first column contains Country or Region instead of Year, you see the top three months for each country or region (across all years) in both cases.

In the case of different dimensions, you can force context independence by replacing [Revenue] in the topCount expression with tuple ([Revenue], X), where X is the default member of the hierarchy that contains Month.

However, for nested levels in the same hierarchy, there is no such workaround at this time.

Limitations When Using Clauses in Summary Functions

A summary function that uses a for clause may yield unexpected results. These may include error messages, warnings, incorrect numbers, and more or fewer than expected rows, columns, or chart points and lines.

To avoid these problems, ensure that the parameters that follow the for clause adhere to the following constraints:

- Parameters must be simple data item references.
- All data items in the parameter list must appear on every list, crosstab, or chart that uses that summary.
- For any edge used in the for clause, data items listed in the for clause must start with the first data item on that edge.
- Data items must be listed in the order in which they appear on each edge of the report with no gaps.
- In crosstabs and charts, there must be no sibling data items that are considered details. Summaries are normally not considered details.
- Section headers must not be included in the parameter list.

If following these constraints does not resolve the problems and your report uses dimensional data with no detail or summary filters, consider using the within set clause instead of the for clause.

Limited Support for Relational Functions When Used with OLAP Data Sources

When working with an OLAP data source, we recommend that you not use relational functions, such as substring and concatenation functions, in a report that also contains a measure with the **Aggregate Function** property set to **Calculated** or **Automatic** in the model. If you do so, you may encounter unexpected results. For example, some summaries are calculated using the **Minimum** function instead of the aggregate function derived from the individual query items.

In the expression editor, an exclamation mark (!) that precedes a function indicates that the function is not naturally supported for that data source. IBM Cognos Business Intelligence uses a local approximation for that function. Because an approximation is used, performance can be degraded and the results may not be what you expect.

For example, you create an IBM Cognos Query Studio report that contains the data items Product line and Retailer site count. The footer summary is set to **Calculated**. You then insert a calculated column that returns the first three characters of the Product line item, which uses the relational concatenation function. The footer summary now shows the lowest gross margin value.

Product line	First Three Characters	Retailer Site Count
Camping Equipment	Cam	632
Mountaineering Equipment	Mou	265
Personal Accessories	Per	810
Outdoor Protection	Out	639
Golf Equipment	Gol	367
Summary		265

Related concepts:

“Summarizing Data Dimensionally” on page 266

Summarize data in your reports to obtain totals, averages, and so on.

Limitations When Summarizing Measures in DMR Data Sources

There are limitations when summarizing dimensionally-modeled relational (DMR) measures and semi-additive measures in crosstabs using the aggregation function `count distinct`, `median`, `standard-deviation`, or `variance`. The following limitations can produce empty or error cells when the report is run:

- The aggregation function must apply to all members of a level or all children of a member.
- To use OLAP functions in detail filters that are applied to a dimension that is not in the report, or is at a level below what is being reported, only the functions `children`, `level`, `members`, `roleValue`, and `rootMembers` will work.
- You cannot define detail filters that reference one or more measures and are set to **After auto aggregation**.
- You cannot define context filters that have more than one member from a dimension that does not appear in the report.
- Context filters that have more than one member from a dimension that appears in the report produce errors in all cells that are ancestors of the slicer members.
- If a crosstab has a row that is a set of members from one dimension (dimension A) and another row that is a set of members from another dimension (dimension B), and a context filter containing members from dimension A is defined, error cells are produced in the row that contains members from dimension B.
- If a context filter contains members from a dimension, and a crosstab has a row that is a set of members from a higher level than the slicer members, error cells are produced for that row.
- Error cells are produced when drilling down on a crosstab that has two nested levels.

If you do not consider these limitations in a calculation, the report may return inaccurate results.

If there is a non-measure calculation that returns a constant or contains a summary function, and the calculation has a lower solve order than the measure being aggregated, error cells are returned for the aggregated measure.

In list reports, error cells are produced as a result of these limitations if the list uses an OLAP function other than `children`, `filter`, `level`, `members`, `roleValue`, and `rootMembers`.

Limitations When Filtering Dimensional Data Sources

Avoid combining context filters (slicers) with dimensional constructs that involve members from hierarchies that are used elsewhere in the report. This combination gives results that are often not what you might expect and that may change in a future release.

Dimensional data sources provide implicit rollup at all levels of each dimensional hierarchy. Context filters and slicers with more than one member invalidate any pre-computed rollup of members at hierarchy levels above the level at which the filter applies.

The following types of filtering are safe for dimensional reporting:

- Context filters (slicers) with one or more explicit, non-calculated members per hierarchy, if those hierarchies are not used elsewhere in the report.
- Expressions that use the filter function (not in a slicer), comparing measure, tuple, or attribute values.

Nesting Incomplete Sets

When you nest sets (especially sets of explicit members, and sets that result from the functions such as filter and intersect), there may be members at one nesting level that have no corresponding members that can appear nested below them. In such cases, filtering results may not be what you expect: the higher-level members may or may not appear in the result.

While this is most commonly seen within a single hierarchy, it can also happen across different hierarchies and dimensions.

To avoid this problem, ensure that the lower-level sets are constructed to ensure that they are never empty for any of the members in the higher-level set. For example, you could filter only the top level set and nest only the complete set of descendants at the desired levels below.

Error Characters (--) When Filtering

When you use slicers or context filters with a calculated fact or measure, you may see two dashes (--) as values for some or all of the cells in the report that represent aggregates that are calculated in the database (aggregation is set to **Automatic**). This means that the data source is unable to compute these values.

You can avoid this error by using an explicit rollup rule or aggregation function such as **Total**. However, do this only if you are familiar with the data and absolutely certain that this is the appropriate answer for that report.

Time Hierarchies

Error characters also appear in summaries if your report includes a time hierarchy and you use two or more members from a different time hierarchy as a context filter. To avoid the error, use only one member as the context filter.

Filters in Queries and Sub-queries

For dimensional data sources, filters in queries and sub-queries are considered equivalent. The same applies to slicers.

Limitations When Specifying the Scope of Summary Filters with Dimensional Data Sources

When you specify the scope for a summary filter, consider the following limitations. The scope of a summary filter

- must refer to a grouped data item for list reports. Otherwise, you encounter the following error:

OP-ERR-0212 The summary filter scope (Scope1) found in the query (Query1) is not valid. It must refer to a grouped query item.

- can refer to multiple data items, but it can refer to only one data item per edge of the crosstab. Otherwise, you encounter the following error:

OP-ERR-0213 The summary filter scope (Scope1) found in the query (Query1) is not valid. Referencing more than one query item from the same edge is not supported.

- must refer to a level and cannot refer to a measure. Otherwise, you encounter the following error:

OP-ERR-0209 The summary filter scope (Scope1) found in the query (Query1) is not valid. It must refer to a level.

- must refer to a data item that is projected on an edge of the crosstab. If the scope of a summary filter refers to a data item that was deleted from the report layout, you may encounter unexpected results. Otherwise, you encounter the following error:

OP-ERR-0213 The summary filter scope (Scope1) found in the query (Query1) is not valid. Referencing more than one query item from the same edge is not supported.

- must refer to unique data items. For example, the summary filter cannot refer to the same data item more than once.

Limitations When Filtering Data Using an SAP BW Data Source

If you are working with an SAP BW data source, you must consider additional exceptions when applying filters.

If you apply a filter and a sort to an item that corresponds to the leaf-level of a recursive hierarchy, siblings may appear in the report even though the aggregated values are correct. Siblings are characteristic values with the same parent as the filtered member.

Each level in an SAP BW hierarchy has an item with the same name as the level and a role of `_businessKey`. Such items are known as level identifiers. The level identifier must be an exact value for the operators `=`, `<`, and `>` to work. For example, for the filter `[Office] > 'Chicago'` to work, the value `'Chicago'` must exist in the data source. If you do not know the exact values, you can apply the filter to one of the attribute items associated with the level, such as `[OfficeLongName] > 'C'`. Filters on non-identifiers are possible, but they are slower because SAP BW data sources are optimized for queries based on level identifiers.

When filtering time-related data, only the level identifier items of the time-related characteristics in SAP BW, such as `0CALDAY` and `0CALMONTH`, should be used for performing anything other than equality filters. All other (attribute) items in these hierarchies are formatted string representations of the characteristic values with which they are associated. These formatted values sort alphanumerically and not chronologically.

Using Prompt Expressions in Filters

If you create a filter expression using report item attributes, such as the following, no data is returned.

```
[ report item attribute ] = ?prompt?
```

To resolve the problem, do one of the following:

- Fully qualify the item by using items from the source tree instead of data items from the report.
- Use prompt controls in the report instead of hand coded prompts.

Considerations when Creating Calculations

Consider the following information and limitations when creating dimensional calculations.

Calculation Solve Order

When calculations in the rows and columns of a report intersect, calculations are performed in the following order: addition or subtraction, multiplication or division, aggregation (rollup), and then the remaining arithmetic functions.

The remaining functions are as follows:

- absolute, round, average, minimum, maximum, medium, count
- percentage, % difference (growth), or % of total
- rank, quartile, quantile, percentile

If both calculations have the same precedence, for example, if they are both business functions, then the row calculation takes precedence.

You can override the order of precedence by changing the solve order property. For more information, see “Resolve Multiple Calculations for Crosstabs and Charts” on page 540.

Length of Expressions

When creating layout calculations that use complex expressions, limit the length of the expression to less than 1,000 tokens. A token is a keyword, identifier, constant, or special character symbol that the server identifies when it parses the SQL. For example, the expression $1+1+1+1+1+1+1+1+1+1$ contains approximately 28 tokens, whereas the expression $1+1+1\dots+1$ (400 times) contains more than 1000 tokens.

Tip: The Sales Commissions for Central Europe sample report in the GO Data Warehouse (analysis) package includes expressions. For more information about The Sample Outdoors Company samples, see Appendix C, “Sample Reports and Packages,” on page 507.

Quality of Service Indicators

Not all data sources support functions the same way. The data modeler can set a quality of service indicator on functions to give a visual clue about the behavior of the functions. Report authors can use the quality of service indicators to determine which functions to use in a report. The quality of service indicators are:

- not available (X)

The function is not available for any data source in the package.

- limited availability (!!)

The function is not available for some data sources in the package.

- limited support (!)

The function is available for all data sources in the package but is not naturally supported for that data source. IBM Cognos Business Intelligence uses a local approximation for that function. Because an approximation is used, performance can be poor and the results may not be what you expect.

- unconstrained (check mark)

The function is available for all data sources.

Using Quotation Marks in Literal Strings

When inserting literal strings in an expression, you must enclose the string in single quotation marks. If the string contains a quotation mark, it must be escaped. For example, if you want to insert the string ab'c, you must type 'ab"c'.


Limitations of Calculations

You should use only the expressions and functions available in IBM Cognos Report Studio, and follow their syntax.

Minimal checking exists for calculations. If your calculation uses an invalid expression, your report results may contain unexpected values.

In addition, you should define member summaries as follows:

summary_function (*currentMeasure* within set *set_reference*)

where *set_reference* is a level or set inserted from the **Source** tab .

Unless otherwise required, *summary_function* should be the aggregate function. If you use an explicit summary function, you may encounter problems with measures (such as profit margin, distinct count, and so on) that have complex rollup values, and/or scenario or account dimension members that do not roll up.

Know your data, and confirm with the owner of the cube where overriding the automatic aggregation is safe.

Because of the above limitations, summaries of calculations may not provide reliable values. For convenience, you may have to build reports where row summaries and calculated member columns intersect. In such reports, these intersections may contain unexpected values. In contrast, row calculations intersecting with column aggregates using the aggregate function are safe because the calculation is performed on the reliably summarized values.

Units of Measure

When creating calculations in IBM Cognos Report Studio and IBM Cognos Query Studio, you may encounter problems with the units of measure. For example, the calculation Cost*Cost returns the unit of measure * instead of a currency unit of measure. To avoid this problem, change the format of the corresponding column to obtain the desired unit of measure.

Limitation When Using Dimensional Functions with Running and Moving Summaries

IBM Cognos Business Intelligence does not currently support queries that contain both dimensional functions and running summaries or moving summaries. For example, when you drill down in a report, the query uses the dimensional function `children`, which is not compatible with running and moving summaries. Running and moving summaries are supported for only the overall level of a dimension.

Creating Expressions Using SAP BW Data Sources

You must consider the following when creating expressions using an SAP BW data source, or you may not get the results you expect.

- The case and if/then/else constructs are not supported in filters.
- The query item identifier of the leaf-level of the 0CALDAY characteristic and its presentation hierarchies is of type date. When the values for the query item identifier are presented in IBM Cognos Report Studio, they are formatted as dates. These formatted values should not be used in filter expressions. The correct date constant format for use in expressions is YYYY-MM-DD.
- You can apply a comparison expression with an operator other than equals to a query item that represents a level identifier. However, level identifiers are more efficient for identifying specific values. Range comparisons must be performed on the IBM Cognos application server, which slows down the performance of the report.

Using Microsoft Excel Functions with SSAS 2005 Data Sources

If you are working with a Microsoft SQL Server 2005 Analysis Services (SSAS) data source and you want to use Microsoft Excel VBA functions such as ROUNDDOWN in MDX queries, the following Microsoft Office features must be installed on the SSAS server:

- Microsoft Office Excel
- Microsoft Visual Basic for Applications

To see a list of Excel VBA functions, see the Microsoft Web site (<http://www.microsoft.com>).

If these Microsoft Office features are not installed on the SSAS 2005 server, and you use Excel VBA functions, you encounter an error such as the following: YK-ERR-0008 The data provider returned an error message: "The '[Excel].[ROUNDDOWN]' function does not exist."

This error occurs because the OLAP server cannot process the function since Excel function libraries are missing.

For more information, see the Microsoft Knowledge Base article # 932214 at <http://support.microsoft.com>.

Concatenating Strings

When IBM Cognos Business Intelligence concatenates strings locally and if any of the involved strings contain null values, the result of the concatenation is an empty cell or a null value. This occurs because IBM Cognos BI requires that an expression that involves a null value returns a null value. Many databases ignore null strings when they perform concatenations. For example, if you concatenate strings A, B, and C, and if string B is a null value, the database may concatenate only strings A and C.

Intersecting Calculations in Crosstabs and Charts

An intersection point in a crosstab or chart can contain a value that is derived from multiple calculations.

If the query expressions for the row and column that intersect in a crosstab both include calculations, the intersecting value is the result of performing both calculations. The second calculation is performed on the result of the first calculation. If you change the order in which the calculations are performed, the resulting value at the intersection point changes.

The solve order is a positive numeric value that you assign to data items. Negative values are not supported. The data item with the lowest value is calculated first, followed by the next higher value, and so on. The data item with the highest solve order is computed last. If you do not specify a solve order, the default value of 0 is used. In crosstabs, if more than one data item has the same solve order, column items are calculated first and row items are calculated second.

For example, a crosstab contains the columns Revenue, Sales target, and a column that calculates the percentage by which actual revenue exceeds target revenue. The crosstab contains a row for each Year and a summary row that calculates the overall totals for each of the three columns. The cell where the percentage calculation and the overall total calculation intersect contains only one value. By default, IBM Cognos Business Intelligence calculates the column percentage first and the summary row last. The value that appears at the intersection is therefore a sum of the percentages, which is not a meaningful result. The value is more meaningful if the overall percentage is calculated after the actual and sales target revenues are summed. Specifying a solve order for the percentage calculation that is higher than the overall total calculation gives the following result:

	Revenue	Sales target	Percentage by which Actual Exceeds Target
2010	\$914,352,803.72	\$812,885,300.00	12%
2011	\$1,159,195,590.16	\$1,036,923,300.00	12%
2012	\$1,495,891,100.90	\$1,332,553,100.00	12%
2013	\$1,117,336,274.07	\$1,023,006,840.00	9%
Total	\$4,686,775,768.85	\$4,205,368,540.00	11%

Figure 66. Crosstab showing a calculation that has a solve order specified

It is not necessary to specify the solve order for the overall total calculation. Because the default solve order is 0, setting the solve order for the percentage calculation to a value higher than 0 is sufficient.

Nested Calculations in Crosstabs

If a crosstab contains nested calculations, the calculations are performed in the following order by default:

1. outermost calculation on the columns
2. innermost calculation on the columns
3. outermost calculation on the rows
4. innermost calculation on the rows

If there are solve order ties, column items are calculated before row items and outer nesting items are calculated before inner nesting items.

Resolve Multiple Calculations for Crosstabs and Charts

If an intersection in a crosstab or chart contains a value that is derived from multiple calculations, you can specify the order in which to perform the calculations. The solve order must be a positive numeric value. The calculations are performed from lowest to highest solve order value.


Setting the **Rollup Aggregate Function** property to **Calculated** for a data item assigns a solve order that is higher than any other data item in a query unless a

solve order is explicitly specified. If there are multiple data items that have the **Rollup Aggregate Function** property set to **Calculated**, the normal rules for solve order apply.

Procedure

1. Click the data item for which to specify the solve order.

A data item can have only one solve order value. Consequently, if a data item is in a query that is used in more than one context and you want the data item to have a different solve order in each context, you must use a separate data item.

Tip: In crosstabs, to specify the solve order for the default measure, click the crosstab and, in the **Properties** pane, click the select ancestor button  and click **Crosstab**. Or you can click the container selector (three orange dots) of the crosstab to select it.

2. In the **Properties** pane, set the **Solve Order** property to an integer value.

Tip: To specify the solve order for the default measure, click **Default Measure Solve Order**.

Resolve Query Calculations that Intersect with Calculated Measures Defined in Microsoft Analysis Services

Microsoft SQL Server Analysis Services (SSAS) data sources may include data source calculations. Because IBM Cognos Business Intelligence cannot predict the presence of a solve order on such calculations, setting the **Solve Order** property may not resolve the solve order correctly. You can suppress potentially meaningless results when querying dimensional data sources that include data source calculations. In the following example, the columns **YTD Change** and **YTD Growth** are data source calculated members and the summary values for these two columns were suppressed.

Revenue	Prior YTD	YTD	YTD Change	YTD Growth
Camping Equipment	290,355,466.50	352,910,329.97	62,554,863.47	21.54%
Personal Accessories	329,883,402.11	443,693,449.85	113,810,047.74	34.50%
Outdoor Protection	5,942,944.77	4,471,025.26	-1,471,919.51	-24.77%
Golf Equipment	138,993,560.79	174,740,819.29	35,747,258.50	25.72%
Mountaineering Equipment	93,654,629.48	141,520,649.70	47,866,020.22	51.11%
Total(Product line)	858,830,003.65	1,117,336,274.07	--	--


Figure 67. Crosstab showing revenue by product line with a summary row

When a query-defined calculated member and a data source calculated member intersect, the value is the result of performing both calculations. The second calculation is performed on the result of the first calculation. Whether the final value is meaningful depends on the order in which the calculations are performed. Because IBM Cognos BI cannot determine the presence of these members ahead of time, it cannot automatically determine the correct solve order.

In most cases, SSAS 2005 gives the expected results when no solve order is defined in the cube. Therefore, when using SSAS 2005, you do not need to set either the **Solve Order** property in the query or the **Calculation Intersection** property.

Note: Dimensionally-modeled relational (DMR) data sources query one or more underlying relational databases, and therefore cannot contain data source calculations. They are not considered dimensional data sources in the context of this topic.

Procedure

1. Pause the pointer over the query explorer button  and click the query that contains the data item for which to suppress values.
2. In the **Data Items** pane, click the data item.
3. In the **Properties** pane, set the **Calculation Intersection** property to **Show "Not applicable"**.

Results

When a query-defined calculated member and a data source calculated member intersect, the resulting value is suppressed. If the intersecting members do not contain data source calculations, the value is not suppressed.

Null (Missing) Values in Calculations and Summaries

The data source that you use determines how null (or missing) values are handled in calculations, summaries, and other expressions.

Null values represent missing data values. For example, a new eyewear product, called Abby, is introduced in 2012. Therefore there are no sales in 2011. If you create a report with the years 2011 and 2012, the values for sales of Abby for the year 2011 are null (missing).

By default, null values appear as blank cells in a crosstab or list report. You can change the default to specify the display of other characters, such as the word null, by changing the data format of the **Missing Value Characters** property for the cells or report. For more information, see “Set the Default Data Formats” on page 387.

Arithmetic Operations

Null values in arithmetic operations yield different results depending on the type of data source.

In Microsoft SQL Server Analysis Services (SSAS) and Cubing Services data sources, a null value in arithmetic operations is treated as follows:

- In operations such as addition (+), a null value yields the same result as zero ($9 + \text{NULL} = 9$)
- In operations such as multiplication (*), a null value yields a null result ($9 * \text{NULL} = \text{NULL}$)

You can accommodate this behavior by using more complex expressions such as the following:

- `if ([M] is not NULL, then ([M]) else (0)`
- `if ([M] is not NULL, then (<expression involving M> else NULL)`

In relational and other OLAP data sources the result of an operation that includes a null value is always null. For example, $9 + \text{NULL} = \text{NULL}$.

Equality Comparisons

Equality comparisons, such as equal to (=) and not equal to (<>), compare two values and return a Boolean value of true or false.

For all data sources, equality comparisons are treated as tests for missing data. Inequality comparisons are treated as tests for non-missing data.

For example, NULL=NULL is true and NULL=0 is false.

Ordered Comparisons

In ordered comparisons, such as rank and quantile functions, null values are handled as follows.

For relational data sources, the result of the comparison is always false. For example, NULL < 1 is false.

For Microsoft SSAS, Cubing Services, and other OLAP data sources, the null value is treated as zero. For example, NULL < 1 is true.

Boolean Functions

In Boolean operations, such as or, null values are handled as follows.

For relational and dimensionally-modeled relational data sources, the result of a Boolean operation is always null. Boolean functions are used in conditions and the null result is treated as a false condition. For example, NULL OR TRUE = NULL (FALSE)

For Microsoft SSAS, Cubing Services, and other OLAP data sources, the null value is treated as if it is false. For example, NULL OR TRUE = TRUE.

Summary Functions

All summary functions, such as aggregate, average, and maximum, ignore null values. For all functions except count, if all values in the expression are null, the result is null. For count, if all values in the expression are null, the result is zero.

For example, if the value for Quantity for 2013 is 10 and the values for 2011 and 2012 are null, then the average is as follows:

- average ([Quantity] within set set([2012], [2013])) = 10
- average ([Quantity] within set set([2012], [2011])) = NULL

The count is as follows:

- count ([Quantity] within set set([2012], [2013])) = 1
- count ([Quantity] within set set([2012], [2011])) = 0

String Operations

For all data sources, the result of string operations, such as concatenation (||), that include a null value is always null.

For example, 'A' || NULL = NULL and NULL || NULL = NULL.

Dimensional Coercion Rules

IBM Cognos Business Intelligence uses dimensional coercion rules to automatically convert dimensional types to better match other types. These conversions help you build simpler expressions, making them easier to understand. In addition to the implicit rules that IBM Cognos BI provides, you can make explicit data type conversions using various functions, such as `children`.

IBM Cognos BI supports the following types of coercion:

- coercion of an object of one dimensional type into another, such as a level into a member set
- coercion of a dimensional object into a numeric, date, time, or string value, such as a numeric measure into a numeric value

Coercion rules are applied to expressions and data items. In expressions, an operator or function may require operands to be of a particular dimensional type. When an operand is not of the required type, one or more coercion rules may be applied to coerce the operand to the appropriate type. Coercion rules may also be applied to data items to coerce the data item to a collection of members or values.

Function Operands

The following describes how coercion rules are applied to function operands:

- If the operand is of the required type, no coercion is required.
- If the function operand is supposed to be a numeric value, it is coerced into one. A coercion rule exists for each type of dimensional object coercion.
- If the function operand is supposed to be a dimensional object and a coercion exists to coerce the operand to the required type, the coercion is applied.
- If no coercion exists, an error message with the code `QE-DEF-0478` appears to indicate that an unsupported conversion of a dimensional object from the source to target type occurred.

Comparison and Other Symmetric Operators

Binary operators that accept operands of more than one type, such as equals (=) and `in`, need both operands to be the same dimensional type.

No coercion is possible between value domains (numeric, date, time, and string) or between members and values. Consequently, if either operand is a value type, both must be in the same value domain and converted explicitly using a function. Otherwise, the query fails.

Members and member set operands are valid only with the operators equals (=), not equals (<>), `in`, and `not in`, where the right side of the expression is a member, member set, or prompt. Only the following are valid:

- `[member / member set] = [member]`
- `[member / member set] <> [member]`
- `[member / member set] = ?p?`
- `[member / member set] <> ?p?`
- `[member / member set] in ([member], ...)[member / member set] not in ([member], ...)`
- `[member / member set] in ([member set])[member / member set] not in ([member set])[member / member set] in ?p?[member / member set] not in ?p?`

Exceptions

For the left operand, member sets are supported in detail and summary filter expressions, but not in expressions that use the `filter` function. Members are not supported in detail and summary filters, but they may be used in expressions that use the `filter` function.

The `in_range` operator is not supported for members and member sets.

Normal coercion rules apply to these operands.

NULL operands are considered values, rather than members.

Examples

The following examples illustrate how coercion is applied to levels in expressions with operators.

```
[Sales].[Products].[].[Product Line] = [Sales].[Products].[].[Product Line]->[Outdoor Equipment]
```

The left operand is coerced to the following member set:

```
members ([Sales].[Products].[].[Product Line])
```

The following expressions are invalid:

- `[Sales].[Products].[].[Product Line] = NULL`
- `[Sales].[Products].[].[Product Line] + 1`
- `[Sales].[Products].[].[Product Line] = 'Canada'`
- `[Sales].[Products].[].[Product Line] > 2000`

The following examples illustrate how coercion is applied to members in expressions with operators. In each of the examples below, the left operand is coerced to a value of the current cell at this member:

```
(tuple ([Sales].[Products].[].[Product Line]->[Outdoor Equipment]))
```

- `[Sales].[Products].[].[Product Line]->[Outdoor Equipment] = NULL`
- `[Sales].[Products].[].[Product Line]->[Outdoor Equipment] + 1`
- `[Sales].[Products].[].[Product Line]->[Outdoor Equipment] > 2000`
- `[Sales].[Products].[].[Product Line]->[Outdoor Equipment] + 'Canada'`

Coercion Rules for Dimensional Objects

The following table describes coercion rules that are applied when coercing an object of one dimensional type into another.

Note: Measures and Member Unique Names (MUNs) are considered members.

Source type	Target type	Result
Measure dimension	Hierarchy	A measure dimension can be used without any conversion as a hierarchy.

Source type	Target type	Result
Measure dimension	Member set	The member set contains the members of the measure dimension. This coercion is done in two steps. First, measure dimensions are coerced to hierarchies, and then hierarchies are coerced to member sets.
Hierarchy	Member set	A set containing the members of the hierarchy.
Level	Member set	A set containing the members of the level. The equivalent expression is members (<i>level</i>).
Measure	Member	A measure can be used without any conversion as a member.
Measure	Tuple	This coercion is done in two steps. First, measures are coerced to members, and then members are coerced to tuples.
Measure	Member set	This coercion is done in two steps. First, measures are coerced to members, and then members are coerced to member sets.
Member	Tuple	The tuple consists of the member. The equivalent expression is tuple (<i>member</i>).
Member	Member set	The set consists of the member. This coercion is done in two steps. First, members are coerced to tuples, and then tuples are coerced to member sets.

Coercion Rules for Numeric and String Values


The following table describes the coercion rules for expressions or prompts that return a numeric or string value. These rules apply to functions and operators that require an operand of a particular data type, as well as to binary operators that require operands of the same type.

Source type	Target type	Result
Measure	Number, Date/Time, or String	The result is the value of the measure at the current cube intersection.

Source type	Target type	Result
Member	Number	The result is the value of the cell at the cube intersection specified by the member. This coercion is done in two steps. First, members are coerced to tuples, and then tuples are coerced to the target type.
Tuple	Number	The value of the cell at the cube intersection specified by the tuple. The equivalent expression is value (<i>operand or parameter</i>).

Coercion Paths

The following diagram shows how coercion rules are connected. The expression that coerces a source node type to a target node type is built by following the path that connects them. A dotted line indicates a coercion that does not require an explicit conversion function. This occurs whenever the source type is a specialization of the target type. For example, every measure is a member so you can use measures without conversion wherever a member is required.

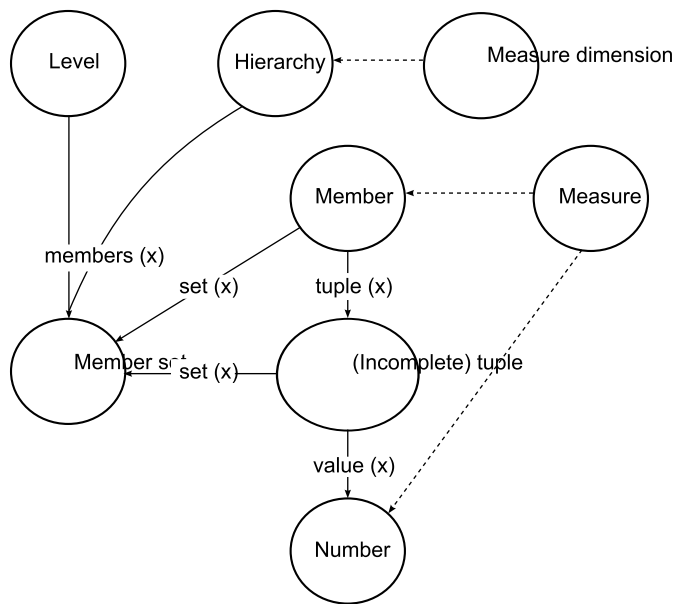


Recommendation - Use Member Unique Name (MUN) Aliases

If you are working with a dimensional data source, use MUN aliases to simplify building reports and expressions. In addition, you can tie the MUN back to the member in the package.

When working with dimensional data sources, IBM Cognos Business Intelligence uses MUNs to uniquely identify members. MUNs are very complex. For example, the MUN for the member 2012 might appear as

[great_outdoors_company].[Years].[Years].[Year]->:[PC] . [@MEMBER] . [20120101-20121231].

When you build expressions that involve members, the use of MUNs makes these expressions difficult to read and maintain.

Tip: To view the MUN of a member, in the **Source** tab , right-click the member and click **Properties**.

IBM Cognos Report Studio has an option that automatically generates an alias for MUNs (**Tools > Options > Report tab > Alias member unique names**). The MUN alias is a data item that has the MUN as its definition. For the previous example, you would see 2012 as the MUN alias in the **Expression** property for the data item. If the MUN alias is not enabled, you would see the complex MUN as shown above in the **Expression** property.

Important: Do not modify or rename MUN aliases, because they will lose their connection to their respective members in the package.

Running a Report That Contains Members

If you are using members in a report and your modeler has updated the data source in a way that changes member unique names, the following problems may arise when you run the report.

- If the report queries an OLAP data source, you receive an error message explaining that some specific members cannot be found.
- If the report queries a dimensionally modeled relational (DMR) data source, data items whose member unique names have changed do not appear in the report. Calculations that refer to members that have changed no longer contain values from the members.

To resolve these problems, you must update the member unique names in the report. Open the query that contains the members that you need to update in Query Explorer. Delete the member from the pane in which it appears and reinsert it from the **Source** tab. For example, if you inserted the member as a detail filter, delete it from the **Detail Filters** pane and reinsert it.

Limitations When Formatting Empty Cells in SAP BW Data Sources

When working with SAP BW data sources, if the SAP BW server administrator configured custom formatting for empty cells on the SAP BW server, this custom format does not appear in IBM Cognos Business Intelligence reports. Ask your administrator to configure the formatting of empty cells in IBM Cognos BI.

Related tasks:

“Suppress Empty Cells” on page 391

Sparse data may result in crosstabs showing empty cells. For example, a crosstab that matches employees with products results in many rows of empty values for the revenue measure if the employee does not sell those products.

Appendix E. Limitations When Producing Reports in Microsoft Excel Format

There are limitations when producing reports in Microsoft Excel format.

Unable to Load Images from the IBM Cognos Business Intelligence Content Store in a Report

If a report contains an image whose URL points to the IBM Cognos Business Intelligence content store, the Microsoft Excel spreadsheet software generates an access violation error and shuts down.

This problem is a known issue in the Microsoft knowledge base, and Microsoft is currently investigating the problem. This problem occurs only in Excel 2002.

Blank Worksheet Appears

If the Microsoft Excel spreadsheet software cannot download a worksheet within a timeout period, Excel may instead open a blank worksheet.

Warning Message Appears When Excel Opens an IBM Cognos Business Intelligence Report

Each time the Microsoft Excel spreadsheet software opens an IBM Cognos Business Intelligence report, a warning message appears.

The warning message is as follows:

Some of the files in this Web page are not in the expected location. Do you want to download them anyway? If you are sure the Web page is from a trusted source, click Yes.

The Excel workbook in HTML/XML format requires the presence of the file `filelist.xml`. IBM Cognos BI does not allow the creation of local files on the client side. In addition, a local file that contains URLs introduces a security issue. Consequently, this message will appear whenever you open an IBM Cognos BI report in Excel. If you see this error message, click **Yes** to open the report.

Spreadsheet Content Not Saved for Reports Saved in XLS Format

If you open a report that was saved in XLS format or run a report in XLS format, and security settings in your Web browser are set so that you are prompted to open or save the report, do not click **Save**. If you save the report, the spreadsheet content will not be saved. This is because Microsoft Excel reports in Microsoft Office 2000 HTML format use relative paths to the spreadsheets. The relative URL paths are no longer available when you open a saved XLS report.

Instead, click **Open** first and then choose to save the report.

Unable to Load Excel Report in Netscape 7.01

This version of IBM Cognos Business Intelligence does not support loading Microsoft Excel reports in Netscape 7.01.

Unable to Nest Labels in Charts

Currently, it is not possible to specify nested labels for the category axis via XML.

Data Series Are Truncated

The Microsoft Excel spreadsheet software may group data series or categories differently when compared to a chart produced by IBM Cognos Business Intelligence.

A 1 KB buffer limit in Excel limits the maximum number of data series per chart to 120. Data series over 120 are truncated.

Colors Different From Those in HTML or PDF

If an IBM Cognos Business Intelligence report contains a chart that uses custom colors, the Microsoft Excel spreadsheet software may not be able to add the custom color to the Excel color palette. Excel will attempt to match the custom color to one of its available standard colors. As a result, colors in Excel may vary from those seen in HTML or PDF.

We recommend that you use standard colors in charts.

Repeating Pie Charts

If you have a report that has repeating pie charts and you define a chart title, the Microsoft Excel spreadsheet software will show each pie with a title that is a concatenation of the chart title and the data series. For example, if the chart title is Quantity Sold by Order Method and Product Line and the data series is Order method, the title of each pie in Excel will be Quantity Sold by Order Method and Product Line, *order method*.

Unable to Skip Discrete Axis Labels

In IBM Cognos Business Intelligence charts, you can control the skipping of discrete axis labels. This feature is not supported in Microsoft Excel charts.

Unsupported IBM Cognos BI Formatting

About 30% of the formatting functions available in IBM Cognos Business Intelligence are not supported in the Microsoft Excel spreadsheet software.

In particular, Excel does not allow changing locale-dependent formatting attributes, such as the following:

- Decimal Separator
- Exponential Symbol
- Group Separator
- Monetary Decimal Separator
- AM String

- Day Name
- Day Short Name
- Decimal Delimiter Symbol
- Month Name
- Month Short Name
- PM String

In addition, Excel does not support the following:

- Format Width
- International Currency Symbol
- List Separator
- Percent Symbol (Excel does not support percent symbols for charts)
- Multiplier
- Overline Text Format
- PerMill Symbol
- Plus Sign
- Scale (Excel has a different scaling formula than IBM Cognos BI)
- Calendar (Excel does not allow changing the calendar)
- Era Name
- First Day Of Week
- Show Era

Cells Contain Series of

Cells in the Microsoft Excel spreadsheet software have a limit of 255 characters. If your report contains text strings that are longer than 255 characters, they will be formatted as text and appear as #####.

To resolve this problem, use fewer characters.

Table and Column Widths

The Microsoft Excel spreadsheet software does not support using percentages to determine the width of tables.

If the report contains only one table, the value of the width attribute for the Table element in the report specification determines the width of the table in the Excel worksheet. If the report contains more than one table, Excel determines the width of all the tables in the worksheet. If the tables are nested, the width specified for the outer table is used and, if necessary, the width is adjusted to accommodate data in the nested tables. The columns and rows around the table are merged to preserve the appearance of the nested table. When you save the workbook, only a single table is saved per worksheet.

Secure Socket Layer (SSL) Is Not Supported in Some Excel Formats and Versions

SSL is supported for only the Microsoft Excel 2002 format in Microsoft Excel 2002 and Microsoft Excel 2003.

Number Formats Become Currency Formats in Japanese Excel

A report uses the Number data format and you save it as Microsoft Excel output. When you open the report in the Japanese version of Microsoft Excel, the data format is listed as Currency rather than Number. This occurs because Japanese Excel interprets the standard Number data format slightly differently than other versions of Excel.

The value appears correctly in Number format. For example, if you specified five digits as your number format, five digits still appear. In Excel, click the **Custom** number format to see the exact format string being used.

Reports Show Data in Wrong Columns

A report contains a large amount of data that is presented using a large number of nested report objects, such as tables and blocks. When the report is produced in Microsoft Excel format, some of the data appears in the wrong columns. This occurs because Excel has a 64K limit on how many nested cell objects can appear in a single spreadsheet.

To solve this problem, you can redesign the report to present the data using non-nested structures.

Unable to Access Reports on Remote Servers

You cannot access a report in Microsoft Excel format on a remote server.

To resolve this problem, you must change the hostname portion of the gateway URI from localhost to either the IP address of the computer or the computer name. You do this using IBM Cognos Configuration.

Drill-through Reports Are Not Supported in Excel

IBM Cognos Business Intelligence does not support drill-through for reports in Microsoft Excel format.

Map Reports Are Not Supported in Excel

IBM Cognos Business Intelligence does not support map reports in Microsoft Excel format.

Unsupported Excel Formatting

IBM Cognos Business Intelligence does not support some formatting.

The following formatting functions that are available in the Microsoft Excel spreadsheet software are not supported by IBM Cognos BI:

- background images in table cells
- Excel-specific headers and footers
- text flow and justification
- floating text objects
- white space, normal, and wrap text formatting
- maximum characters

Some layouts do not show exactly in HTML and PDF due to Excel limitations.

Hyperlink Buttons Are Not Supported in Excel

The Microsoft Excel spreadsheet software does not support hyperlink buttons.

Unable to View Reports in Excel Format Sent as Email Attachments

IBM Cognos Business Intelligence can send Microsoft Excel reports in HTML and XML format by email. However, you cannot open them directly from the email message.

Save the Excel email attachments to your computer and view them from there.

Unsupported Chart Properties in Excel

The following IBM Cognos Business Intelligence chart properties are not supported in the Microsoft Excel spreadsheet software:

- tool tips
- conditional text
- depth
- visual angle
- show values
- marker text location
- show baseline
- new note
- new marker
- truncation text and allow n-degrees rotation category labels
- border
- margin
- box type
- font and font alignment
- footer
- subtitle
- regression line
- baseline
- Include Zero For Auto Scale

In addition, IBM Cognos BI makes sure that Excel reuses the same color palette that is defined in IBM Cognos BI. However, Excel can only use the first 16 colors from the IBM Cognos BI palette. If the number of categories in a chart exceeds 16, the rest of the colors are taken from the default Excel palette.

Unsupported Chart Types in Excel

About 30% of the chart types available in IBM Cognos Business Intelligence are not matched in the Microsoft Excel spreadsheet software.

The following chart types appear differently or are not supported. Charts that are not supported appear as a default column chart in Excel.

- Bipolar charts

- Bubble charts
Excel does not support regression lines.
- Combination charts
In Excel, combination charts appear as two-dimensional. If a three-dimensional or two-dimensional combination chart includes only an area, column, or line chart, only the one chart appears.
- Gauge charts
- Donut charts
Excel may fill in the donut hole to accommodate extra measures. Excel shows donut three-dimensional charts as donut charts.
- Maps
In Excel, no chart appears.
- Matrix charts
- Metrics range charts
In Excel, they appear as combination charts with two line charts for the tolerance bars.
- Pareto charts
In Excel, the cumulative line is not displayed.
- Pie charts
Excel shows only one type of pie chart and may show it at a different angle.
- Progressive column charts
- Polar charts
In Excel, a scatter chart appears instead.
- Quadrant charts
- Radar charts
Excel does not support stacked area radar charts. Excel names area radar charts as filled radar charts. Excel shows radar charts as radar with markers.
- Scatter charts
In Excel, three-dimensional scatter charts appear as two-dimensional scatter charts. The z-axis is dropped.
- 100% stacked bar and column charts
In Excel, the percentage of each value in the bar or column is not displayed. Instead, the underlying values are displayed.

Cell Height and Width Are Incorrect

The width and height of cells that contain data with curly brackets {} or parentheses () may appear incorrectly.

This is because the Microsoft Excel spreadsheet software uses different word wrapping algorithms than IBM Cognos Business Intelligence.

Appendix F. Using the expression editor

An expression is any combination of operators, constants, functions, and other components that evaluates to a single value. You build expressions to create calculation and filter definitions. A calculation is an expression that you use to create a new value from existing values contained within a data item. A filter is an expression that you use to retrieve a specific subset of records.

You build expressions using the components that are defined below.

Operators

Operators specify what happens to the values on either side of the operator. Operators are similar to functions, in that they manipulate data items and return a result.

(

Identifies the beginning of an expression.

Syntax

(expression)

)

Identifies the end of an expression.

Syntax

(expression)

*

Multiplies two numeric values.

Syntax

value1 * value2

,

Separates expression components.

Syntax

expression (parameter1, parameter2)

/

Divides two numeric values.

Syntax

value1 / value2

||

Concatenates, or joins, strings.

Syntax

string1 || string2

+

Adds two numeric values.

Syntax

value1 + value2

-

Subtracts two numeric values or negates a numeric value.

Syntax

value1 - value2
or
- value

<

Compares the values that are represented by "value1" against "value2" and retrieves the values that are less than "value2".

Syntax

value1 < value2

<=

Compares the values that are represented by "value1" against "value2" and retrieves the values that are less than or equal to "value2".

Syntax

value1 <= value2

<>

Compares the values that are represented by "value1" against "value2" and retrieves the values that are not equal to "value2".

Syntax

value1 <> value2

=

Compares the values that are represented by "value1" against "value2" and retrieves the values that are equal to "value2".

Syntax

value1 = value2

>

Compares the values that are represented by "value1" against "value2" and retrieves the values that are greater than "value2".

Syntax`value1 > value2`**->**

Separates the components in a literal member expression.

Syntax`[namespace].[dimension].[hierarchy].[level]->[L1]`**>=**

Compares the values that are represented by "value1" against "value2" and retrieves the values that are greater than or equal to "value2".

Syntax`value1 >= value2`**and**

Returns "true" if the conditions on both sides of the expression are true.

Syntax`argument1 and argument2`**auto**

Works with summary expressions to define the scope to be adjusted based on the grouping columns in the query. The scope is context-dependent.

Syntax`aggregate_function (expression AUTO)`**between**

Determines if a value falls in a given range.

Syntax`expression between value1 and value2`**Example**`[Revenue] between 200 and 300`**Result**

Returns the number of results with revenues between 200 and 300.

Result data

Revenue	Between
\$332.06	false
\$230.55	true
\$107.94	false

case

Works with when, then, else, and end. Case identifies the beginning of a specific situation, in which when, then, and else actions are defined.

Syntax

```
case expression { when expression then expression } [ else  
expression ] end
```

contains

Determines if "string1" contains "string2".

Syntax

```
string1 contains string2
```

currentMeasure

Keyword that can be used as the first argument of member summary functions. This function appears in the Total Revenue by Country sample report in the GO Data Warehouse (query) package.

Syntax

```
aggregate_function ( currentMeasure within set expression )
```

default

Works with the lookup construct.

Syntax

```
lookup (....) in (....) default (....)
```

distinct

A keyword used in an aggregate expression to include only distinct occurrences of values. See also the function unique.

Syntax

```
distinct dataItem
```

Example

```
count ( distinct [OrderDetailQuantity] )
```

Result

```
1704
```

else

Works with the if or case constructs. If the if condition or the case expression are not true, then the else expression is used. This function appears in the Top 10 Retailers for 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
if ( condition ) then .... else ( expression ) , or case .... else ( expression ) end
```

end

Indicates the end of a case or when construct.

Syntax

```
case .... end
```

ends with

Determines if "string1" ends with "string2".

Syntax

```
string1 ends with string2
```

escape

Determines if "string1" matches the pattern of "string2", with the character "char" optionally used to escape characters in the pattern string.

Syntax

```
string1 LIKE string2 [ ESCAPE char ]
```

Example 1

```
[PRODUCT_LINE] like 'G%'
```

Result

All product lines that start with 'G'.

Example 2

```
[PRODUCT_LINE] like '%Ga%' escape 'a'
```

Result

All the product lines that end with 'G%'.

for

Works with summary expressions to define the scope of the aggregation in the query.

Syntax

```
aggregate_function ( expression for expression { , expression } )
```

for all

Works with summary expressions to define the scope to be all the specified grouping columns in the query. See also the for clause.

Syntax

```
aggregate_function ( expression for ALL expression { , expression } )
```

for any

Works with summary expressions to define the scope to be adjusted based on a subset of the grouping columns in the query. Equivalent to the for clause.

Syntax

```
aggregate_function ( expression for ANY expression { , expression } )
```

for report

Works with summary expressions to set the scope to be the whole query. See also the for clause. This function appears in the Customer Returns and Satisfaction sample report in the GO Data Warehouse (analysis) package.

Syntax

```
aggregate_function ( expression for report )
```

if

Works with the then and else constructs. If defines a condition; when the if condition is true, the then expression is used. When the if condition is not true, the else expression is used. This function appears in the Top 10 Retailers for 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
if ( condition ) then ( expression ) else ( expression )
```

in

Determines if "expression1" exists in a given list of expressions.

Syntax

```
expression1 in ( expression_list )
```

in_range

Determines if "expression1" exists in a given list of constant values or ranges.

Syntax

```
expression1 in_range { constant : constant [ , constant :  
constant ] }
```

Example 1

```
[code] in_range { 5 }
```

Result

This is equivalent to [code] = 5.

Example 2

```
[code] in_range { 5: }
```

Result

This is equivalent to [code] >= 5.

Example 3

```
[code] in_range { :5 }
```

Result

This is equivalent to [code] <= 5.

Example 4

```
[code] in_range { 5:10 }
```

Result

This is equivalent to ([code] >= 5 and [code] <= 10).

Example 5

```
[code] in_range { :5,10,20: }
```

Result

This is equivalent to ([code] <= 5 or [code] = 10 or [code] >= 20).

is missing

Determines if "value" is undefined in the data.

Syntax

```
value is missing
```

is null

Determines if "value" is undefined in the data.

Syntax

```
value is null
```

is not missing

Determines if "value" is defined in the data.

Syntax

```
value is not missing
```

is not null

Determines if "value" is defined in the data.

Syntax

```
value is not null
```

like

Determines if "string1" matches the pattern of "string2", with the character "char" optionally used to escape characters in the pattern string.

Syntax

```
string1 LIKE string2 [ ESCAPE char ]
```

Example 1

```
[PRODUCT_LINE] like 'G%'
```

Result

All product lines that start with 'G'.

Example 2

```
[PRODUCT_LINE] like '%G%' escape 'a'
```

Result

All the product lines that end with 'G%'.

lookup

Finds and replaces data with a value you specify. It is preferable to use the case construct.

Syntax

```
lookup ( name ) in ( value1 --> value2 ) default ( expression )
```

Example

```
lookup ( [Country] ) in ( 'Canada'--> ( [List Price] * 0.60),  
'Australia'--> ( [List Price] * 0.80 ) ) default ( [List Price] )
```

not

Returns TRUE if "argument" is false or returns FALSE if "argument" is true.

Syntax

```
NOT argument
```

or

Returns TRUE if either of "argument1" or "argument2" are true.

Syntax

```
argument1 or argument2
```

prefilter

Performs a summary calculation before applying the summary filter.

Syntax

```
summary_function ([expression] prefilter)
```

Example

```
total ( [Quantity] for report prefilter )  
summaryFilter: total(  
  [Quantity] for [ProductNo] ) > 50000
```

Result

Sums the quantities in a report before the summary filter is applied.

Result data

ProductNo	Total_forProductNo	Total_forReport	Total_forReport_Prefilter
88	54928	298140	2215354
89	51126	298140	2215354
90	69996	298140	2215354
94	69004	298140	2215354
95	53086	298140	2215354

rows

Counts the number of rows output by the query. Use with Count ().

Syntax

```
count ( ROWS )
```

rows

Counts the number of rows output by the query. Use with Count ().

Syntax

```
count ( ROWS [ expression ] )
```

starts with

Determines if "string1" starts with "string2".

Syntax

```
string1 starts with string2
```

then

Works with the if or case constructs. When the if condition or the when expression are true, the then expression is used. This function appears in the Top 10 Retailers for 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
if ( condition ) then ..., or case expression when expression  
then .... end
```

when

Works with the case construct. You can define conditions to occur when the WHEN expression is true.

Syntax

```
case [expression] when ... end
```

Summaries

This list contains predefined functions that return either a single summary value for a group of related values or a different summary value for each instance of a group of related values.

Statistical functions

This list contains predefined summary functions of statistical nature.

corr

Returns the coefficient of correlation of a set of number pairs. This is computed as follows: $\text{COVAR_POP}(\text{numeric_expression1}, \text{numeric_expression2}) / (\text{STDDEV_POP}(\text{numeric_expression1}) * \text{STDDEV_POP}(\text{numeric_expression2}))$

Syntax

```
corr ( numeric_expression1 , numeric_expression2 [ auto ] )  
corr ( numeric_expression1 , numeric_expression2 for [ all|any ]  
expression { , expression } )  
corr ( numeric_expression1 , numeric_expression2 for report )
```

Example

```
corr ( Cost , Margin for report)
```

Result

The coefficient of correlation between Cost and Margin.

Result data

Cost	Margin	corr (Cost, Margin for report)
4	0.33	0.0872648
5	0.28	0.0872648
9.22	0.23	0.0872648
15.93	0.28	0.0872648
34.97	0.3	0.0872648

covariance-pop

Returns the population covariance of a set of number pairs.

Syntax

```
covariance-pop ( numeric_expression1 , numeric_expression2 )  
covariance-pop ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
covariance-pop ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
covariance-pop ( Cost , Margin for report)
```

Result

The population covariance between Cost and Margin.

Result data

Cost	Margin	covariance-pop (Cost, Margin for report)
4	0.33	0.032384
5	0.28	0.032384
9.22	0.23	0.032384
15.93	0.28	0.032384
34.97	0.3	0.032384

covariance-samp

Returns the sample covariance of a set of number pairs.

Syntax

```
covariance-samp ( numeric_expression1 , numeric_expression2 )  
covariance-samp ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
covariance-samp ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
covariance-samp ( Cost , Margin for report)
```

Result

The sample covariance between Cost and Margin.

Result data

Cost	Margin	covariance-samp (Cost, Margin for report)
4	0.33	0.04048
5	0.28	0.04048
9.22	0.23	0.04048
15.93	0.28	0.04048
34.97	0.3	0.04048

regression-average-x

Returns the average of the independent variable (numeric_expression2) of the regression line.

Syntax

```
regression-average-x ( numeric_expression1 , numeric_expression2 )  
regression-average-x ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-average-x ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-average-x ( Cost , Margin for report)
```

Result

The average of Margin within the regression line for Cost and Margin.

Result data

Cost	Margin	regression-average-x (Cost, Margin for report)
4	0.33	0.284
5	0.28	0.284
9.22	0.23	0.284
15.93	0.28	0.284
34.97	0.3	0.284

regression-average-y

Returns the average of the dependent variable (numeric_expression1) of the regression line.

Syntax

```
regression-average-y ( numeric_expression1 , numeric_expression2 )  
regression-average-y ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-average-y ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-average-y ( Cost , Margin for report)
```

Result

The average of Cost within the regression line for Cost and Margin.

Result data

Cost	Margin	regression-average-y (Cost, Margin for report)
4	0.33	13.824
5	0.28	13.824
9.22	0.23	13.824
15.93	0.28	13.824
34.97	0.3	13.824

regression-count

Returns the number of non-null numbers used to fit the regression line.

Syntax

```
regression-count ( numeric_expression1 , numeric_expression2 )  
regression-count ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-count ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-count ( Cost , Margin for report)
```

Result

The number of non-null numbers used to fit the regression line for Cost and Margin.

Result data

Cost	Margin	regression-count (Cost, Margin for report)
4	0.33	5
5	0.28	5
9.22	0.23	5
15.93	0.28	5
34.97	0.3	5

regression-intercept

Returns the y-intercept of the regression line. This is computed as follows:
 $AVG(\text{numeric_expression1}) - REGR_SLOPE(\text{numeric_expression1}, \text{numeric_expression2}) * AVG(\text{numeric_expression2})$

Syntax

```
regression-intercept ( numeric_expression1 , numeric_expression2 )  
regression-intercept ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-intercept ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-intercept ( Cost , Margin for report)
```

Result

The y-intercept of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-intercept (Cost, Margin for report)
4	0.33	5.18015038
5	0.28	5.18015038
9.22	0.23	5.18015038
15.93	0.28	5.18015038
34.97	0.3	5.18015038

regression-r2

Returns the coefficient of determination (also known as "R-squared" or "goodness of fit") of the regression line. This value is computed based on the following conditions: IF VAR_POP(numeric_expression2) = 0 THEN NULL IF VAR_POP(numeric_expression1) = 0 AND VAR_POP(numeric_expression2) <> 0 THEN 1 IF VAR_POP(numeric_expression1) > 0 and VAR_POP(numeric_expression2) <> 0 THEN POWER(CORR (numeric_expression1, numeric_expression2))

Syntax

```
regression-r2 ( numeric_expression1 , numeric_expression2 )  
regression-r2 ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-r2 ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-r2 ( Cost , Margin for report)
```

Result

The coefficient of determination of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-r2 (Cost, Margin for report)
4	0.33	0.00761514
5	0.28	0.00761514
9.22	0.23	0.00761514
15.93	0.28	0.00761514
34.97	0.3	0.00761514

regression-slope

Returns the slope of the regression line. This is computed as follows:
 $\text{COVAR_POP}(\text{numeric_expression1}, \text{numeric_expression2}) / \text{VAR_POP}(\text{numeric_expression2})$

Syntax

```

regression-slope ( numeric_expression1 , numeric_expression2 )
regression-slope ( numeric_expression1 , numeric_expression2 for
[ all|any ] expression { , expression } )
regression-slope ( numeric_expression1 , numeric_expression2 for
report )

```

Example

```
regression-slope ( Cost , Margin )
```

Result

The slope of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-slope (Cost, Margin for report)
4	0.33	30.43609023
5	0.28	30.43609023
9.22	0.23	30.43609023
15.93	0.28	30.43609023
34.97	0.3	30.43609023

regression-sxx

Returns the following computation after eliminating NULL pairs:
 $\text{REGR_COUNT}(\text{numeric_expression1}, \text{numeric_expression2}) * \text{VAR_POP}(\text{numeric_expression2})$

Syntax

```

regression-sxx ( numeric_expression1 , numeric_expression2 )
regression-sxx ( numeric_expression1 , numeric_expression2 for
[ all|any ] expression { , expression } )
regression-sxx ( numeric_expression1 , numeric_expression2 for
report )

```

Example

```
regression-sxx ( Cost , Margin for report)
```

Result

The sxx computation of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-sxx (Cost, Margin for report)
4	0.33	0.00532
5	0.28	0.00532
9.22	0.23	0.00532
15.93	0.28	0.00532
34.97	0.3	0.00532

regression-sxy

Returns the following computation after eliminating NULL pairs:
 $\text{REGR_COUNT}(\text{numeric_expression1}, \text{numeric_expression2}) * \text{COVAR_POP}(\text{numeric_expression1}, \text{numeric_expression2})$

Syntax

```
regression-sxy ( numeric_expression1 , numeric_expression2 )  
regression-sxy ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-sxy ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-sxy ( Cost , Margin for report)
```

Result

The sxy computation of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-sxy (Cost, Margin for report)
4	0.33	0.16192
5	0.28	0.16192
9.22	0.23	0.16192
15.93	0.28	0.16192
34.97	0.3	0.16192

regression-syy

Returns the following computation after eliminating NULL pairs:
REGR_COUNT(numeric_expression1, numeric_expression2) *
VAR_POP(numeric_expression1)

Syntax

```
regression-syy ( numeric_expression1 , numeric_expression2 )  
regression-syy ( numeric_expression1 , numeric_expression2 for  
[ all|any ] expression { , expression } )  
regression-syy ( numeric_expression1 , numeric_expression2 for  
report )
```

Example

```
regression-syy ( Cost , Margin for report)
```

Result

The syy computation of the regression line for Cost and Margin.

Result data

Cost	Margin	regression-syy (Cost, Margin for report)
4	0.33	647.15932
5	0.28	647.15932
9.22	0.23	647.15932
15.93	0.28	647.15932
34.97	0.3	647.15932

standard-deviation

Returns the standard deviation of selected data items.

Syntax

```
standard-deviation ( expression [ auto ] )  
standard-deviation ( expression for [ all|any ] expression { ,  
    expression } )  
standard-deviation ( expression for report )
```

Example

```
standard-deviation ( ProductCost )
```

Result

Returns a value indicating the deviation between product costs and the average product cost.

standard-deviation-pop

Computes the population standard deviation and returns the square root of the population variance.

Syntax

```
standard-deviation-pop ( expression [ auto ] )  
standard-deviation-pop ( expression for [ all|any ] expression { ,  
    expression } )  
standard-deviation-pop ( expression for report )
```

Example

```
standard-deviation-pop ( ProductCost )
```

Result

Returns a value of the square root of the population variance.

standard-deviation-samp

Computes the sample standard deviation and returns the square root of the population variance.

Syntax

```
standard-deviation-samp ( expression [ auto ] )  
standard-deviation-samp ( expression for [ all|any ] expression { ,  
    expression } )  
standard-deviation-samp ( expression for report )
```

Example

```
standard-deviation-samp ( ProductCost )
```

Result

Returns a value of the square root of the sample variance.

variance

Returns the variance of selected data items.

Syntax

```
variance ( expression [ auto ] )  
variance ( expression for [ all|any ] expression { , expression } )  
variance ( expression for report )
```

Example

```
variance ( Product Cost )
```

Result

Returns a value indicating how widely product costs vary from the average product cost.

variance-pop

Returns the population variance of a set of numbers after discarding the nulls in this set.

Syntax

```
variance-pop ( expression [ auto ] )  
variance-pop ( expression for [ all|any ] expression { ,  
expression } )  
variance-pop ( expression for report )
```

Example

```
variance-pop ( Qty )
```

Result

For each row, returns the population variance of a set of numbers after discarding the nulls in this set.

variance-samp

Returns the sample variance of a set of numbers after discarding the nulls in this set.

Syntax

```
variance-samp ( expression [ auto ] )  
variance-samp ( expression for [ all|any ] expression { ,  
expression } )  
variance-samp ( expression for report )
```

Example

```
variance-samp ( Qty )
```

Result

For each row, returns the sample variance of a set of numbers after discarding the nulls in this set.

aggregate

Returns a calculated value using the appropriate aggregation function, based on the aggregation type of the expression. This function appears in the Budget vs. Actual sample report in the GO Data Warehouse (analysis) package.

Syntax

```
aggregate ( expression [ auto ] )  
aggregate ( expression for [ all|any ] expression { , expression } )  
aggregate ( expression for report )
```

average

Returns the average value of selected data items. Distinct is an alternative expression that is compatible with earlier versions of the product.

Syntax

```
average ( [ distinct ] expression [ auto ] )  
average ( [ distinct ] expression for [ all|any ] expression { ,  
expression } )  
average ( [ distinct ] expression for report )
```

Example

```
average ( Sales )
```

Result

Returns the average of all Sales values.

count

Returns the number of selected data items excluding null values. Distinct is an alternative expression that is compatible with earlier versions of the product.

Syntax

```
count ( [ distinct ] expression [ auto ] )  
count ( [ distinct ] expression for [ all|any ] expression { ,  
expression } )  
count ( [ distinct ] expression for report )
```

Example

```
count ( Sales )
```

Result

Returns the total number of entries under Sales.

maximum

Returns the maximum value of selected data items. Distinct is an alternative expression that is compatible with earlier versions of the product.

Syntax

```
maximum ( [ distinct ] expression [ auto ] )  
maximum ( [ distinct ] expression for [ all|any ] expression { ,  
expression } )  
maximum ( [ distinct ] expression for report )
```

Example

```
maximum ( Sales )
```

Result

Returns the maximum value out of all Sales values.

median

Returns the median value of selected data items.

Syntax

```
median ( expression [ auto ] )  
median ( expression for [ all|any ] expression { , expression } )  
median ( expression for report )
```

minimum

Returns the minimum value of selected data items. Distinct is an alternative expression that is compatible with earlier versions of the product.

Syntax

```
minimum ( [ distinct ] expression [ auto ] )  
minimum ( [ distinct ] expression for [ all|any ] expression { ,  
    expression } )  
minimum ( [ distinct ] expression for report )
```

Example

```
minimum ( Sales )
```

Result

Returns the minimum value out of all Sales values.

moving-average

Returns a moving average by row for a specified set of values of over a specified number of rows. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
moving-average ( numeric_expression , numeric_expression [ at  
expression { , expression } ] [ <for-option> ] [ prefilter ] )  
moving-average ( numeric_expression , numeric_expression  
[ <for-option> ] [ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
moving-average ( Qty , 3 )
```

Result

For each row, returns the quantity and a moving average of the current row and the preceding two rows.

Result data

Qty	Moving-Average (Qty, 3)
200	200
700	450
400	433.3333
200	433.3333
200	266.6667
500	300.0000

moving-total

Returns a moving total by row for a specified set of values over a specified number of rows. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
moving-total ( numeric_expression , numeric_expression [ at  
expression { , expression } ] [ <for-option> ] [ prefilter ] )  
moving-total ( numeric_expression , numeric_expression  
[ <for-option> ] [ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
moving-total ( Qty , 3 )
```

Result

For each row, returns the quantity and a moving total of the current row and the preceding two rows.

Result data

Qty	Moving-Total (Qty, 3)
200	200
700	900
400	1300
200	1300
200	800
500	900

percentage

Returns the percent of the total value for selected data items. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources. This function appears in the Percentage Calculation (by year) interactive sample report.

Syntax

```
percentage ( numeric_expression [ at expression { , expression } ]  
[ <for-option> ] [ prefilter ] )  
percentage ( numeric_expression [ <for-option> ] [ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
percentage ( Sales 98 )
```

Result

Returns the percentage of the total sales for 1998 that is attributed to each sales representative.

Result data

Sales Rep	Sales 98	Percentage
Gibbons	60646	7.11%

Sales Rep	Sales 98	Percentage
Flertjan	62523	7.35%
Cornel	22396	2.63%

percentile

Returns a value, on a scale of one hundred, that indicates the percent of a distribution that is equal to or below the selected data items. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
percentile ( numeric_expression [ at expression { , expression } ]
[ <for-option> ] [ prefilter ] )
percentile ( numeric_expression [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
percentile ( Sales 98 )
```

Result

For each row, returns the percentage of rows that are equal to or less than the quantity value of that row.

Result data

Qty	Percentile (Qty)
800	1
700	0.875
600	0.75
500	0.625
400	0.5
400	0.5
200	0.25
200	0.25

quantile

Returns the rank of a value within a range that you specify. It returns integers to represent any range of ranks, such as 1 (highest) to 100 (lowest). The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
quantile ( numeric_expression , numeric_expression [ at expression { ,
expression } ] [ <for-option> ] [ prefilter ] )
quantile ( numeric_expression , numeric_expression [ <for-option> ]
[ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
quantile ( Qty , 4 )
```

Result

Returns the quantity, the rank of the quantity value, and the quantity values broken down into 4 quantile groups (quartiles).

Result data

Qty	Rank (Qty)	Quantile (Qty, 4)
800	1	1
700	2	1
600	3	2
500	4	2
400	5	3
400	5	3
200	7	4
200	7	4

quartile

Returns the rank of a value, represented as integers from 1 (highest) to 4 (lowest), relative to a group of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
quartile ( numeric_expression [ at expression { , expression } ]
[ <for-option> ] [ prefilter ] )
quartile ( numeric_expression [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
quartile ( Qty )
```

Result

Returns the quantity and the quartile of the quantity value represented as integers from 1 (highest) to 4 (lowest).

Result data

Qty	Quartile (Qty)
450	1
400	1
350	2
300	2
250	3
200	3
150	4
100	4

rank

Returns the rank value of selected data items. The sort order is optional; descending order (DESC) is assumed by default. If two or more rows tie, then there is a gap in the sequence of ranked values (also known as Olympic ranking). The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources. Distinct is an alternative expression that is compatible with earlier versions of the

product. Null values are ranked last. This function appears in the Top 10 Retailers for 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
rank ( expression [ ASC|DESC ] { , expression [ ASC|DESC ] } [ at
expression { , expression } ] [ <for-option> ] [ prefilter ] )
rank ( [ distinct ] expression [ ASC|DESC ] { , expression
[ ASC|DESC ] } [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
rank ( Sales 98 )
```

Result

For each row, returns the rank value of sales for 1998 that is attributed to each sales representative. Some numbers are skipped when a tie between rows occurs.

Result data

Sales Rep	Sales 98	Rank
Gibbons	60000	1
Flertjan	50000	2
Cornel	50000	2
Smith	48000	4

running-average

Returns the running average by row (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-average ( numeric_expression [ at expression { ,
expression } ] [ <for-option> ] [ prefilter ] )
running-average ( numeric_expression [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-average ( Qty )
```

Result

For each row, returns the quantity and a running average of the current and the previous rows.

Result data

Name	Qty	Avg	Running-Average for name
Smith	7	5	7
Smith	3	5	5
Smith	6	5	5.33
Smith	4	5	5
Wong	3	4	3
Wong	5	4	4

running-count

Returns the running count by row (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-count ( numeric_expression [ at expression { , expression } ]  
[ <for-option> ] [ prefilter ] )  
running-count ( numeric_expression [ <for-option> ] [ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-count ( Qty )
```

Result

For each row, returns the quantity and a running count of the position of the current row.

Result data

Name	Qty	Count	Running-Count for name
Smith	7	4	1
Smith	3	4	2
Smith	6	4	3
Smith	4	4	4
Wong	3	3	1
Wong	5	3	2

running-difference

Returns a running difference by row, calculated as the difference between the value for the current row and the preceding row, (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-difference ( numeric_expression [ at expression { ,  
expression } ] [ <for-option> ] [ prefilter ] )  
running-difference ( numeric_expression [ <for-option> ]  
[ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-difference ( Qty )
```

Result

For each row, returns the quantity and a running difference between the value for the current row and the preceding row.

Result data

Name	Qty	Running-Difference for name
Smith	7	NULL
Smith	3	-4
Smith	6	3
Smith	4	-2
Wong	3	-1
Wong	5	2

running-maximum

Returns the running maximum by row (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-maximum ( numeric_expression [ at expression { ,
  expression } ] [ <for-option> ] [ prefilter ] )
running-maximum ( numeric_expression [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-maximum ( Qty )
```

Result

For each row, returns the quantity and a running maximum of the current and previous rows.

Result data

Name	Qty	Max	Running-Maximum (Qty) for name
Smith	2	7	2
Smith	3	7	3
Smith	6	7	6
Smith	7	7	7
Wong	3	5	3
Wong	5	5	5

running-minimum

Returns the running minimum by row (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-minimum ( numeric_expression [ at expression { ,
  expression } ] [ <for-option> ] [ prefilter ] )
running-minimum ( numeric_expression [ <for-option> ] [ prefilter ] )
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-minimum ( Qty )
```

Result

For each row, returns the quantity and a running minimum of the current and previous rows.

Result data

Name	Qty	Min	Running-Minimum (Qty) for name
Smith	7	2	7
Smith	3	2	3
Smith	6	2	3
Smith	2	2	2
Wong	4	3	4
Wong	5	3	4

running-total

Returns a running total by row (including the current row) for a set of values. The "<for-option>" defines the scope of the function. The "at" option defines the level of aggregation and can be used only in the context of relational datasources.

Syntax

```
running-total ( numeric_expression [ at expression { ,  
  expression } ] [ <for-option> ] [ prefilter ] )  
running-total ( numeric_expression [ <for-option> ] [ prefilter ] )  
<for-option> ::= for expression { , expression }|for report|auto
```

Example

```
running-total ( Qty )
```

Result

For each row, returns the quantity and a running total of the current and previous rows.

Result data

Name	Qty	Total	Running-Total (Qty) for name
Smith	2	18	2
Smith	3	18	5
Smith	6	18	11
Smith	7	18	18
Wong	3	12	3
Wong	5	12	8

total

Returns the total value of selected data items. Distinct is an alternative expression that is compatible with earlier versions of the product. This function appears in the Budget vs. Actual sample report in the GO Data Warehouse (analysis) package.

Syntax

```
total ( [ distinct ] expression [ auto ] )
total ( [ distinct ] expression for [ all|any ] expression { ,
  expression } )
total ( [ distinct ] expression for report )
```

Example

```
total ( Sales )
```

Result

Returns the total value of all Sales values.

Member Summaries

This list contains predefined functions that return either a single summary value for a set of members or a different summary value for each member of a set of members.

aggregate

Returns a calculated value using the appropriate aggregation function based on the aggregation type of the expression.

Syntax

```
aggregate ( < currentMeasure|numeric_expression > within set
  set_expression )
aggregate ( < currentMeasure|numeric_expression > within <
  detail|aggregate > expression )
```

average

Returns the average value of the selected data items.

Syntax

```
average ( < currentMeasure|numeric_expression > within set
  set_expression )
average ( < currentMeasure|numeric_expression > within <
  detail|aggregate > expression )
```

Example

```
average ( Sales )
```

Result

Returns the average of all Sales values.

count

Returns the number of selected data items excluding null values.

Syntax

```
count ( < currentMeasure|numeric_expression > within set
  set_expression )
count ( < currentMeasure|numeric_expression > within <
  detail|aggregate > expression )
```

Example

```
count ( Sales )
```

Result

Returns the total number of entries under Sales.

maximum

Returns the maximum value of selected data items.

Syntax

```
maximum ( < currentMeasure|numeric_expression > within set  
set_expression )  
maximum ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

Example

```
maximum ( Sales )
```

Result

Returns the maximum value out of all Sales values.

median

Returns the median value of selected data items.

Syntax

```
median ( < currentMeasure|numeric_expression > within set  
set_expression )  
median ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

minimum

Returns the minimum value of selected data items.

Syntax

```
minimum ( < currentMeasure|numeric_expression > within set  
set_expression )  
minimum ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

Example

```
minimum ( Sales )
```

Result

Returns the minimum value out of all Sales values.

percentage

Returns the percent of the total value for the selected data items.

Syntax

```
percentage ( numeric_expression [ tuple member_expression { ,  
member_expression }_ ] within set set_expression )
```

Example

```
percentage ( [gosales].[sales measures].[quantity] tuple [gosales].
[Staff].[].[department] -> [West] within set children ( [gosales].
[Staff].[].[Staff] ) )
```

percentile

Returns a value, on a scale from 0 to 100, that indicates the percent of a distribution that is equal to or below the selected data items.

Syntax

```
percentile ( numeric_expression [ tuple member_expression { ,
member_expression } ] within set set_expression )
```

quantile

Returns the rank of a value for the specified range. It returns integers to represent any range of ranks, such as 1 (highest) to 100 (lowest).

Syntax

```
quantile ( numeric_expression , numeric_expression [ tuple
member_expression { , member_expression } ] within set
set_expression )
```

quartile

Returns the rank of a value, represented as integers from 1 (highest) to 4 (lowest), relative to a group of values.

Syntax

```
quartile ( numeric_expression [ tuple member_expression { ,
member_expression } ] within set set_expression )
```

rank

Returns the rank value of the selected data items. The type of ranking returned (Olympic, dense, or serial) is data source dependent. The sort order is optional; DESC is assumed by default.

Syntax

```
rank ( numeric_expression [ ASC|DESC ] [ tuple member_expression { ,
member_expression } ] within set set_expression )
```

Example

```
rank ( [gosales].[sales measures].[quantity] tuple [gosales].[Staff].
[].[department] -> [West] within set children ( [gosales].[Staff].[].[
Staff] ) )
```

standard-deviation

Returns the standard deviation of the selected data items.

Syntax

```
standard-deviation ( < currentMeasure|numeric_expression > within set
set_expression )
standard-deviation ( < currentMeasure|numeric_expression > within <
detail|aggregate > expression )
```

standard-deviation-pop

Returns the standard deviation population of the selected data items.

Syntax

```
standard-deviation-pop ( < currentMeasure|numeric_expression > within  
set set_expression )  
standard-deviation-pop ( < currentMeasure|numeric_expression > within  
< detail|aggregate > expression )
```

total

Returns the total value of the selected data items.

Syntax

```
total ( < currentMeasure|numeric_expression > within set  
set_expression )  
total ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

variance

Returns the variance of the selected data items.

Syntax

```
variance ( < currentMeasure|numeric_expression > within set  
set_expression )  
variance ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

variance-pop

Returns the variance population of the selected data items.

Syntax

```
variance-pop ( < currentMeasure|numeric_expression > within set  
set_expression )  
variance-pop ( < currentMeasure|numeric_expression > within <  
detail|aggregate > expression )
```

Constants

A constant is a fixed value that you can use in an expression.

date

Inserts the current system date.

date-time

Inserts the current system date and time.

time with time zone

Inserts a zero time with time zone.

timestamp with time zone

Inserts an example of a timestamp with time zone.

interval

Inserts a zero interval: 000 00:00:00.000.

interval year

Inserts a zero year interval: 0 year.

interval month

Inserts a zero month interval: 0 month.

interval year to month

Inserts a zero year to month interval: 0000-00 year to month.

interval day

Inserts a zero day interval: 0 day.

interval hour

Inserts a zero hour interval: 0 hour.

interval minute

Inserts a zero minute interval: 0 minute.

interval second

Inserts a zero second interval: 0 second.

interval day to hour

Inserts a zero day to hour interval: 0 00 day to hour.

interval day to minute

Inserts a zero day to minute interval: 0 00:00 day to minute.

interval day to second

Inserts a zero day to second interval: 0 00:00:00.000000000 day to second.

interval hour to minute

Inserts a zero hour to minute interval: 00:00 hour to minute.

interval hour to second

Inserts a zero hour to second interval: 00:00:00.000000000 hour to second.

interval minute to second

Inserts a zero minute to second interval: 00:00.000000000 minute to second.

null

Inserts "null" if the expression conditions are not met.

number

Inserts the number 0, which can be replaced with a new numeric value.

string

Inserts an empty string as two single quotation marks between which you can type a string.

time

Inserts the current system time.

Constructs

This list contains constructs and templates that can be used to create an expression. Templates combine multiple functions into a group. For example, the search case template includes the case, when, else, and end functions.

if then else

This construct is the template for an if...then...else statement. This construct appears in the Top 10 Retailers for 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
IF ([Country] = 'Canada') THEN ([List Price] * 0.60) ELSE ([List Price])
```

in_range

This is the template for an in_range expression.

Syntax

```
[code] IN_RANGE { :30 , 40, 50, 999: }
```

Example 1

```
[code] IN_RANGE { 5 }
```

Result

This is equivalent to [code] = 5.

Example 2

```
[code] IN_RANGE { 5: }
```

Result

This is equivalent to [code] >= 5.

Example 3

```
[code] IN_RANGE { :5 }
```

Result

This is equivalent to [code] <= 5.

Example 4

```
[code] IN_RANGE { 5:10 }
```

Result

This is equivalent to ([code] >= 5 and [code] <= 10).

Example 5

```
[code] IN_RANGE { :5,10,20: }
```

Result

This is equivalent to ([code] <= 5 or [code] = 10 or [code] >= 20).

search case

This construct is the template for a search case, including the CASE, WHEN, ELSE, and END functions.

Syntax

```
CASE WHEN [Country] = 'Canada' THEN ([List Price] * 0.60) WHEN  
[CountryCode] > 100 THEN [List Price] * 0.80  
ELSE [List Price] END
```

simple case

This construct is the template for a simple case, including the CASE, WHEN, ELSE, and END functions.

Syntax

```
CASE [Country] WHEN 'Canada' THEN ([List Price] * 0.60) WHEN  
'Australia' THEN [List Price] * 0.80  
ELSE [List Price] END
```

Business Date/Time Functions

This list contains business functions for performing date and time calculations.

_add_days

Returns the date or datetime, depending on the format of "date_expression", that results from adding "integer_expression" days to "date_expression".

Syntax

```
_add_days ( date_expression, integer_expression )
```

Example 1

```
_add_days ( 2002-04-30 , 1 )
```

Result

2002-05-01

Example 2

```
_add_days ( 2002-04-30 12:10:10.000, 1 )
```

Result

2002-05-01 12:10:10.000

Example 3

```
_add_days ( 2002-04-30 00:00:00.000, 1/24 )
```

Note that the second argument is not a whole number. This is supported by some database technologies and increments the time portion.

Result

```
2002-04-30 01:00:00.000
```

_add_months

Returns the date or datetime, depending on the format of "date_expression", that results from the addition of "integer_expression" months to "date_expression".

Syntax

```
_add_months ( date_expression, integer_expression )
```

Example 1

```
_add_months ( 2002-04-30 , 1 )
```

Result

```
2002-05-30
```

Example 2

```
_add_months ( 2002-04-30 12:10:10.000, 1 )
```

Result

```
2002-05-30 12:10:10.000
```

_add_years

Returns the date or datetime, depending on the format of "date_expression", that results from the addition of "integer_expression" years to "date_expression".

Syntax

```
_add_years ( date_expression, integer_expression )
```

Example 1

```
_add_years ( 2002-04-30 , 1 )
```

Result

```
2003-04-30
```

Example 2

```
_add_years ( 2002-04-30 12:10:10.000 , 1 )
```

Result

```
2003-04-30 12:10:10.000
```

_age

Returns a number that is obtained from subtracting "date_expression" from today's date. The returned value has the form YYYYMMDD, where YYYY represents the number of years, MM represents the number of months, and DD represents the number of days.

Syntax

```
_age ( date_expression )
```

Example

```
_age ( 1990-04-30 ) (if today's date is 2003-02-05)
```

Result

120906, meaning 12 years, 9 months, and 6 days.

_day_of_week

Returns the day of week (1 to 7), where 1 is the first day of the week as indicated by the second parameter (1 to 7, 1 being Monday and 7 being Sunday). Note that in ISO 8601 standard, a week begins with Monday being day 1.

Syntax

```
_day_of_week ( date_expression, integer )
```

Example

```
_day_of_week ( 2003-01-01 , 1 )
```

Result

3

_day_of_year

Returns the day of year (1 to 366) in "date_expression". Also known as Julian day.

Syntax

```
_day_of_year ( date_expression )
```

Example

```
_day_of_year ( 2003-03-01 )
```

Result

61

_days_between

Returns a positive or negative number representing the number of days between "date_expression1" and "date_expression2". If "date_expression1" < "date_expression2", then the result will be a negative number.

Syntax

```
_days_between ( date_expression1 , date_expression2 )
```

Example

```
_days_between ( 2002-04-30 , 2002-06-21 )
```

Result

-52

_days_to_end_of_month

Returns a number representing the number of days remaining in the month represented by "date_expression".

Syntax

```
_days_to_end_of_month ( date_expression )
```

Example

```
_days_to_end_of_month ( 2002-04-20 14:30:22.123 )
```

Result

10

_first_of_month

Returns a date or datetime, depending on the argument, by converting "date_expression" to a date with the same year and month but with the day set to 1.

Syntax

```
_first_of_month ( date_expression )
```

Example 1

```
_first_of_month ( 2002-04-20 )
```

Result

2002-04-01

Example 2

```
_first_of_month ( 2002-04-20 12:10:10.000 )
```

Result

2002-04-01 12:10:10.000

_last_of_month

Returns a date or datetime, depending on the argument, that is the last day of the month represented by "date_expression".

Syntax

```
_last_of_month ( date_expression )
```

Example 1

```
_last_of_month ( 2002-01-14 )
```

Result

2002-01-31

Example 2

```
_last_of_month ( 2002-01-14 12:10:10.000 )
```

Result

2002-01-31 12:10:10.000

_make_timestamp

Returns a timestamp constructed from "integer_expression1" (the year), "integer_expression2" (the month), and "integer_expression3" (the day). The time portion defaults to 00:00:00.000 .

Syntax

```
_make_timestamp ( integer_expression1, integer_expression2,  
integer_expression3 )
```

Example

```
_make_timestamp ( 2002 , 01 , 14 )
```

Result

2002-01-14 00:00:00.000

_months_between

Returns a positive or negative integer number representing the number of months between "date_expression1" and "date_expression2". If "date_expression1" is earlier than "date_expression2", then a negative number is returned.

Syntax

```
_months_between ( date_expression1, date_expression2 )
```

Example

```
_months_between ( 2002-04-03 , 2002-01-30 )
```

Result

2

_week_of_year

Returns the number of the week of the year of "date_expression" according to the ISO 8601 standard. Week 1 of the year is the first week of the year to contain a Thursday, which is equivalent to the first week containing January 4th. A week starts on Monday (day 1) and ends on Sunday (day 7).

Syntax

```
_week_of_year ( date_expression )
```

Example

```
_week_of_year ( 2003-01-01 )
```

Result

1

__years_between

Returns a positive or negative integer number representing the number of years between "date_expression1" and "date_expression2". If "date_expression1" < "date_expression2" then a negative value is returned.

Syntax

```
__years_between ( date_expression1, date_expression2 )
```

Example

```
__years_between ( 2003-01-30 , 2001-04-03 )
```

Result

1

__ymdint_between

Returns a number representing the difference between "date_expression1" and "date_expression2". The returned value has the form YYYYMMDD, where YYYY represents the number of years, MM represents the number of months, and DD represents the number of days.

Syntax

```
__ymdint_between ( date_expression1 , date_expression2 )
```

Example

```
__ymdint_between ( 1990-04-30 , 2003-02-05 )
```

Result

120906, meaning 12 years, 9 months and 6 days.

Block Functions

This list contains functions used to access members of a set, usually in the context of Analysis Studio.

__firstFromSet

Returns the first members found in the set up to "numeric_expression_maximum" + "numeric_expression_overflow". If "numeric_expression_maximum" + "numeric_expression_overflow" is exceeded, then only the maximum number of members are returned. For a set that has only a few members more than the specified numeric_expression_maximum, the numeric_expression_overflow allows the small set of extra members to be included. If the set has more members than the overflow allows, then only the numeric_expression_maximum members will be returned.

Syntax

```
__firstFromSet ( set_expression , numeric_expression_maximum ,  
numeric_expression_overflow )
```

Example 1


```
_firstFromSet ( [great_outdoors_company].[Products].[Products].  
[Product line] , 2 , 8 )
```

Result

Returns the five members in the Product line set. The first two members are returned within the maximum and the following three members are returned as the overflow.

Result data

Camping Equipment
Golf Equipment
Mountaineering Equipment
Outdoor Protection
Personal Accessories

Example 2

```
_firstFromSet ( [great_outdoors_company].[Products].[Products].  
[Product line] , 2 , 2 )
```

Result

Camping Equipment, Golf Equipment

_remainderSet

Returns the set containing "member_expression" when the size of "set_expression" is greater than "numeric_expression"; i.e., a new member will be generated if the number of members in "set_expression" is larger than the specified "numeric_expression".

Syntax

```
_remainderSet ( member_expression , set_expression ,  
numeric_expression )
```

Example

```
_remainderSet ( member ( aggregate ( currentMeasure within set  
[great_outdoors_company].[Products].[Products].[Product line] ) ,  
'Product Aggregate' , 'Product Aggregate' , [great_outdoors_company].  
[Products].[Products] ) , [great_outdoors_company].[Products].  
[Products].[Product line] , 1 )
```

Result

Quantity sold for Product Aggregate

Aster Data

Aster Data String

overlay

Returns the "string_exp1" replacing "string_exp2" from character position numeric_exp.

Syntax

```
overlay ( string_exp1 , string_exp2 , numeric_exp1 [, numeric_exp2] )
```

btrim

Returns string_exp1 after removing the longest string of characters in string_exp2.

Syntax

```
btrim( string_exp1 [, string_exp2] )
```

initcap

Returns "string_exp", with the first letter of each word in uppercase and all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_exp )
```

lpad

Returns "string_exp1" padded to length "integer_exp" with occurrences of "string_exp2". If "string_exp1" is longer than "integer_exp", the appropriate portion of "string_exp1" is returned.

Syntax

```
lpad ( string_exp1, integer_exp [ , string_exp2 ] )
```

ltrim

Returns "string_exp1", with leading characters removed up to the first character not in "string_exp2", e.g., ltrim('xyxXxyAB', 'xy') returns 'XxyAB'.

Syntax

```
ltrim ( string_exp1 [ , string_exp2 ] )
```

md5

Returns the MD5 hash of "string_exp1".

Syntax

```
md5 ( string_exp1 )
```

to_hex

Returns the hexadecimal string representation of "numeric_exp1".

Syntax

```
to_hex ( numeric_exp1 )
```

repeat

Returns the "string_exp" repeated "numeric_exp1" times.

Syntax

```
repeat ( string_exp, numeric_exp1 )
```

replace

Returns "string_exp" having replaced "string_exp2" with "string_exp3".

Syntax

```
replace( string_exp, string_exp2, string_exp3)
```

rpad

Returns "string_exp1" right-padded to length "integer_exp" with occurrences of "string_exp2". If "string_exp1" is longer than "integer_exp", the appropriate portion of "string_exp1" is returned. If "string_exp2" is not specified, then spaces are used.

Syntax

```
rpad ( string_exp1, integer_exp [ , string_exp2 ] )
```

rtrim

Returns "string_exp1", with final characters removed after the last character not in "string_exp2", e.g., rtrim('ABxXxyx', 'xy') returns 'ABxX'. If "string_exp2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_exp1 [ , string_exp2 ] )
```

split_part

Returns "numeric_exp" field having split "string_exp1" on "string_exp2".

Syntax

```
split_part ( string_exp1 , string_exp2 , numeric_exp )
```

Aster Data Data Type Formatting

to_char

Returns the string representation of "exp" with the format of "string_exp". "Exp" can be either a date value or a numeric value.

Syntax

```
to_char ( exp , string_exp )
```

to_date

Converts "string_exp1" to a date value as specified by the format "string_exp2".

Syntax

```
to_date ( string_exp1 , string_exp2 )
```

to_number

Converts "string_exp1" to a numeric value as specified by the format "string_exp2".

Syntax

```
to_number ( string_exp1, string_exp2 )
```

to_timestamp

Converts "string_exp1" to a timestamp value as specified by the format "string_exp2".

Syntax

```
to_timestamp ( string_exp1, string_exp2 )
```

Aster Data Math

log

Returns the base 10 logarithm of "numeric_exp1" or logarithm to the base "numeric_exp2".

Syntax

`log (numeric_exp1[, numeric_exp2])`

ln

Returns the natural logarithm of "numeric_exp1".

Syntax

`ln (numeric_exp)`

cbrt

Returns the cube root of "numeric_exp1".

Syntax

`cbrt (numeric_exp)`

pi

Returns the constant of pi.

Syntax

`pi ()`

Aster Data Trigonometry

acos

Returns the arccosine of "numeric_exp" in radians. The arccosine is the angle whose cosine is "numeric_exp".

Syntax

`acos (numeric_exp)`

asin

Returns the arcsine of "numeric_exp" in radians. The arcsine is the angle whose sine is "numeric_exp".

Syntax

`asin (numeric_exp)`

atan

Returns the arctangent of "numeric_exp" in radians. The arctangent is the angle whose tangent is "numeric_exp".

Syntax

`atan (numeric_exp)`

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_exp1" and "numeric_exp2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_exp2" / "numeric_exp1".

Syntax

`atan2 (numeric_exp1, numeric_exp2)`

cos

Returns the cosine of "numeric_exp", where "numeric_exp" is an angle expressed in radians.

Syntax

`cos (numeric_exp)`

cot

Returns the cotangent of "numeric_exp", where "numeric_exp" is an angle expressed in radians.

Syntax

`cot (numeric_exp)`

degrees

Returns the degrees where "numeric_exp" is an angle expressed in radians.

Syntax

`degrees (numeric_exp)`

radians

Returns the radians where "numeric_exp" is an angle expressed in degrees.

Syntax

`radians (numeric_exp)`

sin

Returns the sine of "numeric_exp", where "numeric_exp" is an angle expressed in radians.

Syntax

`sin (numeric_exp)`

tan

Returns the tangent of "numeric_exp", where "numeric_exp" is an angle expressed in radians.

Syntax

`tan (numeric_exp)`

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_exp", e.g., `ascii('A')` is 65.

Syntax

`ascii (string_exp)`

chr

Returns the character that has the ASCII code value specified by "integer_exp". "Integer_exp" should be between 0 and 255.

Syntax

`chr (integer_exp)`

current_schema

Returns the name of the current schema

Syntax

current_schema ()

translate

Returns "string_exp1", with each occurrence of each character in "string_exp2" replaced by its corresponding character in "string_exp3".

Syntax

translate (string_exp1, string_exp2, string_exp3)

date_trunc

Returns the timestamp to the specified precision.

Syntax

date_trunc (string_exp, timestamp_exp)

version

Returns the string value of the database version.

Syntax

version ()

DB2

DB2 Math

log

Returns the natural logarithm of "numeric_expression".

Syntax

log (numeric_expression)

log10

Returns the base ten logarithm of "numeric_expression".

Syntax

log10 (numeric_expression)

rand

Generates a random number using "integer_expression" as a seed value.

Syntax

rand (integer_expression)

DB2 Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

acos (numeric_expression)

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atanh

Returns the hyperbolic arctangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
atanh ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

```
atan2 ( numeric_expression1 , numeric_expression2 )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

cosh

Returns the hyperbolic cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cosh ( numeric_expression )
```

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cot ( numeric_expression )
```

degrees

Returns "numeric_expression" radians converted to degrees.

Syntax

degrees (numeric_expression)

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sin (numeric_expression)

sinh

Returns the hyperbolic sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sinh (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

tanh

Returns the hyperbolic tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tanh (numeric_expression)

ascii

Returns the ASCII code value of the leftmost character of the argument as an integer.

Syntax

ascii (string_expression)

Example

ascii (a)

Result

Returns 65, the ASCII code value of "a".

ceiling

Returns the smallest integer greater than or equal to "numeric_expression".

Syntax

ceiling (numeric_expression)

Example

ceiling (0.75)

Result

Returns 0.8.

char

Returns a string representation of a date/time value or a decimal number.

Syntax

`char (expression)`

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

`chr (integer_expression)`

Example

`chr (65)`

Result

Returns a, the character for the ASCII code value of 65.

concat

Returns a string that is the result of concatenating "string_expression1" with "string_expression2".

Syntax

`concat (string_expression1, string_expression2)`

Example

`concat ([Sales target (query)].[Sales staff].[First name], [Sales target (query)].[Sales staff].[Last name])`

Result

Returns the first name and last name; e.g., Bob Smith.

date

Returns a date from a single input value. "Expression" can be a string or integer representation of a date.

Syntax

`date (expression)`

Example

`date ('1998-01-08')`

Result

Returns 8 January 1998.

day

Returns the day of the month (1-31) from "date_expression". "Date_expression" can be a date value or a string representation of a date.

Syntax

```
day ( date_expression )
```

Example

```
day ( '1998-01-08' )
```

Result

Returns 8.

dayname

Returns a character string containing the data source-specific name of the day (for example, Sunday through Saturday or Sun. through Sat. for a data source that uses English, or Sonntag through Samstag for a data source that uses German) for the day portion of "date_expression". "Date_expression" can be a date value or a string representation of a date.

Syntax

```
dayname ( date_expression )
```

Example

```
dayname ( '1998-01-08' )
```

Result

Returns Thursday.

dayofweek

Returns the day of the week in "date_expression" as an integer in the range 1 to 7, where 1 represents Sunday. "date_expression" can be a date value or a string representation of a date.

Syntax

```
dayofweek ( date_expression )
```

Example

```
dayofweek ( '1998-01-08' )
```

Result

Returns 5.

dayofweek_iso

Returns the day of the week in "date_expression" as an integer in the range 1 to 7, where 1 represents Monday. "date_expression" can be a date value or a string representation of a date.

Syntax

```
dayofweek_iso ( date_expression )
```

Example

```
dayofweek_iso ( '1998-01-08' )
```

Result

Returns 4.

dayofyear

Returns the day of the year in "date_expression" as an integer in the range 1 to 366. "Date_expression" can be a date value or a string representation of a date.

Syntax

```
dayofyear ( date_expression )
```

Example

```
dayofyear ( current_date )
```

Result

Returns the day of the year for the current date; e.g., if it was January 28, the expression would return 28.

days

Returns an integer representation of a date. "Expression" can be a date value or a string representation of a date.

Syntax

```
days ( expression )
```

dec

Returns the decimal representation of "string-expression" using "precision-integer" and "scale-integer". The "decimal-character" can be used to specify the single-byte character constant used to delimit the decimal digits in "string-expression". The "string-expression" must be formatted as an SQL Integer or Decimal constant. Alternate syntax: dec (numeric-expression [, precision-integer [, scale-integer]]) Returns the decimal representation of "numeric-expression" using "precision-integer" and "scale-integer".

Syntax

```
dec ( string-expression [ , precision-integer [ , scale-integer [ ,  
decimal-character ] ] ] )
```

decimal

Returns the decimal representation of "string-expression" using "precision-integer" and "scale-integer". The "decimal-character" can be used to specify the single-byte character constant used to delimit the decimal digits in "string-expression". The "string-expression" must be formatted as an SQL Integer or Decimal constant. Alternate syntax: decimal (numeric-expression [, precision-integer [, scale-integer]]) Returns the decimal representation of "numeric-expression" using "precision-integer" and "scale-integer".

Syntax

```
decimal ( string-expression [ , precision-integer [ , scale-integer  
[ , decimal-character ] ] ] )
```

difference

Returns an integer value representing the difference between the values returned by the data source-specific soundex function for "string_expression1" and "string_expression2". The value returned ranges from 0 to 4, with 4 indicating the best match. Note that 4 does not mean that the strings are equal.

Syntax

```
difference ( string_expression1 , string_expression2 )
```

Example 1

```
difference ([Sales target (query)].[Sales staff].[First name],[Sales (query)].[Retailers].[Contact first name])
```

Result

0

Example 2

```
difference ([Sales target (query)].[Sales staff].[First name],[Sales target (query)].[Sales staff].[First name])
```

Result

4

digits

Returns the character string representation of a non-floating point number.

Syntax

```
digits ( numeric_expression )
```

double

Returns the floating-point representation of an expression. "Expression" can either be a numeric or string expression.

Syntax

```
double ( expression )
```

event_mon_state

Returns the operational state of a particular state monitor.

Syntax

```
event_mon_state ( string_expression )
```

float

Returns the floating-point representation of a number.

Syntax

```
float ( numeric_expression )
```

hex

Returns the hexadecimal representation of a value.

Syntax

```
hex ( expression )
```

hour

Returns the hour, an integer from 0 (midnight) to 23 (11:00 pm), from "time_expression". "Time_expression" can be a time value or a string representation of a time.

Syntax

```
hour ( time_expression )
```

Example

```
hour ( 01:22:45 )
```

Result

Returns 1.

insert

Returns a string where "integer_expression2" characters have been deleted from "string_expression1" beginning at "integer_expression1" and where "string_expression2" has been inserted into "string_expression1" at its start. The first character in the string is at position 1.

Syntax

```
insert ( string_expression1, integer_expression1,  
integer_expression2, string_expression2 )
```

integer

Returns the integer representation of an expression. "Expression" can be a numeric value or a string representation of a number.

Syntax

```
integer ( expression )
```

Example

```
integer ( 84.95 )
```

Result

85

int

Returns the integer representation of an expression. "Expression" can be a numeric value or a string representation of a number.

Syntax

```
int ( expression )
```

Example

```
int ( 84.95 )
```

Result

85

julian_day

Returns an integer value representing the number of days from January 1, 4712 BC (the start of the Julian date calendar) to the date value specified in "expression". "Expression" can be a date value or a string representation of a date.

Syntax

```
julian_day ( expression )
```

Example

```
julian_day ( '2009-06-29' )
```

Result

2455012.22130739595741034

lcase

Returns "string_expression" with all uppercase characters shifted to lowercase.

Syntax

```
lcase ( string_expression )
```

Example

```
lcase ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with no uppercase letters.

left

Returns the leftmost "integer_expression" characters of "string_expression".

Syntax

```
left ( string_expression, integer_expression )
```

Example

```
left ( [Sales (query)].[Sales staff].[Last name] , 3 )
```

Result

Returns the first three characters of each last name.

length

Returns the length of the operand in bytes. Exception: double byte string types return the length in characters.

Syntax

length (expression)

Example

length ([Sales (query)].[Sales staff].[Record start date])

Result

Returns 4; dates always return a value of 4.

locate

Returns the starting position of the first occurrence of "string_expression1" within "string_expression2". The search starts at position start "integer_expression" of "string_expression2". The first character in a string is at position 1. If "string_expression1" is not found, zero is returned.

Syntax

locate (string_expression1, string_expression2 [,
integer_expression])

Example

locate (A, [Sales (query)].[Sales staff].[Last name] , 2)

Result

Returns the position of the character A in the last names starting at the second character of the last name.

long_varchar

Returns a long string.

Syntax

long_varchar (string_expression)

ltrim

Returns "string_expression" with leading spaces removed.

Syntax

ltrim (string_expression)

Example

ltrim ([Sales (query)].[Sales staff].[Last name])

Result

Returns last names with any leading spaces removed.

microsecond

Returns the microsecond (time-unit) part of a value. "Expression" can be a timestamp or a string representation of a timestamp.

Syntax

microsecond (expression)

Example

microsecond (01:45:34.056)

Result

Returns 056.

midnight_seconds

Returns an integer value in the range 0 to 86400 representing the number of seconds between midnight and time value specified in the argument. "Expression" can be a time value, a timestamp or a string representation of a time.

Syntax

midnight_seconds (expression)

Example

midnight_seconds (01:45:34.056)

Result

Returns 6334.

minute

Returns the minute (an integer from 0-59) from "time_expression". "Time_expression" can be a time value, a timestamp, or a string representation of a time.

Syntax

minute (time_expression)

Example

minute (01:45:34.056)

Result

Returns 45.

month

Returns the month (an integer from 1-12) from "date_expression".

Syntax

month (date_expression)

Example

month (2005-11-01)

Result

Returns 11.

monthname

Returns a character string containing the data source-specific name of the month (for example, January through December or Jan. through Dec. for an English data source, or Januar through Dezember for a German data source) for the month portion of "date_expression".

Syntax

```
monthname ( date_expression )
```

Example

```
monthname ( 2005-11-01 )
```

Result

November

quarter

Returns the quarter in "date_expression" as a number in the range 1 to 4, where 1 represents January 1 through March 31.

Syntax

```
quarter ( date_expression )
```

Example

```
quarter ( 2005-11-01 )
```

Result

Returns 4.

radians

Returns the number of radians converted from "numeric_expression" degrees.

Syntax

```
radians ( numeric_expression )
```

repeat

Returns a string consisting of "string_expression" repeated "integer_expression" times.

Syntax

```
repeat ( string_expression, integer_expression )
```

Example

```
repeat ( XYZ, 3 )
```

Result

Returns XYZXYZXYZ.

replace

Replaces all occurrences of "string_expression2" in "string_expression1" with "string_expression3".

Syntax

```
replace ( string_expression1, string_expression2, string_expression3 )
```

Example

```
replace ( [Sales (query)].[Sales staff].[Position code], A, a )
```

Result

Returns position codes with all occurrences of "A" replaced by "a".

right

Returns the rightmost "integer_expression" characters of "string_expression".

Syntax

```
right ( string_expression, integer_expression )
```

Example

```
right ( [Sales (query)].[Sales staff].[Position code], 3 )
```

Result

Returns the rightmost 3 characters of each position code.

round

Returns "numeric_expression" rounded to "integer_expression" places to the right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value "integer_expression" places to the left of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression, integer_expression )
```

Example

```
round ( 3.14159265, 3 )
```

Result

Returns 3.142.

rtrim

Returns "string_expression" with trailing spaces removed.

Syntax

```
rtrim ( string_expression )
```

Example

```
rtrim ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with any spaces at the end of the name removed.

second

Returns the second (an integer from 0-59) from "time_expression".

Syntax

```
second ( time_expression )
```

Example

```
second ( 01:45:34.056 )
```

Result

Returns 34.

sign

Returns an indicator of the sign of "numeric_expression": +1 if "numeric_expression" is positive, 0 if zero, or -1 if negative.

Syntax

```
sign ( numeric_expression )
```

Example

```
sign ( [Revenue] )
```

Result

Returns + for positive values and - for negative values.

smallint

Returns the small integer representation of a number.

Syntax

```
smallint ( expression )
```

soundex

Returns a 4 character string code obtained by systematically abbreviating words and names in "string_expression" according to phonetics. Can be used to determine if two strings sound the same. For example, does sound-of ('SMITH') = sound-of ('SMYTH').

Syntax

```
soundex ( string_expression )
```

space

Returns a string consisting of "integer_expression" spaces.

Syntax

```
space ( integer_expression )
```

Example

```
space ( 5 )
```

Result

Returns 5 spaces.

substr

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters. The first character in "string_expression" is at position 1.

Syntax

```
substr ( string_expression , integer_expression1 [ ,  
integer_expression2 ] )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

table_name

Returns an unqualified name of a table or view based on the object name in "string_expression1" and the schema name given in "string_expression2". It is used to resolve aliases.

Syntax

```
table_name ( string_expression1 [ , string_expression2 ] )
```

table_schema

Returns the schema name portion of the two-part table or view name based on the object name in "string_expression1" and the schema name in "string_expression2". It is used to resolve aliases.

Syntax

```
table_schema ( string_expression1 [ , string_expression2 ] )
```

time

Returns a time from a value.

Syntax

```
time ( expression )
```

timestamp

Returns a timestamp from a value or a pair of values. "Expression1" must represent a date value, and "expression2" must represent a time value.

Syntax

```
timestamp ( expression1 [ , expression2 ] )
```

Example

```
timestamp ( 11 November 2005 , 12:00:00.000000 )
```

Result

Returns 2005-11-11-12:00:00.000000.

timestamp_iso

Returns a datetime in the ISO format (yyyy-mm-dd hh:mm:ss.nnnnnn) converted from the IBM format (yyyy-mm-dd-hh.mm.ss.nnnnnn). If "expression" is a time, it inserts the value of the CURRENT DATE for the date elements and zero for the fractional time element.

Syntax

```
timestamp_iso ( expression )
```

Example

```
timestamp_iso ( 11 November 2005 , 12:00:00.000000 )
```

Result

Returns 2005-11-11 12:00:00.000000.

timestampdiff

Returns an estimated number of intervals of type "expression1" based on the difference between two timestamps. "Expression2" is the result of subtracting two timestamp types and converting the result to CHAR. Valid values of "expression1" are: 1 Fractions of a second; 2 Seconds; 4 Minutes; 8 Hours; 16 Days; 32 Weeks; 64 Months; 128 Quarters; 256 Years.

Syntax

```
timestampdiff ( expression1, expression2 )
```

to_char

Returns the string representation of a timestamp with the format of "string_expression".

Syntax

```
to_char ( timestamp_expression , string_expression )
```

translate

Returns "string_expression1" in which characters from "string_expression3" are translated to the equivalent characters in "string_expression2". "String_expression4" is a single character that is used to pad "string_expression2" if it is shorter than "string_expression3". If only "string_expression1" is present, then this function translates it to uppercase characters.

Syntax

```
translate ( string_expression1 [ , string_expression2,  
string_expression3 [ , string_expression4 ] ] )
```

Example 1

```
translate ( 'abcdefg' )
```

Result

Returns ABCDEFG.

Example 2

```
translate ( 'mnop' , n, m , - )
```

Result

Returns n-nlop.

trunc

Returns "numeric_expression1" truncated to "numeric_expression2" places to the right of the decimal point. If "numeric_expression2" is negative, "numeric_expression1" is truncated to the absolute value of "numeric_expression2" places to the left of the decimal point.

Syntax

```
trunc ( numeric_expression1, numeric_expression2 )
```

Example

```
trunc ( 3.14159265, 3 )
```

Result

Returns 3.141.

truncate

Returns "numeric_expression1" truncated to "numeric_expression2" places to the right of the decimal point. If "numeric_expression2" is negative, "numeric_expression1" is truncated to the absolute value of "numeric_expression2" places to the left of the decimal point.

Syntax

```
truncate ( numeric_expression1, numeric_expression2 )
```

Example

```
truncate ( 3141.59265, -3 )
```

Result

Returns 3.

ucase

Returns "string_expression" with all lowercase characters shifted to uppercase.

Syntax

```
ucase ( string_expression )
```

Example

```
ucase ( XY896Zbcd789 )
```

Result

Returns XY896ZBCED789.

value

Returns the first non-null argument (or null if all arguments are null). The Value function takes two or more arguments.

Syntax

```
value ( expression_list )
```

Example

```
value ( [Unit cost], [Unit price], [Unit sale price] )
```

Result

Returns the first non-null value.

varchar

Returns a VARCHAR representation of expression, with length numeric_expression.

Syntax

```
varchar ( expression [ , numeric_expression ] )
```

week

Returns the week of the year in "date_expression" as an integer value in the range 1 to 53.

Syntax

```
week ( date_expression )
```

Example

```
week ( 11 November 2005 )
```

Result

Returns 45.

year

Returns the year from "date_expression".

Syntax

```
year ( date_expression )
```

Example

```
year ( 11 November 2005 )
```

Result

Returns 2005.

Greenplum String

overlay

Returns the "string_expression1" replacing "string_expression2" from character position "numeric_expression".

Syntax

```
overlay ( string_expression1 , string_expression2 ,  
numeric_expression1 [ , numeric_expression2 ] )
```

btrim

Returns "string_expression1" after removing the longest string of characters in "string_expression2".

Syntax

```
btrim ( string_expression1 [ , string_expression2 ] )
```

initcap

Returns "string_expression" with the first letter of each word in uppercase and all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_expression )
```

lpad

Returns "string_expression1" padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1 , integer_expression [ , string_expression2  
] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

md5

Returns the MD5 hash of "string_expression1".

Syntax

```
md5 ( string_expression1 )
```

to_hex

Returns the hexadecimal string representation of "numeric_expression1".

Syntax

```
to_hex ( numeric_expression1 )
```


repeat

Returns the "string_expression" repeated "numeric_expression1" times.

Syntax

```
repeat ( string_expression , numeric_expression1 )
```

replace

Returns "string_expression" having replaced "string_expression2" with "string_expression3".

Syntax

```
replace ( string_expression , string_expression2 , string_expression3)
```

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then spaces are used.

Syntax

```
rpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

split_part

Returns "numeric_expression" field having split "string_expression1" on "string_expression2".

Syntax

```
split_part ( string_expression1 , string_expression2 ,  
numeric_expression )
```

Greenplum Data type formatting

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can either be a date value or a numeric value.

Syntax

```
to_char ( expression , string_expression )
```

to_date

Converts "string_expression1" to a date value as specified by the format "string_expression2".

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2".

Syntax

```
to_number ( string_expression1 , string_expression2 )
```

to_timestamp

Converts "string_expression1" to a timestamp value as specified by the format "string_expression2".

Syntax

```
to_timestamp ( string_expression1 , string_expression2 )
```

Greenplum Math

log

Returns the base 10 logarithm of "numeric_expression1" or logarithm to the base "numeric_expression2".

Syntax

```
log ( numeric_expression1 [ , numeric_expression2 ] )
```

ln

Returns the natural logarithm of "numeric_expression1".

Syntax

```
ln ( numeric_expression )
```

cbrt

Returns the cube root of "numeric_expression1".

Syntax

```
cbrt ( numeric_expression )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

Greenplum Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

`asin (numeric_expression)`

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

`atan (numeric_expression)`

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

`atan2 (numeric_expression1 ,numeric_expression2)`

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cos (numeric_expression)`

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cot (numeric_expression)`

degrees

Returns the degrees where "numeric_expression" is an angle expressed in radians.

Syntax

`degrees (numeric_expression)`

radians

Returns the radians where "numeric_expression" is an angle expressed in degrees.

Syntax

`radians (numeric_expression)`

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`sin (numeric_expression)`

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`tan (numeric_expression)`

ascii

Returns a number representing the ascii code value of the leftmost character of "string_expression"; for example, `ascii ('A')` is 65.

Syntax

`ascii (string_expression)`

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

`chr (integer_expression)`

current_database

Returns the name of the current database.

Syntax

`current_database ()`

current_schema

Returns the name of the current schema.

Syntax

`current_schema ()`

{current_user}

Syntax

`{current_user}`

{session_user}

Syntax

`{session_user}`

translate

Returns "string_expression1" with each occurrence of each character in "string_expression2" replaced by its corresponding character in "string_expression3".

Syntax

`translate (string_expression1 , string_expression2 , string_expression3)`

date_trunc

Returns the timestamp to the specified precision.

Syntax

`date_trunc (string_expression , timestamp_expression)`

version

Returns the string value of the database version.

Syntax

```
version ( )
```

Informix

Informix Math

log10

Returns the logarithm of "numeric_expression" to base 10.

Syntax

```
log10 ( numeric_expression )
```

logn

Returns the natural logarithm of "numeric_expression".

Syntax

```
logn ( numeric_expression )
```

root

Returns the root value of "numeric_expression1". Requires at least one numeric argument (the radians argument). If only "numeric_expression1" is supplied, 2 is used as a default value for "numeric_expression2". Zero cannot be used as the value of "numeric_expression2".

Syntax

```
root ( numeric_expression1 [ , numeric_expression2 ] )
```

Informix Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression1".

Syntax

```
atan2 ( numeric_expression1 , numeric_expression2 )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
sin ( numeric_expression )
```

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
tan ( numeric_expression )
```

cardinality

Returns the number of elements in a collection column (SET, MULTISSET, LIST).

Syntax

```
cardinality ( string_expression )
```

char_length

Returns the number of logical characters in "string_expression". The number of logical characters can be distinct from the number of bytes in some East Asian locales.

Syntax

```
char_length ( string_expression )
```

concat

Returns a string that is the result of concatenating, or joining, "string_expression1" to "string_expression2".

Syntax

```
concat ( string_expression1 , string_expression2 )
```

Example

```
concat ( [Sales (query)].[Sales staff].[First name], [Sales (query)].  
[Sales staff].[Last name] )
```

Result

Returns the first name and last name; e.g., Bob Smith.

date

Returns the date value of "string_expression", "date_expression", or "integer_expression".

Syntax

```
date ( string_expression|date_expression|integer_expression )
```

day

Returns an integer that represents the day of the month (1-31).

Syntax

```
day ( date_expression )
```

extend

Adjusts the precision of a datetime or date expression. The expression cannot be a quoted string representation of a date value. If you do not specify first and last qualifiers, the default qualifiers are year to fraction (3). If the expression contains fields that are not specified by the qualifiers, the unwanted fields are discarded. If the first qualifier specifies a larger (more significant) field than what exists in the expression, the new fields are filled in with values returned by the current function. If the last qualifier specifies a smaller (less significant) field than what exists in the expression, the new fields are filled in with constant values. A missing month or day field is filled in with 1, and missing hour to fraction fields are filled in with 0.

Syntax

```
extend ( date_expression , ' { ' year to second ' } ' )
```

Example

```
extend ( some_date_column , { year to second } )
```

hex

Returns the hexadecimal encoding of "integer_expression".

Syntax

```
hex ( integer_expression )
```

initcap

Returns "string_expression" with the first letter of each word in uppercase and all other letters in lowercase. A word begins after any character other than a letter. Thus, in addition to a blank space, symbols such as commas, periods, and colons can introduce a new word.

Syntax

```
initcap ( string_expression )
```

length

Returns the number of bytes in "string_expression", not including any trailing blank spaces. For byte or text "string_expression", length returns the full number of bytes, including any trailing blank spaces.

Syntax

```
length ( string_expression )
```

lpad

Returns "string_expression1" left-padded by "string_expression2" to the total number of characters specified by "integer_expression". The sequence of "string_expression2" occurs as many times as necessary to make the return string the length specified by "integer_expression".

Syntax

```
lpad ( string_expression1 , integer_expression , string_expression2 )
```

mdy

Returns a type date value with three expressions that evaluate to integers that represent the month (integer_expression1), day (integer_expression2), and year (integer_expression3).

Syntax

```
mdy ( integer_expression1 , integer_expression2 ,  
      integer_expression3 )
```

month

Returns an integer corresponding to the month portion of "date_expression".

Syntax

```
month ( date_expression )
```

nvl

Returns the value of "expression1" if "expression1" is not NULL. If "expression1" is NULL, then returns the value of "expression2".

Syntax

```
nvl ( expression1 , expression2 )
```

Example

```
nvl ( [Unit sale price] , [Unit price] )
```

Result

Returns the unit sale price, or returns the unit price if the unit sale price is NULL.

octet_length

Returns the number of bytes in "string_expression", including any trailing spaces.

Syntax

```
octet_length ( string_expression )
```


replace

Returns "string_expression1" in which every occurrence of "string_expression2" is replaced by "string_expression3". If you omit the "string_expression3" option, every occurrence of "string_expression2" is omitted from the return string.

Syntax

```
replace ( string_expression1 , string_expression2 [ ,  
         string_expression3 ] )
```

Example

```
replace ( [Sales (query)].[Products].[Product line code] , - )
```

Result

Returns all product line codes without the character "-"

round

Returns the rounded value of "numeric_expression". If you omit "integer_expression", the value is rounded to zero digits or to the units place. The digit range of 32 (+ and -) refers to the entire decimal value. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression [ , integer_expression ] )
```

Example

```
round (125, -1)
```

Result

130

rpad

Returns "string_expression1" right-padded by "string_expression2" to the total number of characters specified by "integer_expression". The sequence of "string_expression2" occurs as many times as necessary to make the return string the length specified by "integer_expression".

Syntax

```
rpad ( string_expression1 , integer_expression , string_expression2 )
```

substr

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters. The first character in "string_expression" is at position 1. If you omit "integer_expression2", returns the substring of "string_expression" that starts at position "integer_expression1" and ends at the end of "string_expression".

Syntax

```
substr ( string_expression , integer_expression1 [ ,  
         integer_expression2 ] )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

to_char

Returns the character string "date_expression" with the specified "string_expression" formatting. You can use this function only with built-in data types.

Syntax

```
to_char ( date_expression , string_expression )
```

to_date

Returns "string_expression1" as a date according to the date format you specify in "string_expression2". If "string_expression1" is NULL, then a NULL value is returned.

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

trunc

Returns the truncated value of "numeric_expression". If you omit "integer_expression", then "numeric_expression" is truncated to zero digits or to the unit's place. The digit limitation of 32 (+ and -) refers to the entire decimal value.

Syntax

```
trunc ( numeric_expression [ , integer_expression ] )
```

weekday

Returns an integer that represents the day of the week of "date_expression". Zero (0) represents Sunday, one (1) represents Monday, and so on.

Syntax

```
weekday ( date_expression )
```

year

Returns a four-digit integer that represents the year of "date_expression".

Syntax

```
year ( date_expression )
```

MS Access**MS Access Cast****cast_decimal**

Returns the value of "expression" cast as a decimal.

Syntax

```
cast_decimal ( expression )
```

cast_float

Returns the value of "expression" cast as a float.

Syntax

cast_float (expression)

cast_integer

Returns the value of "expression" cast as an integer.

Syntax

cast_integer (expression)

Example

cast_integer (84.95)

Result

84

cast_numeric

Returns "string_expression" cast as a numeric value.

Syntax

cast_numeric (string_expression)

cast_real

Returns the value of "expression" cast as a real value.

Syntax

cast_real (expression)

cast_smallint

Returns "expression" cast as a small integer.

Syntax

cast_smallint (expression)

cast_varchar

Returns the value of "expression" cast as a variable character field.

Syntax

cast_varchar (expression)

MS Access Math

log

Returns the natural logarithm of "numeric_expression".

Syntax

log (numeric_expression)

rand

Generates a random number using "integer_expression" as a seed value.

Syntax

rand (integer_expression)

MS Access Trigonometry

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

atan (numeric_expression)

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

cos (numeric_expression)

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sin (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

ascii

Returns the ascii code value of the leftmost character of "string_expression".

Syntax

ascii (string_expression)

ceiling

Returns the smallest integer greater than or equal to "numeric_expression".

Syntax

ceiling (numeric_expression)

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

chr (integer_expression)

concat

Returns a string that is the result of concatenating, or joining, "string_expression1" to "string_expression2".

Syntax

```
concat ( string_expression1 , string_expression2 )
```

Example

```
concat ( [Sales (query)].[Sales staff].[First name], [Sales (query)].  
[Sales staff].[Last name] )
```

Result

Returns the first name and last name; e.g., Bob Smith.

curdate

Returns a date value representing the current date of the computer that the database software runs on.

Syntax

```
curdate ()
```

curtime

Returns a time value representing the current time of the computer that the database software runs on.

Syntax

```
curtime ()
```

dayname

Returns a character string containing the data source-specific name of the day (for example, Sunday through Saturday or Sun. through Sat. for an English data source, or Sonntag through Samstag for a German data source) for the day portion of "date_expression".

Syntax

```
dayname ( date_expression )
```

dayofmonth

Returns the day of the month (1-31) from "date_expression". Returns the days field (a signed integer) from "interval_expression".

Syntax

```
dayofmonth ( date_expression|interval_expression )
```

dayofweek

Returns the day of the week in "date_expression" as an integer (1-7), where 1 represents Monday.

Syntax

```
dayofweek ( date_expression )
```

dayofyear

Returns the day of the year in "date_expression" as an integer (1-366).

Syntax

```
dayofyear ( date_expression )
```

hour

Returns the hour from "time_expression" as an integer from 0 (midnight) to 23 (11:00 pm).

Syntax

```
hour ( time_expression )
```

instr

Searches "string_expression1" for the first occurrence of "string_expression2" and returns an integer specifying the position of "string_expression2". "Integer_expression1" sets the starting position for the search. If "integer_expression1" is omitted, the search begins at the first character position of "string_expression1". "Integer_expression2" specifies the type of string comparison. "Integer_expression1" is required if "integer_expression2" is specified.

Syntax

```
instr ( [ integer_expression1 , ] string_expression1 ,  
string_expression2 [ , integer_expression2 ] )
```

lcase

Returns "string_expression" with all uppercase characters converted to lowercase.

Syntax

```
lcase ( string_expression )
```

left

Returns the leftmost "integer_expression" characters of "string_expression".

Syntax

```
left ( string_expression , integer_expression )
```

Example

```
left ( [Sales (query)].[Sales staff].[Last name] , 3 )
```

Result

Returns the first three characters of each last name.

length

Returns the number of characters in "string_expression", excluding trailing blanks and the string termination character.

Syntax

```
length ( string_expression )
```

locate

Returns the starting position of the first occurrence of "string_expression1" within "string_expression2". The search starts at position "integer_expression" of "string_expression2". The first character in a string is at position 1. If "string_expression1" is not found, then zero is returned.

Syntax

```
locate ( string_expression1 , string_expression2 [ ,  
integer_expression ] )
```

ltrim

Returns "string_expression" with leading spaces removed.

Syntax

```
ltrim ( string_expression )
```

minute

Returns the minute (an integer from 0-59) from "time_expression".

Syntax

```
minute ( time_expression )
```

month

Returns the month (an integer from 1-12) from "date_expression".

Syntax

```
month ( date_expression )
```

monthname

Returns a character string containing the data source-specific name of the month (for example, January through December or Jan. through Dec. for an English data source, or Januar through Dezember for a German data source) for the month portion of "date_expression".

Syntax

```
monthname ( date_expression )
```

Example

```
monthname ( 2005-11-01 )
```

Result

```
November
```

now

Returns a datetime value representing the current date and time of the computer that the database software runs on.

Syntax

```
now ( )
```

position

Returns the starting position of "string_expression1" in "string_expression2". The first character in a string is at position 1.

Syntax

```
position ( string_expression1 , string_expression2 )
```

quarter

Returns the quarter in "date_expression" as a number (1-4), where 1 represents January 1 through March 31.

Syntax

```
quarter ( date_expression )
```

right

Returns the rightmost "integer_expression" characters of "string_expression".

Syntax

```
right ( string_expression , integer_expression )
```

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value "integer_expression" places to the left of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression , integer_expression )
```

Example

```
round (125, -1)
```

Result

```
130
```

rtrim

Returns "string_expression" with trailing spaces removed.

Syntax

```
rtrim ( string_expression )
```

Example

```
rtrim ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with any spaces at the end of the name removed.

sign

Returns an indicator of the sign of "numeric_expression", +1 if positive, 0 if zero, or -1 if negative.

Syntax

```
sign ( numeric_expression )
```

space

Returns a string consisting of "integer_expression" spaces.

Syntax

```
space ( integer_expression )
```

substr

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters. The first character in "string_expression" is at position 1.

Syntax

```
substr ( string_expression , integer_expression1 ,  
        integer_expression2 )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

substring

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters. The first character in "string_expression" is at position 1.

Syntax

```
substring ( string_expression , integer_expression1 ,  
           integer_expression2 )
```

Example

```
substring ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

truncate

Returns "string_expression" with trailing spaces removed.

Syntax

```
truncate ( string_expression )
```

ucase

Returns "string_expression" with all lowercase characters converted to uppercase.

Syntax

```
ucase ( string_expression )
```

week

Returns the week of the year in "date_expression" as an integer value (1-53), where 1 represents the first week of the year.

Syntax

```
week ( date_expression )
```

year

Returns the year from "date_expression".

Syntax

```
year ( date_expression )
```

MySQL

MySQL String

lpad

Returns "string_expression1" padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

hex

Returns the hexadecimal string representation of "numeric_expression1".

Syntax

```
hex ( numeric_expression1 )
```

repeat

Returns the "string_expression" repeated "numeric_expression1" times.

Syntax

```
repeat ( string_expression , numeric_expression1 )
```

replace

Returns "string_expression" having replaced "string_expression2" with "string_expression3".

Syntax

```
replace ( string_expression , string_expression2 , string_expression3 )
```

reverse

Returns "string_expression" reversed.

Syntax

```
reverse ( string_expression )
```

right

Returns the rightmost "numeric_expression" characters from "string_expression1".

Syntax

```
right ( string_expression1 , numeric_expression )
```

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then spaces are used.

Syntax

```
rpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

soundex

Returns a soundex string of "string_expression1".

Syntax

```
soundex ( string_expression1 )
```

MySQL Math

log

Returns the base 10 logarithm of "numeric_expression1" or logarithm to the base "numeric_expression2".

Syntax

```
log ( numeric_expression )
```

ln

Returns the natural logarithm of "numeric_expression1".

Syntax

```
ln ( numeric_expression )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

MySQL Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

```
atan2 ( numeric_expression1 ,numeric_expression2 )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cot (numeric_expression)`

degrees

Returns the degrees where "numeric_expression" is an angle expressed in radians.

Syntax

`degrees (numeric_expression)`

radians

Returns the radians where "numeric_expression" is an angle expressed in degrees.

Syntax

`radians (numeric_expression)`

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`sin (numeric_expression)`

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`tan (numeric_expression)`

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_expression"; for example, `ascii ('A')` is 65.

Syntax

`ascii (string_expression)`

database

Returns the current database name

Syntax

`database ()`

schema

Returns the current schema name

Syntax

`schema ()`

session_user

Return the user name returned by the client

Syntax

`session_user ()`

system_user

Return the user name returned by the client

Syntax

```
system_user ( )
```

version

Returns the string value of the database version.

Syntax

```
version ( )
```

Netezza

Netezza Math

log

Returns the logarithm of "numeric_expression2" to the base "numeric_expression1". When the optional argument "numeric_expression1" is not specified, the base 10 is used.

Syntax

```
log ( [numeric_expression1 ,] numeric_expression2 )
```

Netezza Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

atan2 (numeric_expression1 , numeric_expression2)

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

cos (numeric_expression)

degrees

Returns the degrees where "numeric_expression" is an angle expressed in radians.

Syntax

degrees (numeric_expression)

radians

Returns the radians where "numeric_expression" is an angle expressed in degrees.

Syntax

radians (numeric_expression)

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sin (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

Netezza Fuzzy

le_dst

Returns a value indicating how different the two input strings are, calculated according to the Levenshtein edit distance algorithm.

Syntax

le_dst (string_expression1 , string_expression2)

dle_dst

Returns a value indicating how different the two input strings are, calculated according to the Damerau-Levenshtein distance algorithm

Syntax

dle_dst (string_expression1 , string_expression2)

Netezza Phonetic

nysiis

Returns a Soundex representation of "string_expression" using the New York State Identification and Intelligence System (NYSIIS) variation of Soundex.

Syntax

```
nysiis ( string_expression )
```

dbl_mp

Returns a composite 32-bit value of "string_expression".

Syntax

```
dbl_mp ( string_expression )
```

pri_mp

Returns the 4 character primary metaphone string from "numeric_expression" returned by dbl_mp.

Syntax

```
pri_mp ( numeric_expression )
```

sec_mp

Returns the 4 character secondary metaphone string from "numeric_expression" returned by dbl_mp.

Syntax

```
sec_mp ( numeric_expression )
```

score_mp

Returns a score for how closely "numeric_expression" and "numeric_expression2" match.

Syntax

```
score_mp ( numeric_expression , numeric_expression2 ,  
numeric_expression3 , numeric_expression4 , numeric_expression5 ,  
numeric_expression6 )
```

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_expression"; for example, ascii ('A') is 65.

Syntax

```
ascii ( string_expression )
```

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

```
chr ( integer_expression )
```


decode

Compares "expr" to each search value one by one. If "expr" is equal to a search, then it returns the corresponding result. If no match is found, it returns "default". If "default" is omitted, it returns null.

Syntax

```
decode ( expr , search , result [ , search , result]... [ , default] )
```

initcap

Returns "string_expression", with the first letter of each word in uppercase, all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_expression )
```

instr

Searches "string_expression1" starting at position "integer_expression1" for the "integer_expression2" occurrence of "string_expression2". If "integer_expression1" is negative then the search is backwards from the end of "string_expression1". Returns an integer indicating the position of "string_expression2".

Syntax

```
instr ( string_expression1 , string_expression2 [ ,  
integer_expression1 [ , integer_expression2 ] ] )
```

lpad

Returns "string_expression1" padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1 , integer_expression [ , string_expression2  
] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

months_between

Returns the number of months from "date_expression1" to "date_expression2". If "date_expression1" is later than "date_expression2" then the result will be a positive number. The days and time portions of the difference are ignored, i.e., the months are not rounded, except if "date_expression1" and "date_expression2" are the last days of a month.

Syntax

```
months_between ( date_expression1 , date_expression2 )
```

next_day

Returns the datetime of the first weekday named by "string_expression" that is later than "datetime_expression". The return value has the same hours, minutes, and seconds as "datetime_expression".

Syntax

```
next_day ( datetime_expression , string_expression )
```

nvl

Returns the value of "expression1" if "expression1" is not NULL. If "expression1" is NULL, then returns the value of "expression2".

Syntax

```
nvl ( expression1 , expression2 )
```

Example

```
nvl ( [Unit sale price] , 0 )
```

Result

Returns the unit sale price, or returns 0 if the unit sale price is NULL.

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value "integer_expression" places to the left of the decimal point; for example, round (125, -1) rounds to 130.

Syntax

```
round ( numeric_expression [ , integer_expression ] )
```

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then spaces are used.

Syntax

```
rpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

substr

Returns the substring of "string_expression" that starts at position "integer_expression1". The first character in "string_expression" is at position 1. "Integer_expression2" can be used to select fewer characters; by default it selects characters to the end of the string.

Syntax

```
substr ( string_expression , integer_expression1 [ ,  
integer_expression2 ] )
```

{current_db}

Syntax

```
{current_db}
```

{current_user}

Syntax

```
{current_user}
```

{session_user}

Syntax

```
{session_user}
```

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can be either a date value or a numeric value.

Syntax

```
to_char ( expression [ , string_expression ] )
```

to_date

Converts "string_expression1" to a datetime value as specified by the format "string_expression2".

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2".

Syntax

```
to_number ( string_expression1 , string_expression2 )
```

translate

Returns "string_expression1", with all occurrences of each character in "string_expression2" replaced by its corresponding character in "string_expression3".

Syntax

```
translate ( string_expression1 , string_expression2 ,  
string_expression3 )
```

date_trunc

Truncates "date_expression1" to a value as specified by the format "string_expression1".

Syntax

```
date_trunc ( string_expression1 , date_expression1 )
```

trunc

Truncates digits from "numeric_expression1" using "numeric_expression2" as the precision.

Syntax

```
trunc ( numeric_expression1 [ , numeric_expression2 ] )
```

version

Returns the "string_expression1" value of the database version.

Syntax

```
version ( )
```

Oracle

Oracle Math

log

Returns the logarithm of "numeric_expression2" to the base "numeric_expression1". When the optional argument "numeric_expression1" is not specified, the base used is the constant e (which is approximately equal to 2.71282).

Syntax

```
log ([ numeric_expression1 , ] numeric_expression2 )
```

Oracle Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

`atan (numeric_expression)`

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

`atan2 (numeric_expression1 ,numeric_expression2)`

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cos (numeric_expression)`

cosh

Returns the hyperbolic cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cosh (numeric_expression)`

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`sin (numeric_expression)`

sinh

Returns the hyperbolic sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`sinh (numeric_expression)`

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`tan (numeric_expression)`

tanh

Returns the hyperbolic tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`tanh (numeric_expression)`

add_months

Returns the datetime resulting from adding "integer_expression" months to "date_expression".

Syntax

```
add_months ( date_expression , integer_expression )
```

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_expression".

Syntax

```
ascii ( string_expression )
```

Example

```
ascii ( 'A' )
```

Result

Returns '65'

ceil

Returns the smallest integer greater than or equal to "numeric_expression".

Syntax

```
ceil ( numeric_expression )
```

char_length

Returns the number of logical characters in "string_expression". The number of logical characters can be distinct from the number of bytes in some East Asian locales.

Syntax

```
char_length ( string_expression )
```

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

```
chr ( integer_expression )
```

concat

Returns a string that is the result of concatenating, or joining, "string_expression1" to "string_expression2".

Syntax

```
concat ( string_expression1 , string_expression2 )
```

Example

```
concat ( [Sales (query)].[Sales staff].[First name], [Sales (query)].  
[Sales staff].[Last name] )
```

Result

Returns the first name and last name; e.g., Bob Smith.

decode

Compares "expression" to each search value one by one. If "expression" is equal to a search, then it returns the corresponding result. If no match is found, it returns "default", or if "default" is omitted, it returns null.

Syntax

```
decode ( expression , search , result [ , search , result ]... [ ,  
  default ] )
```

dump

Returns internal representation of "expression" with the format of "numeric_expression1" starting from position "numeric_expression2" for "numeric_expression3" characters.

Syntax

```
dump ( expression [ , numeric_expression1 [ , numeric_expression2 [ ,  
  numeric_expression3 ] ] ] )
```

greatest

Returns the greatest value in "expression_list".

Syntax

```
greatest ( expression_list )
```

initcap

Returns "string_expression" with the first letter of each word in uppercase and all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_expression )
```

instr

Searches "string_expression1" starting at position "integer_expression1" for the "integer_expression2" occurrence of "string_expression2". If "integer_expression1" is negative, then the search occurs backwards from the end of "string_expression1". Returns an integer indicating the position of "string_expression2".

Syntax

```
instr ( string_expression1, string_expression2 [ ,  
  integer_expression1 [ , integer_expression2 ] ] )
```

instrb

Searches "string_expression1" starting at position "integer_expression1" for the "integer_expression2" occurrence of "string_expression2". If "integer_expression1" is negative, then the search occurs backwards from the end of "string_expression1". Returns the position (byte number) where "string_expression2" was found.

Syntax

```
instrb ( string_expression1, string_expression2 [ ,  
integer_expression1 [ , integer_expression2 ] ] )
```

least

Returns the least value in "expression_list".

Syntax

```
least ( expression_list )
```

length

Returns the number of characters in "string_expression".

Syntax

```
length ( string_expression )
```

lengthb

Returns the number of bytes in "string_expression".

Syntax

```
lengthb ( string_expression )
```

lpad

Returns "string_expression1" left-padded to the length defined by "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1, integer_expression [ ,  
string_expression2 ] )
```

ltrim

Returns "string_expression1" with leading characters removed up to the first character not in "string_expression2".

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

Example

```
ltrim ( 'xyxXxyAB' , 'xy' )
```

Result

```
XxyAB
```

months_between

Returns the number of months from "date_expression1" to "date_expression2". If "date_expression1" is later than "date_expression2" then the result will be a positive number. The days and time portion of the difference are ignored, so the months are not rounded unless "date_expression1" and "date_expression2" are the last days of a month.

Syntax

```
months_between ( date_expression1 , date_expression2 )
```

new_time

Returns the datetime in "new_timezone" for "datetime_expression" in "old_timezone". "Old_timezone" and "new_timezone" can be one of 'AST', 'ADT', 'BST', 'BDT', 'CST', 'CDT', 'EST', 'EDT', 'HST', 'HDT', 'MST', 'MDT', 'NST', 'PST', 'PDT', 'YST', or 'YDT'.

Syntax

```
new_time ( datetime_expression , old_timezone , new_timezone )
```

next_day

Returns the datetime of the first weekday named by "string_expression" that is later than "datetime_expression". The return value has the same format as "datetime_expression".

Syntax

```
next_day ( datetime_expression , string_expression )
```

nls_initcap

Returns "string_expression1" with the first letter of each word in uppercase and all other letters in lowercase. A word begins after any character other than a letter. Thus, in addition to a blank space, symbols such as commas, periods, and colons can introduce a new word. "String_expression2" specifies the sorting sequence.

Syntax

```
nls_initcap ( string_expression1 [ , string_expression2 ] )
```

nls_lower

Returns "string_expression1" with all letters in lowercase. "String_expression2" specifies the sorting sequence.

Syntax

```
nls_lower ( string_expression1 [ , string_expression2 ] )
```

nls_upper

Returns "string_expression1" with all letters in uppercase. "String_expression2" specifies the sorting sequence.

Syntax

```
nls_upper ( string_expression1 [ , string_expression2 ] )
```

nvl

Returns the value of "expression1" if "expression1" is not NULL. If "expression1" is NULL, then returns the value of "expression2".

Syntax

```
nvl ( expression1 , expression2 )
```

Example

```
nvl ( [Unit sale price] , 0 )
```

Result

Returns the unit sale price, or returns 0 if the unit sale price is NULL.

replace

Replaces all occurrences of "string_expression2" in "string_expression1" with "string_expression3". If "string_expression3" is not specified, then it removes all occurrences of "string_expression2".

Syntax

```
replace ( string_expression1 , string_expression2 [ ,  
         string_expression3 ] )
```

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value "integer_expression" places to the left of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression [ , integer_expression ] )
```

Example

```
round ( 125 , -1 )
```

Result

Returns 130

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then occurrences of "string_expression2" are replaced with spaces.

Syntax

```
rpad ( string_expression1 , integer_expression [ ,  
      string_expression2 ] )
```

rtrim

Returns "string_expression1" with the final characters removed after the last character not in "string_expression2". If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

Example

```
rtrim ( 'ABxXxyx' , 'xy' )
```

Result

Returns 'ABxX'

sign

Returns an indicator of the sign of "numeric_expression", +1 if positive, 0 if zero, or -1 if negative.

Syntax

```
sign ( numeric_expression )
```

soundex

Returns a character string containing the phonetic representation of "string_expression".

Syntax

```
soundex ( string_expression )
```

substr

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters or to the end of "string_expression" if "integer_expression2" is omitted. The first character in "string_expression" is at position 1.

Syntax

```
substr ( string_expression , integer_expression1 [ ,  
integer_expression2 ] )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

substrb

Returns the substring of "string_expression" that starts at position "numeric_expression1" and ends after "numeric_expression2" bytes. The first byte in "string_expression" is at position 1. If you omit "numeric_expression2", returns the substring of "string_expression" that starts at position "numeric_expression1" and ends at the end of "string_expression".

Syntax

```
substrb ( string_expression , numeric_expression1 [ ,  
numeric_expression2 ] )
```

Example

```
substrb ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

{sysdate}

Returns a datetime value representing the current date and time of the computer that the database software runs on.

Syntax

```
{ sysdate }
```

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can be either a date value or a numeric value.

Syntax

```
to_char ( expression [ , string_expression ] )
```

to_date

Converts "string_expression1" to a datetime value as specified by the format "string_expression2". "String_expression3" specifies the format elements, such as language.

Syntax

```
to_date ( string_expression1 [ , string_expression2 [ ,  
string_expression3 ] ] )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2". "String_expression3" specifies the format elements, such as currency information.

Syntax

```
to_number ( string_expression1 , string_expression2 ,  
string_expression3 )
```

translate

Returns "string_expression1" with all occurrences of each character in "string_expression2" replaced by the corresponding character in "string_expression3".

Syntax

```
translate ( string_expression1 , string_expression2 ,  
string_expression3 )
```

trunc

Truncates "date_expression" using the format specified by "string_expression". For example, if "string_expression" is 'year', then "date_expression" is truncated to the first day of the year.

Syntax

```
trunc ( date_expression , string_expression )
```

Example

```
trunc ( 2003-08-22 , 'year' )
```

Result

Returns 2003-01-01.

trunc

Truncates digits from "numeric_expression1" using "numeric_expression2" as the precision.

Syntax

```
trunc ( numeric_expression1 , numeric_expression2 )
```

{user}

Returns the username of the current Oracle user.

Syntax

```
{ user }
```

vsize

Returns the number of bytes in the internal representation of "expression". "Expression" must be a string expression.

Syntax

```
vsize ( expression )
```

Paracel

Paracel String

overlay

Returns "string_expression1", replacing "string_expression2" from character position numeric_expression.

Syntax

```
overlay ( string_expression1 , string_expression2 ,  
numeric_expression1 [ , numeric_expression2 ] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

replace

Returns "string_expression", having replaced "string_expression2" with "string_expression3".

Syntax

```
replace ( string_expression , string_expression2 , string_expression3  
)
```

rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

Paracel Data type formatting

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can be either a date value or a numeric value.

Syntax

```
to_char ( expression , string_expression )
```

to_date

Converts "string_expression1" to a date value as specified by the format "string_expression2".

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2".

Syntax

```
to_number ( string_expression1 , string_expression2 )
```

Paracel Math

cbrt

Returns the cube root of "numeric_expression1".

Syntax

```
cbrt ( numeric_expression )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

current_database

Returns the name of the current database.

Syntax

```
current_database ( )
```

current_schema

Returns the name of the current schema

Syntax

`current_schema ()`

{current_user}

Syntax

`{current_user}`

{session_user}

Syntax

`{session_user}`

translate

Returns "string_expression1", with each occurrence of each character in "string_expression2" replaced by its corresponding character in "string_expression3".

Syntax

`translate (string_expression1 , string_expression2 , string_expression3)`

version

Returns the string value of the database version.

Syntax

`version ()`

Postgres

Postgres String

overlay

Returns the "string_expression1" replacing "string_expression2" from character position numeric_expression.

Syntax

`overlay (string_expression1 , string_expression2 , numeric_expression1 [, numeric_expression2])`

btrim

Returns string_expression1 after removing the longest string of characters in "string_expression2".

Syntax

`btrim (string_expression1 [, string_expression2])`

initcap

Returns "string_expression", with the first letter of each word in uppercase and all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_expression )
```

lpad

Returns "string_expression1" padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

md5

Returns the MD5 hash of "string_expression1".

Syntax

```
md5 ( string_expression1 )
```

to_hex

Returns the hexadecimal string representation of "numeric_expression1".

Syntax

```
to_hex ( numeric_expression1 )
```

repeat

Returns the "string_expression" repeated "numeric_expression1" times.

Syntax

```
repeat ( string_expression , numeric_expression1 )
```

replace

Returns "string_expression" with "string_expression2" replaced with "string_expression3".

Syntax

```
replace ( string_expression , string_expression2 , string_expression3 )
```

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then spaces are used.

Syntax

```
rpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```


rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

split_part

Returns "numeric_expression" field having split "string_expression1" on "string_expression2".

Syntax

```
split_part ( string_expression1 , string_expression2 ,  
numeric_expression )
```

Postgres Data type formatting

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can be either a date value or a numeric value.

Syntax

```
to_char ( expression , string_expression )
```

to_date

Converts "string_expression1" to a date value as specified by the format "string_expression2".

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2".

Syntax

```
to_number ( string_expression1 , string_expression2 )
```

to_timestamp

Converts "string_expression1" to a timestamp value as specified by the format "string_expression2". Alternate syntax: to_timestamp (numeric-expression)
Converts an Unix epoch clock time to a timestamp value.

Syntax

```
to_timestamp ( string_expression1 , string_expression2 )
```

Postgres Math

log

Returns the base 10 logarithm of "numeric_expression1" or logarithm to the base "numeric_expression2".

Syntax

```
log ( numeric_expression1 [ , numeric_expression2 ] )
```

ln

Returns the natural logarithm of "numeric_expression1".

Syntax

```
ln ( numeric_expression )
```

cbrt

Returns the cube root of "numeric_expression1".

Syntax

```
cbrt ( numeric_expression )
```

div

Returns the integer quotient of "numeric_expression1" divided by "numeric_expression2".

Syntax

```
div ( numeric_expression1 , numeric_expression2 )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

Postgres Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

`atan2 (numeric_expression1 , numeric_expression2)`

cos

Returns the cosine of "numeric_expression", where "numeric_expression" is an angle expressed in radians.

Syntax

`cos (numeric_expression)`

cot

Returns the cotangent of "numeric_expression", where "numeric_expression" is an angle expressed in radians.

Syntax

`cot (numeric_expression)`

degrees

Returns the degrees where "numeric_expression" is an angle expressed in radians.

Syntax

`degrees (numeric_expression)`

radians

Returns the radians where "numeric_expression" is an angle expressed in degrees.

Syntax

`radians (numeric_expression)`

sin

Returns the sine of "numeric_expression", where "numeric_expression" is an angle expressed in radians.

Syntax

`sin (numeric_expression)`

tan

Returns the tangent of "numeric_expression", where "numeric_expression" is an angle expressed in radians.

Syntax

`tan (numeric_expression)`

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_expression"; for example, `ascii ('A')` is 65.

Syntax

`ascii (string_expression)`

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

`chr (integer_expression)`

{current_db}

Syntax

`current_database()`

{current_catalog}

Syntax

`{current_catalog}`

{current_schema}

Syntax

`{current_schema}`

{current_user}

Syntax

`{current_user}`

{session_user}

Syntax

`{session_user}`

translate

Returns "string_expression1", with each occurrence of each character in "string_expression2" replaced by its corresponding character in "string_expression3".

Syntax

`translate (string_expression1 , string_expression2 , string_expression3)`

date_trunc

Returns the timestamp to the specified precision.

Syntax

`date_trunc (string_expression , timestamp_expression)`

version

Returns the string value of the database version.

Syntax

`version ()`

Red Brick

ceil

Returns the smallest integer greater than or equal to "numeric_expression" or "string_expression". Note that "string_expression" must represent a valid numeric value.

Syntax

```
ceil ( numeric_expression|string_expression )
```

concat

Returns a string that is the result of concatenating, or joining, "string_expression1" to "string_expression2".

Syntax

```
concat ( string_expression1 , string_expression2 )
```

Example

```
concat ( [Sales (query)].[Sales staff].[First name], [Sales (query)].  
[Sales staff].[Last name] )
```

Result

Returns the first name and last name; e.g., Bob Smith.

{current_user}

Returns the database username (authorization ID) of the current user.

Syntax

```
{ current_user }
```

date

Returns a date value. "Expression" can be either characters or a timestamp.

Syntax

```
date ( expression )
```

dateadd

Adds "interval" to "datetime_expression" and returns a result that is the same datetime data type as "datetime_expression". "Datepart" refers to the year, month, day, hour, minute, second. "Interval" must be an integer and "datetime_expression" can be a date, time, or timestamp.

Syntax

```
dateadd ( { datepart } , interval, datetime_expression )
```

datediff

Determines the difference between two datetime expressions and returns an integer result in "datepart" units. "Datepart" refers to a year, month, day, hour, minute, or second. "Datetime_expression1" and "datetime_expression2" can be dates, times, or timestamps.

Syntax

```
datediff ( { datepart } , datetime_expression1, datetime_expression2 )
```

datetimeame

Extracts "datepart" of "datetime_expression" and returns its value as a character string. "Datepart" refers to a year, month, day, hour, minute, or second. "Datetime_expression" can be a date, a time, or a timestamp.

Syntax

```
datetime ( { datepart } , datetime_expression )
```

dec

Converts "expression" to a decimal value with the data type decimal (precision, scale). The default value of precision is 9. The default value of scale is 0.

Syntax

```
dec ( expression , [ precision , scale ] )
```

decimal

Converts "expression" to a decimal value with the data type decimal (precision, scale). The default value of precision is 9. The default value of scale is 0.

Syntax

```
decimal ( expression , [ precision , scale ] )
```

decode

Compares and converts "expression" to another value. If "expression" matches "target", it is replaced, otherwise it is replaced by "default" or null if no default is specified. The expressions can be any data type as long as they are all the same data type.

Syntax

```
decode ( expression , target , replacement [ ,default ] )
```

float

Converts "numeric_expression" into a double-precision floating-point value.

Syntax

```
float ( numeric_expression )
```

ifnull

Tests "expression" for missing values and replaces each one with "substitute". If "expression" is null, "substitute" is returned, otherwise it returns the value of "expression". The expressions can be any data type as long as they are all the same data type.

Syntax

```
ifnull ( expression, substitute )
```

int

Converts "numeric_expression" into an integer value and returns an integer value. If "numeric_expression" is null, it returns null.

Syntax

```
int ( numeric_expression )
```

integer

Converts "numeric_expression" into an integer value and returns an integer value. If "numeric_expression" is null, it returns null.

Syntax

```
integer ( numeric_expression )
```

Example

```
integer ( 84.95 )
```

Result

```
85
```

length

Returns an integer result specifying the number of characters in "string_expression". If "string_expression" is null, it returns null.

Syntax

```
length ( string_expression )
```

lengthb

Returns an integer result specifying the number of bytes in "string_expression". If "string_expression" is null, it returns null.

Syntax

```
lengthb ( string_expression )
```

ltrim

Removes leading blanks from "string_expression". If "string_expression" is null, it returns null.

Syntax

```
ltrim ( string_expression )
```

nullif

Returns null if both "expression1" and "expression2" have the same value. If they have different values, the value of "expression1" is returned. "Expression1" and "expression2" can be any data type as long as they are the same data type.

Syntax

```
nullif ( expression1 , expression2 )
```

positionb

Returns an integer that is relative to the beginning byte position of "string_expression1" in "string_expression2". If "string_expression1" is not located, the result is 0. If "string_expression1" is of zero length, the result is 1. If "string_expression1" is null, an error message is returned. If "string_expression2" is null, the result is 0.

Syntax

```
positionb ( string_expression1, string_expression2 )
```

real

Returns a real value. If "numeric_expression" is null, it returns null.

Syntax

```
real ( numeric_expression )
```

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places to the right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value "integer_expression" places to the left of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression , integer_expression )
```

Example

```
round (125, -1)
```

Result

```
130
```

rtrim

Removes trailing blanks from "string_expression". If "string_expression" is null, it returns null.

Syntax

```
rtrim ( string_expression )
```

Example

```
rtrim ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with any spaces at the end of the name removed.

sign

Determines the sign of "numeric_expression", and returns 1 for a positive value, -1 for a negative value, and 0 for zero.

Syntax

```
sign ( numeric_expression )
```

string

Converts "expression" to a character string. "Expression" can be either numeric or datetime.

Syntax

```
string ( expression [ , length [ , scale ] ] )
```


substr

Returns a substring of "string_expression" that begins at position "start_integer" and continues for "length_integer" characters. If "length_integer" is not specified, a substring from "start_integer" to the end of "string_expression" is returned.

Syntax

```
substr ( string_expression , start_integer , length_integer )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

substrb

Returns a substring of "string_expression" that begins at position "start_integer" and continues for "length_integer" bytes. If "length_integer" is not specified, a substring from "start_integer" to the end of "string_expression" is returned.

Syntax

```
substrb ( string_expression , start_integer , length_integer )
```

time

Creates a time value from "expression", which can be a character string or a time-stamp data type expression.

Syntax

```
time ( expression )
```

timestamp

Creates a time-stamp value from "timestamp_expression", which is a character string.

Syntax

```
timestamp ( timestamp_expression )
```

timestamp

Creates a time-stamp value from "time_expression" and "date_expression". If either "time_expression" or "date_expression" is null, the resulting time-stamp expression is also null.

Syntax

```
timestamp ( date_expression , time_expression )
```

to_char

Converts "source_date" to the character string specified by "format_string". "Source_date" can be a date, time, or timestamp data type.

Syntax

```
to_char ( source_date, format_string )
```

SAP BW Trigonometry

arccos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
arccos ( numeric_expression )
```

arcsin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
arcsin ( numeric_expression )
```

arctan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
arctan ( numeric_expression )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
sin ( numeric_expression )
```

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
tan ( numeric_expression )
```

coshyp

Returns the hyperbolic cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
coshyp ( numeric_expression )
```

sinhyp

Returns the hyperbolic sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
sinhyp ( numeric_expression )
```

tanhyp

Returns the hyperbolic tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
tanhyp ( numeric_expression )
```

SAP BW Math

log10

Returns the base ten logarithm of "numeric_expression".

Syntax

```
log10 ( numeric_expression )
```

Salesforce.com

Date Functions

CALENDAR_MONTH

Returns a number representing the calendar month of "date_expression".

Syntax

```
CALENDAR_MONTH ( date_expression )
```

Example

```
CALENDAR_MONTH ( '2012-02-29' )
```

Result

2

CALENDAR_QUARTER

Returns a number representing the calendar quarter of "date_expression".

Syntax

```
CALENDAR_QUARTER ( date_expression )
```

Example

```
CALENDAR_QUARTER ( '2012-02-29' )
```

Result

1

CALENDAR_YEAR

Returns a number representing the calendar year of "date_expression".

Syntax

```
CALENDAR_YEAR ( date_expression )
```

Example

```
CALENDAR_YEAR ( '2012-02-29' )
```

Result

2012

DAY_IN_MONTH

Returns a number representing the day in the month of "date_expression".

Syntax

```
DAY_IN_MONTH ( date_expression )
```

Example

```
DAY_IN_MONTH ( '2012-02-29' )
```

Result

29

DAY_IN_WEEK

Returns a number representing the day of the week for "date_expression" 1 for Sunday, 7 for Saturday.

Syntax

```
DAY_IN_WEEK ( date_expression )
```

Example

```
DAY_IN_WEEK ( '2012-02-29' )
```

Result

4 (Wednesday)

DAY_IN_YEAR

Returns a number representing the day in the year for "date_expression".

Syntax

```
DAY_IN_YEAR ( date_expression )
```

Example

```
DAY_IN_YEAR ( '2012-02-29' )
```

Result

60

DAY_ONLY

Returns a date representing the day portion of "dateTime_expression".

Syntax

```
DAY_ONLY ( dateTime_expression )
```

Example

```
DAY_ONLY ( '2012-02-29T23:00:01Z' )
```

Result

```
2012-02-29
```

FISCAL_MONTH

Returns a number representing the fiscal month of "date_expression". This differs from CALENDAR_MONTH() if your organization uses a fiscal year that does not match the Gregorian calendar. If your fiscal year starts in March, 1 for March 12 for February.

Syntax

```
FISCAL_MONTH ( date_expression )
```

Example

```
FISCAL_MONTH ( '2012-02-29' )
```

Result

```
12
```

FISCAL_QUARTER

Returns a number representing the fiscal quarter of "date_expression". This differs from CALENDAR_QUARTER() if your organization uses a fiscal year that does not match the Gregorian calendar. If your fiscal year starts in July, 1 for July 15 and 4 for June 6

Syntax

```
FISCAL_QUARTER ( date_expression )
```

Example

```
FISCAL_QUARTER ( '2012-02-29' )
```

Result

```
3
```

FISCAL_YEAR

Returns a number representing the fiscal year of "date_expression". This differs from CALENDAR_YEAR() if your organization uses a fiscal year that does not match the Gregorian calendar.

Syntax

```
FISCAL_YEAR ( date_expression )
```

Example

```
FISCAL_YEAR ( '2012-02-29' )
```

Result

2012

HOURL_IN_DAY

Returns a number representing the hour in the day for "dateTime_expression".

Syntax

HOURL_IN_DAY (dateTime_expression)

Example

HOURL_IN_DAY ('2012-02-29T23:00:01Z')

Result

23

WEEK_IN_MONTH

Returns a number representing the week in the month for "date_expression". The first week is from the first through the seventh day of the month

Syntax

WEEK_IN_MONTH (date_expression)

Example

WEEK_IN_MONTH ('2012-02-29')

Result

5

WEEK_IN_YEAR

Returns a number representing the calendar week of a "date_expression". The first week is from January 1 through January 7

Syntax

WEEK_IN_YEAR (date_expression)

Example

WEEK_IN_YEAR ('2012-02-29')

Result

9

convertCurrency

Converts "numeric_expression" to the user's currency when multicurrency is enabled.

Syntax

convertCurrency (numeric_expression)

convertTimezone

Converts "dateTime_expression" to the user's time zone.

Syntax

```
convertTimezone ( dateTime_expression )
```

SQL Server

SQL Server Math

log

Returns the natural logarithm of "numeric_expression".

Syntax

```
log ( numeric_expression )
```

log10

Returns the base ten logarithm of "numeric_expression".

Syntax

```
log10 ( numeric_expression )
```

pi

Returns the constant value of pi as a floating point value.

Syntax

```
pi ( )
```

rand

Generates a random number using "integer_expression" as the seed value.

Syntax

```
rand ( integer_expression )
```

SQL Server Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

atan (numeric_expression)

atn2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression1".

Syntax

atn2 (numeric_expression1, numeric_expression2)

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

cos (numeric_expression)

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

cot (numeric_expression)

degrees

Returns "numeric_expression" radians converted to degrees.

Syntax

degrees (numeric_expression)

radians

Returns the number of radians converted from "numeric_expression" degrees.

Syntax

radians (numeric_expression)

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sin (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

ascii

Returns a number representing the ascii code value of the leftmost character of "string_expression".

Syntax

```
ascii ( string_expression )
```

Example

```
ascii ( 'A' )
```

Result

65

char

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

```
char ( integer_expression )
```

Example

```
char ( 65 )
```

Result

A

charindex

Searches "string_expression2" for the first occurrence of "string_expression1" and returns an integer. "Start_location" is the character position to start searching for "string_expression1" in "string_expression2". If "start_location" is not specified, is a negative number, or is zero, the search starts at the beginning of "string_expression2".

Syntax

```
charindex ( string_expression1 , string_expression2 [ ,  
start_location ] )
```

{current_user}

Returns the name of the current user.

Syntax

```
{ current_user }
```

datalength

Returns the length in bytes of "string_expression".

Syntax

```
datalength ( string_expression )
```

dateadd

Returns the date resulting from the addition of "integer_expression" units (indicated by "datepart" (day, month, year)) to "date_expression".

Syntax

```
dateadd ( { datepart } , integer_expression , date_expression )
```

datediff

Returns the number of "datepart" (day, month, year) units between "date_expression1" and "date_expression2".

Syntax

```
datediff ( {datepart} , date_expression1 , date_expression2 )
```

Example

```
datediff ( {yy} , 1984-01-01 , 1997-01-01 )
```

Result

13

datetimeame

Returns "datepart" from "date_expression", which can be a datetime, smalldatetime, date, or time value as an ASCII string. Note that "datepart" must be a keyword representing a datepart or its abbreviation recognized by Microsoft® SQL Server and must be enclosed in curly brackets.

Syntax

```
datetimeame ( ' { ' datepart ' } ' , date_expression )
```

Example

```
datetimeame ( {mm} , 2000-01-01 )
```

Result

January

datepart

Returns part of "date_expression" (for example, the month) as an integer. "date_expression" can be a datetime, smalldatetime, date, or time value. Note that "datepart" must be a keyword representing a datepart or its abbreviation recognized by Microsoft® SQL Server and must be enclosed in curly brackets.

Syntax

```
datepart ( ' { ' datepart ' } ' , date_expression )
```

Example

```
datepart ( {wk} , 2000-01-01 )
```

Result

1 (first week of the year)

day

Returns the day portion of "date_expression". Same as extract (day from date_expression).

Syntax

day (date_expression)

difference

Returns an integer value representing the difference between the values returned by the data source-specific soundex function for "string_expression1" and "string_expression2". The value returned ranges from 0 to 4, with 4 indicating the best match. Note that 4 does not mean that the strings are equal.

Syntax

difference (string_expression1 , string_expression2)

Example 1

```
difference ([Sales target (query)].[Sales Staff].[First name],[Sales (
query)].[Retailers].[Contact first name])
```

Result

0

Example 2

```
difference ([Sales target (query)].[Sales Staff].[First name],[Sales
target (query)].[Sales Staff].[First name])
```

Result

4

getdate

Returns a datetime value representing the current date and time of the computer that the database software runs on.

Syntax

getdate ()

isnull

Returns the first non-null argument (or null if both arguments are null). It is recommended to use the sql standard COALESCE function instead.

Syntax

isnull (expression , expression)

Example

```
isnull ( [Sales (query)].[Sales Fact].[Sales quantity] , 0 )
```

Result

Returns the sales quantity if it's not null, otherwise returns 0.

left

Returns the leftmost "integer_expression" characters of "string_expression".

Syntax

left (string_expression , integer_expression)

Example

```
left ( [Sales (query)].[Sales staff].[Last name] , 3 )
```

Result

Returns the first three characters of each last name.

ltrim

Returns "string_expression" with leading spaces removed.

Syntax

```
ltrim ( string_expression )
```

month

Returns the month portion of "date_expression". Same as extract (month from date_expression).

Syntax

```
month ( date_expression )
```

patindex

Returns an integer that represents the starting position of the first occurrence of "string_expression1" in the "string_expression2". Returns 0 if "string_expression1" is not found. The % wildcard character must precede and follow "string_expression1", except when searching for first or last characters.

Syntax

```
patindex ( string_expression1 , string_expression2 )
```

Example

```
patindex ( '%po%', 'Report' )
```

Result

3

replace

Replaces all occurrences of "string_expression2" in "string_expression1" with "string_expression3".

Syntax

```
replace ( string_expression1 , string_expression2 ,  
string_expression3 )
```

replicate

Returns a string consisting of "string_expression" repeated "integer_expression" times.

Syntax

```
replicate ( string_expression , integer_expression )
```

reverse

Returns "string_expression" in reverse order.

Syntax

```
reverse ( string_expression )
```

right

Returns the rightmost "integer_expression" characters of "string_expression".

Syntax

```
right ( string_expression , integer_expression )
```

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places to the right of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression , integer_expression )
```

Example

```
round (125, -1)
```

Result

```
130
```

rtrim

Returns "string_expression" with trailing spaces removed.

Syntax

```
rtrim ( string_expression )
```

Example

```
rtrim ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with any spaces at the end of the name removed.

sign

Returns an indicator of the sign "numeric_expression": +1 if "numeric_expression" is positive, 0 if zero or -1 if negative.

Syntax

```
sign ( numeric_expression )
```

soundex

Returns a four character string representing the sound of the words in "string_expression".

Syntax

soundex (string_expression)

space

Returns a string consisting of "integer_expression" spaces.

Syntax

space (integer_expression)

str

Returns a string representation of "numeric_expression" where "integer_expression1" is the length of the string returned and "integer_expression2" is the number of decimal digits.

Syntax

str (numeric_expression [, integer_expression1 [, integer_expression2]])

stuff

Returns a string where "integer_expression2" characters have been deleted from "string_expression1" beginning at "integer_expression1", and where "string_expression2" has been inserted into "string_expression1" at its start. The first character in a string is at position 1.

Syntax

stuff (string_expression1 , integer_expression1 , integer_expression2 , string_expression2)

year

Returns the year portion of "date_expression". Same as extract (year from date_expression).

Syntax

year (date_expression)

Sybase

Sybase Math

log

Returns the natural logarithm of "numeric_expression".

Syntax

log (numeric_expression)

log10

Returns the base ten logarithm of "numeric_expression".

Syntax

log10 (numeric_expression)

pi

Returns the constant value of pi as a floating point value.

Syntax

pi ()

sign

Returns an indicator denoting the sign of "numeric_expression": +1 if "numeric_expression" is positive, 0 if "numeric_expression" is zero, or -1 if "numeric_expression" is negative.

Syntax

sign (numeric_expression)

Sybase Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

acos (numeric_expression)

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

asin (numeric_expression)

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

atan (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

atan2

Returns the angle, in radians, whose tangent is "numeric_expression1" / "numeric_expression2".

Syntax

atan2 (numeric_expression1, numeric_expression2)

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cot ( numeric_expression )
```

degrees

Returns "numeric_expression" radians converted to degrees.

Syntax

```
degrees ( numeric_expression )
```

radians

Returns the degree equivalent of "numeric_expression". Results are of the same type as "numeric_expression". For numeric or decimal expressions, the results have an internal precision of 77 and a scale equal to that of "numeric_expression". When the money datatype is used, an internal conversion to float may cause some loss of precision.

Syntax

```
radians ( numeric_expression )
```

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
sin ( numeric_expression )
```

ascii

Returns a number representing the ascii code value of the leftmost character of "string_expression".

Syntax

```
ascii ( string_expression )
```

Example

```
ascii ( 'A' )
```

Result

65

char

Converts "integer_expression" to a character value. Char is usually used as the inverse of ascii where "integer_expression" must be between 0 and 255. If the resulting value is the first byte of a multibyte character, the character may be undefined.

Syntax


```
char ( integer_expression )
```

charindex

Returns an integer that represents the starting position of "string_expression1" within "string_expression2". If "string_expression1" is not found, zero is returned. If "string_expression1" contains wildcard characters, charindex treats them as literals.

Syntax

```
charindex ( string_expression1 , string_expression2 )
```

datalength

Returns the length in bytes of "string_expression".

Syntax

```
datalength ( string_expression )
```

dateadd

Returns the date resulting from adding "integer_expression" units indicated by datepart (day, month, year) to "date_expression". Note that "datepart" must be enclosed in curly brackets.

Syntax

```
dateadd ( ' { ' datepart ' } ' , integer_expression ,  
date_expression )
```

Example

```
dateadd ( {dd} , 16 , 1997-06-16 )
```

Result

Jul 2, 1997

datediff

Returns the number of units indicated by "datepart" (day, month, year) between "date_expression1" and "date_expression2". Note that "datepart" must be enclosed in curly brackets.

Syntax

```
datediff ( ' { ' datepart ' } ' , date_expression1 ,  
date_expression2 )
```

Example

```
datediff ( {yy} , 1984-01-01 , 1997-01-01 )
```

Result

13

datename

Returns "datepart" of "date_expression" as an ASCII string. "Date_expression" can be a datetime, smalldatetime, date, or time value. Note that "datepart" must be enclosed in curly brackets.

Syntax

```
datetime ( ' { ' datepart ' } ' , date_expression )
```

Example

```
datetime ( {mm} , 1999-05-01 )
```

Result

May

datepart

Returns "datepart" of "date_expression" as an integer. "Date_expression" can be a datetime, smalldatetime, date, or time value. Note that the datepart argument must be enclosed in curly brackets.

Syntax

```
datepart ( ' { ' datepart ' } ' , date_expression )
```

Example

```
datepart ( {mm} , 1999-05-01 )
```

Result

5

day

Returns the day of the month (1-31) from "date_expression".

Syntax

```
day ( date_expression )
```

difference

Returns an integer value representing the difference between the values returned by the data source-specific soundex function for "string_expression1" and "string_expression2". The value that is returned ranges from 0 to 4, with 4 indicating the best match. Note that 4 does not mean that the strings are equal.

Syntax

```
difference ( string_expression1 , string_expression2 )
```

Example 1

```
difference ([Sales target (query)].[Sales staff].[First name],[Sales (query)].[Retailers].[Contact first name])
```

Result

0

Example 2

```
difference ([Sales target (query)].[Sales staff].[First name],[Sales target (query)].[Sales staff].[First name])
```

Result

getdate

Returns current system date and time.

Syntax

```
getdate ( )
```

left

Returns the leftmost "integer_expression" characters of "string_expression".

Syntax

```
left ( string_expression , integer_expression )
```

Example

```
left ( [Sales (query)].[Sales staff].[Last name] , 3 )
```

Result

Returns the first three characters of each last name.

ltrim

Returns "string_expression" with any leading spaces removed.

Syntax

```
ltrim ( string_expression )
```

month

Returns the month number (1-12) from "date_expression".

Syntax

```
month ( date_expression )
```

patindex

Returns an integer representing the starting position of the first occurrence of "string_expression1" in "string_expression2" or returns 0 if "string_expression1" is not found. By default, patindex returns the offset in characters. The offset can be returned in bytes by setting the return type to bytes. The % wildcard character must precede and follow the pattern in "string_expression1", except when searching for first or last characters.

Syntax

```
patindex ( string_expression1 , string_expression2 [ using  
{bytes|chars|characters} ] )
```

rand

Returns a random float value between 0 and 1, using the optional "integer_expression" as a seed value.

Syntax

```
rand ( integer_expression )
```

replicate

Returns a string with the same datatype as "string_expression", containing the same expression repeated "integer_expression" times or as many times as will fit into a 225-byte space, whichever is less.

Syntax

```
replicate ( string_expression , integer_expression )
```

reverse

Returns the reverse of "string_expression".

Syntax

```
reverse ( string_expression )
```

right

Returns the rightmost "integer_expression" characters of "string_expression".

Syntax

```
right ( string_expression , integer_expression )
```

round

Returns "numeric_expression" rounded to the nearest value "integer_expression" places to the right of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression, integer_expression )
```

Example

```
round (125, -1)
```

Result

```
130
```

rtrim

Returns "string_expression" with trailing spaces removed.

Syntax

```
rtrim ( string_expression )
```

Example

```
rtrim ( [Sales (query)].[Sales staff].[Last name] )
```

Result

Returns last names with any spaces at the end of the name removed.

soundex

Returns a four-character soundex code for character strings that are composed of a contiguous sequence of valid single- or double-byte Roman letter.

Syntax

soundex (string_expression)

space

Returns a string with "integer_expression" single-byte spacing.

Syntax

space (integer_expression)

str

Returns a string representation of "numeric_expression". "Integer_expression1" is the length of the returned string and has a default setting of 10. "Integer_expression2" is the number of decimal digits and has a default setting of 0. Both are optional values.

Syntax

```
str ( numeric_expression [ , integer_expression1 [ ,  
integer_expression2 ] ] )
```

stuff

Deletes "integer_expression2" characters from "string_expression1" starting at "integer_expression1", and inserts "string_expression2" into "string_expression1" at that position. To delete characters without inserting other characters, "string_expression2" should be null and not " ", which indicates a single space.

Syntax

```
stuff ( string_expression1 , integer_expression1 ,  
integer_expression2 , string_expression2 )
```

substring

Returns the substring of "string_expression" that starts at position "integer_expression1". "Integer_expression2" specifies the number of characters in the substring.

Syntax

```
substring ( string_expression , integer_expression1 ,  
integer_expression2 )
```

Example

```
substring ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

to_unichar

Returns a unichar expression with the value "integer_expression". If "integer_expression" is in the range 0xD800..0xDFFF, the operation is aborted. If the "integer_expression" is in the range 0..0xFFFF, a single Unicode value is returned. If "integer_expression" is in the range 0x10000..0x10FFFF, a surrogate pair is returned.

Syntax

```
to_unichar ( integer_expression )
```

uhighsurr

Returns 1 if the Unicode value at "integer_expression" is the high half of a surrogate pair (which should appear first in the pair). Otherwise, it returns 0. This function allows you to write explicit code for surrogate handling. Particularly, if a substring starts on a Unicode character where uhighsurr () is true, extract a substring of at least 2 Unicode values, as substr() does not extract just 1. Substr () does not extract half of a surrogate pair.

Syntax

```
uhighsurr ( string_expression , integer_expression )
```

ulowsurr

Returns 1 if the Unicode value at "integer_expression" is the low half of a surrogate pair (which should appear second in the pair). Otherwise, it returns 0. This function allows you to explicitly code around the adjustments performed by substr (), stuff (), and right (). Particularly, if a substring ends on a Unicode value where ulowsurr () is true, extract a substring of 1 less characters (or 1 more), since substr () does not extract a string that contains an unmatched surrogate pair.

Syntax

```
ulowsurr ( string_expression , integer_expression )
```

uscalar

Returns the Unicode scalar value for the first Unicode character in "string_expression". If the first character is not the high-order half of a surrogate pair, then the value is in the range 0..0xFFFF. If the first character is the high-order half of a surrogate pair, a second value must be a low-order half, and the return value is in the range 0x10000..0x10FFFF. If this function is called on a Unicode character expression containing an unmatched surrogate half, the operation is aborted.

Syntax

```
uscalar ( string_expression )
```

year

Returns the year from date_expression.

Syntax

```
year ( date_expression )
```

Teradata

Teradata Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression". "Numeric_expression" must be between -1 and 1, inclusive.

Syntax

```
acos ( numeric_expression )
```

acosh

Returns the inverse hyperbolic cosine of "numeric_expression" where "numeric_expression" can be any real number equal to or greater than 1.

Syntax

```
acosh ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression". "Numeric_expression" must be between -1 and 1, inclusive.

Syntax

```
asin ( numeric_expression )
```

asinh

Returns the inverse hyperbolic sine of "numeric_expression" where "numeric_expression" can be any real number.

Syntax

```
asinh ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians where the arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The returned angle will be between - and π radians, excluding π .

Syntax

```
atan2 ( numeric_expression1, numeric_expression2 )
```

atanh

Returns the inverse hyperbolic tangent of "numeric_expression" where "numeric_expression" can be any real number between 1 and -1, excluding 1 and -1.

Syntax

```
atanh ( numeric_expression )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

cosh

Returns the hyperbolic cosine of "numeric_expression" where "numeric_expression" can be any real number.

Syntax

cosh (numeric_expression)

sin

Returns the sine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

sin (numeric_expression)

sinh

Returns the hyperbolic sine of "numeric_expression" where "numeric_expression" can be any real number.

Syntax

sinh (numeric_expression)

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

tan (numeric_expression)

tanh

Returns the hyperbolic tangent of "numeric_expression" where "numeric_expression" can be any real number.

Syntax

tanh (numeric_expression)

account

Returns the account string for the current user.

Syntax

{account}

add_months

Returns the date or the datetime resulting from adding "integer_expression" months to "date_expression" or "datetime_expression".

Syntax

add_months (date_expression|datetime_expression ,
integer_expression)

bytes

Returns the number of bytes contained in "byte_expression". "Byte_expression" is restricted to BYTE or VARBYTE.

Syntax

bytes (byte_expression)

case_n

Evaluates "condition_expression_list" and returns the position of the first true condition, provided that no prior condition in the list evaluates to unknown. The keywords must be enclosed in curly brackets. No case is an optional condition that evaluates to true if every expression in the list evaluates to false. No case or unknown is an optional condition that evaluates to true if every expression in the list evaluates to false, or if an expression evaluates to unknown and all prior conditions in the list evaluate to false. Unknown is an optional condition that evaluates to true if an expression evaluates to unknown and all prior conditions in the list evaluate to false.

Syntax

```
case_n ( condition_expression_list [ , NO CASE|UNKNOWN|NO CASE OR UNKNOWN [ , UNKNOWN ] ] )
```

char2hexint

Returns the hexadecimal representation for "string_expression".

Syntax

```
char2hexint ( string_expression )
```

characters

Returns an integer value representing the number of logical characters or bytes contained in "string_expression".

Syntax

```
characters ( string_expression )
```

database

Returns the name of the default database for the current user.

Syntax

```
{database}
```

date

Returns the current date.

Syntax

```
{date}
```

format

Returns the declared format for "expression" as a variable character string of up to 30 characters.

Syntax

```
format ( expression )
```

index

Returns the starting position of "string_expression2" in "string_expression1".

Syntax

```
index ( string_expression1 , string_expression2 )
```

log

Computes the base 10 logarithm of "numeric_expression". "Numeric_expression" must be a non-zero, positive, numeric expression.

Syntax

```
log ( numeric_expression )
```

nullif

Returns null if "scalar_expression1" and "scalar_expression2" are equal. Otherwise, it returns "scalar_expression1". "Scalar_expression1" and "scalar_expression2" can be any data type.

Syntax

```
nullif ( scalar_expression1 , scalar_expression2 )
```

nullifzero

If "numeric_expression" is zero, converts it to null to avoid division by zero.

Syntax

```
nullifzero ( numeric_expression )
```

profile

Returns the current profile for the session or null if none.

Syntax

```
{profile}
```

random

Returns a random integer number for each row of the results table. "Lower_bound" and "upper_bound" are integer constants. The limits for "lower_bound" and "upper_bound" range from -2147483648 to 2147483647 inclusive. "Upper_bound" must be greater than or equal to "lower_bound".

Syntax

```
random ( lower_bound , upper_bound )
```

role

Returns the current role for the session or null if none.

Syntax

```
{role}
```

session

Returns the number of the session for the current user.

Syntax

```
{session}
```

soundex

Returns a character string that represents the Soundex code for "string_expression".

Syntax

```
soundex ( string_expression )
```

substr

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters. The first character in "string_expression" is at position 1. If "integer_expression2" is omitted, returns the substring of "string_expression" that starts at position "integer_expression1" and ends at the end of "string_expression".

Syntax

```
substr ( string_expression , integer_expression1 [ ,  
integer_expression2 ] )
```

Example

```
substr ( [Sales (query)].[Sales staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

time

Returns the current time based on a 24-hour day. According to Teradata documentation, the system function TIME is deprecated. Use CURRENT_TIME function instead. Please note that in Compatible Mode TIME returns time data type, while in Dynamic Query Mode time returns a value of type FLOAT.

Syntax

```
{time}
```

type

Returns the data type defined for "expression".

Syntax

```
type ( expression )
```

user

Returns the user name of the current user.

Syntax

```
{user}
```

vargraphic

Returns a character string that represents the vargraphic code for "string_expression".

Syntax

```
vargraphic ( string_expression )
```

zeroifnull

Converts data from null to 0 to avoid errors created by a null value. If "numeric_expression" is not null, returns the value of "numeric_expression". If "numeric_expression" is a character string, it is converted to a numeric value of float data type. If "numeric_expression" is null or zero, it returns zero.

Syntax

```
zeroifnull ( numeric_expression )
```

Vectorwise

Vectorwise String

lpad

Returns "string_exp1" padded to length "integer_exp" with occurrences of "string_exp2". If "string_exp1" is longer than "integer_exp", the appropriate portion of "string_exp1" is returned.

Syntax

```
lpad ( string_exp1, integer_exp [ , string_exp2 ] )
```

ltrim

Returns "string_exp1", with leading blank characters removed.

Syntax

```
ltrim ( string_exp1 )
```

rtrim

Returns "string_exp1", with trailing blank characters removed.

Syntax

```
rtrim ( string_exp1 )
```

shift

Returns "string_exp1" shifted by numeric_exp character. If "numeric_exp" is greater than zero shift to the right else shift to the left.

Syntax

```
shift ( string_exp1, numeric_exp )
```

soundex

Returns a four character code for the "string_exp1".

Syntax

```
soundex ( string_exp1 )
```

squeeze

Returns "string_exp1" with multiple whitespace characters collapsed into a single whitespace character.

Syntax

```
squeeze ( string_exp1 )
```

Vectorwise Math

log

Returns the base 10 logarithm of "numeric_exp1".

Syntax

```
log ( numeric_exp1 )
```

ln

Returns the natural logarithm of "numeric_exp1".

Syntax

```
ln ( numeric_exp )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

Vectorwise Trigonometry

acos

Returns the arccosine of "numeric_exp" in radians. The arccosine is the angle whose cosine is "numeric_exp".

Syntax

```
acos ( numeric_exp )
```

asin

Returns the arcsine of "numeric_exp" in radians. The arcsine is the angle whose sine is "numeric_exp".

Syntax

```
asin ( numeric_exp )
```

atan

Returns the arctangent of "numeric_exp" in radians. The arctangent is the angle whose tangent is "numeric_exp".

Syntax

```
atan ( numeric_exp )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_exp1" and "numeric_exp2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_exp2" / "numeric_exp1".

Syntax

```
atan2 ( numeric_exp1 ,numeric_exp2 )
```

cos

Returns the cosine of "numeric_exp" where "numeric_exp" is an angle expressed in radians.

Syntax

cos (numeric_exp)

sin

Returns the sine of "numeric_exp" where "numeric_exp" is an angle expressed in radians.

Syntax

sin (numeric_exp)

tan

Returns the tangent of "numeric_exp" where "numeric_exp" is an angle expressed in radians.

Syntax

tan (numeric_exp)

{initial_user}

Returns the initial username.

Syntax

{ initial_user }

{session_user}

Returns the session username.

Syntax

{ session_user }

numeric_trunc

Returns the numeric_exp1 truncated at the decimal place or numeric_exp2 digits to the left or right of the decimal place.

Syntax

trunc (numeric_exp1 , numeric_exp2)

Vertica**Vertica String****overlay**

Returns the "string_expression1", replacing "string_expression2" from character position numeric_expression.

Syntax

overlay (string_expression1 , string_expression2 ,
numeric_expression1 [, numeric_expression2])

btrim

Returns string_expression1 after removing the longest string of characters in string_expression2.

Syntax

```
btrim ( string_expression1 [ , string_expression2 ] )
```

initcap

Returns "string_expression", with the first letter of each word in uppercase and all other letters in lowercase. Words are delimited by white space or characters that are not alphanumeric.

Syntax

```
initcap ( string_expression )
```

lpad

Returns "string_expression1" padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned.

Syntax

```
lpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

ltrim

Returns "string_expression1", with leading characters removed up to the first character not in "string_expression2"; for example, ltrim ('xyxXxyAB' , 'xy') returns XxyAB.

Syntax

```
ltrim ( string_expression1 [ , string_expression2 ] )
```

to_hex

Returns the hexadecimal string representation of "numeric_exp1".

Syntax

```
to_hex ( numeric_expression1 )
```

repeat

Returns the "string_expression" repeated "numeric_expression1" times.

Syntax

```
repeat ( string_expression , numeric_expression1 )
```

replace

Returns "string_expression" having replaced "string_expression2" with "string_expression3".

Syntax

```
replace ( string_expression , string_expression2 , string_expression3 )
```

rpad

Returns "string_expression1" right-padded to length "integer_expression" with occurrences of "string_expression2". If "string_expression1" is longer than "integer_expression", the appropriate portion of "string_expression1" is returned. If "string_expression2" is not specified, then spaces are used.

Syntax

```
rpad ( string_expression1 , integer_expression [ , string_expression2 ] )
```

rtrim

Returns "string_expression1", with final characters removed after the last character not in "string_expression2"; for example, rtrim ('ABxXxyx' , 'xy') returns ABxX. If "string_expression2" is not specified, the final space characters are removed.

Syntax

```
rtrim ( string_expression1 [ , string_expression2 ] )
```

Vertica Data type formatting

to_char

Returns the string representation of "expression" with the format of "string_expression". "Expression" can be either a date value or a numeric value.

Syntax

```
to_char ( expression , string_expression )
```

to_date

Converts "string_expression1" to a date value as specified by the format "string_expression2".

Syntax

```
to_date ( string_expression1 , string_expression2 )
```

to_number

Converts "string_expression1" to a numeric value as specified by the format "string_expression2".

Syntax

```
to_number ( string_expression1, string_expression2 )
```

to_timestamp

Converts "string_expression1" to a timestamp value as specified by the format "string_expression2".

Syntax

```
to_timestamp ( string_expression1, string_expression2 )
```

Vertica Math

log

Returns the base 10 logarithm of "numeric_expression1" or logarithm to the base "numeric_expression2".

Syntax

```
log ( numeric_expression1 [ , numeric_expression2 ] )
```

ln

Returns the natural logarithm of "numeric_expression1".

Syntax

```
ln ( numeric_expression )
```


cbrt

Returns the cube root of "numeric_expression1".

Syntax

```
cbrt ( numeric_expression )
```

pi

Returns the constant of pi.

Syntax

```
pi ( )
```

Vertica Trigonometry

acos

Returns the arccosine of "numeric_expression" in radians. The arccosine is the angle whose cosine is "numeric_expression".

Syntax

```
acos ( numeric_expression )
```

asin

Returns the arcsine of "numeric_expression" in radians. The arcsine is the angle whose sine is "numeric_expression".

Syntax

```
asin ( numeric_expression )
```

atan

Returns the arctangent of "numeric_expression" in radians. The arctangent is the angle whose tangent is "numeric_expression".

Syntax

```
atan ( numeric_expression )
```

atan2

Returns the arctangent of the x and y coordinates specified by "numeric_expression1" and "numeric_expression2", respectively, in radians. The arctangent is the angle whose tangent is "numeric_expression2" / "numeric_expression1".

Syntax

```
atan2 ( numeric_expression1 , numeric_expression2 )
```

cos

Returns the cosine of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

cot

Returns the cotangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`cot (numeric_expression)`

degrees

Returns the degrees where "numeric_expression" is an angle expressed in radians.

Syntax

`degrees (numeric_expression)`

radians

Returns the radians where "numeric_expression" is an angle expressed in degrees.

Syntax

`radians (numeric_expression)`

sin

Returns the sine of "numeric_exp" where "numeric_expression" is an angle expressed in radians.

Syntax

`sin (numeric_expression)`

tan

Returns the tangent of "numeric_expression" where "numeric_expression" is an angle expressed in radians.

Syntax

`tan (numeric_expression)`

ascii

Returns a number representing the ASCII code value of the leftmost character of "string_expression"; for example, `ascii ('A')` is 65.

Syntax

`ascii (string_expression)`

chr

Returns the character that has the ASCII code value specified by "integer_expression". "Integer_expression" should be between 0 and 255.

Syntax

`chr (integer_expression)`

current_database

Returns the name of the current database.

Syntax

`current_database ()`

current_schema

Returns the name of the current schema

Syntax

current_schema ()

{current_user}

Syntax

{current_user}

{session_user}

Syntax

{session_user}

translate

Returns "string_expression1", with each occurrence of each character in "string_expression2" replaced by its corresponding character in "string_expression3".

Syntax

translate (string_expression1 , string_expression2 ,
string_expression3)

date_trunc

Returns the timestamp to the specified precision.

Syntax

date_trunc (string_expression , timestamp_expression)

version

Returns the string value of the database version.

Syntax

version ()

Macro Functions

This list contains functions that can be used within a macro. A macro may contain one or more macro functions. A macro is delimited by a number sign (#) at the beginning and at the end. Everything between the number signs is treated as a macro expression and is executed at run time. For macro functions that accept expressions of datatype timestamp with time zone as arguments, the accepted format is 'yyyy-mm-dd hh:mm:ss[.ff]+hh:mm' where fractional seconds are optional and can be represented by 1 to 9 digits. In lieu of a space separating the date portion to the time portion, the character 'T' is also accepted. Also, in lieu of the time zone '+hh:mm', the character 'Z' is accepted and will be processed internally as '+00:00'. The macro functions that return expressions of datatype timestamp with time zone return 9 digits by default for their fractional seconds. The macro function timestampMask () can be used to trim the output if required.

+

Concatenates two strings.

Syntax

value1 + value2

Example

```
# '{ ' + $runLocale + ' }' #
```

Result

```
{en-us}
```

_add_days

Returns the timestamp with time zone (as a string) that results from adding "integer_expression" number of days to "string_expression", where "string_expression" represents a timestamp with time zone.

Syntax

```
_add_days ( string_expression , integer_expression )
```

Example 1

```
# _add_days ( '2005-11-01 12:00:00.000-05:00' , -1 ) #
```

Result

```
2005-10-31 12:00:00.000000000-05:00
```

Example 2

```
# _add_days ( $current_timestamp , 1 ) #
```

Result

```
2005-11-02 12:00:00.000000000-05:00
```

Example 3

```
# timestampMask ( _add_days ( $current_timestamp , 1 ) ,  
'yyyy-mm-dd' ) #
```

Result

```
2005-11-02
```

_add_months

Returns the timestamp with time zone (as a string) that results from adding "integer_expression" number of months to "string_expression", where "string_expression" represents a timestamp with time zone.

Syntax

```
_add_months ( string_expression , integer_expression )
```

Example 1

```
# _add_months ( '2005-11-01 12:00:00.000-05:00' , -1 ) #
```

Result

```
2005-10-01 12:00:00.000000000-05:00
```

Example 2

```
# _add_months ( $current_timestamp , 1 ) #
```

Result

2005-12-01 12:00:00.000000000-05:00

Example 3

```
# timestampMask ( _add_months ( $current_timestamp , 1 ) ,  
  'yyyy-mm-dd' ) #
```

Result

2005-12-01

_add_years

Returns the timestamp with time zone (as a string) that results from adding "integer_expression" number of years to "string_expression", where "string_expression" represents a timestamp with time zone.

Syntax

```
_add_years ( string_expression , integer_expression )
```

Example 1

```
# _add_years ( '2005-11-01 12:00:00.000-05:00' , -1 ) #
```

Result

2004-11-01 12:00:00.000000000-05:00

Example 2

```
# _add_years ( $current_timestamp , 1 ) #
```

Result

2006-11-01 12:00:00.000000000-05:00

Example 3

```
# timestampMask ( _add_years ( $current_timestamp , 1 ) ,  
  'yyyy-mm-dd' ) #
```

Result

2006-11-01

array

Constructs an array out of the list of parameters.

Syntax

```
array ( string_expression|array_expression { ,  
  string_expression|array_expression } )
```

Example

```
# csv ( array ( 'a1' , array ( 'x1' , 'x2' ) , 'a2' ) ) #
```

Result

```
'a1' , 'x1' , 'x2' , 'a2'
```

CSV

Constructs a string from the elements of the array where the values are separated by commas. Optionally, the separator and quote strings can be specified. The default separator is a comma (,) and the default quote character is a single quote (').

Syntax

```
csv ( array_expression [ , separator_string [ , quote_string ] ] )
```

Example

```
# csv ( array ( 'a1' , 'a2' ) ) #
```

Result

```
'a1', 'a2'
```

dq

Surrounds "string_expression" with double quotes.

Syntax

```
dq ( string_expression )
```

Example

```
# dq ( 'zero' ) #
```

Result

```
"zero"
```

getConfigurationEntry

Get an entry from the IBM® Cognos® configuration file. The force_decode_flag is optional and must be one of: 'true' , '1' , 1 , 'false' , '0' , 0. The default is 'true'. When true, the value of the configuration entry will be decrypted into plain text if it is encrypted.

Syntax

```
getConfigurationEntry ( entry_string , force_decode_flag )
```

Example

```
# getConfigurationEntry ( 'serverLocale' ) #
```

Result

```
en
```

grep

Searches for and returns elements of an array that match the pattern specified in "pattern_string".

Syntax

```
grep ( pattern_string , array_expression )
```

Example

```
# csv ( grep ( 's' , array ( 'as', 'an', 'arts' ) ) ) #
```

Result

```
'as', 'arts'
```

_first_of_month

Returns a timestamp with time zone (as a string) by converting the day value in "string_expression" to 1, where "string_expression" is a timestamp with time zone.

Syntax

```
_first_of_month ( string_expression )
```

Example 1

```
# _first_of_month ( '2005-11-11 12:00:00.000-05:00' ) #
```

Result

```
2005-11-01 12:00:00.000000000-05:00
```

Example 2

```
# timestampMask ( _first_of_month ( '2005-11-11 12:00:00.000-05:00' ) , 'yyyymmdd' ) #
```

Result

```
20051101
```

_last_of_month

Returns a timestamp with time zone (as a string) that is the last day of the month represented by "string_expression", where "string_expression" is a timestamp with time zone.

Syntax

```
_last_of_month ( string_expression )
```

Example 1

```
# _last_of_month ( '2005-11-11 12:00:00.000-05:00' ) #
```

Result

```
2005-11-30 12:00:00.000000000-05:00
```

Example 2

```
# timestampMask ( _last_of_month ( '2005-11-11 12:00:00.000-05:00' ) , 'yyyy-mm-dd' ) #
```

Result

```
2005-11-30
```

join

Joins the elements of an array using "separator_string".

Syntax

```
join ( separator_string , array_expression )
```

Example

```
# sq ( join ( ' | | ' , array ( 'as', 'an', 'arts' ) ) ) #
```

Result

```
'as | | an | | arts'
```

lstrip

Strips the leading characters from the first argument. The optional second argument defines the set of characters to strip. By default, this function strips white space (ie. space, tab, carriage return and line feed).

Syntax

```
lstrip ( string_expression [ , set_of_characters ] )
```

Example 1

```
# sq( lstrip ( '   abc ' ) ) #
```

Result

```
'abc '
```

Example 2

```
' ) #
```

Result

```
53.2100
```

prompt

Prompts the user for a single value. Only "prompt_name" is required. The datatype defaults to "string" when it is not specified. The prompt is optional when "defaultText" is specified. "Text", when specified, will precede the value. "QueryItem" can be specified to take advantage of the prompt information properties of "queryItem". "Trailing_text", when specified, will be appended to the value.

Syntax

```
prompt ( prompt_name , datatype , defaultText , text , queryItem ,  
        trailing_text )
```

Example 1

```
select . . . where COUNTRY_MULTILINGUAL.COUNTRY_CODE > #prompt ( 'Starting CountryCode' , 'integer' , '10' ) #
```

Result

```
select . . . where COUNTRY_MULTILINGUAL.COUNTRY_CODE > 10
```


Example 2

```
[gosales].[COUNTRY].[COUNTRY] = # prompt ( 'countryPrompt' ,  
'string' , '''Canada''' ) #
```

Result

```
[gosales].[COUNTRY].[COUNTRY] = 'Canada'
```

Notes

- The "defaultText" parameter must be specified such that it is literally valid in the context of the macro since no formatting takes place on this value. The default string "Canada" in Example 2 is specified as a string using single quotes, in which the embedded single quotes are doubled up, thus 3 quotes. This results in the string being properly displayed within single quotes in the expression. As a general rule for the string datatype, "defaultText" should always be specified like this, except in the context of a stored procedure parameter. For "defaultText" of types 'date' or 'datetime', a special format should be used in the context of SQL. Examples of these formats are 'DATE "2001-12-25"' and 'DATETIME "2001-12-25 12:00:00"'. In all other contexts, use the date/datetime without the keyword and escaped single quotes (e.g., '2001-12-25').

promptmany

Prompts the user for one or more values. Only "prompt_name" is required. The datatype defaults to string when it is not specified. The prompt is optional when "defaultText" is specified. "Text", when specified, will precede the list of values. "QueryItem" can be specified to take advantage of the prompt information properties of "queryItem". "Trailing_text", when specified, will be appended to the list of values.

Syntax

```
promptmany ( prompt_name , datatype , defaultText , text , queryItem ,  
trailing_text )
```

Example 1

```
select . . . where COUNTRY_MULTILINGUAL.COUNTRY in ( # promptmany ( 'CountryName' ) # )
```

Result

```
select . . . where COUNTRY_MULTILINGUAL.COUNTRY_CODE in ( 'Canada' , 'The Netherlands' , 'Russia' )
```

Example 2

```
select . . . from gosales.gosales.dbo.COUNTRY_MULTILINGUAL  
COUNTRY_MULTILINGUAL , gosales.gosales.dbo.COUNTRY XX where  
COUNTRY_MULTILINGUAL.COUNTRY_CODE = XX.COUNTRY_CODE # promptmany ( 'Selected CountryCodes' , 'integer' , ' ' , 'and  
COUNTRY_MULTILINGUAL.COUNTRY_CODE in ( ' , ' , ' ) ' ) #
```

Result

```
select . . . from gosales.gosales.dbo.COUNTRY_MULTILINGUAL  
COUNTRY_MULTILINGUAL , gosales.gosales.dbo.COUNTRY XX where  
COUNTRY_MULTILINGUAL.COUNTRY_CODE = XX.COUNTRY_CODE and  
COUNTRY_MULTILINGUAL.COUNTRY_CODE in ( 'Canada' , 'The  
Netherlands' , 'Russia' )
```

rstrip

Strips the trailing characters from the first argument. The optional second argument defines the set of characters to strip. By default, this function strips white space (ie. space, tab, carriage return and line feed).

Syntax

```
rstrip ( string_expression [ , set_of_characters ] )
```

Example 1

```
# sq( rstrip ( ' abc ' ) ) #
```

Result

```
' abc'
```

Example 2

```
' ) #
```

Result

```
0053.21
```

sb

Surrounds "string_expression" with square brackets.

Syntax

```
sb ( string_expression )
```

Example

```
# sb ( 'abc' ) #
```

Result

```
[abc]
```

sq

Surrounds "string_expression" with single quotes.

Syntax

```
sq ( string_expression )
```

Example

```
# sq ( 'zero' ) #
```

Result

```
'zero'
```

sort

Sorts the elements of the array in alphabetical order. Duplicates are retained.

Syntax

```
sort ( array_expression )
```

Example

```
# csv ( sort ( array ( 's3', 'a', 'x' ) ) ) #
```

Result

```
'a', 's3', 'x'
```

split

Splits a string or string elements of the array into separate elements.

Syntax

```
split ( pattern_string, string_expression|array_expression )
```

Example 1

```
# csv ( split ( '::', 'ab=c::de=f::gh=i' ) ) #
```

Result

```
'ab=c', 'de=f', 'gh=i'
```

Example 2

```
# csv ( split ( '=', split ( '::', 'ab=c::de=f::gh=i' ) ) ) #
```

Result

```
'ab', 'c', 'de', 'f', 'gh', 'i'
```

strip

Strips the leading and trailing characters from the first argument. The optional second argument defines the set of characters to strip. By default, this function strips white space (ie. space, tab, carriage return and line feed).

Syntax

```
strip ( string_expression [ , set_of_characters ] )
```

Example 1

```
# sq( strip ( '   abc   ' ) ) #
```

Result

```
'abc'
```

Example 2

```
' ) #
```

Result

```
53.21
```

substitute

Searches for a pattern in a string or in the string elements of an array and substitutes the first occurrence of "pattern_string" with "replacement_string".

Syntax

```
substitute ( pattern_string, replacement_string,  
string_expression|array_expression )
```

Example 1

```
#sq ( substitute ( '^cn=', '***', 'cn=help' ) )#
```

Result

```
'***help'
```

Example 2

```
# csv ( substitute ( '^cn=', '***', array ( 'cn=help' , 'acn=5' ) ) )  
#
```

Result

```
'***help', 'acn=5'
```

Example 3

```
# csv ( substitute ( 'cn=', '', array ( 'cn=help' , 'acn=5' ) ) ) #
```

Result

```
'help', 'a5'
```

timestampMask

Returns "string_expression1", representing a timestamp with time zone, trimmed to the format specified in "string_expression2". The format in "string_expression2" must be one of the following: 'yyyy', 'mm', 'dd', 'yyyy-mm', 'yyyymm', 'yyyy-mm-dd', 'yyyymmdd', 'yyyy-mm-dd hh:mm:ss', 'yyyy-mm-dd hh:mm:ss+hh:mm', 'yyyy-mm-dd hh:mm:ss.ff3', 'yyyy-mm-dd hh:mm:ss.ff3+hh:mm', 'yyyy-mm-ddThh:mm:ss', 'yyyy-mm-ddThh:mm:ss+hh:mm', 'yyyy-mm-ddThh:mm:ss.ff3+hh:mm', or 'yyyy-mm-ddThh:mm:ss.ff3+hh:mm'. The macro functions that return a string representation of a timestamp with time zone show a precision of 9 digits for the fractional part of the seconds by default. The format options allow this to be trimmed down to a precision of 3 or 0.

Syntax

```
timestampMask ( string_expression1 , string_expression2 )
```

Example 1

```
# timestampMask ( $current_timestamp , 'yyyy-dd-mm' ) #
```

Result

```
2005-11-01
```

Example 2

```
# timestampMask ( '2005-11-01 12:00:00.000-05:00' , 'yyyy-mm-dd  
hh:mm:ss+hh:mm' ) #
```

Result

```
2005-11-01 12:00:00-05:00
```

Example 3

```
# timestampMask ( '2005-11-01 12:00:00.123456789-05:00' ,  
'yyyy-mm-ddThh:mm:ss+hh:mm.ff3+hh:mm' ) #
```

Result

```
2005-11-01T12:00:00.123-05:00
```

toLocal

Returns the string representing a timestamp with time zone resulting from adjusting "string_expression" to the time zone of the operating system. Note that the macro function timestampMask () can be used to trim the output.

Syntax

```
toLocal ( string_expression )
```

Example 1

```
# toLocal ( '2005-11-01 17:00:00.000-00:00' ) # where OS local time  
zone is -05:00
```

Result

```
2005-11-01 12:00:00.000000000-05:00
```

Example 2

```
# timestampMask ( toLocal ( '2005-11-01 17:00:00.000-00:00' ) ,  
'yyyy-mm-dd hh:mm:ss+hh:mm' ) # where OS local time zone is -05:00
```

Result

```
2005-11-01 12:00:00-05:00
```

Example 3

```
# toLocal ( '2005-11-01 13:30:00.000-03:30' ) # where OS local time  
zone is -05:00
```

Result

```
2005-11-01 12:00:00.000000000-05:00
```

tolower

Returns the string "string_expression" with all the characters converted to lower case using the rules of the locale "locale_string". If no locale is specified, the locale 'en' is used.

Syntax

```
tolower ( string_expression [ , locale_string ] )
```

Example 1

```
# tolower ( 'ABC' ) #
```

Result

```
abc
```

Example 2

```
# tolower ( 'ABC' , 'fr' ) #
```

Result

```
abc
```

toupper

Returns the string "string_expression" with all the characters converted to upper case using the rules of the locale defined in "locale_string". If "locale_string" is not specified, the locale 'en' is used.

Syntax

```
toupper ( string_expression [ , locale_string ] )
```

Example 1

```
# toupper ( 'abc' ) #
```

Result

```
ABC
```

Example 2

```
# toupper ( 'abc' , 'fr' ) #
```

Result

```
ABC
```

toUTC

Returns the string representing a timestamp with time zone resulting from adjusting "string_expression" to the zero-point reference UTC time zone, also known as GMT time. Note that the macro function timestampMask () can be used to trim the output.

Syntax

```
toUTC ( string_expression )
```

Example 1

```
# toUTC ( '2005-11-01 12:00:00.000-05:00' ) #
```

Result

```
2005-11-01 17:00:00.000000000-00:00
```

Example 2

```
# timestampMask( toUTC ( '2005-11-01 12:00:00.000-05:00' ) ,  
'yyyy-mm-dd hh:mm:ss.ff3+hh:mm' ) #
```

Result

```
2005-11-01 17:00:00.000-00:00
```

Example 3

```
# toUTC ( $current_timestamp ) #
```

Result

```
2005-11-01 17:00:00.000000000-00:00
```

unique

Removes duplicate entries from the array. The order of the elements is retained.

Syntax

```
unique ( array_expression )
```

Example

```
# csv ( unique ( array ( 's3', 'a', 's3', 'x' ) ) ) #
```

Result

```
's3', 'a', 'x'
```

urlencode

URL-encodes the passed argument. This function is useful when specifying XML connection strings.

Syntax

```
urlencode ( prompt ( 'userValue' ) )
```

Example

```
urlencode ( prompt ( 'some_val' ) )
```

Result

```
%27testValue%27
```

CSVIdentityName

Uses the identity information of the current authenticated user to look up values in the specified parameter map. Each individual piece of the user's identity (account name, group names, role names) is used as a key into the map. The unique list of values that is retrieved from the parameter map is then returned as a string, where each value is surrounded by single quotes and where multiple values are separated by commas.

Syntax

```
CSVIdentityName ( %parameter_map_name [ , separator_string ] )
```

Example

```
# CSVIdentityName ( %security_clearance_level_map ) #
```

Result

```
'level_500', 'level_501', 'level_700'
```

CSVIdentityNameList

Returns the pieces of the user's identity (account name, group names, role names) as a list of strings. The unique list of values is returned as a string, where each value is surrounded by single quotes and where multiple values are separated by commas.

Syntax

```
CSVIdentityNameList ( [ separator_string ] )
```

Example

```
# CSVIdentityNameList ( ) #
```

Result

```
'Everyone', 'Report Administrators', 'Query User'
```

CAMPassport

Returns the Cognos® Access Manager passport.

Syntax

```
CAMPassport ( )
```

Example

```
# CAMPassport ( ) #
```

Result

```
111:98812d62-4fd4-037b-4354-26414cf7ebef:3677162321
```

CAMIDList

Returns the pieces of the user's Cognos® Access Manager ID (CAMID), such as account name, group names, or role names, as a list of values separated by commas.

Syntax

```
CAMIDList ( [ separator_string ] )
```

Example

```
#CAMIDList ( ) #
```

Result

```
CAMID ( "::Everyone" ) , CAMID ( ":Authors" ) , CAMID ( ":Query  
Users" ) , CAMID ( ":Consumers" ) , CAMID ( ":Metrics Authors" )
```

CAMIDListForType

Returns an array of the user's Cognos® Access Manager IDs (CAMIDs) based on the identity type (account, group, or role). CAMIDListForType can be used with the macro functions csv or join.

Syntax

```
CAMIDListForType ( identity type )
```


Example

```
[qs].[userRole] in ( # csv ( CAMIDListForType ( 'role' ) ) # )
```

Result

```
[qs].[userRole] in ( 'CAMID ( "::System Administrators" ) ' , 'CAMID ( "::Authors" ) ' )
```

simple case

This macro construct is the template for a simple case, including the case, when, else, and end functions. Note that this macro construct is only supported in DQM mode.

Syntax

```
CASE <expression> WHEN <literal> THEN <expression> [ELSE <expression>] END
```

Example

```
#CASE prompt('pDateRange','token') WHEN 'Current Week' THEN '[PR Current Week]' ELSE '[PR Prior Week]' END#
```

Result

```
[PR Current Week]
```

Common Functions**abs**

Returns the absolute value of "numeric_expression". Negative values are returned as positive values.

Syntax

```
abs ( numeric_expression )
```

Example 1

```
abs ( 15 )
```

Result

```
15
```

Example 2

```
abs ( -15 )
```

Result

```
15
```

cast

Converts "expression" to a specified data type. Some data types allow for a length and precision to be specified. Make sure that the target is of the appropriate type and size. The following can be used for "datatype_specification": character, varchar, char, numeric, decimal, integer, smallint, real, float, date, time, timestamp, time

with time zone, timestamp with time zone, and interval. When type casting to an interval type, one of the following interval qualifiers must be specified: year, month, or year to month for the year-to-month interval datatype; day, hour, minute, second, day to hour, day to minute, day to second, hour to minute, hour to second, or minute to second for the day-to-second interval datatype. Notes: When you convert a value of type timestamp to type date, the time portion of the timestamp value is ignored. When you convert a value of type timestamp to type time, the date portion of the timestamp is ignored. When you convert a value of type date to type timestamp, the time components of the timestamp are set to zero. When you convert a value of type time to type timestamp, the date component is set to the current system date. It is invalid to convert one interval datatype to the other (for instance because the number of days in a month is variable). Note that you can specify the number of digits for the leading qualifier only, i.e. YEAR(4) TO MONTH, DAY(5). Errors will be reported if the target type and size are not compatible with the source type and size.

Syntax

```
cast ( expression , datatype_specification )
```

Example 1

```
cast ( '123' , integer )
```

Result

123

Example 2

```
cast ( 12345 , varchar ( 10 ) )
```

Result

a string containing 12345

ceil

Returns the smallest integer that is greater than or equal to "numeric_expression".

Syntax

```
ceil ( numeric_expression )
```

ceiling

Returns the smallest integer that is greater than or equal to "numeric_expression".

Syntax

```
ceiling ( numeric_expression )
```

Example 1

```
ceiling ( 4.22 )
```

Result

5

Example 2

```
ceiling ( -1.23 )
```

Result

-1

char_length

Returns the number of logical characters in "string_expression". The number of logical characters can be distinct from the number of bytes in some East Asian locales.

Syntax

```
char_length ( string_expression )
```

Example

```
char_length ( 'Canada' )
```

Result

6

character_length

Returns the number of characters in "string_expression".

Syntax

```
character_length ( string_expression )
```

Example

```
character_length ( 'Canada' )
```

Result

6

coalesce

Returns the first non-null argument (or null if all arguments are null). Requires two or more arguments in "expression_list".

Syntax

```
coalesce ( expression_list )
```

Example

```
coalesce ( [Unit price], [Unit sale price] )
```

Result

Returns the unit price, or the unit sale price if the unit price is null.

current_date

Returns a date value representing the current date of the computer that the database software runs on.

Syntax

```
current_date
```

Example

current_date

Result

2003-03-04

current_time

Returns a time with time zone value, representing the current time of the computer that runs the database software if the database supports this function. Otherwise, it represents the current time of the computer that runs IBM® Cognos® BI software.

Syntax

current_time

Example

current_time

Result

16:33:11.354+05:00

current_timestamp

Returns a datetime with time zone value, representing the current time of the computer that runs the database software if the database supports this function. Otherwise, it represents the current time of the computer that runs IBM® Cognos® BI software.

Syntax

current_timestamp

Example

current_timestamp

Result

2003-03-03 16:40:15.535+05:00

exp

Returns 'e' raised to the power of "numeric_expression". The constant 'e' is the base of the natural logarithm.

Syntax

exp (numeric_expression)

Example

exp (2)

Result

7.389056

extract

Returns an integer representing the value of datepart (year, month, day, hour, minute, second) in "datetime_expression".

Syntax

```
extract ( datepart , datetime_expression )
```

Example 1

```
extract ( year , 2003-03-03 16:40:15.535 )
```

Result

2003

Example 2

```
extract ( hour , 2003-03-03 16:40:15.535 )
```

Result

16

floor

Returns the largest integer that is less than or equal to "numeric_expression".

Syntax

```
floor ( numeric_expression )
```

Example 1

```
floor ( 3.22 )
```

Result

3

Example 2

```
floor ( -1.23 )
```

Result

-2

ln

Returns the natural logarithm of "numeric_expression".

Syntax

```
ln ( numeric_expression )
```

Example

```
ln ( 4 )
```

Result

1.38629

localtime

Returns a time value, representing the current time of the computer that runs the database software.

Syntax

```
localtime
```

Example

```
localtime
```

Result

```
16:33:11
```

localtimestamp

Returns a datetime value, representing the current timestamp of the computer that runs the database software.

Syntax

```
localtimestamp
```

Example

```
localtimestamp
```

Result

```
2003-03-03 16:40:15
```

lower

Returns "string_expression" with all uppercase characters shifted to lowercase.

Syntax

```
lower ( string_expression )
```

Example

```
lower ( 'ABCDEF' )
```

Result

```
abcdef
```

mod

Returns the remainder (modulus) of "integer_expression1" divided by "integer_expression2". "Integer_expression2" must not be zero or an exception condition is raised.

Syntax

```
mod ( integer_expression1, integer_expression2 )
```

Example

```
mod ( 20 , 3 )
```

Result

2

nullif

Returns null if "expression1" equals "expression2", otherwise returns "expression1".

Syntax

```
nullif ( expression1, expression2 )
```

octet_length

Returns the number of bytes in "string_expression".

Syntax

```
octet_length ( string_expression )
```

Example 1

```
octet_length ( 'ABCDEF' )
```

Result

6

Example 2

```
octet_length ( '' )
```

Result

0

position

Returns the integer value representing the starting position of "string_expression1" in "string_expression2" or 0 when the "string_expression1" is not found.

Syntax

```
position ( string_expression1 , string_expression2 )
```

Example 1

```
position ( 'C' , 'ABCDEF' )
```

Result

3

Example 2

```
position ( 'H' , 'ABCDEF' )
```

Result

0

power

Returns "numeric_expression1" raised to the power "numeric_expression2". If "numeric_expression1" is negative, then "numeric_expression2" must result in an integer value.

Syntax

```
power ( numeric_expression1 , numeric_expression2 )
```

Example

```
power ( 3 , 2 )
```

Result

9

_round

Returns "numeric_expression" rounded to "integer_expression" places to the right of the decimal point. Notes: "integer_expression" must be a non-negative integer. Rounding takes place before data formatting is applied.

Syntax

```
_round ( numeric_expression , integer_expression )
```

Example

```
_round ( 1220.42369, 2 )
```

Result

1220.42

row

The row constructor represents a collection of values organized as a row of data. It can be used in conditional expressions (i.e. IF-THEN-ELSE) and filter expressions (i.e. IN clause).

Syntax

```
row ( expression_list )
```

Example 1

```
if ( row([RetailerName],[OrderMethodCode]) = row('ActiForme',4) )  
then ('A')  
else ('B')
```

Result

Returns 'A' if the Retailer Name is 'ActiForme' and the order method code is 4. Otherwise, the value 'B' is returned.

Example 2

```
case row([RetailerName],[OrderMethodCode])  
when row('Advanced  
Climbing Ltd',3) then 1  
when row('ActiForme',5) then 2  
else 3  
end
```

Result

Returns 1 if the Retailer Name is 'Advanced Climbing Ltd' and the order method code is 3. Returns 2 if the Retailer Name is 'ActiForme' and the order method code is 5. Otherwise, the value 3 is returned.

Example 3

```
row ( [OrderMethodCode], [Year] ) in ( [Query].[OMC], [Query].[YR] )
```

Result

The returned data is filtered on the following two conditions: 1) [OrderMethodCode] in ([Query].[OMC]) 2) [Year] in ([Query].[YR])

sqrt

Returns the square root of "numeric_expression". "Numeric_expression" must be non-negative.

Syntax

```
sqrt ( numeric_expression )
```

Example

```
sqrt ( 9 )
```

Result

3

substring

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters or to the end of "string_expression" if "integer_expression2" is omitted. The first character in "string_expression" is at position 1.

Syntax

```
substring ( string_expression , integer_expression1 [ , integer_expression2 ] )
```

Example

```
substring ( 'abcdefg' , 3 , 2 )
```

Result

cd

trim

Returns "string_expression" trimmed of leading and trailing blanks or trimmed of a certain character specified in "match_character_expression". "Both" is implicit when the first argument is not stated and blank is implicit when the second argument is not stated.

Syntax

```
trim ( [ [ trailing|leading|both ] [ match_character_expression ] , ] string_expression )
```

Example 1

```
trim ( trailing 'A' , 'ABCDEF A' )
```

Result

ABCDEF

Example 2

```
trim ( both , ' ABCDEF ' )
```

Result

ABCDEF

upper

Returns "string_expression" with all lowercase characters converted to uppercase.

Syntax

```
upper ( string_expression )
```

Example

```
upper ( 'abcdef' )
```

Result

ABCDEF

width-bucket

For a given expression, this function returns the bucket number into which the value of this expression would fall after being evaluated.

Syntax

```
width-bucket ( numeric_expression , min_value , max_value ,  
              num_of_buckets )
```

Example

```
width-bucket ( Quantity , 100 , 5000 , 10 )
```

Result

For each row, returns the bucket number (from 0 to 11) for the current Quantity value.

Result data

Quantity	width-bucket (Quantity)
50	0
450	1
1400	3
3600	8
4900	10
5000	11

Trigonometric functions

arccos

This inverse trigonometric function returns the arc cosine of the argument, where the argument is in the range of -1 to 1 and the result is a value expressed in radians.

Syntax

```
arccos ( numeric_expression )
```

Example

```
arccos ( -1 )
```

Result

3.1415

arcsin

This inverse trigonometric function returns the arc sine of the argument, where the argument is in the range of -1 to 1 and the result is a value expressed in radians.

Syntax

```
arcsin ( numeric_expression )
```

Example

```
arcsin ( 0 )
```

Result

3.1415

arctan

This inverse trigonometric function returns the arc tangent of the argument, where the argument is in the range of -1 to 1 and the result is a value expressed in radians.

Syntax

```
arctan ( numeric_expression )
```

Example

```
arctan ( 0 )
```

Result

3.1415

COS

This trigonometric function returns the cosine of the argument, where the argument is an angle expressed in radians.

Syntax

```
cos ( numeric_expression )
```

Example

```
cos ( 0.3333 * 3.1415 )
```

Result

0.5

coshyp

This trigonometric function returns the hyperbolic cosine of the argument, where the argument is an angle expressed in radians.

Syntax

```
coshyp ( numeric_expression )
```

Example

```
coshyp ( 0 )
```

Result

1

sin

This trigonometric function returns the sine of the argument, where the argument is an angle expressed in radians.

Syntax

```
sin ( numeric_expression )
```

Example

```
sin ( 0.1667 * 3.1415 )
```

Result

0.5

sinhyp

This trigonometric function returns the hyperbolic sine of the argument, where the argument is an angle expressed in radians.

Syntax

```
sinhyp ( numeric_expression )
```

Example

```
sinhyp ( 0 )
```

Result

0

tan

This trigonometric function returns the tangent of the argument, where the argument is an angle expressed in radians.

Syntax

```
tan ( numeric_expression )
```

Example

```
tan ( 0.25 * 3.1415 )
```

Result

1

tanhyp

This trigonometric function returns the hyperbolic tangent of the argument, where the argument is an angle expressed in radians.

Syntax

```
tanhyp ( numeric_expression )
```

Example

```
tanhyp ( 0 )
```

Result

0

Dimensional Functions

ancestor

Returns the ancestor of "member" at "level" or at "integer" number of levels above "member". Note: The result is not guaranteed to be consistent when there is more than one such ancestor.

Syntax

```
ancestor ( member, level|integer )
```

Example 1

```
ancestor ( [TrailChef Water Bag] , 1 )
```

Result

Cooking Gear

Example 2

```
ancestor ( [TrailChef Water Bag] , 2 )
```

Result

Camping Equipment

Example 3

```
ancestor ( [TrailChef Water Bag] , [great_outdoors_company].  
[Products].[Products].[Product type] )
```

Result

Cooking Gear

ancestors

Returns all the ancestors of "member" at "level" or "index" distance above the member. (Most data sources support only one ancestor at a specified level. If the data source supports more than one ancestor, the result is a member set.)

Syntax

ancestors (member , level | index)

Example 1

ancestors ([TrailChef Water Bag] , 1)

Result

Cooking Gear

Example 2

ancestors ([TrailChef Water Bag] , 2)

Result

Camping Equipment

Example 3

ancestors ([TrailChef Water Bag] , [great_outdoors_company].
[Products].[Products].[Product type])

Result

Cooking Gear

bottomCount

Sorts a set according to the value of "numeric_expression" evaluated at each of the members of "set_expression" and returns the bottom "index_expression" members.

Syntax

bottomCount (set_expression , index_expression , numeric_expression)

Example

bottomCount ([great_outdoors_company].[Products].[Products].[Product
line] , 2 , [Revenue])

Result

Returns the bottom two members of the set sorted by revenue.

Result data

Product line	Revenue
Outdoor Protection	\$3,171,114.92
Mountaineering Equipment	\$20,891,350.60

bottomPercent

Sorts the set specified in "set_expression" in ascending order and returns the bottommost elements from the sorted set whose cumulative percentage of the total is greater than or equal to "percentage".

Syntax

bottomPercent (set_expression , percentage , numeric_expression)

Example

```
bottomPercent ( set ( [Camping Equipment] , [Golf Equipment] ,  
[Mountaineering Equipment] ) , 40 , [2006] )
```

Result

For the set of Camping Equipment, Golf Equipment, and Mountaineering Equipment, returns the members with the smallest Gross profit whose total for the year 2006 is at least 40% of the overall total.

bottomSum

Sorts the set specified in "set_expression" in ascending order and returns the bottommost elements from the sorted set whose cumulative total is greater than or equal to "value".

Syntax

```
bottomSum ( set_expression , value , numeric_expression )
```

Example

```
bottomSum ( members ( [great_outdoors_company].[Products].[Products].  
[Product line] ) , 6000000 , tuple ( [2006] ,  
[great_outdoors_company].[Measures].[Gross profit] ) )
```

Result

For the Product line members, returns the members with the smallest Gross profit whose total for the year 2006 is at least \$6,000,000.

caption

Returns the caption values of "level", "member", or "set_expression". The caption is the string display name for an element and does not necessarily match the unique identifier used to generate the business key or member unique name (MUN) for the element. The caption is not necessarily unique; for example, the caption for a month may return the month name without further year details to make the value unique.

Syntax

```
caption ( level|member|set_expression )
```

Example 1

```
caption ( [TrailChef Water Bag] )
```

Result

TrailChef Water Bag

Example 2

```
caption ( [great_outdoors_company].[Products].[Products].[Product  
line] )
```

Result

Returns the caption values of the Product line set.

Result data

Camping Equipment
Mountaineering Equipment
Personal Accessories
Outdoor Protection
Golf Equipment

children

Returns the set of children of a specified member.

Syntax

children (member)

Example

children ([Camping Equipment])

Result

Returns the set of children for Camping Equipment.

Result data

Cooking Gear
Tents
Sleeping Bags
Packs
Lanterns

closingPeriod

Returns the last sibling member among the descendants of a member at "level".
This function is typically used with a time dimension.

Syntax

closingPeriod (level [, member])

Example 1

closingPeriod ([great_outdoors_company].[Years].[Years].[Month])

Result

2006/Dec

Example 2

closingPeriod ([great_outdoors_company].[Years].[Years].[Year])

Result

2006

Example 3

closingPeriod ([great_outdoors_company].[Years].[Years].[Month] ,
[2006 Q 4])

Result

2006/Dec

cousin

Returns the child member of "member2" with the same relative position as "member1" to its parent. This function appears in the Revenue by GO Subsidiary 2005 sample report in the GO Data Warehouse (analysis) package.

Syntax

```
cousin ( member1 , member2 )
```

Example 1

```
cousin ( [Irons] , [Camping Equipment] )
```

Result

Cooking Gear

Example 2

```
cousin ( [Putters] , [Camping Equipment] )
```

Result

Sleeping Bags

completeTuple

Identifies a cell location (intersection) based on the specified members, each of which must be from a different dimension. However, completeTuple () implicitly includes the default member from all dimensions not otherwise specified in the arguments, rather than the current member. CompleteTuple will use the default measure rather than the currentMeasure in the query if the measure is not defined in the completetuple function. This function appears in the Planned Headcount sample report in the GO Data Warehouse (analysis) package.

Syntax

```
completeTuple ( member { , member } )
```

Example 1

```
completeTuple ( [Mountaineering Equipment] , [Fax] )
```

Result

The completeTuple does not pick up the currentMember by default as the tuple function does. The values in the first column are identical across each year because the default member of the Years dimension, the root member, is used rather than the current member. Likewise, the first column displays Revenue rather than Quantity Sold because the Revenue measure is the default from the Measures dimension. CompleteTuple will use the default measure rather than the currentMeasure in the query if the measure is not defined in the completetuple function.

Result data

Quantity Sold	Mountaineering Sales by Fax
2004	\$1,220,329.38
2005	\$1,220,329.38
2006	\$1,220,329.38

Example 2

```
completeTuple ( [Mountaineering Equipment] , [Fax] , [Quantity sold] ,  
currentMember ( [great_outdoors_company].[Years].[Years] ) )
```

Result

The completeTuple function uses the currentMember of the Years dimension and the Quantity sold measure.

Result data

Quantity Sold	Mountaineering Sales by Fax
2004	0
2005	8,746
2006	7,860

currentMember

Returns the current member of the hierarchy during an iteration. If "hierarchy" is not present in the context in which the expression is being evaluated, its default member is assumed. This function appears in the Rolling and Moving Averages interactive sample report.

Syntax

```
currentMember ( hierarchy )
```

defaultMember

Returns the default member of "hierarchy".

Syntax

```
defaultMember ( hierarchy )
```

Example 1

```
defaultMember ( [great_outdoors_company].[Products].[Products] )
```

Result

Products

Example 2

```
defaultMember ( [great_outdoors_company].[Years].[Years] )
```

Result

Year

Example 3

```
defaultMember ( hierarchy ( [great_outdoors_company].[Measures].  
[Quantity sold] ) )
```

Result

Revenue

descendants

Returns the set of descendants of "member" or "set_expression" at "level" (qualified name) or "distance" (integer 0..n) from the root. Multiple options may be specified (separated by a space) to determine which members are returned. self: Only the members at the specified level are included in the final set (this is the default behaviour in the absence of any options). before: If there are any intermediate levels between the member's level and the one specified, members from those levels are included. If the level specified is the same as the member upon which the function is applied, the member is included in the final set. beforewithmember: If there are any intermediate levels between the member's level and the one specified, members from those levels are included. The member upon which the function is applied is also included in the final set. after: If other levels exist after the specified level, members from those levels are included in the final set. This function appears in the Sales Commissions for Central Europe sample report in the GO Data Warehouse (analysis) package.

Syntax

```
descendants ( member|set_expression , level|distance [ ,  
  { self|before|beforewithmember|after } ] )
```

Example 1

```
descendants ( [great_outdoors_company].[Products].[Products].  
[Products] , [great_outdoors_company].[Products].[Products].[Product  
type] )
```

Result

Returns the set of descendants of the Products set at the Product type level. Note: [great_outdoors_company].[Products].[Products].[Products] is the root member of the Products hierarchy.

Result data

```
Cooking Gear  
Sleeping Bags  
Packs  
Tents  
...  
Eyewear  
Knives  
Watches
```

Example 2

```
descendants ( [great_outdoors_company].[Products].[Products].  
[Products] , 1 )
```

Result

Returns the set of descendants of the Products set at the first level.

Result data

```
Camping Equipment  
Golf Equipment  
Mountaineering Equipment  
Outdoor Protection  
Personal Accessories
```

Example 3

```
descendants ( [great_outdoors_company].[Products].[Products].  
[Products] , 3 , before )
```

Result

Returns the descendants of the Products set before the third level.

Result data

```
Camping Equipment  
Cooking Gear  
Sleeping Bags  
Packs  
Tents  
...  
Eyewear  
Knives  
Watches
```

Example 4

```
descendants ( [great_outdoors_company].[Products].[Products].  
[Products] , 2 , self before )
```

Result

Returns the set of descendants of the Products set before and including the second level.

Result data

```
Camping Equipment  
Cooking Gear  
Sleeping Bags  
Packs  
Tents  
...  
Eyewear  
Knives  
Watches
```

except

Returns the members of "set_expression1" that are not also in "set_expression2". Duplicates are retained only if the optional keyword "all" is supplied as the third argument.

Syntax

```
except ( set_expression1 , set_expression2 [ , all ] )
```

Example

```
except ( set ( [Camping Equipment] , [Mountaineering Equipment] ) ,  
set ( [Camping Equipment] , [Golf Equipment] ) )
```

Result

Mountaineering Equipment

filter

Returns the set resulting from filtering a specified set based on the Boolean condition. Each member is included in the result if and only if the corresponding value of "Boolean_expression" is true.

Syntax

```
filter ( set_expression , Boolean_expression )
```

Example

```
filter ( [Product line] , [Gross margin] > .30 )
```

Result

Mountaineering Equipment

firstChild

Returns the first child of "member".

Syntax

```
firstChild ( member )
```

Example 1

```
firstChild ( [By Product Lines] )
```

Result

Camping Equipment

Example 2

```
firstChild ( [Camping Equipment] )
```

Result

Cooking Gear

firstSibling

Returns the first child of the parent of "member".

Syntax

```
firstSibling ( member )
```

Example 1

```
firstSibling ( [Outdoor Protection] )
```

Result

Camping Equipment

Example 2

```
firstSibling ( [Camping Equipment] )
```

Result

_format

Associates a format with the expression. The `format_keyword` can be `PERCENTAGE_0`, `PERCENTAGE_1`, or `PERCENTAGE_2`. `PERCENTAGE_1` returns a percentage with one digit to the right of the decimal point, `PERCENTAGE_2` returns a percentage with two digits to the right of the decimal point, and `PERCENTAGE_3` returns a percentage value out of one with three digits to the right of the decimal point (for example, 0.965).

Syntax

```
_format ( expression , format_keyword )
```

Example

```
_format ( [Unit Sale Price] / [Unit Price] , PERCENTAGE_2 )
```

Result

75.12%

emptySet

Returns an empty member set for "hierarchy". This is most often used as a placeholder during development or with dynamic report design (either with the IBM® Cognos® Software Development Kit or via report design). By creating a data item that contains the `emptyset` function, it is possible to build complex expressions that can later be revised by redefining the `emptyset` data item.

Syntax

```
emptySet ( hierarchy )
```

Example

```
except ( [great_outdoors_company].[Products].[Products].[Product  
line] , emptySet ( [great_outdoors_company].[Products].[Products] ) )
```

Result

Returns the Product line set and an empty set for the Products set.

Result data

```
Camping Equipment  
Golf Equipment  
Mountaineering Equipment  
Outdoor Protection  
Personal Accessories
```

generate

Evaluates "`set_expression2`" for each member of "`set_expression1`" and joins the resulting sets by union. The result retains duplicates only when the optional keyword "`all`" is supplied as the third argument.

Syntax

```
generate ( set_expression1 , set_expression2 [ , all ] )
```

Example

```
generate ( [Product line] , topCount ( descendants ( currentMember (
  [great_outdoors_company].[Products].[Products] ) ,
  [great_outdoors_company].[Products].[Products].[Product name] ) , 2 ,
  [Revenue] ) )
```

Result

Returns the top two products by revenue for each product line.

head

Returns the first "index_expression" elements of "set_expression". The default for "index_expression" is 1.

Syntax

```
head ( set_expression [ , index_expression ] )
```

Example 1

```
head ( members ( [great_outdoors_company].[Products].[Products].
  [Product line] ) )
```

Result

Camping Equipment

Example 2

```
head ( members ( [great_outdoors_company].[Products].[Products].
  [Product line] ) , 2 )
```

Result

Returns the top two members of the Product line set.

Result data

Camping Equipment
Mountaineering Equipment

hierarchize

Orders the members of "set_expression" in a hierarchy. Members in a level are sorted in their natural order. This is the default ordering of the members along a dimension when no other sort conditions are specified.

Syntax

```
hierarchize ( set_expression )
```

Example

```
hierarchize ( set ( [Golf Equipment] , [Mountaineering Equipment] ,
  [Camping Equipment] ) )
```

Result

Returns Camping Equipment, Golf Equipment, Mountaineering Equipment.

hierarchy

Returns the hierarchy that contains "level", "member", or "set_expression".

Syntax

```
hierarchy ( level|member|set_expression )
```

Example 1

```
hierarchy ( [Cooking Gear] )
```

Result

Returns every member in the hierarchy that contains Cooking Gear.

Result data

```
Products  
Camping Equipment  
Cooking Gear  
TrailChef Water Bag  
TrailChef Canteen  
...  
Mountain Man Extreme  
Mountain Man Deluxe
```

Example 2

```
hierarchy ( [great_outdoors_company].[Products].[Products].[Product  
line] )
```

Result

Returns every member in the hierarchy that contains the Product line.

Result data

```
Products  
Camping Equipment  
Cooking Gear  
TrailChef Water Bag  
TrailChef Canteen  
...  
Mountain Man Extreme  
Mountain Man Deluxe
```

item

Returns a member from the "index" location within "set_expression". The index into the set is zero based.

Syntax

```
item ( set_expression , index )
```

Example

```
item ( children ( [Camping Equipment] ) , 2 )
```

Result

Sleeping Bags

intersect

Returns the intersection of "set_expression1" and "set_expression2". The result retains duplicates only when the optional keyword "all" is supplied as the third argument.

Syntax

```
intersect ( set_expression1 , set_expression2 [ , all ] )
```

Example

```
intersect ( set ( [Camping Equipment] , [Mountaineering Equipment] ) ,  
  set ( [Camping Equipment] , [Outdoor Protection] , ) , all )
```

Result

Camping Equipment

lag

Returns the sibling member that is "index_expression" number of positions prior to "member".

Syntax

```
lag ( member , index_expression )
```

Example 1

```
lag ( [Tents] , 1 )
```

Result

Cooking Gear

Example 2

```
lag ( [Tents] , -2 )
```

Result

Packs

lastChild

Returns the last child of a specified member.

Syntax

```
lastChild ( member )
```

Example 1

```
lastChild ( Cooking Gear )
```

Result

TrailChef Utensils

Example 2

```
lastChild ( [By Product Line] )
```

Result

Golf Equipment

lastPeriods

Returns the set of members from the same level that ends with "member". The number of members returned is the absolute value of "integer_expression". If "integer_expression" is negative, members following and including the specified member are returned. Typically used with a time dimension. This function appears in the Rolling and Moving Averages interactive sample report.

Syntax

```
lastPeriods ( integer_expression , member )
```

Example 1

```
lastPeriods ( 2 , [2006 Q 4] )
```

Result

Returns the last two members from the level that ends with 2006 Q 4.

Result data

```
2006 Q 3  
2006 Q 4
```

Example 2

```
lastPeriods ( -3 , [2006 Q 4] )
```

Result

Returns the last three members from the level that starts with 2006 Q 4.

Result data

```
2006 Q 4  
2007 Q 1  
2007 Q 2
```

lastSibling

Returns the last child of the parent of a specified member.

Syntax

```
lastSibling ( member )
```

Example

```
lastSibling ( [Camping Equipment] )
```

Result

Golf Equipment

lead

Returns the sibling member that is "index_expression" number of positions after "member". If "index_expression" is negative, returns the sibling member that is "index_expression" number of positions before "member".

Syntax

```
lead ( member , index_expression )
```

Example 1

```
lead ( [Outdoor Protection] , 1 )
```

Result

Personal Accessories

Example 2

```
lead ( [Outdoor Protection] , -2 )
```

Result

Golf Equipment

level

Returns the level of "member".

Syntax

```
level ( member )
```

Example

```
level ( [Golf Equipment] )
```

Result

Returns the members on the Golf Equipment level.

Result data

Camping Equipment
 Mountaineering Equipment
 Personal Accessories
 Outdoor Protection
 Golf Equipment

levels

Returns the level in "hierarchy" whose distance from the root is specified by "index".

Syntax

```
levels ( hierarchy , index )
```

Example 1

```
levels ( [great_outdoors_company].[Products].[Products] , 2 )
```

Result

Returns the members two levels from the root Products hierarchy.

Result data

Cooking Gear
Sleeping Bags
Packs
Tents
...
Irons
Putters
Woods
Golf Accessories

Example 2

```
levels ( [great_outdoors_company].[Products].[Products] , 1 )
```

Result

Returns the members one level from the root Products hierarchy.

Result data

Camping Equipment
Mountaineering Equipment
Personal Accessories
Outdoor Protection
Golf Equipment

linkMember

Returns the corresponding member in "level" or "hierarchy" (of the same dimension). For level-based hierarchies, a level must be specified as the second argument, and for parent-child hierarchies, a hierarchy must be specified. An exception is thrown when the second parameter does not resolve to a hierarchy of the member's dimension. Note that calculated members are not supported as the first argument.

Syntax

```
linkMember ( member , level|hierarchy )
```

members

Returns the set of members in "hierarchy" or "level". In the case of a hierarchy, the order of the members in the result is not guaranteed. If a predictable order is required, an explicit ordering function (such as hierarchize) must be used.

Syntax

```
members ( hierarchy|level )
```

Example 1

```
members ( [great_outdoors_company].[Years].[Years] )
```

Result

Returns the members in Years.

Example 2

```
members ( [great_outdoors_company].[Products].[Products].[Product  
line] )
```

Result

Returns the members in Product line.

nextMember

Returns the next member in the "member" level.

Syntax

```
nextMember ( member )
```

Example

```
nextMember ( [Outdoor Protection] )
```

Result

Golf Equipment

openingPeriod

Returns the first sibling member among the descendants of a member at "level". This function is typically used with a time dimension.

Syntax

```
openingPeriod ( level [ , member ] )
```

Example 1

```
openingPeriod ( [great_outdoors_company].[Years].[Years].[Month] )
```

Result

2004/Jan

Example 2

```
openingPeriod ( [great_outdoors_company].[Years].[Years].[Year] )
```

Result

2004

Example 3

```
openingPeriod ( [great_outdoors_company].[Years].[Years].[Month] ,  
[2006 Q 4] )
```

Result

2006/Oct

order

Arranges the members of "set_expression" according to their "value_expression" and the third parameter. ASC and DESC arrange members in ascending or descending order, respectively, according to their position in the set hierarchy. Then the children of each member are arranged according to "value_expression". BASC and BDESC arrange members in the set without regard to the hierarchy. In the absence of an explicit specification, ASC is the default.

Syntax

```
order ( set_expression , value_expression [ , ASC|DESC|BASC|BDESC ] )
```

Example 1

```
order ( members ( [Great Outdoors Company].[Product].[Product].  
[Product type] ) , [Quantity sold] , BASC )
```

Result

Returns the quantity sold for each product type in no particular order.

Result data

Product Line	Quantity
Woods	13,924
Irons	14,244
Safety	22,332
...	...
Sunscreen	215,432
Insect Repellents	270,074
Lanterns	345,096

Example 2

```
order ( members ( [Great Outdoors Company].[Product].[Product].  
[Product type] ) , [Quantity sold] , ASC )
```

Result

Returns the quantity sold for each product type in ascending order.

Result data

Product Line	Quantity
Woods	13,924
Irons	14,244
Putters	23,244
...	...
Tents	130,664
Cooking Gear	198,676
Lanterns	345,096

ordinal

Returns the zero-based ordinal value (distance from the root level) of "level".

Syntax

```
ordinal ( level )
```

Example 1

```
ordinal ( [great_outdoors_company].[Products].[Products].[Product  
line] )
```

Result

1

Example 2

```
ordinal ( [great_outdoors_company].[Products].[Products].[Product
type] )
```

Result

2

parallelPeriod

Returns a member from a prior period in the same relative position as "member". This function is similar to the cousin function, but is more closely related to time series. It takes the ancestor of "member" at "level" (called "ancestor") and the sibling of "ancestor" that lags by "integer_expression" positions, and returns the parallel period of "member" among the descendants of that sibling. When unspecified, "integer_expression" defaults to 1 and "member" defaults to the current member.

Syntax

```
parallelPeriod ( level [ , integer_expression [ , member ] ] )
```

Example 1

```
parallelPeriod ( [great_outdoors_company].[Years].[Years].[Quarter] ,
-1 , [2006/Aug] )
```

Result

2006/Nov

Example 2

```
parallelPeriod ( [great_outdoors_company].[Years].[Years].[Quarter] ,
1 , [2006/Aug] )
```

Result

2006/May

Example 3

```
parallelPeriod ( [great_outdoors_company].[Years].[Years].[Year] , 2 ,
[2006/Aug] )
```

Result

2004/Aug

parent

Returns the member that is the parent of "member" or "measure".

Syntax

```
parent ( member|measure )
```

Example

```
parent ( [Cooking Gear] )
```

Result

periodsToDate

Returns a set of sibling members from the same level as "member", as constrained by "level". It locates the ancestor of "member" at "level" and returns that ancestor's descendants at the same level as "member" (up to and including "member"). Typically used with a time dimension. This function appears in the Rolling and Moving Averages interactive sample report.

Syntax

```
periodsToDate ( level , member )
```

Example

```
periodsToDate ( [great_outdoors_company].[Years].[Years].[Year] ,  
[2004/Mar] )
```

Result

Returns values for [2004/Jan], [2004/Feb], [2004/Mar]

prevMember

Returns the member that immediately precedes "member" in the same level. This function appears in the Sales Growth Year Over Year sample report in the GO Data Warehouse (analysis) package.

Syntax

```
prevMember ( member )
```

Example 1

```
prevMember ( [Outdoor Protection] )
```

Result

Personal Accessories

Example 2

```
prevMember ( [2005] )
```

Result

2004

member

Defines a member based on "value_expression" in "hierarchy". "String1" identifies the member created by this function. It must be unique in the query and different from any other member in the same hierarchy. "String2" is the caption of the member; if it is absent, the caption is empty. To ensure predictable results, it is recommended that you supply the "hierarchy". Note: All calculations used as grouping items whose sibling items are other calculations or member sets should be explicitly assigned to a hierarchy using this function. The results are not predictable otherwise. The only exception is where the calculation involves only members of the same hierarchy as the siblings. In this case, the calculation is assumed to belong to that hierarchy.

Syntax

```
member ( value_expression [ , string1 [ , string2 [ ,  
hierarchy ] ] ] )
```

Example

```
member ( total ( currentMeasure within set filter ( [great_outdoors_company].[Products].[Products].[Product name] ,  
caption ( [great_outdoors_company].[Products].[Products].[Product name] ) starts with 'B' ) ) , 'BProducts' , 'B Products' ,  
[great_outdoors_company].[Products].[Products] )
```

Result

Returns the quantity sold and revenue for all products that start with the letter B.

nestedSet

This function is intended for use only by Analysis Studio

Syntax

```
nestedSet ( set_expression1 , set_expression2 )
```

set

Returns the list of members defined in the expression. The members must belong to the same hierarchy.

Syntax

```
set ( member { , member } )
```

Example

```
set ( [Golf Equipment] , [Irons] , [TrailChef Cup] )
```

Result

Returns Golf Equipment, Irons, and TrailChef Cup.

siblings

Returns the children of the parent of the specified member.

Syntax

```
siblings ( member )
```

Example

```
siblings ( [Golf Equipment] )
```

Result

Returns the siblings of Golf Equipment.

Result data

```
Camping Equipment  
Golf Equipment  
Mountaineering Equipment  
Outdoor Protection  
Personal Accessories
```

tail

Returns the last "index_expression" elements of "set expression". The default for "index_expression" is 1.

Syntax

```
tail ( set_expression [ , index_expression ] )
```

Example 1

```
tail ( members ( [great_outdoors_company].[Products].[Products].  
[Product line] ) )
```

Result

Returns the last member of the Product line set.

Result data

Personal Accessories

Example 2

```
tail ( members ( [great_outdoors_company].[Products].[Products].  
[Product line] ) , 2 )
```

Result

Returns the last two members of the Product line set.

Result data

Outdoor Protection
Personal Accessories

topCount

Sorts a set according to the values of "numeric_expression" evaluated at each of the members of "set_expression" and returns the top "index_expression" members.

Syntax

```
topCount ( set_expression , index_expression , numeric_expression )
```

Example

```
topCount ( [great_outdoors_company].[Products].[Products].[Product  
line] , 2 , [Revenue] )
```

Result

Returns the top two revenues for the Product line set.

Result data

Product line	Revenue
Camping Equipment	\$89,713,990.92
Personal Accessories	\$31,894,465.86

topPercent

Sorts the set specified in "set_expression" in descending order and returns the topmost elements from the sorted set whose cumulative percentage of the total is greater than or equal to "percentage".

Syntax

```
topPercent ( set_expression , percentage , numeric_expression2 )
```

Example

```
topPercent ( set ( [Camping Equipment] , [Golf Equipment] ,  
[Mountaineering Equipment] ) , 40 , [2006] )
```

Result

For the set of Camping Equipment, Golf Equipment, and Mountaineering Equipment, returns the members with the largest Gross profit whose total for the year 2006 is at least 40% of the overall total.

topSum

Sorts the set specified in "set_expression" in descending order and returns the topmost elements from the sorted set whose cumulative total is greater than or equal to "value".

Syntax

```
topSum ( set_expression , value , numeric_expression2 )
```

Example

```
topSum ( children ( [Products] ) , 16000000 , tuple ( [2006] ,  
[great_outdoors_company].[Measures].[Gross profit] ) )
```

Result

For the Product line members, returns the members with the largest Gross profit whose total for the year 2006 is at least \$6,000,000.

tuple

Identifies a cell location (intersection) based on the specified members, each of which must be from a different dimension. This function implicitly includes the current member from all dimensions that are not otherwise specified in the arguments. The current member of any dimension not specified in the evaluating context is assumed to be the default member of that dimension. The value of this cell can be obtained with the "value" function.

Syntax

```
tuple ( member { , member } )
```

Example

```
tuple ( [Mountaineering Equipment] , [Fax] )
```

Result

Returns the Mountaineering Equipment sales by fax.

union

Returns data for "set_expression1" and "set_expression2". The result retains duplicates only when the optional keyword "all" is supplied as the third argument.

Syntax

```
union ( set_expression1 , set_expression2 [ , all ] )
```

Example 1

```
union ( set ( [Camping Equipment] , [Golf Equipment] ) , set ( [Golf  
Equipment] , [Mountaineering Equipment] ) )
```

Result

Returns data for both sets as one new set, showing the Golf Equipment column only once.

Example 2

```
union ( set ( [Camping Equipment] , [Golf Equipment] ) , set ( [Golf  
Equipment] , [Mountaineering Equipment] ) , all )
```

Result

Returns data for both sets as one new set, showing the Golf Equipment column twice.

roleValue

Returns the value of the attribute that is associated with the role whose name is specified by "string" within the specified context. "Member" or "set_expression" is optional only in a number of limited circumstances, where it can be derived from another context. Applications can be made portable across different data sources and models by accessing attributes by role rather than by query item ID. For dimensionally-modeled relational (DMR) data sources, assignment of roles is the modeler's responsibility. Intrinsic roles that are defined for members of all data source types include: '_businessKey', '_memberCaption', '_memberDescription', '_memberUniqueName'. Additional roles can be defined in Framework Manager for each level in a hierarchy. For example, a Product type level may have an attribute column called "Type Shipping Container", and the Product level may have a "Product Shipping Container" attribute. Each of these could be assigned a custom role in Framework Manager called "Container". The property could then be referenced independently of the actual column name by using the roleValue function.

Syntax

```
roleValue ( string [ , member|set_expression ] )
```

Example 1

```
roleValue ( ' memberCaption' , [Sales].[Product].[Product].[Product  
line] -> [all].[1] )
```

Result

Camping Equipment

Example 2

```
roleValue ( '_businessKey' , [great_outdoors_company].[Years].[Years].
[Year] )
```

Result

Returns the value of the attribute that is associated with the business key role.

Result data

```
("2004-01-01", "2004-12-31")
("2005-01-01", "2005-12-31")
("2006-01-01", "2006-12-31")
```

Example 3

```
roleValue ( '_memberUniqueName' , [great_outdoors_company].[Years].
[Years].[Year] )
```

Result

Returns the value of the attribute that is associated with the MUN role.

Result data

```
[great_outdoors_company].[Years].[Years].[Year] ->:[PC].[Years (
Root)].[20040101-20041231]
[great_outdoors_company].[Years].[Years].[Year] ->:[PC].[Years (
Root)].[20050101-20051231]
[great_outdoors_company].[Years].[Years].[Year] ->:[PC].[Years (
Root)].[20060101-20061231]
```

rootMember

Returns the root member of a single-root hierarchy. This function appears in the Promotion Success sample report in the GO Data Warehouse (analysis) package.

Syntax

```
rootMember ( hierarchy )
```

rootMembers

Returns the root members of a hierarchy.

Syntax

```
rootMembers ( hierarchy )
```

Example

```
rootMembers ( [great_outdoors_company].[Years].[Years] )
```

Result

By Time

subset

Returns a subset of members in "set_expression" starting at "index_expression1" from the beginning. If the count "index_expression2" is specified, that many members are returned (if available). Otherwise, all remaining members are returned.

Syntax

```
subset ( set_expression, index_expression1 [ , index_expression2 ] )
```

Example 1

```
subset ( members ( [great_outdoors_company].[Products].[Products].  
[Product line] ) , 2 )
```

Result

Returns the members of the Product line set starting at the second member.

Result data

Mountaineering Equipment
Outdoor Protection
Personal Accessories

Example 2

```
subset ( members ( [great_outdoors_company].[Products].[Products].  
[Product line] ) , 2 , 2 )
```

Result

Returns two members of the Product line set starting at the second member.

Result data

Mountaineering Equipment
Outdoor Protection

unique

Removes all duplicates from "set_expression". The remaining members retain their original order.

Syntax

```
unique ( set_expression )
```

value

Returns the value of the cell identified by "tuple". Note that the default member of the Measures dimension is the Default Measure.

Syntax

```
value ( tuple )
```

Example 1

```
value ( tuple ( [great_outdoors_company].[Years].[Years].[Year]  
->:[PC].[Years (Root)].[20040101-20041231] , [great_outdoors_company].  
[Measures].[Revenue] ) )
```

Result

\$34,750,563.50

Example 2

```
value ( tuple ( [2004] , [Camping Equipment] , [Revenue] ) )
```

Result

Report Functions

Today

Returns the current system date.

Syntax

Today ()

Now

Returns the current system time.

Syntax

Now ()

AsOfDate

Returns the date value of the AsOfDate expression, if it is defined. Otherwise, AsOfDate returns the report execution date.

Syntax

AsOfDate ()

AsOfTime

Returns the time value of the AsOfTime expression, if it is defined. Otherwise, AsOfTime returns the report execution time.

Syntax

AsOfTime ()

ReportDate

Returns the report execution date and time.

Syntax

ReportDate ()

ReportName

Returns the report name. This function works only when the report is run from IBM® Cognos® Connection.

Syntax

ReportName ()

ReportPath

Returns the report path. This function works only when the report is run from IBM® Cognos® Connection.

Syntax

ReportPath ()

ReportDescription

Returns the report description. This function works only when the report is run from IBM® Cognos® Connection.

Syntax

ReportDescription ()

ReportLocale

Returns the run locale.

Syntax

ReportLocale ()

GetLocale

Returns the run locale (deprecated).

Syntax

GetLocale ()

Locale

Returns the run locale.

Syntax

Locale ()

ReportProductLocale

Returns the product locale.

Syntax

ReportProductLocale ()

ReportAuthorLocale

Returns the author locale.

Syntax

ReportAuthorLocale ()

ReportSaveDate

Returns the date when the report was last saved.

Syntax

ReportSaveDate ()

ReportCreateDate

Returns the date when the report was created.

Syntax

ReportCreateDate ()

ReportID

Returns the report ID.

Syntax

ReportID ()

ReportOutput

Returns the name of the output format, such as CSV, HTML, layoutDataXML, MHT, PDF, rawXML, singleXLS, spreadsheetML, XLS, XML, or XLWA.

Syntax

ReportOutput ()

ReportOption

Returns the value of the run option variable identified by "optionName", such as attachmentEncoding, burst, cssURL, email, emailAsAttachment, emailAsURL, emailBody, emailSubject, emailTo, emailToAddress, metadataModel, outputEncapsulation, outputFormat, outputLocale, outputPageDefinition, outputPageOrientation, primaryWaitThreshold, print, printer, printerAddress, prompt, promptFormat, saveAs, saveOutput, secondaryWaitThreshold, verticalElements, or xslURL.

Syntax

ReportOption ('optionName')

ServerName

Returns the name of the web server where the run request originated from. The value may be empty if the request is executed from the scheduler.

Syntax

ServerName ()

ServerLocale

Returns the locale of the server that runs the report.

Syntax

ServerLocale ()

ModelPath

Returns the model path.

Syntax

ModelPath ()

BurstKey

Returns the burst key.

Syntax

BurstKey ()

BurstRecipients

Returns the distribution list of burst recipients.

Syntax

```
BurstRecipients ()
```

IsBursting

Returns Boolean 1 (true) when the report will be distributed to the recipient; otherwise, returns Boolean 0 (false).

Syntax

```
IsBursting ('recipientName')
```

ParamNames

Returns all parameter names.

Syntax

```
ParamNames ()
```

ParamName

Returns the parameter name of "parameterName".

Syntax

```
ParamName ('parameterName')
```

ParamDisplayValue

Returns a string that is the parameter display value of "parameterName". This function appears in the Recruitment Report sample report in the GO Data Warehouse (analysis) package.

Syntax

```
ParamDisplayValue ('parameterName')
```

ParamValue

Returns the parameter value of "parameterName".

Syntax

```
ParamValue ('parameterName')
```

ParamCount

Returns the parameter count of "parameterName".

Syntax

```
ParamCount ('parameterName')
```

RowNumber

Returns the current row.

Syntax

```
RowNumber ()
```

PageNumber

Returns the current page number.

Syntax

PageNumber ()

PageCount

Returns the current page count. This function works only when the report output is Adobe® PDF or Microsoft® Excel. If you save the report output, this function works for all formats.

Syntax

PageCount ()

IsPageCountAvailable

Returns Boolean 1 (true) if the page count is available for the current execution of the report; otherwise, returns Boolean 0 (false).

Syntax

IsPageCountAvailable ()

HorizontalPageNumber

Returns the current horizontal page number.

Syntax

HorizontalPageNumber ()

HorizontalPageCount

Returns the current horizontal page count.

Syntax

HorizontalPageCount ()

PageName

Returns the current page name.

Syntax

PageName ()

URLEncode

Returns the URL encoded value of the input text.

Syntax

URLEncode ('text')

TOCHeadingCount

Returns the table of contents heading count for a specified heading level.

Syntax

TOCHeadingCount (headingLevel)

IsAccessible

Returns Boolean 1 (true) if the report is run with the accessibility features enabled. Use this function as a variable expression with a conditional block to make your reports accessible. For example, you can add a list or crosstab equivalent to a chart in reports that are run with accessibility features enabled.

Syntax

```
IsAccessible()
```

ColumnNumber

Returns the current column number.

Syntax

```
ColumnNumber ()
```

IsCrosstabRowNodeMember

Returns Boolean 1 (true) if the current node is a crosstab row node member.

Syntax

```
IsCrosstabRowNodeMember ()
```

IsCrosstabColumnNodeMember

Returns Boolean 1 (true) if the current node is a crosstab column node member.

Syntax

```
IsCrosstabColumnNodeMember ()
```

IsInnerMostCrosstabRowNodeMember

Returns Boolean 1 (true) if the current node is an innermost crosstab row node member.

Syntax

```
IsInnerMostCrosstabRowNodeMember ()
```

IsInnerMostCrosstabColumnNodeMember

Returns Boolean 1 (true) if the current node is an innermost crosstab column node member.

Syntax

```
IsInnerMostCrosstabColumnNodeMember ()
```

IsOuterMostCrosstabRowNodeMember

Returns Boolean 1 (true) if the current node is an outermost crosstab row node member.

Syntax

```
IsOuterMostCrosstabRowNodeMember ()
```

IsOuterMostCrosstabColumnNodeMember

Returns Boolean 1 (true) if the current node is an outermost crosstab column node member.

Syntax

IsOuterMostCrosstabColumnNodeMember ()

IsFirstColumn

Returns Boolean 1 (true) if the current column is the first column.

Syntax

IsFirstColumn ()

IsLastColumn

Returns Boolean 1 (true) if the current column is the last column.

Syntax

IsLastColumn ()

IsLastInnerMostCrosstabColumnNodeMember

Returns Boolean 1 (true) if the current node is the last innermost crosstab column node member.

Syntax

IsLastInnerMostCrosstabColumnNodeMember ()

IsLastInnerMostCrosstabRowNodeMember

Returns Boolean 1 (true) if the current node is the last innermost crosstab row node member.

Syntax

IsLastInnerMostCrosstabRowNodeMember ()

CubeName

Returns the name of the cube. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

CubeName (dimension)

CubeDescription

Returns the description of the cube. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

CubeDescription (dimension)

CubeCreatedOn

Returns the date and time when the cube was created. "Dimension" specifies from which cube to retrieve the metadata. If the dimension source is an IBM® Cognos® PowerCube (.mdc), the function returns a blank string because the initial creation date of a PowerCube is not maintained.

Syntax

CubeCreatedOn (dimension)

CubeDataUpdatedOn

Returns the date time that data in the cube was last updated. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

```
CubeDataUpdatedOn ( dimension )
```

CubeSchemaUpdatedOn

Returns the date time that the cube schema was last updated. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

```
CubeSchemaUpdatedOn ( dimension )
```

CubelsOptimized

Returns "true" if the cube is optimized. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

```
CubeIsOptimized ( dimension )
```

CubeDefaultMeasure

Returns the name of the default measure for the cube. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

```
CubeDefaultMeasure ( dimension )
```

CubeCurrentPeriod

Returns the current period for the cube. "Dimension" specifies from which cube to retrieve the metadata.

Syntax

```
CubeCurrentPeriod ( dimension )
```

CellValue

Returns the value of the current crosstab cell.

Syntax

```
CellValue ()
```

InScope

Returns Boolean 1 (true) when the cell is in the scope of the data items and MUNs; otherwise, returns Boolean 0 (false).

Syntax

```
InScope ( dataItem , MUN, ... )
```

Data Type Casting Functions

_add_days

Returns the datetime resulting from adding "integer_expression" days to "timestamp_expression".

Syntax

```
_add_days ( timestamp_expression , integer_expression )
```

Example

```
_add_days ( 2007-01-14 00:00:00.000 , 3 )
```

Result

```
2007-01-17 00:00:00.000
```

_add_months

Returns the datetime resulting from adding "integer_expression" months to "timestamp_expression".

Syntax

```
_add_months ( timestamp_expression , integer_expression )
```

_add_years

Returns the datetime resulting from adding "integer_expression" years to "timestamp_expression".

Syntax

```
_add_years ( timestamp_expression , integer_expression )
```

_age

Returns a number by subtracting "timestamp_expression" from today's date.

Syntax

```
_age ( timestamp_expression )
```

Example

```
_age ([Query1].[Date]), where [Query1].[Date] is March 2, 2004, and today is July 8, 2009
```

Result

```
50,406, where 5 is the number of years, 04 is the number of months, and 06 is the number of days.
```

_day_of_week

Returns the day of the week (between 1 and 7) for "timestamp_expression" where "integer_expression" indicates which day of that week is day 1. To determine "integer_expression", choose the day of the week and count from Monday; for example, if you choose Wednesday, "integer_expression" would be 3 because Wednesday is the third day from Monday.

Syntax

```
_day_of_week ( timestamp_expression , integer_expression )
```

Example

```
_day_of_week ( 2009-01-01 , 7 ), where 7 means that Sunday is the  
first day of the week.
```

Result

5

_day_of_year

Returns the ordinal for the day of the year in "timestamp_expression" (1 to 366).
Also known as Julian day.

Syntax

```
_day_of_year ( timestamp_expression )
```

_days_between

Returns a positive or negative number representing the number of days between
"timestamp_expression1" and "timestamp_expression2". If "timestamp_expression1"
< "timestamp_expression2", the result will be a negative number.

Syntax

```
_days_between ( timestamp_expression1 , timestamp_expression2 )
```

_days_to_end_of_month

Returns a number representing the number of days remaining in the month
represented by "timestamp_expression".

Syntax

```
_days_to_end_of_month ( timestamp_expression )
```

_first_of_month

Returns a datetime that is the first day of the month represented by
"timestamp_expression".

Syntax

```
_first_of_month ( timestamp_expression )
```

Example 1

```
_first_of_month ( 2009-05-04 00:00:00.000 )
```

Result

Returns 2009-05-01 00:00:00.000

Example 2

```
_first_of_month ( current_date )
```

Result

Returns Jul 1, 2009 if the current date is July 30, 2009.

_last_of_month

Returns a datetime that is the last day of the month represented by "timestamp_expression".

Syntax

```
_last_of_month ( timestamp_expression )
```

_make_timestamp

Returns a timestamp constructed from "integer_expression1" (the year), "integer_expression2" (the month), and "integer_expression3" (the day). The time portion defaults to 00:00:00.000 .

Syntax

```
_make_timestamp ( integer_expression1 , integer_expression2 ,  
integer_expression3 )
```

_months_between

Returns a positive or negative number representing the number of months between "timestamp_expression1" and "timestamp_expression2". If "timestamp_expression1" < "timestamp_expression2", the result will be a negative number.

Syntax

```
_months_between ( timestamp_expression1 , timestamp_expression2 )
```

_week_of_year

Returns the week number (1-53) of the year for "timestamp_expression". According to the ISO 8601, week 1 of the year is the first week to contain a Thursday, which is equivalent to the first week containing January 4th. A week starts on a Monday (day 1) and ends on a Sunday (day 7).

Syntax

```
_week_of_year ( timestamp_expression )
```

_years_between

Returns a positive or negative integer representing the number of years between "timestamp_expression1" and "timestamp_expression2". If "timestamp_expression1" < "timestamp_expression2", a negative value is returned.

Syntax

```
_years_between ( timestamp_expression1 , timestamp_expression2 )
```

_ymdint_between

Returns a number representing the difference between "timestamp_expression1" and "timestamp_expression2". This value has the form YYMMDD, where YY represents the number of years, MM represents the number of months, and DD represents the number of days.

Syntax

```
_ymdint_between ( timestamp_expression1 , timestamp_expression2 )
```

Example

`_ymdint_between ([Query1].[Date (close date)] , [Query1].[Date (ship date)])`, where `[Query1].[Date (close date)]` is February 20, 2004, and `[Query1].[Date (ship date)]` is January 19, 2004.

Result

101, where 1 is the number of months and 01 is the number of days.

abs

Returns the absolute value of "numeric_expression". If "numeric_expression" is negative, a positive value is returned.

Syntax

`abs (numeric_expression)`

ceiling

Returns the smallest integer that is greater than or equal to "numeric_expression".

Syntax

`ceiling (numeric_expression)`

character_length

Returns the number of characters in "string_expression".

Syntax

`character_length (string_expression)`

date2string

Returns a date as a string in YYYY-MM-DD format.

Syntax

`date2string (date_expression)`

date2timestamp

Converts "date_expression" to a timestamp. The time part of the timestamp will equal zero.

Syntax

`date2timestamp (date_expression)`

date2timestampTZ

Converts "date_expression" to a timestamp with a time zone. The time and time zone parts of the timestamp will equal zero.

Syntax

`date2timestampTZ (date_expression)`

DTinterval2string

Returns a date time interval as a string in DDDD HH:MM:SS.FFFFFFFF or -DDDD HH:MM:SS.FFF format.

Syntax

```
DTinterval2string ( date_time_interval_expression )
```

DTinterval2stringAsTime

Returns a date time interval as a string in HHHH:MM:SS.FFFFFFFF or HH:MM:SS.FFF format. Days are converted to hours.

Syntax

```
DTinterval2stringAsTime ( date_time_interval_expression )
```

exp

Returns the constant 'e' raised to the power of "numeric_expression". The constant 'e' is the base of the natural logarithm.

Syntax

```
exp ( numeric_expression )
```

Example

```
exp ( 2 )
```

Result

```
7.389056
```

extract

Returns an integer representing the value of "date_part_expression" in "datetime_expression". "Date_part_expression" could be the year, month, day, hour, minute, or second.

Syntax

```
extract ( date_part_expression , datetime_expression )
```

Example 1

```
extract ( year , 2003-03-03 16:40:15.535 )
```

Result

```
2003
```

Example 2

```
extract ( hour , 2003-03-03 16:40:15.535 )
```

Result

```
16
```

floor

Returns the largest integer that is less than or equal to "numeric_expression".

Syntax

```
floor ( numeric_expression )
```

int2DTinterval

Converts an integer to a date time interval. "String_expression" specifies what "integer_expression" represents: "ns" = nanoseconds, "s" = seconds (default), "m" = minutes, "h" = hours, "d" = days.

Syntax

```
int2DTinterval ( integer_expression , string_expression )
```

Example 1

```
int2DTinterval (1020,"h")
```

Result

42 days 12 hours

Example 2

```
int2DTinterval (1020,"s")
```

Result

17 minutes

int2YMinterval

Converts "integer_expression" to a year month interval. "String_expression" specifies what "integer_expression" represents: "y" = years, "m" = months (default).

Syntax

```
int2YMinterval ( integer_expression , string_expression )
```

ln

Returns the natural logarithm of "numeric_expression".

Syntax

```
ln ( numeric_expression )
```

lower

Returns "string_expression" with all uppercase characters converted to lowercase. This function appears in the Bursted Sales Performance Report sample report in the GO Data Warehouse (query) package.

Syntax

```
lower ( string_expression )
```

mapNumberToLetter

Adds "integer_expression" to "string_expression".

Syntax

```
mapNumberToLetter ( string_expression , integer_expression )
```

Example

```
mapNumberToLetter ( 'a' , 1 )
```

Result

b

mod

Returns an integer value representing the remainder (modulo) of "integer_expression1" / "integer_expression2".

Syntax

```
mod ( integer_expression1 , integer_expression2 )
```

nullif

Returns null if "string_expression1" equals "string_expression2" (case-insensitive), otherwise returns "string_expression1".

Syntax

```
nullif ( string_expression1 , string_expression2 )
```

number2string

Converts "numeric_expression" to a string, using the %g format specifier (C/C++ syntax).

Syntax

```
number2string ( numeric_expression )
```

octet_length

Returns the number of bytes in "string_expression".

Syntax

```
octet_length ( string_expression )
```

position

Returns the integer value representing the starting position of "string_expression1" in "string_expression2". Returns 0 if "string_expression1" is not found.

Syntax

```
position ( string_expression1 , string_expression2 )
```

power

Returns "numeric_expression1" raised to the power of "numeric_expression2".

Syntax

```
power ( numeric_expression1 , numeric_expression2 )
```

Example

```
power ( 3 , 2 )
```

Result

9

round

Returns "numeric_expression" rounded to the nearest value with "integer_expression" significant digits to the right of the decimal point. If "integer_expression" is negative, "numeric_expression" is rounded to the nearest absolute value with "integer_expression" significant digits to the left of the decimal point. Rounding takes place before data formatting is applied.

Syntax

```
round ( numeric_expression , integer_expression )
```

Example

```
round (125, -1)
```

Result

```
130
```

sqrt

Returns the square root of "numeric_expression". "Numeric_expression" must not be a negative value.

Syntax

```
sqrt ( numeric_expression )
```

status

Returns the status of "expression". Possible values are: 0 - OK, 1 - null, 2 - not available, 4 - divide by zero, 8 - overflow, 16 - security, 32 - error, 64 - new, 128 - sample, 256 - pending.

Syntax

```
status ( expression )
```

string2date

Returns "string_expression" as a date in YYYY-MM-DD format.

Syntax

```
string2date ( string_expression )
```

string2double

Returns a floating point number. "String_expression" has the following form: "[whitespace] [sign] [digits] [digits] [{d|D|e|E } [sign] digits]"

Syntax

```
string2double ( string_expression )
```

string2DTinterval

Returns "string_expression" as a date time interval in [-]DD HH:MM[:SS[.FFF]] format.

Syntax

```
string2DTinterval ( string_expression )
```

string2int32

Returns an integer. "String_expression" has the following form: "[whitespace] [{+|-}] [digits]"

Syntax

```
string2int32 ( string_expression )
```

string2int64

Returns a long integer. "String_expression" has the following form: "[whitespace] [{+|-}] [digits]"

Syntax

```
string2int64 ( string_expression )
```

string2time

Returns "string_expression" as a time in HH:MM:SS.FFFFFFFF format.

Syntax

```
string2time ( string_expression )
```

string2timestamp

Returns "string_expression" as a timestamp in YYYY-MM-DD [T|t][white space]+] HH:MM:SS.FFFFFFFF format.

Syntax

```
string2timestamp ( string_expression )
```

string2timestampTZ

Returns "string_expression" in YYYY-MM-DD HH:MM:SS.FFFFFFFF +HHMM or YYYY-MM-DD [T|t] HH:MM:SS.FFF -HHMM format.

Syntax

```
string2timestampTZ ( string_expression )
```

string2YMininterval

Returns "string_expression" as a Year Month Interval in [-]YY MM format.

Syntax

```
string2YMininterval ( string_expression )
```

substring

Returns the substring of "string_expression" that starts at position "integer_expression1" for "integer_expression2" characters or to the end of "string_expression" if "integer_expression2" is -1. The first character in "string_expression" is at position 1.

Syntax

```
substring ( string_expression , integer_expression1 ,  
integer_expression2 )
```

Example

```
substring ( [Sales (analysis)].[Sales staff].[Sales staff].[Sales  
staff].[Position code], 3 , 5 )
```

Result

Returns characters 3 to 7 of the position codes.

time2string

Returns a time as a string in HH:MM:SS.FFF format.

Syntax

```
time2string ( time_expression )
```

timestamp2date

Converts "timestamp_expression" to a date. The time part of the timestamp will be ignored.

Syntax

```
timestamp2date ( timestamp_expression )
```

timestamp2string

Returns a timestamp as a string in YYYY-MM-DD HH:MM:SS.FFFFFFFF format.

Syntax

```
timestamp2string ( timestamp_expression )
```

timestamp2timestampTZ

Converts "timestamp_expression" to a timestamp with a time zone. The displacement part of the timestamp with the time zone will be zero.

Syntax

```
timestamp2timestampTZ ( timestamp_expression )
```

timestampTZ2date

Converts "timestamp_time_zone_expression" to a date. The time and time zone parts of the timestamp will be ignored.

Syntax

```
timestampTZ2date ( timestamp_time_zone_expression )
```

timestampTZ2string

Returns a timestamp with the time zone as a string in YYYY-MM-DD HH:MM:SS.FFFFFFFF +HHMM or YYYY-MM-DD HH:MM:SS.FFF -HHMM format.

Syntax

```
timestampTZ2string ( timestamp_time_zone_expression )
```

timestampTZ2timestamp

Converts "timestamp_time_zone_expression" to a timestamp. The displacement part of the timestamp with the time zone will be ignored.

Syntax


```
timestampTZ2timestamp ( timestamp_time_zone_expression )
```

timeTZ2string

Returns a time with the time zone as a string in HH:MM:SS.FFF +HHMM or HH:MM:SS.FFFFFFFF -HHMM format. For example, -05:30 means a timezone of GMT minus 5 hours and 30 minutes

Syntax

```
timeTZ2string ( timeTZ_expression )
```

trim

Returns "string_expression" trimmed of any leading and trailing blanks or trimmed of the character specified by "match_character_expression". "Trim_what_expression" may be "leading", "trailing", or "both" (default). "Match_character_expression" can be an empty string to trim blanks or can specify a character to be trimmed.

Syntax

```
trim ( trim_what_expression , match_character_expression ,  
      string_expression )
```

upper

Returns "string_expression" with all lowercase characters converted to uppercase.

Syntax

```
upper ( string_expression )
```

YMinterval2string

Returns "year_month_interval_expression" as a string in (YY MM) or -(YY MM) format.

Syntax

```
YMinterval2string ( year_month_interval_expression )
```

Appendix G. Report Studio Object and Property Reference

This appendix contains definitions of the objects and properties found in IBM Cognos Report Studio. They are available contextually, by pressing F1 when an object or property is active in the Report Studio authoring environment.

Objects

Objects are visible in the Report Studio work area. They can be inserted from the

Toolbox tab  .

Properties

Properties can be set on Report Studio objects. They are available in the lower-left pane of Report Studio.

Data formatting properties

Data formatting properties can be set on data values by selecting **Default Data Format** from the **Data** menu, or by editing the **Data Format** property for Report Studio objects.

Report Studio Objects

The following is a list of objects available in IBM[®] Cognos[®] Report Studio.

3-D Area

A chart in which members of a data series are represented by three-dimensional areas of varying size and color. The three-dimensional area chart is one of three chart types that can be included in a three-dimensional combination chart.

Properties of 3-D Area

“Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 864, “Values” on page 964

3-D Bar

A chart in which members of a data series are represented by three-dimensional bars of varying length and color. The three-dimensional bar chart is one of three chart types that can be included in a three-dimensional combination chart.

Properties of 3-D Bar

“Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 864, “Values” on page 964

3-D Combination Chart

A chart that includes any number and combination of three-dimensional bar charts, line charts, and area charts. This chart plots any number of data series against one common measure on the vertical numeric axis and one or two common data series on ordinal axes.

Properties of 3-D Combination Chart

"3-D Viewing Angle" on page 846, "Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Margin" on page 904, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Numerical Axis" on page 919, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Series Color" on page 939, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Visible" on page 966, "X Axis" on page 967, "Y Axis" on page 968

3-D Line

A chart in which members of a data series are represented by three-dimensional lines of varying colors. The three-dimensional line chart is one of three chart types that can be included in a three-dimensional combination chart.

Properties of 3-D Line

"Border Color" on page 858, "Borders" on page 858, "Chart Type" on page 864, "Values" on page 964

3-D Scatter Chart

A chart that plots three measures against one or more data series on a three-dimensional X-Y-Z graph.

Properties of 3-D Scatter Chart

"3-D Viewing Angle" on page 846, "Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Legend" on page 900, "Margin" on page 904, "Marker Size (pt)" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Point Shape" on page 924, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Feelers" on page 942, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size &

“Overflow” on page 945, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 957, “Values” on page 964, “Visible” on page 966

Angular Axis

The angular numeric axis for a polar chart, including labels, titles, range, and scale.

Properties of Angular Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Angular Measure

The measure that determines the angular position of each data marker on a polar chart.

Properties of Angular Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Style Variable” on page 950

Area

The data marker used to represent data series in an area chart.

Properties of Area

“Aggregate Function” on page 847, “Area Shape” on page 850, “Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 863, “Conditional Palette” on page 868, “Expression” on page 886, “Extend Width” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Palette” on page 922, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Series Type” on page 940, “Set Definition” on page 940, “Set Sorting” on page 940, “Show Values” on page 944

Area

The data marker used to represent data series in an area chart. This object applies only to legacy charts.

Properties of Area

“Axis Assignment” on page 852, “Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 863, “Grouping Type” on page 892, “Value Location:” on page 963, “Values” on page 964, “Value Type” on page 965

As of Time Expression

An expression that produces a Date-Time value. This expression can be used to show report results for a specific time period that is defined by an expression that you create.

Properties of As of Time Expression

“Report Expression” on page 934

Axis Labels

The labels that appear on an axis.

Properties of Axis Labels

“Auto Font Size” on page 850, “Classes” on page 865, “Conditional Styles” on page 868, “Data Format” on page 874, “Drill-Through Definitions” on page 883, “Font” on page 888, “Foreground Color” on page 889, “Nested Label Display” on page 916, “Render Variable” on page 932, “Text Truncation” on page 954

Axis Title

The title for an axis of the chart. This object applies only to legacy charts.

Properties of Axis Title

“Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Default Title” on page 878, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Style Variable” on page 950

Axis Title

The title for an axis of the chart.

Properties of Axis Title

“Auto Font Size” on page 850, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Default Title” on page 878, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Render Variable” on page 932

Bar

A chart in which members of a data series are represented by bars of varying length and color.

Properties of Bar

“Aggregate Function” on page 847, “Bar Shape” on page 856, “Bar Width” on page 856, “Bevel” on page 857, “Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 863, “Conditional Palette” on page 868, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Palette” on page 922, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Series Type” on page 940, “Set Definition” on page 940, “Set Sorting” on page 940, “Show Values” on page 944

Bar

A chart in which members of a data series are represented by bars of varying length and color. This object applies only to legacy charts.

Properties of Bar

“Axis Assignment” on page 852, “Border Color” on page 858, “Borders” on page 858, “Chart Type” on page 863, “Connecting Lines” on page 869, “Grouping Type” on page 892, “Value Location:” on page 963, “Values” on page 964, “Value Type” on page 965

Baseline

A baseline to be rendered on a chart.

Properties of Baseline

“Axis Assignment” on page 852, “Bar, Line, or Area Index” on page 856, “Box Type” on page 860, “Data Item Value” on page 876, “Label” on page 898, “Legend Label” on page 901, “Line Styles” on page 903, “Master Detail Relationships” on page 907, “Member Offset (%)” on page 910, “Numeric Value” on page 919, “Percentile” on page 923, “Percent of Axis” on page 923, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 934, “Report Expression” on page 933, “Standard Deviations” on page 949

Baseline

A baseline for a polar chart, scatter chart, or bubble chart.

Properties of Baseline

“Axis Assignment” on page 852, “Data Item Value” on page 876, “Label” on page 898, “Legend Label” on page 901, “Line Styles” on page 903, “Master Detail Relationships” on page 907, “Numeric Value” on page 919, “Percentile” on page 923, “Percent of Axis” on page 923, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 933, “Standard Deviations” on page 949

Baseline

A baseline for a three-dimensional combination chart.

Properties of Baseline

“Bar, Line, or Area Index” on page 856, “Box Type” on page 860, “Data Item Value” on page 876, “Line Styles” on page 903, “Master Detail Relationships” on page 907, “Numeric Value” on page 919, “Percentile” on page 923, “Percent of Axis” on page 923, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 933, “Standard Deviations” on page 949

Baseline

A baseline for a three-dimensional scatter chart.

Properties of Baseline

“Box Type” on page 860, “Data Item Value” on page 876, “Line Styles” on page 903, “Master Detail Relationships” on page 907, “Numeric Value” on page 919, “Percentile” on page 923, “Percent of Axis” on page 923, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 933, “Standard Deviations” on page 949

Block

A container into which you can insert other objects.

Properties of Block

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Conditional Styles" on page 868, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Margin" on page 904, "Name" on page 914, "Padding" on page 921, "Render Variable" on page 932, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Visible" on page 966, "White Space" on page 966

Bookmark

A link to another area within the same report. The link can be defined as a static value, a query item, or as the result of a report expression.

Properties of Bookmark

"Data Item Label" on page 875, "Data Item Value" on page 876, "Label" on page 898, "Report Expression" on page 933, "Source Type" on page 948

Bubble Chart

A point chart that plots one or more data series against three measures: a Y-value, an X-value, and a bubble whose relative size represents the third measure. Multiple points are plotted for each category. This object applies only to legacy charts.

To help distinguish values, set the Tooltips property of this object to Yes.

Properties of Bubble Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box Type" on page 859, "Bubble Size" on page 860, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Legend" on page 900, "Margin" on page 904, "Markers" on page 905, "Marker Text Location" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Point Shape" on page 924, "Query" on page 928, "Regression Line" on page 930, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Value Location:" on page 963, "Values" on page 964, "Visible" on page 966, "X Axis" on page 968, "Y Axis" on page 968

Bubble Chart

A point chart that plots one or more data series against three measures: a Y-value, an X-value, and a bubble whose relative size represents the third measure. Multiple points are plotted for each category.

To help distinguish values, set the `Tooltips` property of this object to `Yes`.

Properties of Bubble Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Background Effects"* on page 855, *"Border"* on page 857, *"Box Type"* on page 859, *"Bubble Size"* on page 860, *"Classes"* on page 865, *"Clickable Regions"* on page 866, *"Color by Value"* on page 866, *"Colored Regions"* on page 867, *"Conditional Palette"* on page 868, *"Contained Text Direction"* on page 870, *"Container Select"* on page 870, *"Direction & Justification"* on page 880, *"Display for Orientation"* on page 881, *"Drill-Through Definitions"* on page 883, *"Drop Shadow"* on page 884, *"Legend"* on page 901, *"Margin"* on page 904, *"Markers"* on page 906, *"Master Detail Relationships"* on page 907, *"Material Effects"* on page 907, *"Matrix Rows and Columns"* on page 908, *"Maximum Hotspots"* on page 908, *"Name"* on page 914, *"No Data Contents"* on page 916, *"Notes"* on page 917, *"Numeric Baselines"* on page 919, *"Padding"* on page 921, *"Pagination"* on page 921, *"Palette"* on page 922, *"Plot Area Fill"* on page 924, *"Query"* on page 928, *"Relative Alignment"* on page 930, *"Render Page when Empty"* on page 931, *"Render Variable"* on page 932, *"Set Variable Values"* on page 941, *"Show Hover"* on page 942, *"Show Pointer Cursor"* on page 943, *"Show Values"* on page 945, *"Size & Overflow"* on page 945, *"Suppression"* on page 951, *"Title"* on page 955, *"Tooltips"* on page 956, *"Trendlines"* on page 958, *"Visible"* on page 966

Bubble Measure

The measure that determines the size of each bubble on a bubble chart.

Properties of Bubble Measure

"Conditional Styles" on page 868, *"Custom Label"* on page 873, *"Data Format"* on page 874

Bubble Measure

The measure that determines the size of each bubble on a bubble chart. This object applies only to legacy charts.

Properties of Bubble Measure

"Conditional Styles" on page 868, *"Custom Label"* on page 873, *"Data Format"* on page 874, *"Style Variable"* on page 950

Bullet Chart

A chart that compares a measure to a target. Use the `Colored Regions` property to relate the compared measures against additional qualitative measurements, such as colored regions for good, satisfactory, and poor.

Properties of Bullet Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Background Effects"* on page 855, *"Bevel"* on page 857, *"Border"* on page 857,

"Box Type" on page 859, "Bullet Indicators" on page 860, "Chart Orientation" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Colored Regions" on page 867, "Contained Text Direction" on page 870, "Container Select" on page 870, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Drop Shadow" on page 884, "Legend" on page 901, "Margin" on page 904, "Master Detail Relationships" on page 907, "Matrix Rows and Columns" on page 908, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 956, "Visible" on page 966

Bullet Measure

The measure that determines the size of the bullet for a bullet chart.

Properties of Bullet Measure

"Custom Label" on page 873, "Data Format" on page 874

Button

A button in a static button bar control.

Properties of Button

"Icon" on page 896, "Label" on page 898

Button

A single static button control. The button requires a row in the data table of the control.

Properties of Button

"Application Drill-Through" on page 849, "Button Definition" on page 861, "Contained Text Direction" on page 870, "Control Enable" on page 872, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Icon" on page 896, "Label" on page 898, "Name" on page 914, "Render Variable" on page 932, "Set Variable Values" on page 941, "Size" on page 945

Button Bar

A static button bar control. Each button requires a corresponding row in the data table of the control.

Properties of Button Bar

"Application Drill-Through" on page 849, "Button Gap" on page 861, "Buttons Definition" on page 861, "Button Width" on page 861, "Contained Text Direction" on page 870, "Container Select" on page 870, "Control Enable" on page 872, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Name" on page 914, "Orientation" on page 920, "Render Variable" on page 932, "Set Variable Values" on page 941

Button Extra Item

Data items that are used to determine what appears as the button labels in a data button bar control.

Properties of Button Extra Item

“Data Item” on page 874

Button Icon

The icon used to identify each button in a data button bar control. The icons are obtained from a data item inserted into the control.

Properties of Button Icon

“Data Item” on page 874

Button Label

The label used to identify each button in a data button bar control. Each label is determined by the data items inserted into the control.

Properties of Button Label

“Data Item” on page 874

Calculated Measure

A data item that is a calculated member.

Properties of Calculated Measure

“Calculation Intersection” on page 861, “Dimension” on page 880, “Expression” on page 886, “Label” on page 899, “Name” on page 913, “Solve Order” on page 947, “Type” on page 959

Calculated Member

An item, within a dimension, that represents an occurrence of schema data defined as a calculation of two or more members.

Properties of Calculated Member

“Caption” on page 862, “Data Item” on page 875, “Name” on page 916

Calculated Member

A data item that is a calculated member.

Properties of Calculated Member

“Calculation Intersection” on page 861, “Detail” on page 879, “Dimension” on page 880, “Expression” on page 886, “Hierarchy” on page 894, “Label” on page 899, “Name” on page 913, “Solve Order” on page 947, “Type” on page 959

Caption

The caption on a Field Set object.

Properties of Caption

“Background Color” on page 854, “Border” on page 857, “Classes” on page 865, “Conditional Styles” on page 868, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Padding” on page 921, “Style Variable” on page 950

Card

A card in a static deck control.

Properties of Card

“Current Card” on page 873

Card Extra Item

A data item that is used to determine the data that appears in the cards of a data deck control.

Properties of Card Extra Item

“Data Item” on page 874

Card Label

The label used to identify a card in a deck control.

Properties of Card Label

“Data Item” on page 874

Category

A category that is used to plot data in a visualization.

Properties of Category

“Category Range” on page 863, “Label” on page 899

Category Axis

The axis line for an ordinal, or non-numeric, axis. This object applies only to legacy charts.

Properties of Category Axis

“Allow 45° Rotation” on page 847, “Allow 90° Rotation” on page 848, “Allow Skip” on page 848, “Allow Stagger” on page 848, “Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Display Frequency” on page 882, “Drill-Through Definitions” on page 883, “First Label Index” on page 887, “Gridlines” on page 892, “Label Control” on page 899, “Maximum Truncation Characters” on page 909, “Minor Gridlines” on page 912, “Truncation” on page 958, “Truncation Text” on page 959

Category axis

The axis line for an ordinal, or non-numeric, axis.

Properties of Category axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918, “Reverse Category Order” on page 935

Category Baseline

A baseline for the category in a chart.

Properties of Category Baseline

“Aggregate Function” on page 847, “Category Baselines” on page 863, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Line Style” on page 903, “Master Detail Relationships” on page 907, “Member” on page 910, “Member Offset (%)” on page 910, “Member Unique Name” on page 911, “Properties” on page 927, “Property Unique Name” on page 928, “Query” on page 928, “Render Variable” on page 932, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940

Chart Body

Defines the body style of the chart itself. The style of the body can be set independently of the chart itself. This object applies only to legacy charts.

Properties of Chart Body

“Background Color” on page 854, “Conditional Styles” on page 868, “Fill Effects” on page 887, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Style Variable” on page 950

Chart Body

Defines the body style of the chart itself. The style of the body can be set independently of the chart itself.

Properties of Chart Body

“Background Color” on page 854, “Background Effects” on page 855, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895

Chart Footer

A footer for the chart. This object applies only to legacy charts.

Properties of Chart Footer

“Background Effects” on page 855, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Style Variable” on page 950

Chart Footer

A footer for the chart.

Properties of Chart Footer

“Background Effects” on page 855, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Render Variable” on page 932

Chart Measure

The measure for the chart.

Properties of Chart Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874

Chart Node Member

A data item, and its accompanying text, to render on the chart.

Properties of Chart Node Member

“Aggregate Function” on page 847, “Custom Label” on page 873, “Data Format” on page 874, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Properties” on page 927, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Sorting” on page 947

Chart Subtitle

The subtitle for a chart. This object applies only to legacy charts.

Properties of Chart Subtitle

“Background Effects” on page 855, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Style Variable” on page 950

Chart Subtitle

The subtitle for a chart.

Properties of Chart Subtitle

“Background Effects” on page 855, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Render Variable” on page 932

Chart Text Item

The data source and format for a text item, such as a legend item, legend title, axis label, or axis title. This object applies only to legacy charts.

Properties of Chart Text Item

"Aggregate Function" on page 847, *"Conditional Styles"* on page 868, *"Control Data Item Value"* on page 871, *"Data Format"* on page 874, *"Data Item Label"* on page 875, *"Data Item Value"* on page 875, *"Expression"* on page 886, *"Hierarchy"* on page 894, *"Hierarchy Unique Name"* on page 894, *"Level"* on page 902, *"Level Unique Name"* on page 902, *"Member"* on page 910, *"Member Unique Name"* on page 911, *"Property Unique Name"* on page 928, *"Report Expression"* on page 933, *"Rollup Aggregate Function"* on page 936, *"Root Members Only"* on page 936, *"Set Definition"* on page 940, *"Set Sorting"* on page 940, *"Source Type"* on page 947, *"Style Variable"* on page 950, *"Text"* on page 954, *"Text Source Variable"* on page 954

Chart Text Item

The data source and format for a text item, such as a legend item, legend title, axis label, or axis title.

Properties of Chart Text Item

"Aggregate Function" on page 847, *"Conditional Styles"* on page 868, *"Control Data Item Value"* on page 871, *"Data Format"* on page 874, *"Data Item Label"* on page 875, *"Data Item Value"* on page 875, *"Expression"* on page 886, *"Hierarchy"* on page 894, *"Hierarchy Unique Name"* on page 894, *"Level"* on page 902, *"Level Unique Name"* on page 902, *"Member"* on page 910, *"Member Unique Name"* on page 911, *"Property Unique Name"* on page 928, *"Render Variable"* on page 932, *"Report Expression"* on page 933, *"Rollup Aggregate Function"* on page 936, *"Root Members Only"* on page 936, *"Set Definition"* on page 940, *"Set Sorting"* on page 940, *"Source Type"* on page 947, *"Text"* on page 954, *"Text Source Variable"* on page 954

Chart Title

The title text that appears at the top of the chart. This object applies only to legacy charts.

Properties of Chart Title

"Background Effects" on page 855, *"Box Type"* on page 860, *"Classes"* on page 865, *"Conditional Styles"* on page 868, *"Horizontal Alignment"* on page 895, *"Master Detail Relationships"* on page 907, *"Properties"* on page 927, *"Query"* on page 928, *"Style Variable"* on page 950

Chart Title

The title text that appears at the top of the chart.

Properties of Chart Title

"Background Effects" on page 855, *"Box Type"* on page 860, *"Classes"* on page 865, *"Conditional Styles"* on page 868, *"Horizontal Alignment"* on page 895, *"Master Detail Relationships"* on page 907, *"Properties"* on page 927, *"Query"* on page 928, *"Render Variable"* on page 932

Check Box

A check box in a static check box group control.

Properties of Check Box

“Icon” on page 896, “Label” on page 898

Check Box Extra Item

Data items that are used to determine what appears as the check box labels in a data check box group control.

Properties of Check Box Extra Item

“Data Item” on page 874

Check Box Group

A static check box group control. Each check box requires a corresponding row in the data table of the control.

Properties of Check Box Group

“Application Drill-Through” on page 849, “Check Boxes Definition” on page 864, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Name” on page 914, “Orientation” on page 920, “Render Variable” on page 932, “Set Variable Values” on page 941, “Text Color” on page 954

Check Box Icon

The icon used to identify each check box in a data check box group control. The icons are obtained from a data item inserted into the control.

Properties of Check Box Icon

“Data Item” on page 874

Check Box Label

The label used to identify a check box in a data check box group control. The label is determined by the data items inserted into the control.

Properties of Check Box Label

“Data Item” on page 874

Class

The HTML class name for a layout object. Use this attribute to indicate the type of styling to apply to the object when the report is rendered.

Properties of Class

“Background Effects” on page 855, “Description” on page 879, “Label” on page 898, “Label” on page 898

Color by Value Measure

The measure or value used to determine the color of the points in a scatter or bubble chart. The points are colored according to the range of the data item instead of using the palette.

Properties of Color by Value Measure

"Color by Value" on page 866, *"Conditional Styles"* on page 868, *"Custom Label"* on page 873, *"Data Format"* on page 874

Colored Region

Defines a collection of colored regions, which are rectangles drawn in the chart body to highlight parts of the chart. The regions are drawn behind the data markers and in the same order that they appear in this element. The first region is drawn first, on the bottom, and the last region is drawn on top of the other regions.

Properties of Colored Region

"Aggregate Function" on page 847, *"End Position"* on page 884, *"Expression"* on page 886, *"Hierarchy"* on page 894, *"Hierarchy Unique Name"* on page 894, *"Level"* on page 902, *"Level Unique Name"* on page 902, *"Master Detail Relationships"* on page 907, *"Member"* on page 910, *"Member Unique Name"* on page 911, *"Properties"* on page 927, *"Property Unique Name"* on page 928, *"Query"* on page 928, *"Render Variable"* on page 932, *"Rollup Aggregate Function"* on page 936, *"Root Members Only"* on page 936, *"Set Definition"* on page 940, *"Set Sorting"* on page 940, *"Start Position"* on page 949

Colored Region

Defines a collection of colored regions, which are rectangles drawn in the chart body to highlight parts of the chart. The regions are drawn behind the data markers and in the same order that they appear in this element. The first region is drawn first, on the bottom, and the last region is drawn on top of the other regions.

Properties of Colored Region

"Aggregate Function" on page 847, *"Bottom Position"* on page 859, *"Expression"* on page 886, *"Hierarchy"* on page 894, *"Hierarchy Unique Name"* on page 894, *"Left Position"* on page 900, *"Level"* on page 902, *"Level Unique Name"* on page 902, *"Master Detail Relationships"* on page 907, *"Member"* on page 910, *"Member Unique Name"* on page 911, *"Properties"* on page 927, *"Property Unique Name"* on page 928, *"Query"* on page 928, *"Render Variable"* on page 932, *"Right Position"* on page 935, *"Rollup Aggregate Function"* on page 936, *"Root Members Only"* on page 936, *"Set Definition"* on page 940, *"Set Sorting"* on page 940, *"Top Position"* on page 957

Combination Chart

A chart that uses combinations of column charts, area charts, and line charts as data markers to plot multiple data series. This object applies only to legacy charts.

Properties of Combination Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Box Type" on page 859, "Category Axis" on page 863, "Chart Orientation" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Depth" on page 879, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Legend" on page 900, "Margin" on page 904, "Markers" on page 905, "Marker Text Location" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Rotate Values" on page 937, "Series Color" on page 939, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Value Location:" on page 963, "Visible" on page 966, "Visual Angle" on page 966, "Y1 Axis" on page 968, "Y2 Axis" on page 968, "Y2 Axis Position" on page 968

Combination Chart

A chart that uses combinations of column charts, area charts, and line charts as data markers to plot multiple data series.

Properties of Combination Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 859, "Category Baselines" on page 863, "Chart Orientation" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Colored Regions" on page 867, "Combinations" on page 868, "Contained Text Direction" on page 870, "Container Select" on page 870, "Depth" on page 879, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Drop Shadow" on page 884, "Legend" on page 901, "Margin" on page 904, "Markers" on page 906, "Master Detail Relationships" on page 907, "Material Effects" on page 907, "Matrix Rows and Columns" on page 908, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Numeric Baselines" on page 919, "Padding" on page 921, "Pagination" on page 921, "Plot Area Fill" on page 924, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Series Color" on page 939, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Summarize Small Items" on page 951, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 956, "Trendlines" on page 958, "Visible" on page 966

Component Override

Overrides a child object of the Layout Component Reference object.

Properties of Component Override

"Component Reference" on page 868

Conditional Block

A block that can be used for conditional display.

Properties of Conditional Block

“Background Color” on page 854, “Background Effects” on page 855, “Block Variable” on page 857, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Current Block” on page 873, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Margin” on page 904, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Visible” on page 966, “White Space” on page 966

Conditional Block

Contains the default set of layout objects to render based on a report variable.

Properties of Conditional Block

“Background Color” on page 854, “Background Effects” on page 855, “Block Variable” on page 857, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Current Block” on page 873, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Margin” on page 904, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Visible” on page 966, “White Space” on page 966

Context Item Text

The text associated with a context area item.

Properties of Context Item Text

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Padding” on page 921, “Relative Alignment” on page 930, “Render Variable” on page 932, “Separator” on page 939, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Visible” on page 966

Continuous Values Slider

A slider control that allows users to slide through numeric values between minimum and maximum values that you define, such as 0 and 100.

Properties of Continuous Values Slider

“Animate” on page 849, “Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Control Enable” on page 872, “Data Format” on page 874, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Label Color” on page 899, “Maximum Value” on page 910, “Minimum Value” on page 912, “Name” on page 914, “Orientation” on page 920, “Range Type” on page 930, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Tooltip” on page 944, “Step” on page 950, “Tick Interval” on page 955, “Tick Label

Skip Interval” on page 955, “Tick Type” on page 955, “Track Length” on page 958, “Update Variables Live” on page 959, “Variable” on page 965, “Variable for Maximum” on page 965, “Variable for Minimum” on page 965

Crosstab

A layout object used to render the results of a query that aggregates data, and then arranges it in a two-dimensional grid.

Properties of Crosstab

“Application Drill-Through” on page 849, “Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Clickable Regions” on page 866, “Conditional Styles” on page 868, “Container Filter” on page 870, “Container Select” on page 870, “Default Measure” on page 878, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Drop Shadow” on page 884, “Fact Cells Precedence” on page 887, “Font” on page 888, “Foreground Color” on page 889, “Has Fact Cells” on page 893, “Horizontal Alignment” on page 895, “Margin” on page 904, “Master Detail Relationships” on page 907, “Name” on page 914, “No Data Contents” on page 916, “Pagination” on page 921, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Rows Per Page” on page 937, “Set Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Style Variable” on page 950, “Summary Text” on page 951, “Suppression” on page 951, “Table Properties” on page 952, “Visible” on page 966

Crosstab Columns

Overrides the style for Crosstab Column Member objects that is defined in the GlobalReportStyles.css file.

Properties of Crosstab Columns

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

Crosstab Columns

A list of columns in a crosstab.

Properties of Crosstab Columns

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

Crosstab Corner

The top-left corner of a crosstab, on top of the row labels and to the left of the column labels. It is generally used to represent crosstab members.

Properties of Crosstab Corner

“Aggregate Function” on page 847, *“Background Color”* on page 854, *“Background Effects”* on page 855, *“Border”* on page 857, *“Box Type”* on page 860, *“Classes”* on page 865, *“Conditional Styles”* on page 868, *“Data Format”* on page 874, *“Direction & Justification”* on page 880, *“Expression”* on page 886, *“Font”* on page 888, *“Foreground Color”* on page 889, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Horizontal Alignment”* on page 895, *“Level”* on page 902, *“Level Unique Name”* on page 902, *“Member”* on page 910, *“Member Unique Name”* on page 911, *“Padding”* on page 921, *“Property Unique Name”* on page 928, *“Rollup Aggregate Function”* on page 936, *“Root Members Only”* on page 936, *“Set Definition”* on page 940, *“Set Sorting”* on page 940, *“Size & Overflow”* on page 945, *“Spacing & Breaking”* on page 948, *“Style Variable”* on page 950, *“Vertical Alignment”* on page 965, *“White Space”* on page 966

Crosstab Fact Cells

The contents of the fact cells of the crosstab. There is only one fact cell definition for the crosstab, regardless of the number of measures.

Properties of Crosstab Fact Cells

“Aggregate Function” on page 847, *“Apply Single Class”* on page 850, *“Background Color”* on page 854, *“Background Effects”* on page 855, *“Border”* on page 857, *“Box Type”* on page 860, *“Classes”* on page 865, *“Clickable Region”* on page 865, *“Conditional Styles”* on page 868, *“Data Format”* on page 874, *“Direction & Justification”* on page 880, *“Drill-Through Definitions”* on page 883, *“Expression”* on page 886, *“Font”* on page 888, *“Foreground Color”* on page 889, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Horizontal Alignment”* on page 895, *“Level”* on page 902, *“Level Unique Name”* on page 902, *“Member”* on page 910, *“Member Unique Name”* on page 911, *“Padding”* on page 921, *“Property Unique Name”* on page 928, *“Rollup Aggregate Function”* on page 936, *“Root Members Only”* on page 936, *“Set Definition”* on page 940, *“Set Sorting”* on page 940, *“Size & Overflow”* on page 945, *“Spacing & Breaking”* on page 948, *“Style Variable”* on page 950, *“Vertical Alignment”* on page 965, *“White Space”* on page 966

Crosstab Intersection

An intersection in a crosstab. The cell contents of a specific intersection can be overridden and the style defined.

Properties of Crosstab Intersection

“Aggregate Function” on page 847, *“Background Color”* on page 854, *“Background Effects”* on page 855, *“Border”* on page 857, *“Box Type”* on page 860, *“Classes”* on page 865, *“Clickable Region”* on page 866, *“Column Coordinate”* on page 867, *“Conditional Styles”* on page 868, *“Data Format”* on page 874, *“Define Contents”* on page 878, *“Direction & Justification”* on page 880, *“Drill-Through Definitions”* on page 883, *“Expression”* on page 886, *“Font”* on page 888, *“Foreground Color”* on page 889, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Horizontal Alignment”* on page 895, *“Level”* on page 902, *“Level Unique Name”* on page 902

on page 900, "Member" on page 910, "Member Unique Name" on page 911, "Padding" on page 921, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Row Coordinate" on page 937, "Set Definition" on page 940, "Set Sorting" on page 940, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

Crosstab Member Fact Cells

The contents of the fact cells of a crosstab node member.

Properties of Crosstab Member Fact Cells

"Aggregate Function" on page 847, "Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Classes" on page 865, "Clickable Region" on page 866, "Conditional Styles" on page 868, "Data Format" on page 874, "Define Contents" on page 878, "Direction & Justification" on page 880, "Drill-Through Definitions" on page 883, "Expression" on page 886, "Font" on page 888, "Foreground Color" on page 889, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Horizontal Alignment" on page 895, "Level" on page 902, "Level Unique Name" on page 902, "Member" on page 910, "Member Unique Name" on page 911, "Padding" on page 921, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

Crosstab Node Member

A member in the crosstab node.

Properties of Crosstab Node Member

"Aggregate Function" on page 847, "Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Classes" on page 865, "Clickable Region" on page 866, "Conditional Styles" on page 868, "Data Format" on page 874, "Data Item" on page 874, "Direction & Justification" on page 880, "Drill-Through Definitions" on page 883, "Expression" on page 886, "Font" on page 888, "Foreground Color" on page 889, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Horizontal Alignment" on page 895, "Level" on page 902, "Level Indentation" on page 902, "Level Unique Name" on page 902, "Member" on page 910, "Member Unique Name" on page 911, "Node Coordinate" on page 917, "Padding" on page 921, "Pagination" on page 921, "Properties" on page 927, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940, "Size & Overflow" on page 945, "Sorting" on page 947, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "Visible" on page 965, "White Space" on page 966

Crosstab Rows

Overrides the style for Crosstab Row Member objects that is defined in the GlobalReportStyles.css file.

Properties of Crosstab Rows

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

Crosstab Rows

A list of rows in a crosstab.

Properties of Crosstab Rows

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

Crosstab Space

Inserts an empty cell on a crosstab edge. Allows for the insertion of non-data cells on an edge.

Properties of Crosstab Space

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Classes" on page 865, "Clickable Region" on page 866, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Drill-Through Definitions" on page 883, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Node Coordinate" on page 917, "Padding" on page 921, "Pagination" on page 921, "Render Fact Cells" on page 931, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "Visible" on page 965, "White Space" on page 966

Crosstab Summary

The crosstab summary that appears in executed active reports.

Properties of Crosstab Summary

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Classes" on page 865, "Clickable Region" on page 866, "Conditional Styles" on page 868, "Data Format" on page 874, "Data Item" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Node Coordinate" on page 917, "Output Aggregation Method" on page 920, "Padding" on page 921, "Size & Overflow" on page 945, "Solve Order" on page 946, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "Visible" on page 965, "White Space" on page 966

Cumulation Label

A label that is rendered for the cumulation line in a Pareto chart.

Properties of Cumulation Label

“Conditional Styles” on page 868, “Data Format” on page 874, “Properties” on page 927, “Query” on page 928

Cumulation Line

The cumulation line in a Pareto chart.

Properties of Cumulation Line

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Cumulation Line

A line that shows the cumulative effect of multiple series members on a measure in a Pareto chart. This object applies only to legacy charts.

Properties of Cumulation Line

“Cumulation Axis” on page 872, “Cumulation Label” on page 872, “Line Styles” on page 903, “Marker Shape” on page 906, “Marker Size (pt)” on page 906, “Properties” on page 927, “Value Location:” on page 963, “Values” on page 964

Cumulation Line

A line that shows the cumulative effect of multiple series members on a measure in a Pareto chart.

Properties of Cumulation Line

“Cumulation Label” on page 872, “Data Points” on page 877, “Line Style” on page 903, “Show Values” on page 944

Cumulation Line Axis

The axis for the cumulation line in a Pareto chart.

Properties of Cumulation Line Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Classes” on page 865, “Conditional Styles” on page 868, “Data Format” on page 874, “Font” on page 888, “Foreground Color” on page 889, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Scale Interval” on page 938, “Style Variable” on page 950, “Visible” on page 966

Cumulation Line Label

A label that is rendered with the cumulation line in a Pareto chart. This object applies only to legacy charts.

Properties of Cumulation Line Label

“Aggregate Function” on page 847, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Value” on page 875, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Property Unique Name” on page 928, “Report Expression” on page 933, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Source Type” on page 947, “Text” on page 954, “Text Source Variable” on page 954

Custom Groups

A group of data items defined by the report author.

Properties of Custom Groups

“Define Custom Grouping” on page 878, “Label” on page 899, “Name” on page 913, “Type” on page 959

Data Button Bar

A data-driven button bar control. Each button label is determined by the data items inserted into the control.

Properties of Data Button Bar

“Application Drill-Through” on page 849, “Button Gap” on page 861, “Button Width” on page 861, “Contained Text Direction” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Master Detail Relationships” on page 907, “Name” on page 914, “Orientation” on page 920, “Query” on page 928, “Render Variable” on page 932, “Set Variable Values” on page 941, “Sorting” on page 947, “Suppression” on page 951

Data Check Box Group

A data-driven check box group control. Each check box label is determined by the data items inserted into the control.

Properties of Data Check Box Group

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Master Detail Relationships” on page 907, “Name” on page 914, “Orientation” on page 920, “Query” on page 928, “Render Variable” on page 932, “Set Variable Values” on page 941, “Sorting” on page 947, “Suppression” on page 951, “Text Color” on page 954

Data Container

A set of data that is used to populate a visualization.

Properties of Data Container

"Application Drill-Through" on page 849, "Container Filter" on page 870, "Container Select" on page 870, "Drill-Through Definitions" on page 883, "Master Detail Relationships" on page 907, "Name" on page 914, "Nesting Order" on page 916, "Query" on page 928, "Set Variable Values" on page 941, "Show Hover" on page 942, "Tooltips" on page 957

Data Deck

A data-driven deck control. Each card in the deck is determined by the data items inserted into the control.

Properties of Data Deck

"Application Drill-Through" on page 849, "Container Filter" on page 870, "Container Select" on page 870, "Default Card" on page 877, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Master Detail Relationships" on page 907, "Name" on page 914, "Query" on page 928, "Render Variable" on page 932, "Set Variable Values" on page 941, "Size" on page 945, "Slide Animation Direction" on page 946, "Sorting" on page 947, "Suppression" on page 951

Data Discrete Values Slider

A slider control that allows users to slide through discrete values. The values on the slider are determined by the data items inserted in the control.

Properties of Data Discrete Values Slider

"Animate" on page 849, "Application Drill-Through" on page 849, "Contained Text Direction" on page 870, "Container Filter" on page 870, "Container Select" on page 870, "Control Enable" on page 872, "Data Format" on page 874, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Label Color" on page 899, "Master Detail Relationships" on page 907, "Name" on page 914, "Orientation" on page 920, "Query" on page 928, "Range Type" on page 930, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Tooltip" on page 944, "Sorting" on page 947, "Suppression" on page 951, "Tick Interval" on page 955, "Tick Label Skip Interval" on page 955, "Tick Type" on page 955, "Track Length" on page 958, "Update Variables Live" on page 959

Data Drop-Down List

A data-driven drop-down list control. The items that appear in the list are determined by the data items inserted into the control.

Properties of Data Drop-Down List

"Application Drill-Through" on page 849, "Contained Text Direction" on page 870, "Container Filter" on page 870, "Container Select" on page 870, "Control Enable" on page 872, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Master Detail Relationships" on page 907, "Name" on page 914, "No Value List Item" on page 918, "Query" on page 928, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Icon" on page 943, "Size" on page 945, "Sorting" on page 947, "Suppression" on page 951

Data Item

A set of data values or members.

Properties of Data Item

“Aggregate Function” on page 847, *“Calculation Intersection”* on page 861, *“Detail”* on page 879, *“Expression”* on page 886, *“Pre-Sort”* on page 926, *“Rollup Aggregate Function”* on page 936, *“Solve Order”* on page 947

Data Iterator

A data-driven iterator control that allows users to navigate through values by using buttons such as previous and next. The values on the iterator are determined by the data items inserted in the control.

Properties of Data Iterator

“Application Drill-Through” on page 849, *“Contained Text Direction”* on page 870, *“Container Filter”* on page 870, *“Container Select”* on page 870, *“Control Enable”* on page 872, *“Direction & Justification”* on page 880, *“Display for Orientation”* on page 881, *“Iterator First”* on page 896, *“Iterator Label Area”* on page 897, *“Iterator Last”* on page 897, *“Iterator Next”* on page 897, *“Iterator Previous”* on page 897, *“Master Detail Relationships”* on page 907, *“Name”* on page 914, *“Orientation”* on page 920, *“Query”* on page 928, *“Render Variable”* on page 932, *“Set Variable Values”* on page 941, *“Sorting”* on page 947, *“Suppression”* on page 951

Data List Box

A data-driven list box control. The items that appear in the list are determined by the data items inserted into the control.

Properties of Data List Box

“Application Drill-Through” on page 849, *“Contained Text Direction”* on page 870, *“Container Filter”* on page 870, *“Container Select”* on page 870, *“Control Enable”* on page 872, *“Direction & Justification”* on page 880, *“Display for Orientation”* on page 881, *“Master Detail Relationships”* on page 907, *“Multi-Select”* on page 913, *“Name”* on page 914, *“No Value List Item”* on page 918, *“Query”* on page 928, *“Render Variable”* on page 932, *“Set Variable Values”* on page 941, *“Size”* on page 945, *“Sorting”* on page 947, *“Suppression”* on page 951

Data Radio Button Group

A data-driven radio button group control. Each radio button label is determined by the data items inserted into the control.

Properties of Data Radio Button Group

“Application Drill-Through” on page 849, *“Contained Text Direction”* on page 870, *“Container Filter”* on page 870, *“Container Select”* on page 870, *“Control Enable”* on page 872, *“Direction & Justification”* on page 880, *“Display for Orientation”* on page 881, *“Master Detail Relationships”* on page 907, *“Name”* on page 914, *“Orientation”* on page 920, *“Query”* on page 928, *“Render Variable”* on page 932, *“Set Variable Values”* on page 941, *“Sorting”* on page 947, *“Suppression”* on page 951, *“Text Color”* on page 954

Data Tab Control

A data-driven tab control. The label of each tab is determined by the data items inserted into the control.

Properties of Data Tab Control

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Select” on page 870, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Master Detail Relationships” on page 907, “Name” on page 914, “Query” on page 928, “Render Variable” on page 932, “Set Variable Values” on page 941, “Size” on page 945, “Sorting” on page 947, “Suppression” on page 951, “Tab Orientation” on page 952, “Tab Width” on page 953

Data Toggle Button Bar

A data-driven toggle button bar control. Each toggle button label is determined by the data items inserted into the control.

Properties of Data Toggle Button Bar

“Application Drill-Through” on page 849, “Button Gap” on page 861, “Button Width” on page 861, “Contained Text Direction” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Master Detail Relationships” on page 907, “Name” on page 914, “Orientation” on page 920, “Query” on page 928, “Render Variable” on page 932, “Set Variable Values” on page 941, “Sorting” on page 947, “Suppression” on page 951

Date

The date when the report runs.

Properties of Date

“Background Color” on page 854, “Classes” on page 865, “Data Format” on page 874, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Relative Alignment” on page 930

Date & Time Prompt

A prompt control with which you can select a date and time value.

Properties of Date & Time Prompt

“Box Type” on page 860, “Calendar Type” on page 862, “Choices Deselect All Text” on page 864, “Choices Select All Text” on page 864, “Choices Text” on page 864, “Clock Mode” on page 866, “Conditional Styles” on page 868, “Contained Text Direction” on page 870, “Default Selections” on page 878, “Deselect Text” on page 879, “Direction & Justification” on page 880, “Display Milliseconds” on page 882, “Display Seconds” on page 882, “First Date” on page 887, “From Text” on page 890, “Hide Adornments” on page 893, “Highest Value Text” on page 894, “Insert Text” on page 896, “Last Date” on page 900, “Lowest Value Text” on page 904, “Multi-Select” on page 913, “Name” on page 914, “Parameter” on page 922, “Range” on page 929, “Remove Text” on page 931, “Render Variable” on page 932, “Required” on page 934, “Select UI” on page 939, “Style Variable” on page 950, “To Text” on page 958, “Visible” on page 966

Date Prompt

A prompt control with which you can to select a date value.

Properties of Date Prompt

"Box Type" on page 860, *"Calendar Type"* on page 862, *"Choices Deselect All Text"* on page 864, *"Choices Select All Text"* on page 864, *"Choices Text"* on page 864, *"Conditional Styles"* on page 868, *"Contained Text Direction"* on page 870, *"Default Selections"* on page 878, *"Deselect Text"* on page 879, *"Direction & Justification"* on page 880, *"First Date"* on page 887, *"From Text"* on page 890, *"Hide Adornments"* on page 893, *"Highest Value Text"* on page 894, *"Insert Text"* on page 896, *"Last Date"* on page 900, *"Lowest Value Text"* on page 904, *"Multi-Select"* on page 913, *"Name"* on page 914, *"Parameter"* on page 922, *"Range"* on page 929, *"Relative Alignment"* on page 930, *"Remove Text"* on page 931, *"Render Variable"* on page 932, *"Required"* on page 934, *"Select UI"* on page 939, *"Style Variable"* on page 950, *"To Text"* on page 958, *"Visible"* on page 966

Deck

A static deck control. Each card in the deck requires a corresponding row in the data table of the control.

Properties of Deck

"Application Drill-Through" on page 849, *"Container Filter"* on page 870, *"Container Select"* on page 870, *"Current Card"* on page 873, *"Deck Cards Definition"* on page 877, *"Default Card"* on page 877, *"Direction & Justification"* on page 880, *"Display for Orientation"* on page 881, *"Name"* on page 914, *"Render Variable"* on page 932, *"Set Variable Values"* on page 941, *"Size"* on page 945, *"Slide Animation Direction"* on page 946

Default Measure

A default measure for the chart. If the chart measure cannot be determined by the data series rendered on the chart edges, the default measure is used. This object applies only to legacy charts.

Properties of Default Measure

"Conditional Styles" on page 868, *"Custom Label"* on page 873, *"Data Format"* on page 874, *"Style Variable"* on page 950

Default Measure

A default measure for the chart. If the chart measure cannot be determined by the data series rendered on the chart edges, the default measure is used.

Properties of Default Measure

"Conditional Styles" on page 868, *"Custom Label"* on page 873, *"Data Format"* on page 874

Default Measure

When using a dimensional data source, the default measure for the visualization. If the visualization measure cannot be determined by the data series that is rendered on the visualization edges, the default measure is used.

Detail Filter

A set of conditions in a query that narrow the scope of the data returned. A detail filter is applied before aggregation is complete.

Properties of Detail Filter

“Application” on page 849, “Definition” on page 879, “Usage” on page 960

Dimension

A grouping of descriptive information about an aspect of a business. Dimensions contain levels, whose order defines the hierarchy of organizational structures and data. Dimensions and levels are values by which measures can be viewed, filtered, or aggregated.

Properties of Dimension

“Name” on page 915

Dimensional Edge Summary

A summary that appears on the edge of a crosstab.

Properties of Dimensional Edge Summary

“Aggregate Data Item” on page 847, “Aggregation Method” on page 847, “Calculation Intersection” on page 861, “Dimension” on page 880, “Hierarchy” on page 894, “Label” on page 899, “Name” on page 913, “Solve Order” on page 947, “Type” on page 959, “Use Set Aggregation” on page 962

Discrete Values Slider

A static slider control that allows users to slide through discrete values. Each value in the slider comes from a row in the data table of the control.

Properties of Discrete Values Slider

“Animate” on page 849, “Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Data Format” on page 874, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Label Color” on page 899, “Name” on page 914, “Orientation” on page 920, “Range Type” on page 930, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Tooltip” on page 944, “Slider Values Definition” on page 946, “Tick Interval” on page 955, “Tick Label Skip Interval” on page 955, “Tick Type” on page 955, “Track Length” on page 958, “Update Variables Live” on page 959

Display Layer

A map layer that is there for appearance only. Display layers do not correspond to data series or measures.

Properties of Display Layer

“Border Color” on page 858, “Borders” on page 858, “Conditional Styles” on page 868, “Fill Effects” on page 887, “Show Labels” on page 943, “Style Variable” on page 950

Drop-Down List

A static drop-down list control. Each item in the list requires a corresponding row in the data table of the control.

Properties of Drop-Down List

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “List Items Definition” on page 904, “Name” on page 914, “No Value List Item” on page 918, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Icon” on page 943, “Size” on page 945

Edge Summary

A summary that appears on the edge of a crosstab.

Properties of Edge Summary

“Aggregate Data Item” on page 847, “Aggregation Method” on page 847, “Calculation Intersection” on page 861, “Label” on page 899, “Name” on page 913, “Solve Order” on page 947, “Type” on page 959, “Use Set Aggregation” on page 962

Equation Label

An equation label for a trendline that is displayed on a chart.

Properties of Equation Label

“Conditional Styles” on page 868, “Data Format” on page 874

Equation Label

An equation label for a trendline displayed on a chart.

Properties of Equation Label

“Background Effects” on page 855, “Conditional Styles” on page 868, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Position” on page 925

Explicit Member Set

A set of data items that define an explicit set of members.

Properties of Explicit Member Set

“Detail” on page 879, “Dimension” on page 880, “Hierarchy” on page 894, “Label” on page 899, “Members” on page 911, “Name” on page 913, “Set Sorting” on page 940, “Type” on page 959

Extra Category

A data item that is used for filtering or setting variables. The item is not visible in the visualization.

Extra Value

A measure or single value that is used for filtering or setting variables. The item is not visible in the visualization.

Fact

The central values that are aggregated and analyzed. Also known as measures, they are special business measurement values, such as sales or inventory levels.

Properties of Fact

“Data Item” on page 875, “Name” on page 915

Field Set

A container with a caption, into which you can insert other objects. It is similar to a block object, except that it also has a caption.

Properties of Field Set

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Margin” on page 904, “Name” on page 914, “Relative Alignment” on page 930, “Render Variable” on page 932, “Show Caption” on page 941, “Size & Overflow” on page 945, “Style Variable” on page 950, “Visible” on page 966

Gauge Axis

The axis on the face of the gauge that contains gauge indicators, such as data ranges, color ranges, and interval markers.

Properties of Gauge Axis

“Aggregate Function” on page 847, “Axis Angles” on page 851, “Axis Justification” on page 852, “Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Conditional Palette” on page 868, “Expression” on page 886, “Gauge Axis Colors” on page 890, “Gauge Axis Inner Radius” on page 890, “Gauge Axis Outer Radius” on page 890, “Gauge Needle” on page 891, “Gridlines” on page 892, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918, “Palette” on page 922, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Text Orientation” on page 954

Gauge Chart

A chart that plots a data series against a measure using a dial or gauge for the measure, and needles or indicators for the series members.

Properties of Gauge Chart

“Alternate Text” on page 848, “Application Drill-Through” on page 849, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 859,

“Classes” on page 865, *“Clickable Regions”* on page 866, *“Contained Text Direction”* on page 870, *“Container Select”* on page 870, *“Dial Face Fill”* on page 880, *“Direction & Justification”* on page 880, *“Display for Orientation”* on page 881, *“Drill-Through Definitions”* on page 883, *“Drop Shadow”* on page 884, *“Gauge Axes”* on page 890, *“Gauge Border”* on page 891, *“Gauge Pivot”* on page 891, *“Legend”* on page 901, *“Margin”* on page 904, *“Master Detail Relationships”* on page 907, *“Matrix Rows and Columns”* on page 908, *“Maximum Hotspots”* on page 908, *“Name”* on page 914, *“No Data Contents”* on page 916, *“Notes”* on page 917, *“Padding”* on page 921, *“Pagination”* on page 921, *“Query”* on page 928, *“Relative Alignment”* on page 930, *“Render Page when Empty”* on page 931, *“Render Variable”* on page 932, *“Set Variable Values”* on page 941, *“Show Hover”* on page 942, *“Show Pointer Cursor”* on page 943, *“Size & Overflow”* on page 945, *“Suppression”* on page 951, *“Title”* on page 955, *“Tooltips”* on page 956, *“Visible”* on page 966

Gauge Chart

A chart that plots a data series against a measure using a dial or gauge for the measure, and needles or indicators for the series members. This object applies only to legacy charts.

Properties of Gauge Chart

“Alternate Text” on page 848, *“Application Drill-Through”* on page 849, *“Axis Title”* on page 853, *“Background Color”* on page 854, *“Background Effects”* on page 855, *“Border”* on page 857, *“Border Color”* on page 858, *“Borders”* on page 858, *“Box Type”* on page 859, *“Classes”* on page 865, *“Clickable Regions”* on page 866, *“Conditional Palette”* on page 868, *“Container Select”* on page 870, *“Dial Outline Color”* on page 880, *“Display for Orientation”* on page 881, *“Drill-Through Definitions”* on page 883, *“Face Color”* on page 886, *“Gauge Labels”* on page 891, *“Gauge Palette”* on page 891, *“Legend”* on page 900, *“Margin”* on page 904, *“Master Detail Relationships”* on page 907, *“Maximum Hotspots”* on page 908, *“Name”* on page 914, *“No Data Contents”* on page 916, *“Notes”* on page 917, *“Numerical Axis”* on page 919, *“Padding”* on page 921, *“Pagination”* on page 921, *“Palette”* on page 922, *“Query”* on page 928, *“Relative Alignment”* on page 930, *“Render Page when Empty”* on page 931, *“Render Variable”* on page 932, *“Set Variable Values”* on page 941, *“Show Hover”* on page 942, *“Show Pointer Cursor”* on page 943, *“Size & Overflow”* on page 945, *“Suppression”* on page 951, *“Title”* on page 955, *“Tooltips”* on page 957, *“Visible”* on page 966

Gauge Labels

A label for each gauge in a multiple gauge chart.

Properties of Gauge Labels

“Classes” on page 865, *“Conditional Styles”* on page 868, *“Drill-Through Definitions”* on page 883, *“Font”* on page 888, *“Foreground Color”* on page 889, *“Horizontal Alignment”* on page 895, *“Maximum Truncation Characters”* on page 909, *“Style Variable”* on page 950, *“Truncation”* on page 958, *“Truncation Text”* on page 959, *“Visible”* on page 966

Gauge Numerical Axis

The numeric axis for the gauge chart, including labels, titles, range, and scale.

Properties of Gauge Numerical Axis

“Conditional Styles” on page 868, “Data Format” on page 874, “Font” on page 888, “Foreground Color” on page 889, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Style Variable” on page 950, “Use Same Range For All Instances” on page 962, “Visible” on page 966

Generated Prompt

A control that acts as a placeholder. The report server will replace this control with an appropriate generated prompt control, as if it was on a generated prompt page.

Properties of Generated Prompt

“Hide Adornments” on page 893, “Name” on page 914, “Parameter” on page 922, “Render Variable” on page 932, “Required” on page 934

Hierarchy Set

A set of data items that define the members of a hierarchy.

Properties of Hierarchy Set

“Detail” on page 879, “Dimension” on page 880, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Label” on page 899, “Name” on page 913, “Root Members Only” on page 936, “Set Sorting” on page 940, “Type” on page 959

HTML Item

A container into which you can add HTML, such as a link to a multimedia file. HTML items will only appear when you run the report in HTML format.

When you upgrade to the next version of IBM® Cognos® Business Intelligence, the report upgrade processes do not account for the use of undocumented and unsupported mechanisms or features such as JavaScript that refers to IBM Cognos HTML items.

Properties of HTML Item

“Aggregate Function” on page 847, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Value” on page 876, “Description” on page 879, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “HTML” on page 895, “HTML Source Variable” on page 896, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Name” on page 914, “Property Unique Name” on page 928, “Render Variable” on page 932, “Report Expression” on page 933, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Source Type” on page 947

Hyperlink

A hyperlink that can be defined as a static value, a query item, or as the result of a report expression. If a report expression is used, then the other values are ignored.

Properties of Hyperlink

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Control Data Item Value” on page 871, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Label” on page 875, “Data Item Value” on page 876, “Data Item Value” on page 875, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Name” on page 914, “Padding” on page 921, “Relative Alignment” on page 930, “Render Variable” on page 932, “Report Expression” on page 933, “Report Expression” on page 933, “Size & Overflow” on page 945, “Source Type” on page 947, “Source Type” on page 947, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Text” on page 954, “Text Source Variable” on page 954, “URL” on page 960, “URL Source Variable” on page 960, “Visible” on page 966

Hyperlink Button

A hyperlink that is formatted as a button. The hyperlink can be defined as a static value, a query item, or as the result of a report expression. If a report expression is used, then the other values are ignored.

Properties of Hyperlink Button

“Background Color” on page 854, “Border” on page 857, “Classes” on page 865, “Conditional Styles” on page 868, “Control Data Item Value” on page 871, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Label” on page 875, “Data Item Value” on page 876, “Data Item Value” on page 875, “Display for Orientation” on page 881, “Foreground Color” on page 889, “Margin” on page 904, “Name” on page 914, “Padding” on page 921, “Relative Alignment” on page 930, “Render Variable” on page 932, “Report Expression” on page 933, “Report Expression” on page 933, “Size & Overflow” on page 945, “Source Type” on page 947, “Source Type” on page 947, “Style Variable” on page 950, “Text” on page 954, “Text Source Variable” on page 954, “URL” on page 960, “URL Source Variable” on page 960

Image

A link to an image file. The link can be a static value, or it can come from a report expression or query item. Use the URL source properties of the image object to define the link.

Properties of Image

“Aggregate Function” on page 847, “Alternate Text” on page 848, “Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Value” on page 876, “Display for Orientation” on page 881, “Drill-Through Definitions” on page 883, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Margin” on page 904, “Member” on page 910, “Member Unique Name” on page 911, “Name” on page 914, “Property Unique Name” on page 928, “Relative Alignment” on page 930, “Render Variable” on page 932, “Report Expression” on page 933, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Size & Overflow” on page 945, “Source Type” on page 947, “Style Variable” on page 950, “URL” on page 960,

“URL Source Variable” on page 960, “Visible” on page 966

Intersection (Tuple)

A data item obtained from the combination of two or more members that you specify. An intersection appears as a single, unified member instead of its component members. Each member must be from a different dimension.

Properties of Intersection (Tuple)

“Dimension” on page 880, “Hierarchy” on page 894, “Label” on page 899, “Members” on page 911, “Name” on page 913, “Type” on page 959

Interval Prompt

An advanced prompt control that allows you to enter time duration values.

Properties of Interval Prompt

“Box Type” on page 860, “Choices Deselect All Text” on page 864, “Choices Select All Text” on page 864, “Choices Text” on page 864, “Conditional Styles” on page 868, “Contained Text Direction” on page 870, “Days Text” on page 877, “Default Selections” on page 878, “Deselect Text” on page 879, “Direction & Justification” on page 880, “Display Milliseconds” on page 882, “Display Seconds” on page 882, “From Text” on page 890, “Hide Adornments” on page 893, “Highest Value Text” on page 894, “Hours Text” on page 895, “Insert Text” on page 896, “Lowest Value Text” on page 904, “Milliseconds Text” on page 911, “Minutes Text” on page 913, “Multi-Select” on page 913, “Name” on page 914, “Parameter” on page 922, “Range” on page 929, “Remove Text” on page 931, “Render Variable” on page 932, “Required” on page 934, “Seconds Text” on page 938, “Style Variable” on page 950, “To Text” on page 958, “Visible” on page 966

Iterator

A static iterator control that allows users to navigate through values by using buttons such as previous and next. Each value in the iterator comes from a row in the data table of the control.

Properties of Iterator

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Iterator First” on page 896, “Iterator Label Area” on page 897, “Iterator Last” on page 897, “Iterator Next” on page 897, “Iterator Previous” on page 897, “Iterator Values Definition” on page 897, “Name” on page 914, “Orientation” on page 920, “Render Variable” on page 932, “Set Variable Values” on page 941

Iterator Extra Item

A data item that is used to determine the data that appears in an iterator control.

Properties of Iterator Extra Item

“Data Item” on page 874

Iterator First

The button in the iterator that moves the control to the first value.

Properties of Iterator First

“Button Width” on page 861, “Label” on page 899, “Select UI” on page 938, “Text Color” on page 954

Iterator Label Area

The area in the iterator that shows the label of the current value.

Properties of Iterator Label Area

“Active Dot Color” on page 846, “Dot Color” on page 883, “Drop-Down Width” on page 884, “Number Style” on page 919, “Select UI” on page 939, “Show Icon” on page 943, “Text Color” on page 954

Iterator Last

The button in the iterator that moves the control to the last value.

Properties of Iterator Last

“Button Width” on page 861, “Label” on page 899, “Select UI” on page 938, “Text Color” on page 954

Iterator Next

The button in the iterator that moves the control to the next value.

Properties of Iterator Next

“Button Width” on page 861, “Label” on page 899, “Select UI” on page 938, “Text Color” on page 954

Iterator Previous

The button in the iterator that moves the control to the previous value.

Properties of Iterator Previous

“Button Width” on page 861, “Label” on page 899, “Select UI” on page 938, “Text Color” on page 954

Iterator Value Icon

The icon used to identify each value in an iterator control. The icons are obtained from a data item inserted into the control.

Properties of Iterator Value Icon

“Data Item” on page 874

Iterator Value Label

The label used to identify each value in a data iterator control. Each label is determined by the data items inserted into the control.

Properties of Iterator Value Label

“Data Item” on page 874

Join

A relationship between a field in one table or query and a field of the same data type in another table or query.

Properties of Join

“Join Relationships” on page 897

Key

An object that uniquely identifies members of a level.

If the unique identifier is a primary or alternate key, you need only one key object. If the unique identifier is a composite key, you need one key object for every data item that participates in making the members of a level unique.

Properties of Key

“Data Item” on page 875, “Name” on page 916

Label

Specifies the text, or label, for the object in a chart.

Properties of Label

“Conditional Styles” on page 868, “Data Format” on page 874, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Render Variable” on page 932

Layout Component Reference

A reference to another layout object. Before you can reference an object, its ID property must be set.

Properties of Layout Component Reference

“Component Reference” on page 868, “Embed” on page 884, “Overrides” on page 921

Legend

A key to the patterns or colors assigned to the data series in a chart. This object applies only to legacy charts.

Properties of Legend

“Absolute Position” on page 846, “Auto Truncation” on page 851, “Background Color” on page 854, “Border Color” on page 858, “Borders” on page 858, “Bottom Position (px)” on page 859, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Drill-Through Definitions” on page 883, “Fill Effects” on page 887, “Font” on page 888, “Font Auto-Sizing” on page 889, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Left

Position (px)" on page 900, "Legend Title" on page 901, "Legend Title" on page 901, "Maximum Characters" on page 908, "Position" on page 925, "Right Position (px)" on page 936, "Separator" on page 939, "Show Legend Values" on page 943, "Style Variable" on page 950, "Top Position (px)" on page 957, "Truncation Text" on page 959, "Visible" on page 966

Legend

A key to the patterns or colors assigned to the data series in a chart.

Properties of Legend

"Auto Font Size" on page 850, "Background Effects" on page 855, "Classes" on page 865, "Conditional Styles" on page 868, "Drill-Through Definitions" on page 883, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Legend Separator" on page 901, "Legend Title" on page 901, "Legend Title" on page 901, "Render Variable" on page 932, "Show Values" on page 944, "Text Truncation" on page 954

Legend Title

The title for the legend, including the title text and text style. If this object is empty, a default title is rendered, if available. This object applies only to legacy charts.

Properties of Legend Title

"Box Type" on page 860, "Classes" on page 865, "Conditional Styles" on page 868, "Default Title" on page 878, "Horizontal Alignment" on page 895, "Master Detail Relationships" on page 907, "Properties" on page 927, "Query" on page 928, "Style Variable" on page 950

Legend Title

The title for the legend, including the title text and text style. If this object is empty, a default title is rendered, if available.

Properties of Legend Title

"Auto Font Size" on page 850, "Box Type" on page 860, "Classes" on page 865, "Conditional Styles" on page 868, "Default Title" on page 878, "Horizontal Alignment" on page 895, "Master Detail Relationships" on page 907, "Properties" on page 927, "Query" on page 928, "Render Variable" on page 932

Level

A set of members with a predefined set of similar characteristics. For example, the members Year 2011 and Year 2012 in the Time dimension form a year level, while the corresponding quarters form a quarter level.

Properties of Level

"Caption" on page 862, "Name" on page 915, "Sorting" on page 947

Level Hierarchy

Specifies how the levels in a dimension are logically ordered.

Properties of Level Hierarchy

"Name" on page 916

Level Set

A set of data items that define the members of a level.

Properties of Level Set

"Detail" on page 879, "Dimension" on page 880, "Hierarchy" on page 894, "Label" on page 899, "Level" on page 902, "Level Unique Name" on page 902, "Name" on page 913, "Set Sorting" on page 940, "Type" on page 959

Line

The data marker used to represent a data series in a line chart.

Properties of Line

"Aggregate Function" on page 847, "Chart Type" on page 863, "Conditional Palette" on page 868, "Expression" on page 886, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Level" on page 902, "Level Unique Name" on page 902, "Line and Markers" on page 902, "Line Shape" on page 903, "Member" on page 910, "Member Unique Name" on page 911, "Palette" on page 922, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Series Type" on page 940, "Set Definition" on page 940, "Set Sorting" on page 940, "Show Values" on page 944, "Value Markers" on page 963

Line

The data marker used to represent a data series in a line chart. This object applies only to legacy charts.

Properties of Line

"Axis Assignment" on page 852, "Border Color" on page 858, "Borders" on page 858, "Chart Type" on page 863, "Grouping Type" on page 892, "Line Style" on page 903, "Line Type" on page 903, "Line Weight (pt)" on page 903, "Show Data Points" on page 942, "Show line" on page 943, "Value Location:" on page 963, "Values" on page 964, "Value Type" on page 965

List

A layout object that is used to present query results in a list fashion.

Properties of List

"Application Drill-Through" on page 849, "Background Color" on page 854, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Column Titles" on page 867, "Conditional Styles" on page 868, "Container Filter" on page 870, "Container Select" on page 870, "Contents Height" on page 871, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drop Shadow" on page 884, "Font" on page 888, "Foreground Color" on page 889, "Grouping & Sorting" on page 892, "Horizontal Alignment" on page 895, "Margin" on page 904, "Master Detail Relationships" on page 907, "Name" on page 914, "No Data Contents" on page 916, "Pagination" on page 921

page 919, “Properties” on page 927, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Rows Per Page” on page 937, “Set Variable Values” on page 941, “Share Result Set” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Style Variable” on page 950, “Summary Text” on page 951, “Suppression” on page 951, “Table Properties” on page 952, “Visible” on page 966

List Box

A static list box control. Each item in the list requires a corresponding row in the data table of the control.

Properties of List Box

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “List Items Definition” on page 904, “Multi-Select” on page 913, “Name” on page 914, “No Value List Item” on page 918, “Render Variable” on page 932, “Set Variable Values” on page 941, “Size” on page 945

List Cell

A cell in a row, you can use for a list header or footer.

Properties of List Cell

“Aggregate Function” on page 847, “Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Expression” on page 886, “Font” on page 888, “Foreground Color” on page 889, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Horizontal Alignment” on page 895, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Output Aggregation Method” on page 920, “Padding” on page 921, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Table Header” on page 952, “Vertical Alignment” on page 965, “White Space” on page 966

List Column

A column in a list. Generally, the column will contain a query item, but it may also contain any number of layout objects. For example, the To column in a statement list may present the address in a table format. If the column only contains a query items, then the column will automatically span the group if the query item is grouped.

Properties of List Column

“Allow Sorting” on page 848, “Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Clickable Region” on page 865, “Column Visibility” on page 867, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895

page 893, "Padding" on page 921, "Pagination" on page 921, "Render" on page 931, "Render Variable" on page 932, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Column Body

The contents of a column in a list report.

Properties of List Column Body

"Aggregate Function" on page 847, "Allow Sorting" on page 848, "Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Classes" on page 865, "Clickable Region" on page 865, "Column Visibility" on page 867, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Drill-Through Definitions" on page 883, "Expression" on page 886, "Font" on page 888, "Foreground Color" on page 889, "Group Span" on page 892, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Horizontal Alignment" on page 895, "Level" on page 902, "Level Unique Name" on page 902, "Member" on page 910, "Member Unique Name" on page 911, "Padding" on page 921, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Columns

A set of columns in a list.

Properties of List Columns

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Columns

Overrides the style for List Column objects that is defined in the GlobalReportStyles.css file.

Properties of List Columns

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Columns Body Style

Overrides the style for List Column Body objects that is defined in the GlobalReportStyles.css file.

Properties of List Columns Body Style

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

List Columns Title Style

Overrides the style for List Column Title objects that is defined in the GlobalReportStyles.css file.

Properties of List Columns Title Style

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

List Column Title

The title of a list column.

Properties of List Column Title

“Aggregate Function” on page 847, “Allow Sorting” on page 848, “Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Classes” on page 865, “Clickable Region” on page 865, “Column Visibility” on page 867, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Drill-Through Definitions” on page 883, “Expression” on page 886, “Font” on page 888, “Foreground Color” on page 889, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Horizontal Alignment” on page 895, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Padding” on page 921, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

List Footer

Overall footer that appears once at the end of lists. Footers are containers in which you can insert text, images, data items, and report expressions such as the page number.

Properties of List Footer

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Properties" on page 927, "Push To Bottom" on page 928, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Header

Overall header that appears once at the top of lists. Headers are containers in which you can insert text, images, data items, and report expressions such as the current date.

Properties of List Header

"Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 860, "Conditional Styles" on page 868, "Data Format" on page 874, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Padding" on page 921, "Pagination" on page 921, "Properties" on page 927, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Vertical Alignment" on page 965, "White Space" on page 966

List Item

A list item in a static list box control.

Properties of List Item

"Icon" on page 896, "Label" on page 898

List Item Extra Item

Data items that are used to determine what appears as the item labels in a data list box control.

Properties of List Item Extra Item

"Data Item" on page 874

List Item Icon

The icon used to identify each item in a data list box control. The icons are obtained from a data item inserted into the control.

Properties of List Item Icon

"Data Item" on page 874

List Item Label

The label used to identify each item in a data list box control. Each label is determined by the data items inserted into the control.

Properties of List Item Label

“Data Item” on page 874

List Page Footer

The footer that appears at the bottom of every page of a list report. This object is rendered after the list details and other list footers. It is useful for presenting page totals.

Properties of List Page Footer

“Push To Bottom” on page 928

List Page Header

The header in the list that will appear on every page rendered. It occurs after the column titles and before the overall group header of the list. It is useful for presenting carry forward totals.

Properties of List Page Header

“Display After Overall Header” on page 881

List Row

A row in a list.

Properties of List Row

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Clickable Region” on page 865, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

List Row Cells Style

Overrides the style for Row Cells Style objects that is defined in the GlobalReportStyles.css file.

Properties of List Row Cells Style

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Conditional Styles” on page 868, “Data Format” on page 874, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

List Summary

A summary that is automatically added as the footer row in a list.

Properties of List Summary

"Aggregate Data Item" on page 847, "Aggregation Method" on page 847, "Label" on page 899, "Name" on page 913, "Type" on page 959

List Summary

The list summary that appears in executed active reports.

Properties of List Summary

"Background Color" on page 854, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Conditional Styles" on page 868, "Data Format" on page 874, "Data Item" on page 874, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Font" on page 888, "Foreground Color" on page 889, "Margin" on page 904, "Output Aggregation Method" on page 920, "Padding" on page 921, "Relative Alignment" on page 930, "Render Variable" on page 932, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Visible" on page 966

Map

A chart that uses a map to show data.

Properties of Map

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Axis Title" on page 853, "Background Color" on page 854, "Background Effects" on page 855, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Contained Text Direction" on page 870, "Container Select" on page 870, "Data Language" on page 877, "Dictionary" on page 880, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Expand Features" on page 885, "Ignore Data with No Features" on page 896, "Legend" on page 900, "Map & Layers" on page 904, "Margin" on page 904, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "No Data Features Size (pt)" on page 917, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Visible" on page 966

Map Location

Associates a data series with regions on the region layer of the map.

Properties of Map Location

"Aggregate Function" on page 847, "Expression" on page 886, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Level" on page 902, "Level Unique Name" on page 902, "Member" on page 910, "Member Unique Name" on page 911, "Property Unique Name" on page 928, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940

Map Location

Associates a data series with points on the point layer of the map.

Properties of Map Location

“Aggregate Function” on page 847, *“Expression”* on page 886, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Level”* on page 902, *“Level Unique Name”* on page 902, *“Member”* on page 910, *“Member Unique Name”* on page 911, *“Property Unique Name”* on page 928, *“Rollup Aggregate Function”* on page 936, *“Root Members Only”* on page 936, *“Set Definition”* on page 940, *“Set Sorting”* on page 940

Map Refinement Location

Qualifies the data series members that are associated with regions on the map.

Properties of Map Refinement Location

“Aggregate Function” on page 847, *“Expression”* on page 886, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Level”* on page 902, *“Level Unique Name”* on page 902, *“Member”* on page 910, *“Member Unique Name”* on page 911, *“Property Unique Name”* on page 928, *“Rollup Aggregate Function”* on page 936, *“Root Members Only”* on page 936, *“Set Definition”* on page 940, *“Set Sorting”* on page 940

Map Refinement Location

Qualifies the data series members that are associated with points on the map.

Properties of Map Refinement Location

“Aggregate Function” on page 847, *“Expression”* on page 886, *“Hierarchy”* on page 894, *“Hierarchy Unique Name”* on page 894, *“Level”* on page 902, *“Level Unique Name”* on page 902, *“Member”* on page 910, *“Member Unique Name”* on page 911, *“Property Unique Name”* on page 928, *“Rollup Aggregate Function”* on page 936, *“Root Members Only”* on page 936, *“Set Definition”* on page 940, *“Set Sorting”* on page 940

Marimekko Chart

A type of bar chart that can show three levels of data.

Properties of Marimekko Chart

“Alternate Text” on page 848, *“Application Drill-Through”* on page 849, *“Background Color”* on page 854, *“Background Effects”* on page 855, *“Baselines”* on page 856, *“Border”* on page 857, *“Border Color”* on page 858, *“Borders”* on page 858, *“Box Type”* on page 859, *“Category Axis”* on page 863, *“Classes”* on page 865, *“Clickable Regions”* on page 866, *“Conditional Palette”* on page 868, *“Container Select”* on page 870, *“Depth”* on page 879, *“Display for Orientation”* on page 881, *“Drill-Through Definitions”* on page 883, *“Legend”* on page 900, *“Margin”* on page 904, *“Marimekko Totals”* on page 905, *“Markers”* on page 905, *“Marker Text Location”* on page 906, *“Master Detail Relationships”* on page 907, *“Maximum Hotspots”* on page 908, *“Name”* on page 914, *“No Data Contents”* on page 916, *“Notes”* on page 917, *“Padding”* on page 921, *“Pagination”* on page 921, *“Palette”* on page 922, *“Query”* on page 928, *“Relative Alignment”* on page 930, *“Render Page when Empty”* on page 931, *“Render Variable”* on page 932, *“Set*

Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 957, “Values” on page 964, “Visible” on page 966, “Visual Angle” on page 966, “Y Axis” on page 968

Marker

A marker, or symbol, that you can place at a static place in a chart. Markers can designate a point of significance that may help you analyze or understand the data.

Properties of Marker

“Aggregate Function” on page 847, “Data Item Value” on page 876, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Label Location” on page 900, “Level” on page 902, “Level Unique Name” on page 902, “Marker Shape” on page 906, “Marker Size (pt)” on page 906, “Marker Style” on page 906, “Master Detail Relationships” on page 907, “Member” on page 910, “Member Offset (%)” on page 910, “Member Unique Name” on page 911, “Properties” on page 927, “Property Unique Name” on page 928, “Query” on page 928, “Render Variable” on page 932, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940

Marker

A marker, or symbol, that you can place at a static place in a chart. Markers can designate a point of significance that may help you analyze or understand the data. This object applies only to legacy charts.

Properties of Marker

“Axis Assignment” on page 852, “Bar, Line, or Area Index” on page 856, “Box Type” on page 860, “Data Item Value” on page 876, “Label” on page 898, “Marker Color” on page 905, “Marker Shape” on page 906, “Marker Size (pt)” on page 906, “Master Detail Relationships” on page 907, “Numeric Value” on page 919, “Percentile” on page 923, “Percent of Axis” on page 923, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 934, “Report Expression” on page 933, “Standard Deviations” on page 949

Marker

A marker on a point chart. Point charts include scatter charts, polar charts, radar charts, and bubble charts. This object applies only to legacy charts.

Properties of Marker

“Box Type” on page 860, “Data Item Value” on page 876, “Data Item Value” on page 876, “Expression” on page 886, “Expression” on page 886, “Label” on page 898, “Marker Color” on page 905, “Marker Shape” on page 906, “Marker Size (pt)” on page 906, “Master Detail Relationships” on page 907, “Numeric Value” on page 919, “Numeric Value” on page 920, “Percentile” on page 923, “Percentile” on page 923, “Percent of Axis” on page 924, “Percent of Axis” on page 924, “Position type” on page 925, “Position type” on page 925, “Properties” on page 927, “Query” on page 928, “Report Expression” on page 934, “Report Expression” on page 934, “Standard Deviations” on page 949, “Standard Deviations” on page 949

MDX

A multidimensional expression (MDX) query against an OLAP data source.

Properties of MDX

"Catalog" on page 862, "Data Source" on page 877, "MDX" on page 910, "Name" on page 915

Measure

A data item that defines a measure.

Properties of Measure

"Dimension" on page 880, "Label" on page 899, "Member" on page 910, "Member Unique Name" on page 911, "Name" on page 913, "Type" on page 959

Member

A data item that defines a member.

Properties of Member

"Detail" on page 879, "Dimension" on page 880, "Hierarchy" on page 894, "Label" on page 899, "Member" on page 910, "Member Unique Name" on page 911, "Name" on page 913, "Type" on page 959

Member Children Set

A set of data items that define the children set of a member.

Properties of Member Children Set

"Detail" on page 879, "Dimension" on page 880, "Hierarchy" on page 894, "Label" on page 899, "Member" on page 910, "Member Unique Name" on page 911, "Name" on page 913, "Set Sorting" on page 940, "Type" on page 959

Member Hierarchy

The organization of a dimension's members into a logical tree structure, with each member having one or more "parent" members and an arbitrary number of "child" members.

Properties of Member Hierarchy

"Name" on page 916

Member Property

A property that is associated with members of a level. Attributes can be used to refine a search within level members, or to provide additional information about members.

Properties of Member Property

"Data Item" on page 875, "Name" on page 916

Member Property

A member property from either a level or a hierarchy.

Properties of Member Property

“Dimension” on page 880, “Hierarchy” on page 894, “Label” on page 899, “Level” on page 902, “Name” on page 913, “Property” on page 928, “Property Unique Name” on page 928, “Type” on page 959

Member Set

A data item that represents a named set. Member sets supply the context for expressions that require evaluation for multiple dimensions. For example, they determine the contexts for which you can apply analytical functions such as rank.

Properties of Member Set

“Data Item” on page 874, “Name” on page 915

Metrics Range Chart

A chart that superimposes target value markers, target range markers, and tolerance range markers over any number or combination of bar, line, and area charts.

Properties of Metrics Range Chart

“Alternate Text” on page 848, “Application Drill-Through” on page 849, “Background Color” on page 854, “Background Effects” on page 855, “Baselines” on page 856, “Border” on page 857, “Box Type” on page 859, “Category Axis” on page 863, “Classes” on page 865, “Clickable Regions” on page 866, “Conditional Palette” on page 868, “Container Select” on page 870, “Depth” on page 879, “Display for Orientation” on page 881, “Drill-Through Definitions” on page 883, “Legend” on page 900, “Margin” on page 904, “Marker Color” on page 905, “Marker Label” on page 905, “Markers” on page 905, “Marker Text Location” on page 906, “Master Detail Relationships” on page 907, “Maximum Hotspots” on page 908, “Name” on page 914, “No Data Contents” on page 916, “Notes” on page 917, “Padding” on page 921, “Pagination” on page 921, “Palette” on page 922, “Performance Pattern” on page 924, “Query” on page 928, “Range Label” on page 930, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Suppression” on page 951, “Target Color” on page 953, “Target Marker” on page 953, “Target Marker Border Color” on page 953, “Target Marker Position” on page 953, “Target Range (%)” on page 953, “Title” on page 955, “Tolerance Color” on page 956, “Tolerance Label” on page 956, “Tooltips” on page 957, “Upper Range Skew (%)” on page 960, “Value Location:” on page 963, “Visible” on page 966, “Visual Angle” on page 966, “Y1 Axis” on page 968

Metric Studio Diagram

A Metric Studio diagram rendered as a static image.

Properties of Metric Studio Diagram

“Alternate Text” on page 848, “Description” on page 879, “Diagram Identifier” on page 880

Named Set

A reference to a named set from the model.

Properties of Named Set

“Detail” on page 879, “Dimension” on page 880, “Hierarchy” on page 894, “Label” on page 899, “Name” on page 913, “Set Sorting” on page 940, “Type” on page 959

Node

Data item that represents categorical data in the visualization. For example, the bubbles in a packed bubble visualization.

Properties of Node

“Data Format” on page 874, “Fact Cell Data Format” on page 886, “Sorting” on page 947

Note

A note on a chart. The source of the note text can be static text, a query item, or a report expression.

Properties of Note

“Background Effects” on page 855, “Conditional Styles” on page 868, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Note Text” on page 918, “Position” on page 925, “Properties” on page 927, “Render Variable” on page 932, “Size & Overflow” on page 945

Note

A note on a chart. The source of the note text can be static text, a query item, or a report expression. This object applies only to legacy charts.

Properties of Note

“Bottom Position (px)” on page 859, “Height (px)” on page 893, “Left Position (px)” on page 900, “Note Border” on page 917, “Note Text” on page 918, “Width (px)” on page 967

Note Content

The content and style of a note.

Properties of Note Content

“Background Color” on page 854, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Horizontal Alignment” on page 895, “Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928, “Style Variable” on page 950

No Value List Item

The default item in a list control. When the default item is selected when the report is run, it sets the value of the data item in the control to null. By default, the no value item is the first item in the list.

Properties of No Value List Item

“Label” on page 898, “Position in List” on page 925

Numerical Axis

The numeric axis for a progressive chart, including labels, titles, range, scale, and gridlines. This object applies only to legacy charts.

Properties of Numerical Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Numerical Axis

The numeric axis for a Pareto chart, including labels, titles, and gridlines. This object applies only to legacy charts.

Properties of Numerical Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Numeric Axis

The axis that displays numbers.

Properties of Numeric Axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Numeric Baseline

The baseline on a numeric axis.

Properties of Numeric Baseline

“Aggregate Function” on page 847, “Data Item Value” on page 876, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Line Style” on page 903, “Master Detail Relationships” on page 907, “Member” on page 910, “Member Unique Name” on page 911, “Numeric Baselines” on page 919, “Properties” on page 927, “Property Unique Name” on page 928, “Query” on page 928, “Render Variable” on page 932, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940

Page

A page in a layout.

Properties of Page

“Background Color” on page 854, “Border” on page 857, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Gradient” on page 891, “Horizontal Alignment” on page 895, “Margin” on page 904, “Master Detail Relationships” on page 907, “Name” on page 914, “Pagination” on page 921, “PDF Page Setup” on page 923, “Properties” on page 927, “Query” on page 929, “Render Variable” on page 932, “Size & Overflow” on page 945, “Style Variable” on page 950

Page Body

The main body of a page.

Properties of Page Body

“Classes” on page 865, “Size & Overflow” on page 945

Page Break Text

The text associated with a page break.

Properties of Page Break Text

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Padding” on page 921, “Relative Alignment” on page 930, “Render Variable” on page 932, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Visible” on page 966

Page Footer

The footer of a page.

Properties of Page Footer

“Classes” on page 865, “Size & Overflow” on page 945

Page Header

The header of a page.

Properties of Page Header

“Classes” on page 865, “Size & Overflow” on page 945

Page Number

The number of a page.

Properties of Page Number

“Background Color” on page 854, “Classes” on page 865, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Number Style” on page 919, “Relative Alignment” on page 930

Page Set

The set of pages to render according to a grouping structure.

Properties of Page Set

“Grouping & Sorting” on page 892, “Master Detail Relationships” on page 907, “Name” on page 913, “Pagination” on page 921, “Properties” on page 927, “Query” on page 928

Pareto Bars

The bars in a Pareto chart.

Properties of Pareto Bars

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Pareto Chart

A chart in which data series appear as colored sections stacked in columns or bars. The maximum of each column or bar represents the series total as a percentage of the overall total of all data series in the chart.

Negative values are not supported in Pareto charts.

Properties of Pareto Chart

“Alternate Text” on page 848, “Application Drill-Through” on page 849, “Background Effects” on page 855, “Bar Width” on page 856, “Bevel” on page 857, “Border” on page 857, “Border Color” on page 858, “Borders” on page 858, “Box Type” on page 859, “Category Baselines” on page 863, “Chart Orientation” on page 863, “Classes” on page 865, “Clickable Regions” on page 866, “Colored Regions” on page 867, “Conditional Palette” on page 868, “Contained Text Direction” on page 870, “Container Select” on page 870, “Cumulative Line” on page 873, “Depth” on page 879, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Drill-Through Definitions” on page 883, “Drop Shadow” on page 884, “Legend” on page 901, “Margin” on page 904, “Markers” on page 906, “Master Detail Relationships” on page 907, “Material Effects” on page 907, “Matrix Rows and Columns” on page 908, “Maximum Hotspots” on page 908, “Name” on page 914, “No Data Contents” on page 916, “Notes” on page 917, “Numeric Baselines” on page 919, “Padding” on page 921, “Pagination” on page 921, “Palette” on page 922, “Plot Area Fill” on page 924, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Show Values” on page 944, “Size & Overflow” on page 945, “Summarize Small Items” on page 951, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 956, “Visible” on page 966

Pareto Chart

A chart in which data series appear as colored sections stacked in columns or bars. The maximum of each column or bar represents the series total as a percentage of the overall total of all data series in the chart. This object applies only to legacy charts.

Negative values are not supported in Pareto charts.

Properties of Pareto Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Background Color"* on page 854, *"Background Effects"* on page 855, *"Baselines"* on page 856, *"Border"* on page 857, *"Border Color"* on page 858, *"Borders"* on page 858, *"Box Type"* on page 859, *"Category Axis"* on page 863, *"Chart Orientation"* on page 863, *"Classes"* on page 865, *"Clickable Regions"* on page 866, *"Conditional Palette"* on page 868, *"Connecting Lines"* on page 869, *"Container Select"* on page 870, *"Cumulative Line"* on page 872, *"Depth"* on page 879, *"Display for Orientation"* on page 881, *"Drill-Through Definitions"* on page 883, *"Legend"* on page 900, *"Margin"* on page 904, *"Markers"* on page 905, *"Marker Text Location"* on page 906, *"Master Detail Relationships"* on page 907, *"Maximum Hotspots"* on page 908, *"Name"* on page 914, *"No Data Contents"* on page 916, *"Notes"* on page 917, *"Padding"* on page 921, *"Pagination"* on page 921, *"Palette"* on page 922, *"Pareto Axis"* on page 923, *"Query"* on page 928, *"Relative Alignment"* on page 930, *"Render Page when Empty"* on page 931, *"Render Variable"* on page 932, *"Rotate Values"* on page 937, *"Set Variable Values"* on page 941, *"Show Hover"* on page 942, *"Show Pointer Cursor"* on page 943, *"Size & Overflow"* on page 945, *"Suppression"* on page 951, *"Title"* on page 955, *"Tooltips"* on page 957, *"Value Location:"* on page 963, *"Values"* on page 964, *"Visible"* on page 966, *"Visual Angle"* on page 966

Percentaged Measure

A measure that shows values as a percentage of a summary.

Properties of Percentaged Measure

"Actual Measure" on page 846, *"Dimension"* on page 880, *"Label"* on page 899, *"Name"* on page 913, *"Percentage Based On"* on page 923, *"Type"* on page 959

Pie Chart

A chart that uses sections of a circle as data markers to plot one or more data series. The size of each section is proportional to the value of each data series for a given category value. Each pie corresponds to a category value. This object applies only to legacy charts.

Properties of Pie Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Avoid Label Collision"* on page 851, *"Axis Title"* on page 853, *"Background Color"* on page 854, *"Background Effects"* on page 855, *"Border"* on page 857, *"Border Color"* on page 858, *"Borders"* on page 858, *"Box Type"* on page 859, *"Classes"* on page 865, *"Clickable Regions"* on page 866, *"Conditional Palette"* on page 868, *"Container Select"* on page 870, *"Depth"* on page 879, *"Display for Orientation"* on page 881, *"Drill-Through Definitions"* on page 883, *"Hole Size (%)"* on page 895, *"Labels"* on page 900, *"Legend"* on page 900, *"Margin"* on page 904, *"Master*

Detail Relationships” on page 907, “Maximum Hotspots” on page 908, “Name” on page 914, “No Data Contents” on page 916, “Notes” on page 917, “Padding” on page 921, “Pagination” on page 921, “Palette” on page 922, “Pie Labels” on page 924, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 957, “Value Representation” on page 964, “Values” on page 964, “Visible” on page 966

Pie Chart

A chart that uses sections of a circle as data markers to plot one or more data series. The size of each section is proportional to the value of each data series for a given category value. Each pie corresponds to a category value.

Properties of Pie Chart

“Alternate Text” on page 848, “Application Drill-Through” on page 849, “Axis Title” on page 854, “Background Effects” on page 855, “Bevel” on page 857, “Border” on page 857, “Border Color” on page 858, “Borders” on page 858, “Box Type” on page 859, “Classes” on page 865, “Clickable Regions” on page 866, “Conditional Palette” on page 868, “Contained Text Direction” on page 870, “Container Select” on page 870, “Depth” on page 879, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Drill-Through Definitions” on page 883, “Drop Shadow” on page 884, “Exploded Slices” on page 885, “First Slice Angle” on page 887, “Hole Size (%)” on page 895, “Legend” on page 901, “Margin” on page 904, “Master Detail Relationships” on page 907, “Material Effects” on page 907, “Matrix Rows and Columns” on page 908, “Maximum Hotspots” on page 908, “Name” on page 914, “No Data Contents” on page 916, “Notes” on page 917, “Padding” on page 921, “Pagination” on page 921, “Palette” on page 922, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Set Variable Values” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Show Values” on page 944, “Size & Overflow” on page 945, “Slice Direction” on page 946, “Summarize Small Slices” on page 951, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 956, “Visible” on page 966

Pie Labels

The labels that will be drawn if multiple pie charts are rendered. If this object does not exist, no labels will be rendered.

Properties of Pie Labels

“Classes” on page 865, “Conditional Styles” on page 868, “Drill-Through Definitions” on page 883, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Maximum Truncation Characters” on page 909, “Style Variable” on page 950, “Truncation” on page 958, “Truncation Text” on page 959, “Visible” on page 966

Point Color Legend Title

The title for the point color legend. If this object is empty, a default title is rendered, if available.

Properties of Point Color Legend Title

“Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928

Point Layer

A map layer that includes points, such as cities. The color and size of each point is determined by their respective measure.

Properties of Point Layer

“Border Color” on page 858, “Borders” on page 858, “Color Legend Title” on page 867, “Conditional Palette” on page 868, “Conditional Styles” on page 868, “Fill Effects” on page 887, “Map Drills” on page 904, “Palette” on page 922, “Show Data Range in Legend” on page 942, “Show Features with No Data” on page 942, “Show Values” on page 944, “Size Legend Title” on page 946, “Style Variable” on page 950

Point Measure

The measure that determines the colors of points on a map chart.

Properties of Point Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Style Variable” on page 950

Point Size Legend Title

The title for the point size legend. If this object is empty, a default title is rendered, if available.

Properties of Point Size Legend Title

“Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928

Point Size Measure

The measure that determines the size of the points on a map chart.

Properties of Point Size Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Maximum Size (pt)” on page 909, “Minimum Size (pt)” on page 911, “Style Variable” on page 950

Polar Chart

A point chart that plots one or more data series against two measures. The radius of a data series is determined by one measure and the arc is determined by the other measure. Multiple points are plotted for each category. They can be distinguished with the help of tool tips if the Tool Tip property is set to Yes.

Properties of Polar Chart

"Alternate Text" on page 848, "Angular Axis" on page 849, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Legend" on page 900, "Margin" on page 904, "Markers" on page 905, "Marker Size (pt)" on page 906, "Marker Text Location" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Point Shape" on page 924, "Query" on page 928, "Radial Axis" on page 929, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Spider Effects" on page 948, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Value Location:" on page 963, "Values" on page 964, "Visible" on page 966

Primary Axis

The generic numeric axis for the combination chart. This axis is normally shown as the top-left axis but can be in a different position depending on the chart orientation, as specified in the Chart Orientation property of the chart.

Properties of Primary Axis

"Axis Labels" on page 852, "Axis Line" on page 853, "Axis Range" on page 853, "Axis Title" on page 854, "Axis Title" on page 853, "Gridlines" on page 892, "Minor Gridlines" on page 912, "Number of Minor Intervals" on page 918

Primary Bottom Axis

The numeric axis for a combination chart. This axis is normally rendered as the bottom-left axis, but can change depending on the orientation of the chart, as specified in the Chart Orientation property of the chart.

Properties of Primary Bottom Axis

"Axis Labels" on page 852, "Axis Line" on page 853, "Axis Range" on page 853, "Axis Title" on page 854, "Axis Title" on page 853, "Gridlines" on page 892, "Minor Gridlines" on page 912, "Number of Minor Intervals" on page 918

Progressive Chart

A chart that uses columns as data markers to plot one category across a single measure. The top of the first column represents the starting value for the second column. This chart emphasizes the positive or negative contribution of each value to the total.

Properties of Progressive Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Effects" on page 855, "Bar Width" on page 856, "Bevel" on page 857, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box

Type" on page 859, "Category Baselines" on page 863, "Chart Orientation" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Colored Regions" on page 867, "Conditional Palette" on page 868, "Connecting Lines" on page 869, "Contained Text Direction" on page 870, "Container Select" on page 870, "Depth" on page 879, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Drop Shadow" on page 884, "Legend" on page 901, "Margin" on page 904, "Markers" on page 906, "Master Detail Relationships" on page 907, "Material Effects" on page 907, "Matrix Rows and Columns" on page 908, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Numeric Baselines" on page 919, "Padding" on page 921, "Pagination" on page 921, "Plot Area Fill" on page 924, "Progressive Palette" on page 927, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Show Values" on page 944, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 956, "Total Column" on page 957, "Visible" on page 966

Progressive Chart

A chart that uses columns as data markers to plot one category across a single measure. The top of the first column represents the starting value for the second column. This chart emphasizes the positive or negative contribution of each value to the total. This object applies only to legacy charts.

Properties of Progressive Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box Type" on page 859, "Category Axis" on page 863, "Chart Orientation" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Connecting Lines" on page 869, "Container Select" on page 870, "Depth" on page 879, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "First Column Color" on page 887, "Margin" on page 904, "Markers" on page 905, "Marker Text Location" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "Negative Column Color" on page 916, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Positive Column Color" on page 926, "Progressive Axis" on page 927, "Query" on page 928, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Rotate Values" on page 937, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Total Column" on page 957, "Value Location:" on page 963, "Values" on page 964, "Visible" on page 966, "Visual Angle" on page 966

Prompt Button

A predefined button used in prompt pages. Its usage changes according to its Type property, which can be set to Cancel, Back, Next, Finish, or Reprompt.

Properties of Prompt Button

"Background Color" on page 854, "Border" on page 857, "Classes" on page 865, "Conditional Styles" on page 868, "Font" on page 888, "Foreground Color" on page 889

page 887, "Margin" on page 904, "Name" on page 914, "Padding" on page 921, "Relative Alignment" on page 930, "Size & Overflow" on page 945, "Style Variable" on page 950, "Type" on page 959

Query

The data that is to be retrieved from the database. The query consists of a source, a selection, detailed and summary filters, and dimension information.

Properties of Query

"Auto Group & Summarize" on page 850, "Auto-Sort" on page 851, "Avoid Division by Zero" on page 851, "Cross Product Allowed" on page 872, "Define Member Sets" on page 878, "Execution Method" on page 885, "Execution Optimization" on page 885, "Generated SQL" on page 891, "Maximum Execution Time" on page 908, "Maximum Rows Retrieved" on page 909, "Maximum Tables" on page 909, "Maximum Text Blob Characters" on page 909, "Name" on page 914, "Outer Join Allowed" on page 920, "Override Dimension Info" on page 921, "Processing" on page 926, "Rollup Processing" on page 936, "SQL Join Syntax" on page 948, "Suppress" on page 951, "Use 1.x Behavior" on page 960, "Use Aggregate Cache" on page 960, "Use for Parameter Info" on page 961, "Use Local Cache" on page 961, "User SAP Member Cache" on page 961, "Use SAP MUN as Business Key" on page 962, "Use SQL Parameters" on page 962, "Use SQL With Clause" on page 963

Query Operation

Union, Intersect, Except (minus) operations on one or more queries that result in a projection list upon which other queries can be based.

Properties of Query Operation

"Duplicates" on page 884, "Name" on page 915, "Projection List" on page 927, "Set Operation" on page 940

Query Reference

A reference to another query defined in the same query set.

Properties of Query Reference

"Cardinality" on page 862

Radar Chart

A chart that integrates multiple axes into a single radial figure as lines or stacked areas.

Properties of Radar Chart

"Alternate Text" on page 848, "Application Drill-Through" on page 849, "Background Color" on page 854, "Background Effects" on page 855, "Baselines" on page 856, "Border" on page 857, "Border Color" on page 858, "Borders" on page 858, "Box Type" on page 859, "Category Axis" on page 863, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Palette" on page 868, "Container Select" on page 870, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Legend" on page 900, "Margin" on page 904, "Markers" on page 905, "Marker Size (pt)" on page 906, "Marker Text

Location" on page 906, "Master Detail Relationships" on page 907, "Maximum Hotspots" on page 908, "Name" on page 914, "No Data Contents" on page 916, "Notes" on page 917, "Padding" on page 921, "Pagination" on page 921, "Palette" on page 922, "Point Shape" on page 924, "Query" on page 928, "Radar Type" on page 929, "Radial Axis" on page 929, "Relative Alignment" on page 930, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Spider Effects" on page 948, "Suppression" on page 951, "Title" on page 955, "Tooltips" on page 957, "Value Location:" on page 963, "Values" on page 964, "Visible" on page 966

Radial Axis

The radial numeric axis for a polar chart or radar chart, including labels, titles, range, and scale.

Properties of Radial Axis

"Axis Labels" on page 852, "Axis Line" on page 852, "Axis Title" on page 853, "Axis Title" on page 853, "Classes" on page 865, "Data Format" on page 874, "Gridlines" on page 892, "Include Zero For Auto Scale" on page 896, "Maximum Value" on page 910, "Minimum Value" on page 912, "Minor Gridlines" on page 912, "Scale" on page 937, "Scale Interval" on page 938, "Use Same Range For All Instances" on page 962

Radial Measure

The measure that determines the distance between the center of the chart and each data marker.

Properties of Radial Measure

"Conditional Styles" on page 868, "Custom Label" on page 873, "Data Format" on page 874, "Style Variable" on page 950

Radio Button

A radio button in a static radio button group control.

Properties of Radio Button

"Icon" on page 896, "Label" on page 898

Radio Button Extra Item

Data items that are used to determine what appears as the radio button labels in a data radio button group control.

Properties of Radio Button Extra Item

"Data Item" on page 874

Radio Button Group

A static radio button group control. Each radio button requires a corresponding row in the data table of the control.

Properties of Radio Button Group

“Application Drill-Through” on page 849, “Contained Text Direction” on page 870, “Container Filter” on page 870, “Container Select” on page 870, “Control Enable” on page 872, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Name” on page 914, “Orientation” on page 920, “Radio Buttons Definition” on page 929, “Render Variable” on page 932, “Set Variable Values” on page 941, “Text Color” on page 954

Radio Button Icon

The icon used to identify each radio button in a data radio button group control. The icons are obtained from a data item inserted into the control.

Properties of Radio Button Icon

“Data Item” on page 874

Radio Button Label

The label used to identify each radio button in a data radio button group control. Each label is determined by the data items inserted into the control.

Properties of Radio Button Label

“Data Item” on page 874

Region Color Legend Title

The title for the region color legend. If this object is empty, a default title is rendered, if available.

Properties of Region Color Legend Title

“Master Detail Relationships” on page 907, “Properties” on page 927, “Query” on page 928

Region Layer

A map layer that includes regions, such as provinces.

Properties of Region Layer

“Border Color” on page 858, “Borders” on page 858, “Color Legend Title” on page 867, “Conditional Palette” on page 868, “Conditional Styles” on page 868, “Fill Effects” on page 887, “Map Drills” on page 904, “Palette” on page 922, “Show Data Range in Legend” on page 942, “Show Features with No Data” on page 942, “Show Values” on page 944, “Style Variable” on page 950

Region Measure

The measure that determines the colors of regions on a map chart.

Properties of Region Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Style Variable” on page 950

Regression Line

A regression line for a bubble chart or scatter chart.

Properties of Regression Line

“Box Type” on page 860, “Line Styles” on page 903, “Number of Regression Lines” on page 918, “Polynomial Exponent” on page 925, “Properties” on page 927, “Regression Type” on page 930

Regression Line Label

A label that will be shown in the legend for the regression line.

Repeater

A table into which you can insert items that will be repeated.

Properties of Repeater

“Grouping & Sorting” on page 892, “Master Detail Relationships” on page 907, “Name” on page 914, “No Data Contents” on page 916, “Pagination” on page 921, “Properties” on page 927, “Query” on page 928, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Rows Per Page” on page 937, “Share Result Set” on page 941, “Suppression” on page 951

Repeater Table

Renders query data in a table.

Properties of Repeater Table

“Across” on page 846, “Application Drill-Through” on page 849, “Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Clickable Regions” on page 866, “Conditional Styles” on page 868, “Container Filter” on page 870, “Container Select” on page 870, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Down” on page 883, “Drop Shadow” on page 884, “Font” on page 888, “Foreground Color” on page 889, “Grouping & Sorting” on page 892, “Horizontal Alignment” on page 895, “Margin” on page 904, “Master Detail Relationships” on page 907, “Name” on page 914, “No Data Contents” on page 916, “Pagination” on page 921, “Properties” on page 927, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Repeater Direction” on page 932, “Set Variable Values” on page 941, “Share Result Set” on page 941, “Show Hover” on page 942, “Show Pointer Cursor” on page 943, “Size & Overflow” on page 945, “Style Variable” on page 950, “Summary Text” on page 951, “Suppression” on page 951, “Table Properties” on page 952, “Visible” on page 966

Repeater Table Cell

The contents of a repeater table object.

Properties of Repeater Table Cell

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Font” on page 888,

“Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Render Variable” on page 932, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

Repeater Table Cell

A cell in an active report repeater table.

Properties of Repeater Table Cell

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Vertical Alignment” on page 965, “White Space” on page 966

Rich Text Item

Inserts an object that is used to render a subset of HTML in the layout. The HTML may come from either a static or dynamic source, and the object will also render in PDF output. For information about what elements are allowed in rich text items, see Elements Supported in Rich Text Items.

Properties of Rich Text Item

“Aggregate Function” on page 847, “Control Data Item Value” on page 871, “Data Item Label” on page 875, “Data Item Value” on page 876, “Description” on page 879, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “HTML” on page 895, “HTML Source Variable” on page 896, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Name” on page 914, “Property Unique Name” on page 928, “Render Variable” on page 932, “Report Expression” on page 933, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “Source Type” on page 947

Row Number

Shows the row numbers in a column.

Properties of Row Number

“Background Color” on page 854, “Classes” on page 865, “Data Format” on page 874, “Display for Orientation” on page 881, “Font” on page 888, “Foreground Color” on page 889, “Margin” on page 904, “Relative Alignment” on page 930

Row Number

Shows the row numbers in a column in an active report. The active report row number object will always reflect the visible row number in the report. The report row number object reflects the server calculated row number.

Properties of Row Number

"Background Color" on page 854, *"Classes"* on page 865, *"Data Format"* on page 874, *"Direction & Justification"* on page 880, *"Display for Orientation"* on page 881, *"Font"* on page 888, *"Foreground Color"* on page 889, *"Margin"* on page 904, *"Relative Alignment"* on page 930

Scatter Chart

A point chart that plots one or more data series against two measures. Multiple points are plotted for each category. This object applies only to legacy charts.

Properties of Scatter Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Background Color"* on page 854, *"Background Effects"* on page 855, *"Baselines"* on page 856, *"Border"* on page 857, *"Border Color"* on page 858, *"Borders"* on page 858, *"Box Type"* on page 859, *"Classes"* on page 865, *"Clickable Regions"* on page 866, *"Conditional Palette"* on page 868, *"Container Select"* on page 870, *"Display for Orientation"* on page 881, *"Drill-Through Definitions"* on page 883, *"Legend"* on page 900, *"Margin"* on page 904, *"Markers"* on page 905, *"Marker Size (pt)"* on page 906, *"Marker Text Location"* on page 906, *"Master Detail Relationships"* on page 907, *"Maximum Hotspots"* on page 908, *"Name"* on page 914, *"No Data Contents"* on page 916, *"Notes"* on page 917, *"Padding"* on page 921, *"Pagination"* on page 921, *"Palette"* on page 922, *"Point Shape"* on page 924, *"Query"* on page 928, *"Regression Line"* on page 930, *"Relative Alignment"* on page 930, *"Render Page when Empty"* on page 931, *"Render Variable"* on page 932, *"Set Variable Values"* on page 941, *"Show Hover"* on page 942, *"Show Pointer Cursor"* on page 943, *"Size & Overflow"* on page 945, *"Suppression"* on page 951, *"Title"* on page 955, *"Tooltips"* on page 957, *"Value Location:"* on page 963, *"Values"* on page 964, *"Visible"* on page 966, *"X Axis"* on page 968, *"Y Axis"* on page 968

Scatter Chart

A point chart that plots one or more data series against two measures. Multiple points are plotted for each category.

Properties of Scatter Chart

"Alternate Text" on page 848, *"Application Drill-Through"* on page 849, *"Background Effects"* on page 855, *"Border"* on page 857, *"Box Type"* on page 859, *"Classes"* on page 865, *"Clickable Regions"* on page 866, *"Color by Value"* on page 866, *"Colored Regions"* on page 867, *"Conditional Palette"* on page 868, *"Contained Text Direction"* on page 870, *"Container Select"* on page 870, *"Direction & Justification"* on page 880, *"Display for Orientation"* on page 881, *"Drill-Through Definitions"* on page 883, *"Drop Shadow"* on page 884, *"Legend"* on page 901, *"Margin"* on page 904, *"Markers"* on page 906, *"Master Detail Relationships"* on page 907, *"Material Effects"* on page 907, *"Matrix Rows and Columns"* on page 908, *"Maximum Hotspots"* on page 908, *"Name"* on page 914, *"No Data Contents"* on page 916, *"Notes"* on page 917, *"Numeric Baselines"* on page 919, *"Padding"* on page 921, *"Pagination"* on page 921, *"Palette"* on page 922, *"Plot Area Fill"* on page 924, *"Query"* on page 928, *"Relative Alignment"* on page 930, *"Render Page when Empty"* on page 931, *"Render Variable"* on page 932, *"Set Variable Values"* on page 941, *"Show Hover"* on page 942, *"Show Pointer Cursor"* on page 943, *"Show Values"* on page 944, *"Size & Overflow"* on page 945, *"Suppression"* on page 951, *"Title"* on page 955, *"Tooltips"* on page 956,

“Trendlines” on page 958, “Visible” on page 966

Scatter Marker

A marker, or symbol, that you can place at a static place in a chart. Markers can designate a point of significance that may help you analyze or understand the data.

Properties of Scatter Marker

“Aggregate Function” on page 847, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Label Location” on page 900, “Level” on page 902, “Level Unique Name” on page 902, “Marker Shape” on page 906, “Marker Size (pt)” on page 906, “Marker Style” on page 906, “Master Detail Relationships” on page 907, “Member” on page 910, “Member Unique Name” on page 911, “Properties” on page 927, “Property Unique Name” on page 928, “Query” on page 928, “Render Variable” on page 932, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940, “X-Axis Data Item Value” on page 968, “Y-Axis Data Item Value” on page 969

Secondary Axis

The generic numeric axis for the combination chart. This axis is normally shown as the top-right axis but can be in a different position depending on the chart orientation, as specified in the Chart Orientation property of the chart.

Properties of Secondary Axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Secondary Bottom Axis

The numeric axis for a combination chart. This axis is normally shown as the bottom-right axis, but can change depending on the orientation of the chart, as specified in the Chart Orientation property of the chart.

Properties of Secondary Bottom Axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Select & Search Prompt

An advanced prompt control that allows you to search for values. You cannot use this prompt control with SAP BW data sources.

Properties of Select & Search Prompt

“Box Type” on page 860, “Cascade Source” on page 862, “Case Insensitive” on page 862, “Choices Deselect All Text” on page 864, “Choices Select All Text” on page 864, “Choices Text” on page 864, “Conditional Styles” on page 868, “Contained Text Direction” on page 870, “Data Format” on page 874, “Deselect Text” on page 879, “Direction & Justification” on page 880, “Display Value” on page 882, “Hide Adornments” on page 893, “Insert Text” on page 896, “Keywords

Text" on page 897, "Multi-Select" on page 913, "Name" on page 914, "Options Text" on page 920, "Parameter" on page 922, "Properties" on page 927, "Query" on page 929, "Remove Text" on page 931, "Render Variable" on page 932, "Required" on page 934, "Results Deselect All Text" on page 935, "Results Select All Text" on page 935, "Results Text" on page 935, "Rows Per Page" on page 937, "Search Instructions Text" on page 938, "Search Text" on page 938, "Sorting" on page 947, "Static Choices" on page 949, "Style Variable" on page 950, "Use Value" on page 963, "Visible" on page 966

Set Expression

A set of members.

Properties of Set Expression

"Detail" on page 879, "Dimension" on page 880, "Expression" on page 886, "Hierarchy" on page 894, "Label" on page 899, "Name" on page 913, "Set Sorting" on page 940, "Type" on page 959

Singleton

A query item that you can insert anywhere in the layout of your report where there is no query associated. When the report is run, the singleton object retrieves only the first row value for that query. Singletons are useful for adding boilerplate text to a report, such as a company name or address, to add overall calculations in a report, or to add multidimensional cell calculations in a report.

Properties of Singleton

"Name" on page 914, "Properties" on page 927, "Query" on page 928, "Render Variable" on page 932

Slicer Member Set

A set expression that returns members from a single hierarchy of a single dimension.

Properties of Slicer Member Set

"Expression" on page 885

SQL

An SQL query against a relational data source.

Properties of SQL

"Data Source" on page 877, "Name" on page 915, "SQL" on page 948, "SQL Syntax" on page 949

Static Repeater Table

An active report layout object that is used to present data in a repeating structure. Repeater table controls allow you to create button bars or grids of custom content that control the content that appears in other controls.

Properties of Static Repeater Table

"Across" on page 846, "Application Drill-Through" on page 849, "Background Color" on page 854, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Clickable Regions" on page 866, "Conditional Styles" on page 868, "Container Filter" on page 870, "Container Select" on page 870, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Down" on page 883, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Margin" on page 904, "Name" on page 914, "Relative Alignment" on page 930, "Render Variable" on page 932, "Repeater Direction" on page 932, "Repeater Table Values Definition" on page 933, "Set Variable Values" on page 941, "Show Hover" on page 942, "Show Pointer Cursor" on page 943, "Size & Overflow" on page 945, "Style Variable" on page 950, "Table Properties" on page 952, "Visible" on page 966

Summary Filter

A set of conditions in a query that narrow the scope of the data returned. A summary filter is applied after aggregation is complete.

Properties of Summary Filter

"Definition" on page 879, "Scope" on page 938, "Usage" on page 960

Tab

A tab in a static tab control.

Properties of Tab

"Icon" on page 896, "Label" on page 898

Tab Control

A static tab control. Each tab requires a corresponding row in the data table of the control.

Properties of Tab Control

"Application Drill-Through" on page 849, "Contained Text Direction" on page 870, "Container Select" on page 870, "Current Tab" on page 873, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Name" on page 914, "Render Variable" on page 932, "Set Variable Values" on page 941, "Size" on page 945, "Tab Orientation" on page 952, "Tabs Definition" on page 953, "Tab Width" on page 953

Tab Extra Item

Data items that are used to determine what appears as the tab labels in a data tab control.

Properties of Tab Extra Item

"Data Item" on page 874

Tab Icon

The icon used to identify each tab in a data tab control. The icons are obtained from a data item inserted into the control.

Properties of Tab Icon

“Data Item” on page 874

Tab Label

The label used to identify each tab in a data tab control. Each label is determined by the data items inserted into the control.

Properties of Tab Label

“Data Item” on page 874

Table

A collection of cells in which objects can be organized in a grid fashion.

Properties of Table

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Display for Orientation” on page 881, “Drop Shadow” on page 884, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Margin” on page 904, “Name” on page 914, “Pagination” on page 921, “Relative Alignment” on page 930, “Render Variable” on page 932, “Size & Overflow” on page 945, “Style Variable” on page 950, “Summary Text” on page 951, “Table Properties” on page 952, “Visible” on page 966

Table Cell

The cells within a row.

Properties of Table Cell

“Background Color” on page 854, “Background Effects” on page 855, “Border” on page 857, “Box Type” on page 860, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Padding” on page 921, “Size & Overflow” on page 945, “Spacing & Breaking” on page 948, “Style Variable” on page 950, “Table Header” on page 952, “Vertical Alignment” on page 965, “White Space” on page 966

Table of Contents

A collection of Table of Contents Entry objects that refer the same table of contents. The table of contents is generated in the rendered output.

Properties of Table of Contents

“Background Color” on page 854, “Border” on page 857, “Box Type” on page 859, “Classes” on page 865, “Conditional Styles” on page 868, “Direction & Justification” on page 880, “Font” on page 888, “Foreground Color” on page 889, “Horizontal Alignment” on page 895, “Margin” on page 904, “No Data Contents” on page 916

on page 914, "Padding" on page 921, "Render Page when Empty" on page 931, "Render Variable" on page 932, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Table of Contents Name" on page 952, "Visible" on page 966, "White Space" on page 966

Table of Contents Entry

An entry in the table of contents.

Properties of Table of Contents Entry

"Background Color" on page 854, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Conditional Styles" on page 868, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "Heading Level" on page 893, "Horizontal Alignment" on page 895, "Margin" on page 904, "Padding" on page 921, "Render Variable" on page 932, "Size & Overflow" on page 945, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Table of Contents" on page 952, "Visible" on page 966, "White Space" on page 966

Table Row

The rows in a table.

Properties of Table Row

"Background Color" on page 854, "Box Type" on page 860, "Classes" on page 865, "Conditional Styles" on page 868, "Font" on page 888, "Foreground Color" on page 889, "Horizontal Alignment" on page 895, "Style Variable" on page 950, "Vertical Alignment" on page 965

Target Measure

The target measure for a bullet chart.

Properties of Target Measure

"Custom Label" on page 873, "Data Format" on page 874

Target Measure

The target measure for a metrics range chart.

Properties of Target Measure

"Conditional Styles" on page 868, "Custom Label" on page 873, "Data Format" on page 874, "Style Variable" on page 950

Text Box Prompt

A prompt control that allows you to type in a value.

Properties of Text Box Prompt

"Background Color" on page 854, "Border" on page 857, "Box Type" on page 860, "Choices Deselect All Text" on page 864, "Choices Select All Text" on page 864, "Choices Text" on page 864, "Conditional Styles" on page 868, "Contained Text Direction" on page 870, "Default Selections" on page 878, "Deselect Text" on page 879

877, "Direction & Justification" on page 880, "Font" on page 888, "Foreground Color" on page 889, "From Text" on page 890, "Hide Adornments" on page 893, "Hide Text" on page 893, "Highest Value Text" on page 894, "Insert Text" on page 896, "Lowest Value Text" on page 904, "Multi-Line" on page 913, "Multi-Select" on page 913, "Name" on page 914, "Numbers Only" on page 918, "Parameter" on page 922, "Range" on page 929, "Relative Alignment" on page 930, "Remove Text" on page 931, "Render Variable" on page 932, "Required" on page 934, "Size & Overflow" on page 945, "Style Variable" on page 950, "To Text" on page 958, "Use Thousands Separator" on page 963, "Visible" on page 966

Text Item

A text item in a report. The content can be static text, or it can come from a query item or report expression.

Properties of Text Item

"Aggregate Function" on page 847, "Background Color" on page 854, "Border" on page 857, "Box Type" on page 859, "Classes" on page 865, "Conditional Styles" on page 868, "Control Data Item Value" on page 871, "Data Format" on page 874, "Data Item Label" on page 875, "Data Item Value" on page 875, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Drill-Through Definitions" on page 883, "Expression" on page 886, "Font" on page 888, "Foreground Color" on page 889, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Label For" on page 899, "Level" on page 902, "Level Unique Name" on page 902, "Margin" on page 904, "Maximum Characters" on page 908, "Member" on page 910, "Member Unique Name" on page 911, "Name" on page 914, "Padding" on page 921, "Property Unique Name" on page 928, "Relative Alignment" on page 930, "Render Variable" on page 932, "Report Expression" on page 933, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940, "Size & Overflow" on page 945, "Source Type" on page 947, "Spacing & Breaking" on page 948, "Style Variable" on page 950, "Text" on page 954, "Text Source Variable" on page 954, "Use Detail Value on Page" on page 961, "Visible" on page 966

Time

Returns the time on the report server when the report server started rendering the report.

Properties of Time

"Background Color" on page 854, "Classes" on page 865, "Data Format" on page 874, "Display for Orientation" on page 881, "Font" on page 888, "Foreground Color" on page 889, "Margin" on page 904, "Relative Alignment" on page 930

Time Prompt

An advanced prompt control that allows you to select a time value.

Properties of Time Prompt

"Box Type" on page 860, "Choices Deselect All Text" on page 864, "Choices Select All Text" on page 864, "Choices Text" on page 864, "Clock Mode" on page 866, "Conditional Styles" on page 868, "Contained Text Direction" on page 870, "Default Selections" on page 878, "Deselect Text" on page 879, "Direction & Justification" on page 880, "Display Milliseconds" on page 882, "Display Seconds" on page 882

on page 880, "From Text" on page 890, "Hide Adornments" on page 893, "Highest Value Text" on page 894, "Insert Text" on page 896, "Lowest Value Text" on page 904, "Multi-Select" on page 913, "Name" on page 914, "Parameter" on page 922, "Range" on page 929, "Remove Text" on page 931, "Render Variable" on page 932, "Required" on page 934, "Select UI" on page 939, "Style Variable" on page 950, "To Text" on page 958, "Visible" on page 966

Toggle Button Bar

A static toggle button bar control. Each toggle button requires a corresponding row in the data table of the control.

Properties of Toggle Button Bar

"Application Drill-Through" on page 849, "Button Gap" on page 861, "Buttons Definition" on page 861, "Button Width" on page 861, "Contained Text Direction" on page 870, "Container Select" on page 870, "Control Enable" on page 872, "Direction & Justification" on page 880, "Display for Orientation" on page 881, "Name" on page 914, "Orientation" on page 920, "Render Variable" on page 932, "Set Variable Values" on page 941

Tolerance Measure

The tolerance measure for a metrics chart.

Properties of Tolerance Measure

"Conditional Styles" on page 868, "Custom Label" on page 873, "Data Format" on page 874, "Style Variable" on page 950

Total Column

A column or bar representing the total cumulative value of all other columns or bars in a progressive chart.

Properties of Total Column

"Aggregate Function" on page 847, "Data Format" on page 874, "Data Item Value" on page 875, "Expression" on page 886, "Hierarchy" on page 894, "Hierarchy Unique Name" on page 894, "Level" on page 902, "Level Unique Name" on page 902, "Member" on page 910, "Member Unique Name" on page 911, "Properties" on page 927, "Property Unique Name" on page 928, "Report Expression" on page 933, "Rollup Aggregate Function" on page 936, "Root Members Only" on page 936, "Set Definition" on page 940, "Set Sorting" on page 940, "Text" on page 954, "Total Column Color" on page 958

Total Column Label

The label to be rendered for the total column.

Properties of Total Column Label

"Properties" on page 927

Tree Prompt

A data-driven prompt control that shows hierarchical information and allows you to select one or more members.

Properties of Tree Prompt

“Cascade Source” on page 862, “Conditional Styles” on page 868, “Contained Text Direction” on page 870, “Default Selections” on page 878, “Deselect Text” on page 879, “Direction & Justification” on page 880, “Hide Adornments” on page 893, “Multi-Select” on page 913, “Name” on page 914, “Parameter” on page 922, “Pre-populate” on page 926, “Pre-populate Levels” on page 926, “Query” on page 929, “Render Variable” on page 932, “Required” on page 934, “Results Deselect All Text” on page 935, “Results Select All Text” on page 935, “Rows Per Page” on page 937, “Size & Overflow” on page 945, “Sorting” on page 947, “Style Variable” on page 950, “Use Value” on page 963, “Visible” on page 966

Trendline

A line or curve that indicates the general direction of the data over time.

Properties of Trendline

“Based on” on page 856, “Line Style” on page 903, “Render Variable” on page 932, “Trendline Label” on page 958, “Type” on page 959

Trendline Label

A label that will be shown in the legend for the trend line.

Properties of Trendline Label

“Conditional Styles” on page 868, “Data Format” on page 874, “Properties” on page 927, “Query” on page 928

Value

The return value from the evaluation of the report variable.

Value

A group of two or more variable values.

Value

A measure or single value that is used to plot data in a visualization.

Properties of Value

“Data Format” on page 874, “Label” on page 899, “Rollup Method” on page 936, “Value Range” on page 964

Value Prompt

A prompt control that allows you to select one or more values from a list.

Properties of Value Prompt

“Auto-Submit” on page 851, “Background Color” on page 854, “Box Type” on page 860, “Cascade Source” on page 862, “Choices Deselect All Text” on page 864, “Choices Select All Text” on page 864, “Choices Text” on page 864, “Conditional Styles” on page 868, “Contained Text Direction” on page 870, “Data Format” on page 874, “Default Selections” on page 878, “Deselect Text” on page 879, “Direction & Justification” on page 880, “Display Value” on page 882, “Font” on page 888,

"Foreground Color" on page 889, *"From Text"* on page 890, *"Header Text"* on page 893, *"Hide Adornments"* on page 893, *"Highest Value Text"* on page 894, *"Insert Text"* on page 896, *"Lowest Value Text"* on page 904, *"Multi-Select"* on page 913, *"Name"* on page 914, *"Parameter"* on page 922, *"Pre-populate"* on page 926, *"Properties"* on page 927, *"Query"* on page 929, *"Range"* on page 929, *"Relative Alignment"* on page 930, *"Remove Text"* on page 931, *"Render Variable"* on page 932, *"Required"* on page 934, *"Results Deselect All Text"* on page 935, *"Results Select All Text"* on page 935, *"Rows Per Page"* on page 937, *"Select UI"* on page 939, *"Size & Overflow"* on page 945, *"Sorting"* on page 947, *"Static Choices"* on page 949, *"Style Variable"* on page 950, *"To Text"* on page 958, *"Use Value"* on page 963, *"Visible"* on page 966

Variable

A report variable.

Properties of Variable

"Name" on page 915, *"Report Expression"* on page 934, *"Type"* on page 959

Variable Text Item

A text item that renders the value of an active report variable.

Properties of Variable Text Item

"Active Report Variable" on page 846, *"Background Color"* on page 854, *"Border"* on page 857, *"Box Type"* on page 859, *"Classes"* on page 865, *"Data Format"* on page 874, *"Direction & Justification"* on page 880, *"Display for Orientation"* on page 881, *"Display Values"* on page 883, *"Font"* on page 888, *"Foreground Color"* on page 889, *"Margin"* on page 904, *"Padding"* on page 921, *"Relative Alignment"* on page 930, *"Render Variable"* on page 932, *"Size & Overflow"* on page 945, *"Spacing & Breaking"* on page 948, *"Visible"* on page 966

Visualization

A visual representation of data.

Properties of Visualization

"Alternate Text" on page 848, *"Animation Effect"* on page 849, *"Clickable Regions"* on page 866, *"Data Format"* on page 874, *"Display for Orientation"* on page 881, *"Height"* on page 893, *"Name"* on page 914, *"Render Variable"* on page 932, *"Use Embedded Data"* on page 961, *"Width"* on page 967

Win-Loss Chart

A microchart in which the value of each column is either 1 or -1, often denoting a win or a loss.

Properties of Win-Loss Chart

"Allow Ties" on page 848, *"Axis Line"* on page 852, *"Background Color"* on page 854, *"Background Effects"* on page 855, *"Border"* on page 857, *"Border Color"* on page 858, *"Borders"* on page 858, *"Box Type"* on page 859, *"Chart Orientation"* on page 863, *"Classes"* on page 865, *"Conditional Styles"* on page 868, *"Drill-Through Definitions"* on page 883, *"Font"* on page 888, *"Footer"* on page 889, *"Foreground Color"* on page 889, *"Loss Color"* on page 904, *"Margin"* on page 904, *"Master*

Detail Relationships” on page 907, “Maximum Hotspots” on page 908, “Name” on page 914, “No Data Contents” on page 916, “Padding” on page 921, “Pagination” on page 921, “Query” on page 928, “Relative Alignment” on page 930, “Render Page when Empty” on page 931, “Render Variable” on page 932, “Size & Overflow” on page 945, “Style Variable” on page 950, “Subtitle” on page 950, “Suppression” on page 951, “Title” on page 955, “Tooltips” on page 957, “Visible” on page 966, “Win Color” on page 967, “Win-Loss Threshold” on page 967

Win-Loss Measure

The measure for a win-loss chart.

Properties of Win-Loss Measure

“Aggregate Function” on page 847, “Custom Label” on page 873, “Data Format” on page 874, “Expression” on page 886, “Hierarchy” on page 894, “Hierarchy Unique Name” on page 894, “Level” on page 902, “Level Unique Name” on page 902, “Member” on page 910, “Member Unique Name” on page 911, “Property Unique Name” on page 928, “Rollup Aggregate Function” on page 936, “Root Members Only” on page 936, “Set Definition” on page 940, “Set Sorting” on page 940

X Axis

The horizontal numeric axis for the chart, including labels, titles, range, and scale.

Properties of X Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

X Axis

The x-axis on a scatter or bubble chart.

Properties of X Axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

X Axis

The axis line for an ordinal, or non-numeric, axis.

Properties of X Axis

“Allow 45° Rotation” on page 847, “Allow 90° Rotation” on page 848, “Allow Skip” on page 848, “Allow Stagger” on page 848, “Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Display Frequency” on page 882, “Drill-Through Definitions” on page 883, “First Label Index” on page 887, “Gridlines” on page 892, “Label Control” on page 899, “Maximum Truncation Characters” on page 909, “Minor Gridlines” on page 912, “Truncation” on page 958, “Truncation Text” on page 959

X Axis Measure

The measure for the horizontal axis of a scatter chart or bubble chart.

Properties of X Axis Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Style Variable” on page 950

Y1 Axis

The numeric axis of a metrics chart, or the primary numeric axis of a combination chart.

Properties of Y1 Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Y2 Axis

The secondary numeric axis of a combination chart.

Properties of Y2 Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Y Axis

The vertical numeric axis for the chart, including labels, titles, range, and scale.

Properties of Y Axis

“Axis Labels” on page 852, “Axis Line” on page 852, “Axis Title” on page 853, “Axis Title” on page 853, “Classes” on page 865, “Data Format” on page 874, “Gridlines” on page 892, “Include Zero For Auto Scale” on page 896, “Maximum Value” on page 910, “Minimum Value” on page 912, “Minor Gridlines” on page 912, “Scale” on page 937, “Scale Interval” on page 938, “Use Same Range For All Instances” on page 962

Y Axis

The y-axis on a scatter or bubble chart.

Properties of Y Axis

“Axis Labels” on page 852, “Axis Line” on page 853, “Axis Range” on page 853, “Axis Title” on page 854, “Axis Title” on page 853, “Gridlines” on page 892, “Minor Gridlines” on page 912, “Number of Minor Intervals” on page 918

Y Axis

The axis line for an ordinal, or non-numeric, axis.

Properties of Y Axis

“Allow 45° Rotation” on page 847, *“Allow 90° Rotation”* on page 848, *“Allow Skip”* on page 848, *“Allow Stagger”* on page 848, *“Axis Labels”* on page 852, *“Axis Line”* on page 852, *“Axis Title”* on page 853, *“Axis Title”* on page 853, *“Classes”* on page 865, *“Display Frequency”* on page 882, *“Drill-Through Definitions”* on page 883, *“First Label Index”* on page 887, *“Gridlines”* on page 892, *“Label Control”* on page 899, *“Maximum Truncation Characters”* on page 909, *“Minor Gridlines”* on page 912, *“Truncation”* on page 958, *“Truncation Text”* on page 959

Y Axis Measure

The measure for the vertical axis of a scatter chart or bubble chart.

Properties of Y Axis Measure

“Conditional Styles” on page 868, *“Custom Label”* on page 873, *“Data Format”* on page 874, *“Style Variable”* on page 950

Z Axis

The third numeric axis for a three-dimensional scatter chart, including labels, titles, range, and scale.

Properties of Z Axis

“Axis Labels” on page 852, *“Axis Line”* on page 852, *“Axis Title”* on page 853, *“Axis Title”* on page 853, *“Classes”* on page 865, *“Data Format”* on page 874, *“Gridlines”* on page 892, *“Include Zero For Auto Scale”* on page 896, *“Maximum Value”* on page 910, *“Minimum Value”* on page 912, *“Minor Gridlines”* on page 912, *“Scale”* on page 937, *“Scale Interval”* on page 938, *“Use Same Range For All Instances”* on page 962

Z Axis

The vertical numeric axis for a three-dimensional combination chart, including labels, titles, range, and scale.

Properties of Z Axis

“Axis Labels” on page 852, *“Axis Line”* on page 852, *“Axis Title”* on page 853, *“Axis Title”* on page 853, *“Classes”* on page 865, *“Data Format”* on page 874, *“Gridlines”* on page 892, *“Include Zero For Auto Scale”* on page 896, *“Maximum Value”* on page 910, *“Minimum Value”* on page 912, *“Minor Gridlines”* on page 912, *“Scale”* on page 937, *“Scale Interval”* on page 938, *“Use Same Range For All Instances”* on page 962

Z Axis Measure

The measure for the third axis of a three-dimensional scatter chart.

Properties of Z Axis Measure

“Conditional Styles” on page 868, “Custom Label” on page 873, “Data Format” on page 874, “Style Variable” on page 950

Report Studio Properties

The following is a list of properties available in the lower left pane of IBM® Cognos® Report Studio.

3-D Viewing Angle

Specifies the 3-D viewing angle of the chart.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772

Absolute Position

Specifies that the legend will be positioned absolutely, by setting its pixel position.

Applies to

“Legend” on page 806

Across

Sets the number of times across, or horizontally, that the contents of the object may be rendered.

The default value depends on the setting of the **Repeater Direction** property. If it is set to **Left to right, top to bottom**, the default is one. If it is set to **Top to bottom, left to right**, the default is 20.

Applies to

“Repeater Table” on page 831, “Static Repeater Table” on page 835

Active Dot Color

Specifies the color of the dot of the selected value in the iterator.

Applies to

“Iterator Label Area” on page 805

Active Report Variable

Specifies the variable to use in the control.

Applies to

“Variable Text Item” on page 842

Actual Measure

The measure that is used to show values as a percentage of a summary.

Applies to

“Percentaged Measure” on page 823

Aggregate Data Item

Specifies the data item that is used to calculate the summary or aggregation.

Applies to

“Dimensional Edge Summary” on page 798, “Edge Summary” on page 799, “List Summary” on page 813

Aggregate Function

Specifies the type of aggregation to apply. The Automatic setting means that the application groups or summarizes based on the data type. The Summarize setting means that any setting found in the model will be used to determine the type of aggregation. The default setting is Automatic.

Applies to

“Area” on page 773, “Bar” on page 774, “Category Baseline” on page 781, “Chart Node Member” on page 782, “Chart Text Item” on page 782, “Chart Text Item” on page 783, “Colored Region” on page 785, “Colored Region” on page 785, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Cumulation Line Label” on page 792, “Data Item” on page 795, “Gauge Axis” on page 800, “HTML Item” on page 802, “Image” on page 803, “Line” on page 808, “List Cell” on page 809, “List Column Body” on page 810, “List Column Title” on page 811, “Map Location” on page 814, “Map Location” on page 815, “Map Refinement Location” on page 815, “Map Refinement Location” on page 815, “Marker” on page 816, “Numeric Baseline” on page 820, “Rich Text Item” on page 832, “Scatter Marker” on page 834, “Text Item” on page 839, “Total Column” on page 840, “Win-Loss Measure” on page 843

Aggregation Method

Specifies the type of summary or aggregation that is applied.

Applies to

“Dimensional Edge Summary” on page 798, “Edge Summary” on page 799

Aggregation Method

Specifies the type of summary or aggregation that is applied.

Applies to

“List Summary” on page 813

Allow 45° Rotation

Specifies whether the labels can be rotated 45 degrees if the labels are long.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

Allow 90° Rotation

Specifies whether the labels can be rotated 90 degrees if the labels are long.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

Allow Skip

Specifies whether some labels can be skipped if they are long.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

Allow Sorting

Specifies whether sorting is allowed for the column when the active report is executed. You can set the value of this property for multiple objects simultaneously by first control+clicking the items in the report.

Applies to

“List Column” on page 809, “List Column Body” on page 810, “List Column Title” on page 811

Allow Stagger

Specifies whether the labels can be staggered if they are long.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

Allow Ties

Specifies whether data values that equal the Win Loss Threshold property are converted to zero and mapped on the zero line.

Applies to

“Win-Loss Chart” on page 842

Alternate Text

Specifies a text alternative for non-text objects such as images and charts. Use to make reports accessible for people who use screen readers.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 785, “Combination Chart” on page 786, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “Image” on page 803, “Map” on page 814

page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Metric Studio Diagram” on page 818, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Polar Chart” on page 825, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Scatter Chart” on page 833, “Scatter Chart” on page 833, “Visualization” on page 842

Angular Axis

Specifies whether the axis is rendered.

Applies to

“Polar Chart” on page 825

Animate

Specifies whether to animate the movement of the slider.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Animation Effect

Specifies the effect that is used to animate data changes in the visualization.

Applies to

“Visualization” on page 842

Application

Specifies if the condition will be applied before or after aggregation and summarization. When true, the condition will apply to the summarized rows, and a fact, or aggregate, in the expression will be interpreted as the aggregated value of the summarized rows. When false, the condition will apply to the detail database rows from the tabular result set prior to aggregation or summarization, and a fact, or aggregate, in the expression will be interpreted as the individual database value before it has been summarized. This property has no effect on OLAP data sources, on references to non-aggregate items, or when automatic summarization is disabled.

Applies to

“Detail Filter” on page 798

Application Drill-Through

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Button” on page 778, “Button Bar” on page 778, “Check Box Group” on page 784, “Combination Chart” on page 785, “Combination Chart” on page 786, “Continuous Values Slider” on page 787, “Crosstab” on page 788, “Data Button Bar” on page 793, “Data Check Box Group” on page 793, “Data Container” on page 793, “Data

Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Toggle Button Bar" on page 840

Apply Single Class

Specifies whether to apply all of the classes defined or only one class. When set to Yes, the last class that was applied is used.

For example, if you applied a class to a crosstab intersection and another class to the member fact cells of a crosstab row, the class applied to the intersection is the last class applied to the fact cells. For information about the order in which classes are applied, see the topic Create and Modify Report and Object Styles.

This property is set to Yes when you are upgrading a report so that the upgraded report will look the same as the original report. This is because objects in reports created using earlier versions of IBM[®] Cognos[®] Business Intelligence support only one class.

Applies to

"Crosstab Fact Cells" on page 789

Area Shape

Specifies the shape of an area in an area chart.

Applies to

"Area" on page 773

Auto Font Size

Specifies whether to automatically resize the font to fit the labels.

Applies to

"Axis Labels" on page 774, "Axis Title" on page 774, "Legend" on page 807, "Legend Title" on page 807

Auto Group & Summarize

Specifies whether the application will apply suggested aggregate functions to aggregate data items and group all non-aggregate data items, producing groups and summary rows. If it is set to No, detail rows will be rendered.

Applies to

“Query” on page 828

Auto-Sort

When running the report, specifies whether to automatically sort based on data type.

Applies to

“Query” on page 828

Auto-Submit

Specifies whether the application submits the prompt page automatically, as soon as a value is changed.

Applies to

“Value Prompt” on page 841

Auto Truncation

Specifies whether to allow truncation of text.

Applies to

“Legend” on page 806

Avoid Division by Zero

Specifies whether the application will return a null value when it encounters a division by zero. This property applies only to relational data sources.

Applies to

“Query” on page 828

Avoid Label Collision

Controls how labels are arranged. If set to false, the chart uses the default positions. If set to true, the chart uses a different layout to avoid label collision. To keep existing reports unchanged, set this property to false.

Applies to

“Pie Chart” on page 823

Axis Angles

Specifies the start and end angle and the direction of the gauge axis. All angles are measured in degrees starting from the three o'clock position.

Applies to

“Gauge Axis” on page 800

Axis Assignment

Specifies the numeric axis to use. This property applies only to legacy charts.

Applies to

"Area" on page 773, "Bar" on page 774, "Baseline" on page 775, "Line" on page 808, "Marker" on page 816

Axis Assignment

Specifies which numeric axis to use.

Applies to

"Baseline" on page 775

Axis Justification

Specifies whether the data labels are aligned to the inside or outside of the gauge axis.

Applies to

"Gauge Axis" on page 800

Axis Labels

Specifies whether to show or hide axis labels.

Applies to

"Category axis" on page 780, "Cumulation Line" on page 792, "Gauge Axis" on page 800, "Numeric Axis" on page 820, "Pareto Bars" on page 822, "Primary Axis" on page 826, "Primary Bottom Axis" on page 826, "Secondary Axis" on page 834, "Secondary Bottom Axis" on page 834, "X Axis" on page 843, "Y Axis" on page 844

Axis Labels

Specifies whether to show or hide axis labels. This property applies only to legacy charts.

Applies to

"Angular Axis" on page 773, "Category Axis" on page 780, "Cumulation Line Axis" on page 792, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Y Axis" on page 845, "Z Axis" on page 845, "Z Axis" on page 845

Axis Line

Specifies the properties of the axis line in a chart. This property applies only to legacy charts.

Applies to

"Angular Axis" on page 773, *"Category Axis"* on page 780, *"Cumulation Line Axis"* on page 792, *"Numerical Axis"* on page 820, *"Numerical Axis"* on page 820, *"Radial Axis"* on page 829, *"Win-Loss Chart"* on page 842, *"X Axis"* on page 843, *"X Axis"* on page 843, *"Y1 Axis"* on page 844, *"Y2 Axis"* on page 844, *"Y Axis"* on page 844, *"Y Axis"* on page 845, *"Z Axis"* on page 845, *"Z Axis"* on page 845

Axis Line

Specifies the properties of the axis line in a chart.

Applies to

"Category axis" on page 780, *"Cumulation Line"* on page 792, *"Numeric Axis"* on page 820, *"Pareto Bars"* on page 822, *"Primary Axis"* on page 826, *"Primary Bottom Axis"* on page 826, *"Secondary Axis"* on page 834, *"Secondary Bottom Axis"* on page 834, *"X Axis"* on page 843, *"Y Axis"* on page 844

Axis Line

Specifies the properties of the gauge axis line in a gauge chart.

Applies to

"Gauge Axis" on page 800

Axis Range

Specifies the appearance of the range of values on an axis.

Applies to

"Cumulation Line" on page 792, *"Gauge Axis"* on page 800, *"Numeric Axis"* on page 820, *"Pareto Bars"* on page 822, *"Primary Axis"* on page 826, *"Primary Bottom Axis"* on page 826, *"Secondary Axis"* on page 834, *"Secondary Bottom Axis"* on page 834, *"X Axis"* on page 843, *"Y Axis"* on page 844

Axis Title

Specifies whether an axis title is rendered.

Applies to

"Angular Axis" on page 773, *"Category Axis"* on page 780, *"Category axis"* on page 780, *"Cumulation Line"* on page 792, *"Numerical Axis"* on page 820, *"Numerical Axis"* on page 820, *"Numerical Axis"* on page 820, *"Pareto Bars"* on page 822, *"Primary Axis"* on page 826, *"Primary Bottom Axis"* on page 826, *"Radial Axis"* on page 829, *"Secondary Axis"* on page 834, *"Secondary Bottom Axis"* on page 834, *"X Axis"* on page 843, *"X Axis"* on page 843, *"X Axis"* on page 843, *"Y1 Axis"* on page 844, *"Y2 Axis"* on page 844, *"Y Axis"* on page 844, *"Y Axis"* on page 844, *"Y Axis"* on page 845, *"Z Axis"* on page 845, *"Z Axis"* on page 845

Axis Title

Specifies whether an axis title will be rendered. This property applies only to legacy charts.

Applies to

"Angular Axis" on page 773, *"Category Axis"* on page 780, *"Cumulation Line Axis"* on page 792, *"Gauge Chart"* on page 801, *"Map"* on page 814, *"Numerical Axis"* on page 820, *"Numerical Axis"* on page 820, *"Pie Chart"* on page 823, *"Radial Axis"* on page 829, *"X Axis"* on page 843, *"X Axis"* on page 843, *"Y1 Axis"* on page 844, *"Y2 Axis"* on page 844, *"Y Axis"* on page 844, *"Y Axis"* on page 845, *"Z Axis"* on page 845, *"Z Axis"* on page 845

Axis Title

Specifies whether to show the axis titles in a chart.

Applies to

"Category axis" on page 780, *"Cumulation Line"* on page 792, *"Gauge Axis"* on page 800, *"Numeric Axis"* on page 820, *"Pareto Bars"* on page 822, *"Pie Chart"* on page 824, *"Primary Axis"* on page 826, *"Primary Bottom Axis"* on page 826, *"Secondary Axis"* on page 834, *"Secondary Bottom Axis"* on page 834, *"X Axis"* on page 843, *"Y Axis"* on page 844

Background Color

Specifies the background color for the object.

Applies to

"3-D Combination Chart" on page 772, *"3-D Scatter Chart"* on page 772, *"Block"* on page 776, *"Bubble Chart"* on page 776, *"Caption"* on page 779, *"Chart Body"* on page 781, *"Chart Body"* on page 781, *"Combination Chart"* on page 785, *"Conditional Block"* on page 787, *"Conditional Block"* on page 787, *"Context Item Text"* on page 787, *"Crosstab"* on page 788, *"Crosstab Columns"* on page 788, *"Crosstab Columns"* on page 788, *"Crosstab Corner"* on page 789, *"Crosstab Fact Cells"* on page 789, *"Crosstab Intersection"* on page 789, *"Crosstab Member Fact Cells"* on page 790, *"Crosstab Node Member"* on page 790, *"Crosstab Rows"* on page 790, *"Crosstab Rows"* on page 791, *"Crosstab Space"* on page 791, *"Crosstab Summary"* on page 791, *"Date"* on page 796, *"Field Set"* on page 800, *"Gauge Chart"* on page 801, *"Hyperlink"* on page 802, *"Hyperlink Button"* on page 803, *"Image"* on page 803, *"Legend"* on page 806, *"List"* on page 808, *"List Cell"* on page 809, *"List Column"* on page 809, *"List Column Body"* on page 810, *"List Columns"* on page 810, *"List Columns"* on page 810, *"List Columns Body Style"* on page 811, *"List Columns Title Style"* on page 811, *"List Column Title"* on page 811, *"List Footer"* on page 811, *"List Header"* on page 812, *"List Row"* on page 813, *"List Row Cells Style"* on page 813, *"List Summary"* on page 814, *"Map"* on page 814, *"Marimekko Chart"* on page 815, *"Metrics Range Chart"* on page 818, *"Note Content"* on page 819, *"Page"* on page 821, *"Page Break Text"* on page 821, *"Page Number"* on page 821, *"Pareto Chart"* on page 823, *"Pie Chart"* on page 823, *"Polar Chart"* on page 825, *"Progressive Chart"* on page 827, *"Prompt Button"* on page 827, *"Radar Chart"* on page 828, *"Repeater Table"* on page 831, *"Repeater Table Cell"* on page 831, *"Repeater Table Cell"* on page 832, *"Row Number"* on page 832, *"Row Number"* on page 832, *"Scatter Chart"* on page 833, *"Static Repeater Table"* on page 835, *"Table"* on page 837, *"Table Cell"* on page 837, *"Table of Contents"* on page 837, *"Table of Contents Entry"* on page 838, *"Table Row"* on page 838, *"Text Box Prompt"* on page 838, *"Text Item"* on page 839, *"Time"* on page 839, *"Value Prompt"* on page 841, *"Variable Text Item"* on page 842, *"Win-Loss Chart"* on page 842

Background Effects

Specifies the characteristics of a background. You can add background effects only to objects that have a fixed height and width; if a percentage size is given, the effects are ignored.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Chart Body" on page 781, "Chart Footer" on page 781, "Chart Footer" on page 781, "Chart Subtitle" on page 782, "Chart Subtitle" on page 782, "Chart Title" on page 783, "Chart Title" on page 783, "Class" on page 784, "Combination Chart" on page 785, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional Block" on page 787, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Equation Label" on page 799, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Legend" on page 807, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Note" on page 819, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Table Cell" on page 837, "Win-Loss Chart" on page 842

Background Image

Specifies an image to be used as the background for the object.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Caption" on page 779, "Chart Body" on page 781, "Chart Body" on page 781, "Combination Chart" on page 785, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Field Set" on page 800, "Gauge Chart" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Legend" on page 806, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815

on page 815, "Metrics Range Chart" on page 818, "Page" on page 821, "Page Break Text" on page 821, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Table Row" on page 838, "Text Item" on page 839, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Bar, Line, or Area Index

Specifies which combination object to use when calculating the position. When multiple series exist, the index of 0 represents the topmost bar, line, or area in the Series drop zone, the index of 1 represents the second one, and so on.

Applies to

"Baseline" on page 775, "Baseline" on page 775, "Marker" on page 816

Bar Shape

Specifies the shape of the bars in a bar chart.

Applies to

"Bar" on page 774

Bar Width

Specifies the width of the bars as a percentage of the space available. For example, if you specify 50 percent, the bar takes up half of the space available and the bars are separated from each other. If you specify 100 percent, there is no space between the bars. The default value is 80.

Applies to

"Bar" on page 774, "Pareto Chart" on page 822, "Progressive Chart" on page 826

Based on

Specifies the series data item on which the trendline is based.

Applies to

"Trendline" on page 841

Baselines

Adds reference lines to a chart based on numeric or statistical values, calculations, or layout calculations. This property applies only to legacy charts.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Combination Chart" on page 785, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Polar

Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833

Bevel

Specifies whether the chart appears with a beveled edge.

Applies to

"Bar" on page 774, "Bullet Chart" on page 777, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Progressive Chart" on page 826

Block Variable

Specifies a variable based on which the block can be conditionally rendered.

Applies to

"Conditional Block" on page 787, "Conditional Block" on page 787

Border

Specifies the width, style, and color for the border of the object.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Caption" on page 779, "Combination Chart" on page 785, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page" on page 821, "Page Break Text" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Border Color

Specifies the color of the border rendered around specific chart elements, such as bars, stacks, areas, points, or pie slices.

Applies to

"3-D Area" on page 771, "3-D Bar" on page 771, "3-D Line" on page 772, "3-D Scatter Chart" on page 772, "Area" on page 773, "Area" on page 773, "Bar" on page 774, "Bar" on page 774, "Bubble Chart" on page 776, "Display Layer" on page 798, "Gauge Chart" on page 801, "Legend" on page 806, "Line" on page 808, "Marimekko Chart" on page 815, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Point Layer" on page 825, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Region Layer" on page 830, "Scatter Chart" on page 833, "Win-Loss Chart" on page 842

Border Color

Specifies the color of the borders around the chart body in a pie chart.

Applies to

"Pie Chart" on page 824

Borders

Specifies whether borders are rendered around specific chart elements, such as bars, stacks, areas, points, or pie slices.

Applies to

"3-D Area" on page 771, "3-D Bar" on page 771, "3-D Line" on page 772, "3-D Scatter Chart" on page 772, "Area" on page 773, "Bar" on page 774, "Bubble Chart" on page 776, "Display Layer" on page 798, "Gauge Chart" on page 801, "Legend" on page 806, "Line" on page 808, "Marimekko Chart" on page 815, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Point Layer" on page 825, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Region Layer" on page 830, "Scatter Chart" on page 833, "Win-Loss Chart" on page 842

Borders

Specifies whether borders appear around the chart body.

Applies to

"Area" on page 773, "Bar" on page 774, "Pareto Chart" on page 822, "Progressive Chart" on page 826

Borders

Specifies whether borders appear around the chart body in a pie chart.

Applies to

"Pie Chart" on page 824

Bottom Position

Specifies the position of the bottom edge of the colored region.

Applies to

“Colored Region” on page 785

Bottom Position (px)

Specifies the pixel position of the bottom edge of the note measured from the bottom of the chart.

Applies to

“Note” on page 819

Bottom Position (px)

Specifies the pixel position of the bottom edge of the legend measured from the bottom of the chart.

Applies to

“Legend” on page 806

Box Type

Each report object has a container, or box, which can be set to display the contents (the default) or not. This property specifies whether to override the default box type for the object.

When set to None, the object is not rendered and its space is not reserved in the report. You could use this property to remove an object completely from a report when a specific condition is met. When set to Inline, you can insert other objects on the same line as the object. When set to Block, you can insert other objects only on the lines above and below the object.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Block” on page 776, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 785, “Combination Chart” on page 786, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab” on page 788, “Field Set” on page 800, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “Hyperlink” on page 802, “Image” on page 803, “List” on page 808, “List Summary” on page 814, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Page Break Text” on page 821, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Polar Chart” on page 825, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Repeater Table” on page 831, “Scatter Chart” on page 833, “Scatter Chart” on page 833, “Static Repeater Table” on page 835, “Table” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838, “Text Item” on page 839, “Variable Text Item” on page 842, “Win-Loss Chart” on page 842

Box Type

Each report object has a container, or box, which can be set to display the contents (the default) or not. This property specifies whether to override the default box type for the object. When set to None, the object is not rendered and its space is not reserved in the report.

Applies to

“Axis Title” on page 774, “Axis Title” on page 774, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Chart Footer” on page 781, “Chart Footer” on page 781, “Chart Subtitle” on page 782, “Chart Subtitle” on page 782, “Chart Title” on page 783, “Chart Title” on page 783, “Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Legend” on page 806, “Legend Title” on page 807, “Legend Title” on page 807, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “Marker” on page 816, “Marker” on page 816, “Note Content” on page 819, “Regression Line” on page 831, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Select & Search Prompt” on page 834, “Table Cell” on page 837, “Table Row” on page 838, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Value Prompt” on page 841

Bubble Size

Specifies how the bubble size is computed. Minimum-Based assigns the smallest bubble to the minimum data value. Zero-Based computes the bubble size relative to 0. This option is compatible with Excel 2002. Zero-Based with Negatives shows negative bubbles as hollow, and the bubbles get larger as they get further from 0. This option is compatible with Excel 2007.

Applies to

“Bubble Chart” on page 776

Bubble Size

Specifies how bubble sizes are calculated on a bubble chart.

Applies to

“Bubble Chart” on page 777

Bullet Indicators

Specifies the size and shape of the bullet chart data marker that represents the actual value.

Applies to

“Bullet Chart” on page 777

Button Definition

Defines the button in the control.

Applies to

“Button” on page 778

Button Gap

Specifies the gap between buttons in the button bar.

Applies to

“Button Bar” on page 778, “Data Button Bar” on page 793, “Data Toggle Button Bar” on page 796, “Toggle Button Bar” on page 840

Buttons Definition

Defines the buttons in the button bar.

Applies to

“Button Bar” on page 778, “Toggle Button Bar” on page 840

Button Width

Specifies the width of buttons in the button bar.

Applies to

“Button Bar” on page 778, “Data Button Bar” on page 793, “Data Toggle Button Bar” on page 796, “Toggle Button Bar” on page 840

Button Width

Specifies the width of the button.

Applies to

“Iterator First” on page 805, “Iterator Last” on page 805, “Iterator Next” on page 805, “Iterator Previous” on page 805

Calculation Intersection

Specifies whether to suppress calculated values that occur at the intersection of a data source calculated member and a query-defined calculated member. When values are suppressed, the characters specified for the Not Applicable characters data format appear in the cells.

Applies to

“Calculated Measure” on page 779, “Calculated Member” on page 779, “Data Item” on page 795, “Dimensional Edge Summary” on page 798, “Edge Summary” on page 799

Calendar Type

Specifies the type of calendar to show. The date values are mapped to the selected calendar before being formatted. The default value is inherited from the user's content language.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797

Caption

Specifies the caption for the level.

Applies to

"Level" on page 807

Caption

Specifies the caption.

Applies to

"Calculated Member" on page 779

Cardinality

Specifies the cardinality for this join operand.

Applies to

"Query Reference" on page 828

Cascade Source

Specifies the parameter whose value is used to filter the values displayed in this control.

Applies to

"Select & Search Prompt" on page 834, "Tree Prompt" on page 840, "Value Prompt" on page 841

Case Insensitive

Specifies whether to perform a case insensitive search by default.

Applies to

"Select & Search Prompt" on page 834

Catalog

Specifies the OLAP catalog.

Applies to

"MDX" on page 817

Category Axis

Specifies whether the axis is rendered.

Applies to

“Combination Chart” on page 785, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 823, “Progressive Chart” on page 827, “Radar Chart” on page 828

Category Baselines

Adds reference lines on the category axis of a chart based on numeric or statistical values, calculations, or layout calculations.

Applies to

“Category Baseline” on page 781, “Combination Chart” on page 786, “Pareto Chart” on page 822, “Progressive Chart” on page 826

Category Range

Specifies whether to show all categorical data in the visualization or categorical data that is filtered when users select values in an Active Report control. For example, when all data is selected, all legend items are always shown in the visualization, and the color of each legend item stays the same in the visualization. When a category is inserted on an axis, space is reserved on the axis for all data. When filtered data is selected, only the filtered data is shown in the legend and on axes. The color of each legend item can change when users select different values in the control.

Applies to

“Category” on page 780

Chart Orientation

Specifies whether the chart is rendered vertically or horizontally.

Applies to

“Bullet Chart” on page 777, “Combination Chart” on page 785, “Combination Chart” on page 786, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Win-Loss Chart” on page 842

Chart Type

Specifies whether the data may be rendered as either a bar, line, or area. This property applies only to legacy charts.

Applies to

“Area” on page 773, “Bar” on page 774, “Line” on page 808

Chart Type

Specifies whether the data may be rendered as either a bar, line, or area.

Applies to

"Area" on page 773, "Bar" on page 774, "Line" on page 808

Chart Type

Specifies whether the data may be rendered as either a bar, line or area.

Applies to

"3-D Area" on page 771, "3-D Bar" on page 771, "3-D Line" on page 772

Check Boxes Definition

Defines the check boxes in the check box group.

Applies to

"Check Box Group" on page 784

Choices Deselect All Text

Specifies the text for the link below the choices box that deselects all the items in the box. This property applies to all prompts with either multiple selections and ranges or multiple selections and search. The default link text is Deselect All.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Select & Search Prompt" on page 834, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Choices Select All Text

Specifies the text for the link below the choices box that selects all the items in the box. This property applies to all prompts with either multiple selections and ranges or multiple selections and search. The default link text is Select All.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Select & Search Prompt" on page 834, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Choices Text

Specifies the title that appears above the choices box when multiple selections are enabled. This property applies to the following prompt types: value, text box, date, date & time, time, interval, and select & search. The default title text is Choices.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Select & Search Prompt" on page 834, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Classes

Specifies a class to apply to the object. The class provides a default style. If you apply more than one class, the style properties from all classes are merged together when they are applied. However, if the classes have style properties in common, the style properties from the last class applied override those from previous classes.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Angular Axis” on page 773, “Axis Labels” on page 774, “Axis Title” on page 774, “Axis Title” on page 774, “Block” on page 776, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Caption” on page 779, “Category Axis” on page 780, “Chart Footer” on page 781, “Chart Footer” on page 781, “Chart Subtitle” on page 782, “Chart Subtitle” on page 782, “Chart Title” on page 783, “Chart Title” on page 783, “Combination Chart” on page 785, “Combination Chart” on page 786, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “Cumulation Line Axis” on page 792, “Date” on page 796, “Field Set” on page 800, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “Gauge Labels” on page 801, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803, “Legend” on page 806, “Legend” on page 807, “Legend Title” on page 807, “Legend Title” on page 807, “List” on page 808, “List Cell” on page 809, “List Column Body” on page 810, “List Column Title” on page 811, “List Summary” on page 814, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Note Content” on page 819, “Numerical Axis” on page 820, “Numerical Axis” on page 820, “Page” on page 821, “Page Body” on page 821, “Page Break Text” on page 821, “Page Footer” on page 821, “Page Header” on page 821, “Page Number” on page 821, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Pie Labels” on page 824, “Polar Chart” on page 825, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Prompt Button” on page 827, “Radar Chart” on page 828, “Radial Axis” on page 829, “Repeater Table” on page 831, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Row Number” on page 832, “Row Number” on page 832, “Scatter Chart” on page 833, “Scatter Chart” on page 833, “Static Repeater Table” on page 835, “Table” on page 837, “Table Cell” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838, “Table Row” on page 838, “Text Item” on page 839, “Time” on page 839, “Variable Text Item” on page 842, “Win-Loss Chart” on page 842, “X Axis” on page 843, “X Axis” on page 843, “Y1 Axis” on page 844, “Y2 Axis” on page 844, “Y Axis” on page 844, “Y Axis” on page 845, “Z Axis” on page 845, “Z Axis” on page 845

Clickable Region

Specifies whether to make the object clickable when the active report is executed. You can set the value of this property for multiple objects simultaneously by first control+clicking the items in the report.

Applies to

“Crosstab Fact Cells” on page 789, “List Column” on page 809, “List Column Body” on page 810, “List Column Title” on page 811, “List Row” on page 813

Clickable Region

Specifies whether to make the object clickable. When (Default) is selected, the value is inherited from the Clickable Regions property of the parent object.

Applies to

"Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Space" on page 791, "Crosstab Summary" on page 791

Clickable Regions

Specifies which areas of the data container are clickable. For some data containers, if you select to make parts clickable, you can further refine which areas are clickable with the Clickable Region property.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "List" on page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835

Clickable Regions

Specifies which areas of the visualization are clickable. Visualization as a Whole makes the entire visualization the clickable region. Visualization Intersections makes each element in the visualization clickable.

Applies to

"Visualization" on page 842

Clock Mode

Specifies whether the arms of the clock move.

Applies to

"Date & Time Prompt" on page 796, "Time Prompt" on page 839

Color by Value

Specifies how color by value is rendered in a chart.

Applies to

"Bubble Chart" on page 777, "Color by Value Measure" on page 785, "Scatter Chart" on page 833

Colored Regions

Specifies rectangular colored regions drawn in the chart body to highlight parts of the chart. The regions are rendered behind the data markers. The regions are drawn in the same order that they appear in this property. The first region is drawn first, on the bottom, and the last region is drawn on top of the other regions.

Applies to

“Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 786, “Pareto Chart” on page 822, “Progressive Chart” on page 826, “Scatter Chart” on page 833

Color Legend Title

Specifies a title within the legend above the palette for the region color. If this object is not defined, no additional title is drawn. If no legend is drawn, this object is ignored. Styling for this object is inherited from the legend title.

Applies to

“Region Layer” on page 830

Color Legend Title

Specifies a title within the legend above the palette for the point color. If this object is not defined, no additional title is drawn. If no legend is drawn, this object is ignored. Styling for this object is inherited from the legend title.

Applies to

“Point Layer” on page 825

Column Coordinate

Uniquely identifies the column of a node member or spacer on an edge of the crosstab. You cannot modify this value.

Applies to

“Crosstab Intersection” on page 789

Column Titles

Specifies where or whether column titles may be rendered.

Applies to

“List” on page 808

Column Visibility

Specifies whether a column is visible when the active report is executed. You can set column visibility based on a condition.

Applies to

"List Column" on page 809, "List Column Body" on page 810, "List Column Title" on page 811

Combinations

Specifies which axes to show and the chart types to use for the series.

Applies to

"Combination Chart" on page 786

Component Reference

Specifies the layout object that is referenced. An object is a reusable component only if it has a name.

Applies to

"Layout Component Reference" on page 806

Component Reference

Specifies the layout object that is referenced. An object is a reusable component only if it has a name. You cannot modify this value.

Applies to

"Component Override" on page 786

Conditional Palette

Specifies a conditional palette for the chart.

Applies to

"Area" on page 773, "Bar" on page 774, "Bubble Chart" on page 777, "Gauge Axis" on page 800, "Line" on page 808, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Conditional Palette

Specifies a conditional palette for the chart. This property applies only to legacy charts.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Combination Chart" on page 785, "Gauge Chart" on page 801, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Point Layer" on page 825, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Region Layer" on page 830, "Scatter Chart" on page 833

Conditional Styles

Specifies the conditions and styles used to style the object.

Applies to

"Angular Measure" on page 773, "Axis Labels" on page 774, "Axis Title" on page 774, "Axis Title" on page 774, "Block" on page 776, "Bubble Measure" on page 777, "Bubble Measure" on page 777, "Caption" on page 779, "Chart Body" on page 781, "Chart Footer" on page 781, "Chart Footer" on page 781, "Chart Measure" on page 782, "Chart Subtitle" on page 782, "Chart Subtitle" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Chart Title" on page 783, "Chart Title" on page 783, "Color by Value Measure" on page 785, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Cumulation Label" on page 792, "Cumulation Line Axis" on page 792, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Default Measure" on page 797, "Default Measure" on page 797, "Display Layer" on page 798, "Equation Label" on page 799, "Equation Label" on page 799, "Field Set" on page 800, "Gauge Labels" on page 801, "Gauge Numerical Axis" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Interval Prompt" on page 804, "Label" on page 806, "Legend" on page 806, "Legend" on page 807, "Legend Title" on page 807, "Legend Title" on page 807, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Note" on page 819, "Note Content" on page 819, "Page" on page 821, "Page Break Text" on page 821, "Pie Labels" on page 824, "Point Layer" on page 825, "Point Measure" on page 825, "Point Size Measure" on page 825, "Prompt Button" on page 827, "Radial Measure" on page 829, "Region Layer" on page 830, "Region Measure" on page 830, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Select & Search Prompt" on page 834, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Table Row" on page 838, "Target Measure" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Tolerance Measure" on page 840, "Tree Prompt" on page 840, "Trendline Label" on page 841, "Value Prompt" on page 841, "Win-Loss Chart" on page 842, "X Axis Measure" on page 844, "Y Axis Measure" on page 845, "Z Axis Measure" on page 845

Connecting Lines

Specifies the properties of the lines that connect the segments of a stacked bar. This property is ignored for clustered bars. This property applies only to legacy charts.

Applies to

"Bar" on page 774, "Pareto Chart" on page 823, "Progressive Chart" on page 827

Connecting Lines

Specifies the properties of the lines that connect the segments of a stacked bar in a progressive chart. This property is ignored for clustered bars.

Applies to

“Progressive Chart” on page 826

Contained Text Direction

Specifies the direction of text contained in compound objects. Compound objects include charts, maps, and prompts. Contextual sets the text direction based on the first alphabetic character in the text. If the character belongs to a language that supports bidirectional script, the direction is right to left. Otherwise, the direction is left to right. Numbers and special characters do not influence the text direction. For example, if the text starts with a number followed by an Arabic character, the direction will be right to left. If the text starts with a number followed by a Latin character, the direction will be left to right.

Applies to

“Bubble Chart” on page 777, “Bullet Chart” on page 777, “Button” on page 778, “Button Bar” on page 778, “Check Box Group” on page 784, “Combination Chart” on page 786, “Continuous Values Slider” on page 787, “Data Button Bar” on page 793, “Data Check Box Group” on page 793, “Data Discrete Values Slider” on page 794, “Data Drop-Down List” on page 794, “Data Iterator” on page 795, “Data List Box” on page 795, “Data Radio Button Group” on page 795, “Data Tab Control” on page 796, “Data Toggle Button Bar” on page 796, “Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Discrete Values Slider” on page 798, “Drop-Down List” on page 799, “Gauge Chart” on page 800, “Interval Prompt” on page 804, “Iterator” on page 804, “List Box” on page 809, “Map” on page 814, “Pareto Chart” on page 822, “Pie Chart” on page 824, “Progressive Chart” on page 826, “Radio Button Group” on page 829, “Scatter Chart” on page 833, “Select & Search Prompt” on page 834, “Tab Control” on page 836, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Toggle Button Bar” on page 840, “Tree Prompt” on page 840, “Value Prompt” on page 841

Container Filter

Filters items in the control or container based on the value of a variable.

Applies to

“Check Box Group” on page 784, “Crosstab” on page 788, “Data Check Box Group” on page 793, “Data Container” on page 793, “Data Deck” on page 794, “Data Discrete Values Slider” on page 794, “Data Drop-Down List” on page 794, “Data Iterator” on page 795, “Data List Box” on page 795, “Data Radio Button Group” on page 795, “Deck” on page 797, “Discrete Values Slider” on page 798, “Drop-Down List” on page 799, “Iterator” on page 804, “List” on page 808, “List Box” on page 809, “Radio Button Group” on page 829, “Repeater Table” on page 831, “Static Repeater Table” on page 835

Container Select

Selects an item in the control or container based on the value of a variable. For example, selects a row in a list, selects a named list item from a drop-down list, or selects a named tab from a tab control.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button Bar" on page 778, "Check Box Group" on page 784, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Container" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Toggle Button Bar" on page 840

Contents Height

Specifies the relative height of list rows. This property is used only when a list has a height defined in the **Size and Overflow** property.

Stretched means that the rows will be evenly sized to fit in the list's height. This is default HTML behavior.

Minimal means that rows will take up only as much space as they need, and be compressed at the top of the list. You can position a footer at the bottom of the list by setting the **Push To Bottom** property to **Yes** on a footer object inside the list.

Applies to

"List" on page 808

Control Data Item Value

Specifies the data item used to populate the text item in the control.

Applies to

"Chart Text Item" on page 782, "Chart Text Item" on page 783, "Cumulation Line Label" on page 792, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Text Item" on page 839

Control Data Item Value

Specifies the data item used to populate the HTML item in the control.

Applies to

"HTML Item" on page 802, "Rich Text Item" on page 832

Control Data Item Value

Specifies the data item used to populate the image in the control.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Control Enable

Enables the control or container based on the value of a variable.

Applies to

“Button” on page 778, “Button Bar” on page 778, “Check Box Group” on page 784, “Continuous Values Slider” on page 787, “Data Button Bar” on page 793, “Data Check Box Group” on page 793, “Data Discrete Values Slider” on page 794, “Data Drop-Down List” on page 794, “Data Iterator” on page 795, “Data List Box” on page 795, “Data Radio Button Group” on page 795, “Data Toggle Button Bar” on page 796, “Discrete Values Slider” on page 798, “Drop-Down List” on page 799, “Iterator” on page 804, “List Box” on page 809, “Radio Button Group” on page 829, “Toggle Button Bar” on page 840

Cross Product Allowed

Specifies whether the query will be allowed to run if there is a cross join between database tables. This type of query generates a result set that includes all possible unique combinations of values from the first and second table. The default value is Deny.

Applies to

“Query” on page 828

Cumulation Axis

Specifies whether the axis for the cumulation line is rendered.

Applies to

“Cumulation Line” on page 792

Cumulation Label

Specifies whether a label for the cumulation line is rendered in the legend.

Applies to

“Cumulation Line” on page 792

Cumulation Label

Specifies the label that is shown with the cumulation line on a Pareto chart.

Applies to

“Cumulation Line” on page 792

Cumulative Line

Specifies whether the cumulation line is rendered.

Applies to

"Pareto Chart" on page 823

Cumulative Line

Specifies whether the cumulation line is rendered in a Pareto chart.

Applies to

"Pareto Chart" on page 822

Current Block

Specifies which block is currently being authored.

Applies to

"Conditional Block" on page 787, "Conditional Block" on page 787

Current Card

Specifies which card to show in the report.

Applies to

"Card" on page 780, "Deck" on page 797

Current Tab

Specifies which tab to show in the report.

Applies to

"Tab Control" on page 836

Custom Label

Overrides the default label for the data item.

Applies to

"Angular Measure" on page 773, "Bubble Measure" on page 777, "Chart Node Member" on page 782, "Default Measure" on page 797, "Point Measure" on page 825, "Point Size Measure" on page 825, "Radial Measure" on page 829, "Region Measure" on page 830, "Target Measure" on page 838, "Tolerance Measure" on page 840, "Win-Loss Measure" on page 843, "X Axis Measure" on page 844, "Y Axis Measure" on page 845, "Z Axis Measure" on page 845

Custom Label

Specifies the data source and format for a text item, such as a legend item, legend title, axis label, or axis title.

Applies to

"Bubble Measure" on page 777, "Bullet Measure" on page 778, "Chart Measure" on page 782, "Color by Value Measure" on page 785, "Default Measure" on page 797, "Target Measure" on page 838

Data Format

Specifies the data format of the object.

Applies to

"Angular Axis" on page 773, "Angular Measure" on page 773, "Axis Labels" on page 774, "Bubble Measure" on page 777, "Bubble Measure" on page 777, "Bullet Measure" on page 778, "Chart Measure" on page 782, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Color by Value Measure" on page 785, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Cumulation Label" on page 792, "Cumulation Line Axis" on page 792, "Date" on page 796, "Default Measure" on page 797, "Default Measure" on page 797, "Equation Label" on page 799, "Gauge Numerical Axis" on page 801, "Label" on page 806, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Node" on page 819, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Point Measure" on page 825, "Point Size Measure" on page 825, "Radial Axis" on page 829, "Radial Measure" on page 829, "Region Measure" on page 830, "Row Number" on page 832, "Row Number" on page 832, "Select & Search Prompt" on page 834, "Target Measure" on page 838, "Target Measure" on page 838, "Text Item" on page 839, "Time" on page 839, "Tolerance Measure" on page 840, "Total Column" on page 840, "Trendline Label" on page 841, "Value" on page 841, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Visualization" on page 842, "Win-Loss Measure" on page 843, "X Axis" on page 843, "X Axis Measure" on page 844, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Y Axis Measure" on page 845, "Z Axis" on page 845, "Z Axis" on page 845, "Z Axis Measure" on page 845

Data Format

Specifies the data format of the slider values.

Applies to

"Continuous Values Slider" on page 787, "Data Discrete Values Slider" on page 794, "Discrete Values Slider" on page 798

Data Item

Specifies a reference to a data item. You cannot modify this value.

Applies to

"Button Extra Item" on page 779, "Button Icon" on page 779, "Button Label" on page 779, "Card Extra Item" on page 780, "Card Label" on page 780, "Check Box Extra Item" on page 784, "Check Box Icon" on page 784, "Check Box Label" on page 784, "Crosstab Node Member" on page 790, "Crosstab Summary" on page 791, "Iterator Extra Item" on page 804, "Iterator Value Icon" on page 805, "Iterator Value Label" on page 805, "List Item Extra Item" on page 812, "List Item Icon" on page 812

page 812, “List Item Label” on page 812, “List Summary” on page 814, “Member Set” on page 818, “Radio Button Extra Item” on page 829, “Radio Button Icon” on page 830, “Radio Button Label” on page 830, “Tab Extra Item” on page 836, “Tab Icon” on page 837, “Tab Label” on page 837

Data Item

Specifies a reference to a data item.

Applies to

“Calculated Member” on page 779, “Fact” on page 800, “Key” on page 806, “Member Property” on page 817

Data Item Label

Specifies the data item label that defines the text to render.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839

Data Item Label

Specifies the data item label that defines the HTML to render.

Applies to

“HTML Item” on page 802, “Rich Text Item” on page 832

Data Item Label

Specifies the data item label that defines the URL.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Data Item Label

Specifies the data item label that defines the bookmark. The value used as the bookmark reference must match this value.

Applies to

“Bookmark” on page 776

Data Item Value

Specifies the data item value that defines the text to render.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839, “Total Column” on page 840

Data Item Value

Specifies the data item value that defines the HTML to render.

Applies to

“HTML Item” on page 802, “Rich Text Item” on page 832

Data Item Value

Specifies the data item value that defines the URL.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Data Item Value

Specifies the data item value that defines the bookmark. The value used as the bookmark reference must match this value.

Applies to

“Bookmark” on page 776

Data Item Value

Specifies the numeric position by using a data item value.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Data Item Value

If the marker or baseline is based on a query calculation, allows you to switch to a different data item.

Applies to

“Marker” on page 816, “Numeric Baseline” on page 820

Data Item Value

Specifies the numeric position of a data item.

Applies to

“Marker” on page 816

Data Item Value

Specifies the numeric position of a data item.

Applies to

“Marker” on page 816

Data Language

Specifies the language of the data.

Applies to

“Map” on page 814

Data Points

Specifies whether to show data points on the chart and how they are formatted.

Applies to

“Cumulation Line” on page 792

Data Source

Specifies the query data source.

Applies to

“MDX” on page 817, “SQL” on page 835

Days Text

Specifies the title that appears above the days box in interval prompts. The default title text is Days.

Applies to

“Interval Prompt” on page 804

Deck Cards Definition

The cards in the deck. Each card must have a corresponding row in the static data table.

Applies to

“Deck” on page 797

Default Card

Card to display when no other card matches the current variable state.

Applies to

“Data Deck” on page 794

Default Card

Card to display when no other card matches the current variable state.

Applies to

“Deck” on page 797

Default Measure

Specifies the default measure to use for a crosstab or chart. If the measures of the crosstab or chart cannot be determined by what is being rendered on the edges, then the default measure will be rendered.

Applies to

“Crosstab” on page 788

Default Selections

Specifies the collection of default selections for a prompt control.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841

Default Title

Specifies whether the default title is generated.

Applies to

“Axis Title” on page 774, “Legend Title” on page 807

Default Title

Specifies whether the default title may be generated.

Applies to

“Axis Title” on page 774, “Legend Title” on page 807

Define Contents

Overrides the content of the selected crosstab intersection. Use this property to hide measure values for individual cells or to define custom content.

Applies to

“Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790

Define Custom Grouping

Specifies the details of the data items in custom groups. Custom groups create groups of data items that are meaningful to you.

Applies to

“Custom Groups” on page 793

Define Member Sets

Specifies the set structure of a query. If it is not defined, it is assumed that each data item defines an unrelated set.

Applies to

“Query” on page 828

Definition

Specifies the expression to evaluate when filtering the data.

Applies to

“Detail Filter” on page 798, “Summary Filter” on page 836

Depth

Specifies the three-dimensional depth effect of the chart. A value of zero indicates a flat chart.

Applies to

“Combination Chart” on page 785, “Combination Chart” on page 786, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Progressive Chart” on page 826, “Progressive Chart” on page 827

Description

Specifies a description for the object, that is used to assist authoring.

Applies to

“Class” on page 784, “HTML Item” on page 802, “Metric Studio Diagram” on page 818, “Rich Text Item” on page 832

Deselect Text

Specifies the text for the link that deselects the items when the selection is optional. This property applies to the following prompt types: text box, date, date & time, time, interval, value, select & search, and tree. The default link text is Deselect.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Select & Search Prompt” on page 834, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841

Detail

Specifies whether the data item is to be used for calculating aggregates or not. When set to Yes, the data item is used to aggregate the lowest level details.

Applies to

“Calculated Member” on page 779, “Data Item” on page 795, “Explicit Member Set” on page 799, “Hierarchy Set” on page 802, “Level Set” on page 808, “Member” on page 817, “Member Children Set” on page 817, “Named Set” on page 819, “Set Expression” on page 835

Diagram Identifier

Identifies an impact or custom diagram in IBM® Cognos® Metric Studio. Copy the identifier from Metric Studio (Diagrams tab, View the Diagram Identifier button in the Actions column) and paste it in this property. IBM® Cognos® Report Studio decodes the identifier into an image URL. The diagram is imported as a static image.

Applies to

"Metric Studio Diagram" on page 818

Dial Face Fill

Specifies the fill color and effects for the dial face of a gauge chart.

Applies to

"Gauge Chart" on page 800

Dial Outline Color

Specifies the dial outline color in a gauge chart.

Applies to

"Gauge Chart" on page 801

Dictionary

Specifies the aliases to use when matching data values to feature names in the map.

Applies to

"Map" on page 814

Dimension

Specifies a reference to a dimension. You cannot modify this value.

Applies to

"Calculated Measure" on page 779, "Calculated Member" on page 779, "Dimensional Edge Summary" on page 798, "Explicit Member Set" on page 799, "Hierarchy Set" on page 802, "Intersection (Tuple)" on page 804, "Level Set" on page 808, "Measure" on page 817, "Member" on page 817, "Member Children Set" on page 817, "Member Property" on page 818, "Named Set" on page 819, "Percentaged Measure" on page 823, "Set Expression" on page 835

Direction & Justification

Specifies text flow properties, such as direction, writing mode, and justification.

Applies to

"Block" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button" on page 778, "Button Bar" on page 778, "Check Box Group" on page 784, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional

Block" on page 787, "Context Item Text" on page 787, "Continuous Values Slider" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Gauge Chart" on page 800, "Hyperlink" on page 802, "Interval Prompt" on page 804, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Map" on page 814, "Page" on page 821, "Page Break Text" on page 821, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Progressive Chart" on page 826, "Radio Button Group" on page 829, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Row Number" on page 832, "Scatter Chart" on page 833, "Select & Search Prompt" on page 834, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Toggle Button Bar" on page 840, "Tree Prompt" on page 840, "Value Prompt" on page 841, "Variable Text Item" on page 842

Display After Overall Header

Specifies whether the list page header is to be rendered after the overall header.

Applies to

"List Page Header" on page 813

Display for Orientation

Specifies the orientation of the mobile device required to display the object when the active report is viewed. For example, if Landscape is selected, the object is displayed only when the mobile device is held in a landscape orientation. The object is not displayed when the mobile device is rotated into a portrait orientation.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button" on page 778, "Button Bar" on page 778, "Check Box Group" on page 784, "Combination Chart" on page 785, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Continuous Values Slider" on page 787, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794,

"Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Date" on page 796, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page Break Text" on page 821, "Page Number" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater Table" on page 831, "Row Number" on page 832, "Row Number" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Table" on page 837, "Text Item" on page 839, "Time" on page 839, "Toggle Button Bar" on page 840, "Variable Text Item" on page 842, "Visualization" on page 842

Display Frequency

Specifies the frequency for which chart labels are to be rendered. If set to 3, for example, every third label will be rendered. This property applies only to legacy charts.

Applies to

"Category Axis" on page 780, "X Axis" on page 843, "Y Axis" on page 845

Display Milliseconds

Specifies whether to show the milliseconds. The format of the milliseconds can be controlled by selecting a specific format. This property is ignored if seconds are not rendered. The default value is inherited from the user's content language.

Applies to

"Date & Time Prompt" on page 796, "Interval Prompt" on page 804, "Time Prompt" on page 839

Display Seconds

Specifies whether to show the seconds. The format of the seconds can be controlled by selecting a specific format. The default value is inherited from the user's content language.

Applies to

"Date & Time Prompt" on page 796, "Interval Prompt" on page 804, "Time Prompt" on page 839

Display Value

Specifies the values rendered to the report user when the prompt is used. These values can be different than the ones that are actually used by the report.

Applies to

“Select & Search Prompt” on page 834, “Value Prompt” on page 841

Display Values

Specifies which value of the variable to show. If the variable returns multiple values, List shows the values separated by commas.

Applies to

“Variable Text Item” on page 842

Dot Color

Specifies the color of the dots of the values that are not selected in the iterator.

Applies to

“Iterator Label Area” on page 805

Down

Specifies the number of times down, or rows, that the frame contents may be rendered.

The default value depends on the setting of the **Repeater Direction** property. If it is set to **Left to right, top to bottom**, the default is 20. If it is set to **Top to bottom, left to right**, the default is one.

Applies to

“Repeater Table” on page 831, “Static Repeater Table” on page 835

Drill-Through Definitions

Specifies report-to-report drill-through definitions, bookmarks, and drill-through text for the object.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Axis Labels” on page 774, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Category Axis” on page 780, “Combination Chart” on page 785, “Combination Chart” on page 786, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Space” on page 791, “Data Container” on page 793, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “Gauge Labels” on page 801, “Image” on page 803, “Legend” on page 806, “Legend” on page 807, “List Column Body” on page 810, “List Column Title” on page 811, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Pie Labels” on page 824, “Polar Chart” on page 825, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Scatter Chart” on page 833, “Scatter Chart” on page 833, “Text Item” on page 839, “Win-Loss Chart” on page 842, “X Axis” on page 843, “Y Axis” on page 845

Drop-Down Width

Specifies the width of the drop-down list box.

Applies to

“Iterator Label Area” on page 805

Drop Shadow

Defines a drop shadow that is rendered around a container.

Applies to

“Crosstab” on page 788, “List” on page 808, “Repeater Table” on page 831, “Table” on page 837

Drop Shadow

Specifies whether a drop shadow appears on a chart and how it appears.

Applies to

“Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 786, “Gauge Chart” on page 800, “Pareto Chart” on page 822, “Pie Chart” on page 824, “Progressive Chart” on page 826, “Scatter Chart” on page 833

Duplicates

Specifies whether duplicate rows will be preserved or removed.

Applies to

“Query Operation” on page 828

Embed

Specifies how to embed the reference object. A reference, or pointer, to the object is stored, by default. Alternatively, a copy of the external object can be stored in the report.

Applies to

“Layout Component Reference” on page 806

End Position

Specifies the position of one edge of the colored region along the numeric axis. The region extends from the position defined in the Start Position to the position defined in this property. The value specified in this property must be greater than the value specified in the Start Position property.

Applies to

“Colored Region” on page 785

Execution Method

Specifies whether the query is a candidate to run concurrently. If set to **Concurrent**, the query may still execute sequentially based on other factors. If not explicitly set, the query will execute sequentially. Concurrent query execution may improve performance in some cases.

Applies to

“Query” on page 828

Execution Optimization

Specifies how much of the query processing is performed by the client and how much is performed by the database server. If the database server can perform all the query processing, it does.

If **All Rows** is selected, the optimizer adopts a plan that retrieves all rows of the result set in the least amount of time. This value is generally used in a batch environment.

If **First Rows** is selected, the optimizer adopts a plan that retrieves the first row as quickly as possible. This value is generally used in an interactive environment.

If **Incremental** is selected, the optimizer retrieves the first N rows, and then retrieves the next N rows.

Applies to

“Query” on page 828

Expand Features

Specifies whether to center and expand the feature in the map chart. When set to **Yes**, the map feature is centered and expanded to take up all available space in the chart. When set to **No**, the map feature is not expanded.

Applies to

“Map” on page 814

Exploded Slices

Specifies the slices that appear pulled out of a pie chart and their appearance.

Applies to

“Pie Chart” on page 824

Expression

Specifies the expression that defines the slicer member set.

Applies to

“Slicer Member Set” on page 835

Expression

Specifies the numeric position for a data marker in a scatter chart.

Applies to

"Marker" on page 816

Expression

Specifies the numeric position for a data marker in a scatter chart.

Applies to

"Marker" on page 816

Expression

Specifies the expression used to populate the data item.

Applies to

"Area" on page 773, "Bar" on page 774, "Calculated Measure" on page 779, "Calculated Member" on page 779, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Data Item" on page 795, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Set Expression" on page 835, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Extend Width

Specifies whether the area extends to the width of the chart. This property applies only to defined areas of area charts. When the area chart is converted to a matrix of charts, this property is not supported.

Applies to

"Area" on page 773

Face Color

Specifies the color to show on the face of each gauge in a gauge chart.

Applies to

"Gauge Chart" on page 801

Fact Cell Data Format

Specifies the data format of the object.

Applies to

“Node” on page 819

Fact Cells Precedence

Specifies which style property will override the other style property for intersecting cells in a crosstab, the row's properties, or the column's properties.

This property only applies to style properties that are both set, but to different values. For example, if the row's background color is set to yellow and the column's background color is set to red, you can select which of these properties will override the other. If only the row or the column has a set background color, then that color will be used on the intersecting cell, regardless of this setting.

Applies to

“Crosstab” on page 788

Fill Effects

Specifies the fill effects for the object.

Applies to

“Chart Body” on page 781, “Display Layer” on page 798, “Legend” on page 806, “Point Layer” on page 825, “Region Layer” on page 830

First Column Color

Specifies the color, gradient, or pattern to be used for the first column in the progressive chart.

Applies to

“Progressive Chart” on page 827

First Date

Specifies the earliest date to render in the control, and the earliest date that can be selected.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797

First Label Index

Specifies which label will be rendered first. If set to 5, for example, the fifth label will be the first label rendered. Subsequent labels will be rendered as defined in the Display Frequency property. This property applies only to legacy charts.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

First Slice Angle

Specifies the angle at which the first pie slice begins in a pie chart.

Applies to

"Pie Chart" on page 824

Floating

Specifies how objects flow around an object.

Float controls the way the content that follows the selected object will flow around or below it.

Clear controls where the selected object is positioned, relative to other floating objects.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Interval Prompt" on page 804, "List" on page 808, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page Break Text" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Select & Search Prompt" on page 834, "Static Repeater Table" on page 835, "Table" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Tree Prompt" on page 840, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Font

Specifies the font family, size, weight, style, and effects used to display the object's text.

Applies to

"Axis Labels" on page 774, "Block" on page 776, "Caption" on page 779, "Chart Body" on page 781, "Chart Body" on page 781, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Cumulation Line Axis" on page 792, "Date" on page 796, "Equation Label" on page 799, "Field Set" on page 800, "Gauge Labels" on page 801, "Gauge Numerical Axis" on page 801, "Hyperlink" on page 802, "Legend" on page 806, "Legend" on page 807, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810

page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Note" on page 819, "Page" on page 821, "Page Break Text" on page 821, "Page Number" on page 821, "Pie Labels" on page 824, "Prompt Button" on page 827, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Row Number" on page 832, "Row Number" on page 832, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Table Row" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time" on page 839, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Font Auto-Sizing

Specifies whether to allow automatic resizing of the font.

Applies to

"Legend" on page 806

Footer

Specifies whether a chart footer is rendered. This property applies only to legacy charts.

Applies to

"Win-Loss Chart" on page 842

Footer

Specifies whether a chart footer is rendered.

Applies to

Foreground Color

Specifies the color of the object's text.

Applies to

"Axis Labels" on page 774, "Block" on page 776, "Caption" on page 779, "Chart Body" on page 781, "Chart Body" on page 781, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Cumulation Line Axis" on page 792, "Date" on page 796, "Equation Label" on page 799, "Field Set" on page 800, "Gauge Labels" on page 801, "Gauge Numerical Axis" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Legend" on page 806, "Legend" on page 807, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813

813, "List Row Cells Style" on page 813, "List Summary" on page 814, "Note" on page 819, "Page" on page 821, "Page Break Text" on page 821, "Page Number" on page 821, "Pie Labels" on page 824, "Prompt Button" on page 827, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Row Number" on page 832, "Row Number" on page 832, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Table Row" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time" on page 839, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

From Text

Specifies the label that appears beside the beginning of a range. This property applies to the following prompt types: date, date & time, time, and interval. The default label text is From.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Gauge Axes

Specifies the start and end angles for the gauge axes.

Applies to

"Gauge Chart" on page 800

Gauge Axis Colors

Specifies the colors of the gauge axis.

Applies to

"Gauge Axis" on page 800

Gauge Axis Inner Radius

Specifies the inner radius of the gauge axis as a percentage of the maximum allowed.

Applies to

"Gauge Axis" on page 800

Gauge Axis Outer Radius

Specifies the outer radius of the gauge axis as a percentage of the maximum allowed.

Applies to

"Gauge Axis" on page 800

Gauge Border

Specifies whether borders appear around the chart body in a gauge chart.

Applies to

“Gauge Chart” on page 800

Gauge Labels

Specifies whether gauge labels are rendered.

Applies to

“Gauge Chart” on page 801

Gauge Needle

Specifies the size and style of the gauge needle. The chart contains one needle for each row in the data series. All needles on a gauge axis use the same specified styles.

Applies to

“Gauge Axis” on page 800

Gauge Palette

Specifies the palette that controls the look of the dial portion of a gauge.

Applies to

“Gauge Chart” on page 801

Gauge Pivot

Specifies whether to show the center pivot point and its color, size, and style.

Applies to

“Gauge Chart” on page 800

Generated SQL

Shows the generated SQL or MDX.

Applies to

“Query” on page 828

Gradient

Specifies a color gradient for the page.

Applies to

“Page” on page 821

Gridlines

Specifies the properties of the major gridlines in the gauge axis of a gauge chart.

Applies to

“Gauge Axis” on page 800

Gridlines

Specifies the properties of the gridlines in a chart.

Applies to

“Angular Axis” on page 773, “Category Axis” on page 780, “Cumulation Line Axis” on page 792, “Gauge Numerical Axis” on page 801, “Numerical Axis” on page 820, “Numerical Axis” on page 820, “Radial Axis” on page 829, “X Axis” on page 843, “X Axis” on page 843, “Y1 Axis” on page 844, “Y2 Axis” on page 844, “Y Axis” on page 844, “Y Axis” on page 845, “Z Axis” on page 845, “Z Axis” on page 845

Gridlines

Specifies the properties of the major gridlines in a chart.

Applies to

“Category axis” on page 780, “Cumulation Line” on page 792, “Numeric Axis” on page 820, “Pareto Bars” on page 822, “Primary Axis” on page 826, “Primary Bottom Axis” on page 826, “Secondary Axis” on page 834, “Secondary Bottom Axis” on page 834, “X Axis” on page 843, “Y Axis” on page 844

Grouping & Sorting

Specifies the grouping and sorting structure.

Applies to

“List” on page 808, “Page Set” on page 822, “Repeater” on page 831, “Repeater Table” on page 831

Grouping Type

Specifies whether the absolute, stacked, or 100 percent stacked data may be drawn.

Applies to

“Area” on page 773, “Bar” on page 774, “Line” on page 808

Group Span

Specifies the group that this cell should visually span.

Applies to

“List Column Body” on page 810

Has Fact Cells

Specifies the contents of the fact cells of the crosstab. There is only one fact cell definition for the crosstab, regardless of the number of measures.

Applies to

“Crosstab” on page 788

Header Text

Specifies the title that appears above the list of choices in a value prompt. The default title text is the name of the level above the data items that are listed as choices; for example, Regions.

Applies to

“Value Prompt” on page 841

Heading Level

Specifies the heading level of the table of contents entry.

Applies to

“Table of Contents Entry” on page 838

Height

Specifies the height of the visualization, in pixels.

Applies to

“Visualization” on page 842

Height (px)

Specifies the height of the note, in pixels.

Applies to

“Note” on page 819

Hide Adornments

Specifies whether to hide the asterisk (*) on required prompts and arrow (->) on type-in prompts that are in an error state.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Generated Prompt” on page 802, “Interval Prompt” on page 804, “Select & Search Prompt” on page 834, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841

Hide Text

Specifies whether to replace characters entered in the prompt control with asterisk (*) characters.

Applies to

"Text Box Prompt" on page 838

Hierarchy

Specifies a reference to a hierarchy. You cannot modify this value.

Applies to

"Area" on page 773, "Bar" on page 774, "Calculated Member" on page 779, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Dimensional Edge Summary" on page 798, "Explicit Member Set" on page 799, "Gauge Axis" on page 800, "Hierarchy Set" on page 802, "HTML Item" on page 802, "Image" on page 803, "Intersection (Tuple)" on page 804, "Level Set" on page 808, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Member" on page 817, "Member Children Set" on page 817, "Member Property" on page 818, "Named Set" on page 819, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Set Expression" on page 835, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Hierarchy Unique Name

Specifies the Hierarchy Unique Name (HUN) of the hierarchy to which the data item belongs.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "Hierarchy Set" on page 802, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Highest Value Text

Specifies the label that appears beside the highest value option when ranges are enabled. This property applies to the following prompt types: date, date & time, time, value, text box, and interval. The default label text is Latest date, Latest time, or Highest interval.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Hole Size (%)

Specifies the size of the hole in a donut chart. A value of zero indicates a pie chart.

Applies to

"Pie Chart" on page 823, "Pie Chart" on page 824

Horizontal Alignment

Specifies how the contents of the selected object are aligned horizontally.

Applies to

"Block" on page 776, "Chart Body" on page 781, "Chart Body" on page 781, "Chart Footer" on page 781, "Chart Footer" on page 781, "Chart Subtitle" on page 782, "Chart Subtitle" on page 782, "Chart Title" on page 783, "Chart Title" on page 783, "Conditional Block" on page 787, "Conditional Block" on page 787, "Crosstab" on page 788, "Crosstab Columns" on page 788, "Crosstab Columns" on page 788, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Crosstab Rows" on page 790, "Crosstab Rows" on page 791, "Crosstab Space" on page 791, "Crosstab Summary" on page 791, "Equation Label" on page 799, "Field Set" on page 800, "Gauge Labels" on page 801, "Legend" on page 806, "Legend" on page 807, "Legend Title" on page 807, "Legend Title" on page 807, "List" on page 808, "List Cell" on page 809, "List Column" on page 809, "List Column Body" on page 810, "List Columns" on page 810, "List Columns" on page 810, "List Columns Body Style" on page 811, "List Columns Title Style" on page 811, "List Column Title" on page 811, "List Footer" on page 811, "List Header" on page 812, "List Row" on page 813, "List Row Cells Style" on page 813, "Note" on page 819, "Note Content" on page 819, "Page" on page 821, "Pie Labels" on page 824, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Repeater Table Cell" on page 832, "Static Repeater Table" on page 835, "Table" on page 837, "Table Cell" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Table Row" on page 838

Hours Text

Specifies the title that appears above the hours box in interval prompts. The default title text is Hrs.

Applies to

"Interval Prompt" on page 804

HTML

Specifies the static text used as HTML.

Applies to

"HTML Item" on page 802, "Rich Text Item" on page 832

HTML Source Variable

Specifies a variable based on which the HTML source is chosen.

Applies to

“HTML Item” on page 802, “Rich Text Item” on page 832

Icon

Specifies the image used to identify the object in the control.

Applies to

“Button” on page 778, “Button” on page 778, “Check Box” on page 783, “List Item” on page 812, “Radio Button” on page 829, “Tab” on page 836

Ignore Data with No Features

Specifies whether to allow data that has no corresponding features. When set to Yes, data with no corresponding features will be ignored. When set to No, the map will not run if it contains data with no corresponding features.

Applies to

“Map” on page 814

Include Zero For Auto Scale

Specifies whether the value zero is included in the automatic calculation of the numeric scale. This property applies only to legacy charts.

Applies to

“Angular Axis” on page 773, “Gauge Numerical Axis” on page 801, “Numerical Axis” on page 820, “Numerical Axis” on page 820, “Radial Axis” on page 829, “X Axis” on page 843, “Y1 Axis” on page 844, “Y2 Axis” on page 844, “Y Axis” on page 844, “Z Axis” on page 845, “Z Axis” on page 845

Insert Text

Specifies the label that appears on the button that is used to add items to the selected items box in all multiple selection prompts. The default label text is Insert.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Select & Search Prompt” on page 834, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Value Prompt” on page 841

Iterator First

Specifies whether to show or hide the First button in the iterator.

Applies to

“Data Iterator” on page 795, “Iterator” on page 804

Iterator Label Area

Specifies whether to show or hide the labels of iterator values.

Applies to

“Data Iterator” on page 795, “Iterator” on page 804

Iterator Last

Specifies whether to show or hide the Last button in the iterator.

Applies to

“Data Iterator” on page 795, “Iterator” on page 804

Iterator Next

Specifies whether to show or hide the Next button in the iterator.

Applies to

“Data Iterator” on page 795, “Iterator” on page 804

Iterator Previous

Specifies whether to show or hide the Previous button in the iterator.

Applies to

“Data Iterator” on page 795, “Iterator” on page 804

Iterator Values Definition

Defines the values of the iterator.

Applies to

“Iterator” on page 804

Join Relationships

Specifies how to join the two queries.

Applies to

“Join” on page 806

Keywords Text

Specifies the title that appears above the keyword search box in select & search prompts. The default title text is Keywords.

Applies to

“Select & Search Prompt” on page 834

Label

Specifies the static text that defines the bookmark. The value used as the bookmark reference must match this value.

Applies to

"Bookmark" on page 776

Label

Specifies the class label for a local class.

Applies to

"Class" on page 784

Label

Specifies the class label for a global class. You cannot modify this label.

Applies to

"Class" on page 784

Label

Specifies the name of the no value list item.

Applies to

"No Value List Item" on page 819

Label

Specifies the name of the object in the control.

Applies to

"Button" on page 778, "Button" on page 778, "Check Box" on page 783, "List Item" on page 812, "Radio Button" on page 829, "Tab" on page 836

Label

Specifies whether a label is rendered for the baseline.

Applies to

"Baseline" on page 775, "Baseline" on page 775

Label

Specifies whether a label is rendered for the marker.

Applies to

"Marker" on page 816, "Marker" on page 816

Label

The label for the data item. Automatic text uses the data item name as the label. Specified text uses text that you specify as the label. With specified text, you can add translations for the label to support users in multiple languages.

Applies to

“Category” on page 780, “Value” on page 841

Label

Defines the button label in the iterator.

Applies to

“Iterator First” on page 805, “Iterator Last” on page 805, “Iterator Next” on page 805, “Iterator Previous” on page 805

Label

Specifies the label of the object.

Applies to

“Calculated Measure” on page 779, “Calculated Member” on page 779, “Custom Groups” on page 793, “Dimensional Edge Summary” on page 798, “Edge Summary” on page 799, “Explicit Member Set” on page 799, “Hierarchy Set” on page 802, “Intersection (Tuple)” on page 804, “Level Set” on page 808, “List Summary” on page 813, “Measure” on page 817, “Member” on page 817, “Member Children Set” on page 817, “Member Property” on page 818, “Named Set” on page 819, “Percentaged Measure” on page 823, “Set Expression” on page 835

Label Color

Specifies the color of labels in the slider.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Label Control

Controls how the labels in a chart are rendered.

Applies to

“Category Axis” on page 780, “X Axis” on page 843, “Y Axis” on page 845

Label For

Specifies the name of the prompt control to associate to the text item. This property is used to make a prompt control accessible by defining a label for the control.

Applies to

“Text Item” on page 839

Label Location

Specifies whether to show the label in the legend or in the chart.

Applies to

“Marker” on page 816, “Scatter Marker” on page 834

Labels

Specifies whether labels are rendered.

Applies to

“Pie Chart” on page 823

Last Date

Specifies the latest date rendered in the control, and the last date that can be selected.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797

Left Position

Specifies the position of the left edge of the colored region.

Applies to

“Colored Region” on page 785

Left Position (px)

Specifies the pixel position of the bottom edge of the note measured from the left edge of the chart.

Applies to

“Note” on page 819

Left Position (px)

Specifies the pixel position of the left edge of the legend measured from the left edge of the chart.

Applies to

“Legend” on page 806

Legend

Specifies whether the legend is rendered.

Applies to

“3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Combination Chart” on page 785, “Gauge Chart” on page 801, “Map” on page 814, “Marimekko

Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Polar Chart” on page 825, “Radar Chart” on page 828, “Scatter Chart” on page 833

Legend

Specifies whether a legend is rendered and where the legend is positioned in a chart.

Applies to

“Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 786, “Gauge Chart” on page 800, “Pareto Chart” on page 822, “Pie Chart” on page 824, “Progressive Chart” on page 826, “Scatter Chart” on page 833

Legend Label

Specifies whether to render the baseline in the legend.

Applies to

“Baseline” on page 775, “Baseline” on page 775

Legend Separator

Specifies the separator to use between the legend entry and the value when you show values in the legend. The default is a comma (,) followed by a space.

Applies to

“Legend” on page 807

Legend Title

Specifies whether a legend title is rendered. This property applies only to legacy charts.

Applies to

“Legend” on page 806

Legend Title

Specifies whether a legend title is rendered in a chart.

Applies to

“Legend” on page 807

Legend Title

Specifies whether a legend title is rendered in a chart.

Applies to

“Legend” on page 806, “Legend” on page 807

Level

Specifies a reference to a level. You cannot modify this value.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Level Set" on page 808, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Member Property" on page 818, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Level Indentation

Controls the indentation of the contents of node members in a crosstab.

Applies to

"Crosstab Node Member" on page 790

Level Unique Name

Specifies the Level Unique Name (LUN) of the level to which the data item belongs.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Level Set" on page 808, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Line and Markers

Specifies whether to display a line and whether to display markers.

Applies to

"Line" on page 808

Line Shape

Specifies the shape of a line in a line chart.

Applies to

“Line” on page 808

Line Style

Specifies the style, color, and weight of the line in a Pareto chart.

Applies to

“Cumulation Line” on page 792

Line Style

Specifies the style, color, and weight of the line.

Applies to

“Category Baseline” on page 781, “Numeric Baseline” on page 820, “Trendline” on page 841

Line Style

Specifies the style, color, and weight of the line. This property applies only to legacy charts.

Applies to

“Line” on page 808

Line Styles

Specifies the style, color, and weight of the line.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Cumulation Line” on page 792, “Regression Line” on page 831

Line Type

Specifies the type of line used to connect data values.

Applies to

“Line” on page 808

Line Weight (pt)

Specifies the line thickness in points. A value of zero indicates the thinnest possible line.

Applies to

“Line” on page 808

List Items Definition

Defines the list items in the control.

Applies to

“Drop-Down List” on page 799, “List Box” on page 809

Loss Color

Specifies a color, color gradient, or pattern to apply to the loss values.

Applies to

“Win-Loss Chart” on page 842

Lowest Value Text

Specifies the label that appears beside the lowest value option when ranges are enabled. This property applies to the following prompt types: date, date & time, time, value, text box, and interval. The default label text is Earliest date, Earliest time, or Lowest interval.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Value Prompt” on page 841

Map & Layers

Sets the map and layers for a map chart.

Applies to

“Map” on page 814

Map Drills

Controls the drill definitions in a map. It is possible to define different drill targets for each region or point.

Applies to

“Point Layer” on page 825, “Region Layer” on page 830

Margin

Specifies the margin properties for the object.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Block” on page 776, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Caption” on page 779, “Combination Chart” on page 785, “Combination Chart” on page 786, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab” on page 788, “Date” on page 796, “Field Set” on page 800, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “Hyperlink” on page 802, “Hyperlink Button” on page 803,

"Image" on page 803, "List" on page 808, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page" on page 821, "Page Break Text" on page 821, "Page Number" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Row Number" on page 832, "Row Number" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Table" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Item" on page 839, "Time" on page 839, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Marimekko Totals

Specifies whether to show totals for each column at the top of the chart.

Applies to

"Marimekko Chart" on page 815

Marker Color

Specifies a color for the target value markers in a metrics chart.

Applies to

"Metrics Range Chart" on page 818

Marker Color

Specifies the color of the markers.

Applies to

"Marker" on page 816, "Marker" on page 816

Marker Label

Specifies whether the label for the Target Marker will appear in the legend.

Applies to

"Metrics Range Chart" on page 818

Markers

Adds reference points to a chart based on numeric or statistical values, calculations, or layout calculations. This property applies only to legacy charts.

Applies to

"Bubble Chart" on page 776, "Combination Chart" on page 785, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833

Markers

Adds reference points to a chart based on numeric or statistical values, calculations, or layout calculations.

Applies to

"Bubble Chart" on page 777, "Combination Chart" on page 786, "Pareto Chart" on page 822, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Marker Shape

Specifies the shape of the markers.

Applies to

"Cumulation Line" on page 792, "Marker" on page 816, "Marker" on page 816

Marker Shape

Specifies the shape of the marker symbol.

Applies to

"Marker" on page 816, "Scatter Marker" on page 834

Marker Size (pt)

Specifies the size of markers in points. A value of zero means do not show markers.

Applies to

"3-D Scatter Chart" on page 772, "Cumulation Line" on page 792, "Marker" on page 816, "Marker" on page 816, "Polar Chart" on page 825, "Radar Chart" on page 828, "Scatter Chart" on page 833

Marker Size (pt)

Specifies the size of markers in points. A value of zero means do not show markers.

Applies to

"Marker" on page 816, "Scatter Marker" on page 834

Marker Style

Specifies the shape, fill type, and color of the markers in the chart.

Applies to

"Marker" on page 816, "Scatter Marker" on page 834

Marker Text Location

Specifies where the text of the marker is rendered.

Applies to

"Bubble Chart" on page 776, "Combination Chart" on page 785, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833

Master Detail Relationships

Specifies relationships between the master data container and the detail data container. Specifically, specifies how query items in the master query are linked to query items or parameters in the detail query.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Axis Title" on page 774, "Axis Title" on page 774, "Baseline" on page 775, "Baseline" on page 775, "Baseline" on page 775, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Category Baseline" on page 781, "Chart Footer" on page 781, "Chart Footer" on page 781, "Chart Subtitle" on page 782, "Chart Subtitle" on page 782, "Chart Title" on page 783, "Chart Title" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Container" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Label" on page 806, "Legend Title" on page 807, "Legend Title" on page 807, "List" on page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Marker" on page 816, "Marker" on page 816, "Marker" on page 816, "Metrics Range Chart" on page 818, "Note" on page 819, "Note Content" on page 819, "Numeric Baseline" on page 820, "Page" on page 821, "Page Set" on page 822, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Point Color Legend Title" on page 824, "Point Size Legend Title" on page 825, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Region Color Legend Title" on page 830, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Scatter Marker" on page 834, "Win-Loss Chart" on page 842

Material Effects

Specifies a material effect, such as plastic or metallic.

Applies to

"Bubble Chart" on page 777, "Combination Chart" on page 786, "Pareto Chart" on page 822, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Material Effects

Specifies a material effect, such as plastic or metallic, in a pie chart.

Applies to

"Pie Chart" on page 824

Matrix Rows and Columns

Specifies whether to render a matrix of charts in rows and columns.

Applies to

"Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 786, "Gauge Chart" on page 800, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Maximum Characters

Specifies the maximum number of characters to show before the text is truncated.

Applies to

"Legend" on page 806, "Text Item" on page 839

Maximum Execution Time

Specifies the maximum period, in seconds, that the query can spend to open the database cursor and to retrieve the first row of data. An error is returned if the specified time is exceeded. Note that this property is not for the total time required to execute the query. If no value is specified, no error is returned and the query runs until complete.

Applies to

"Query" on page 828

Maximum Hotspots

Specifies the maximum number of hotspots generated in a chart. A hotspot in a chart appears when you pause a pointer over it. For example, a hotspot on a drill-down symbol or a tooltip gives details about the column, line, or pie slice. If specified, this value overrides the hotspot configuration settings in IBM® Cognos® Administration.

For more information, see the topic Changing the number of hotspots in a chart.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Win-Loss Chart" on page 842

Maximum Rows Retrieved

Specifies the maximum number of database rows that the query can retrieve. An error is returned if the number of database rows returned exceeds the specified value. If no value is specified, no error is returned and the query returns all rows.

Applies to

“Query” on page 828

Maximum Size (pt)

Specifies the maximum size used for map point features that have corresponding data. For example, if the minimum size is 2pt and the maximum size is 12pt, the size of each point is calculated using linear interpolation that is based on its measure value.

Applies to

“Point Size Measure” on page 825

Maximum Tables

Specifies the maximum number of tables that the query can retrieve. An error is returned if the number of tables in the generated IBM® Cognos® SQL exceeds the specified value. If no value is specified, no error is returned and there is no restriction on the number of tables that can be queried.

Applies to

“Query” on page 828

Maximum Text Blob Characters

Specifies the maximum number of characters that the query is allowed to retrieve for each text BLOB. An error is returned if the number of characters retrieved exceeds the specified value. If no value is specified, no error is returned and text BLOBs can be of any size.

Applies to

“Query” on page 828

Maximum Truncation Characters

Specifies the maximum number of characters to show before the label is truncated.

If the **Allow Truncation** property is set to **Yes** and no value is specified in the **Maximum Characters** property, the application automatically determines the optimum number of characters after which to truncate. Use this property only if you want explicit control over the truncation level. Note that regardless of this property's setting, no truncation will occur if there is sufficient space.

Applies to

“Category Axis” on page 780, “Gauge Labels” on page 801, “Pie Labels” on page 824, “X Axis” on page 843, “Y Axis” on page 845

Maximum Value

Specifies the maximum value for the numeric scale. If no value is specified, one will be calculated based on the data.

Applies to

"Angular Axis" on page 773, "Gauge Numerical Axis" on page 801, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Z Axis" on page 845, "Z Axis" on page 845

Maximum Value

Specifies the maximum value for the slider.

Applies to

"Continuous Values Slider" on page 787

MDX

The text of the typed-in MDX. It is assumed to be appropriate for the type and data source. If it is not the query may fail or produce unexpected results.

Applies to

"MDX" on page 817

Member

Specifies a reference to a member. You cannot modify this value.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Measure" on page 817, "Member" on page 817, "Member Children Set" on page 817, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Member Offset (%)

Specifies a position relative to the next item in the chart. This is a percentage value. Negative values indicate before the member and positive values indicate after the member.

Applies to

“Baseline” on page 775, “Category Baseline” on page 781, “Marker” on page 816

Members

Specifies the members of the intersection (tuple).

Applies to

“Intersection (Tuple)” on page 804

Members

Specifies the members in the member set.

Applies to

“Explicit Member Set” on page 799

Member Unique Name

Specifies the Member Unique Name (MUN) of the member.

Applies to

“Area” on page 773, “Bar” on page 774, “Category Baseline” on page 781, “Chart Node Member” on page 782, “Chart Text Item” on page 782, “Chart Text Item” on page 783, “Colored Region” on page 785, “Colored Region” on page 785, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Cumulation Line Label” on page 792, “Gauge Axis” on page 800, “HTML Item” on page 802, “Image” on page 803, “Line” on page 808, “List Cell” on page 809, “List Column Body” on page 810, “List Column Title” on page 811, “Map Location” on page 814, “Map Location” on page 815, “Map Refinement Location” on page 815, “Map Refinement Location” on page 815, “Marker” on page 816, “Measure” on page 817, “Member” on page 817, “Member Children Set” on page 817, “Numeric Baseline” on page 820, “Rich Text Item” on page 832, “Scatter Marker” on page 834, “Text Item” on page 839, “Total Column” on page 840, “Win-Loss Measure” on page 843

Milliseconds Text

Specifies the title that appears above the milliseconds box in interval prompts. The default title text is ms.

Applies to

“Interval Prompt” on page 804

Minimum Size (pt)

Specifies the minimum size used for map point features that have corresponding data. For example, if the minimum size is 2pt and the maximum size is 12pt, the size of each point is calculated using linear interpolation that is based on its measure value.

Applies to

"Point Size Measure" on page 825

Minimum Value

Specifies the minimum value for the numeric scale. If no value is specified, one will be calculated based on the data.

Applies to

"Angular Axis" on page 773, "Gauge Numerical Axis" on page 801, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Z Axis" on page 845, "Z Axis" on page 845

Minimum Value

Specifies the minimum value for the slider.

Applies to

"Continuous Values Slider" on page 787

Minor Gridlines

Specifies the properties of the minor gridlines in the gauge axis of a gauge chart.

Applies to

"Gauge Axis" on page 800

Minor Gridlines

Specifies the properties of the minor gridlines in a chart. This property applies only to legacy charts.

Applies to

"Angular Axis" on page 773, "Category Axis" on page 780, "Cumulation Line Axis" on page 792, "Gauge Numerical Axis" on page 801, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Y Axis" on page 845, "Z Axis" on page 845, "Z Axis" on page 845

Minor Gridlines

Specifies the properties of the minor gridlines in a chart.

Applies to

"Category axis" on page 780, "Cumulation Line" on page 792, "Numeric Axis" on page 820, "Pareto Bars" on page 822, "Primary Axis" on page 826, "Primary Bottom Axis" on page 826, "Secondary Axis" on page 834, "Secondary Bottom Axis" on page 834, "X Axis" on page 843, "Y Axis" on page 844

Minutes Text

Specifies the title that appears above the minutes box in interval prompts. The default title text is Mins.

Applies to

“Interval Prompt” on page 804

Multi-Line

Specifies whether to allow multi-line editing in the text control

Applies to

“Text Box Prompt” on page 838

Multi-Select

Specifies whether the control allows the selection of multiple values. Note that an associated parameterized filter expression will override this object's setting. If you edit this property but do not get the expected results, check the associated expression for the presence of an operator that specifies how many items can be selected. Examples of multiple selection operators are "in" and "not in"; examples of single selection operators are equal (=), less than (<) and greater than (>).

For example, if you used the prompt wizard to create a parameterized filter expression and selected one of the operators that specify selection rules, changing the value of this property is not sufficient to change this restriction. You must also edit the filter's expression to remove the offending operator.

To edit a filter expression, you must select the filter, which is accessible from the Query view, using the Explorer bar.

Applies to

“Data List Box” on page 795, “Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “List Box” on page 809, “Select & Search Prompt” on page 834, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841

Name

Specifies the name of the object.

Applies to

“Calculated Measure” on page 779, “Calculated Member” on page 779, “Custom Groups” on page 793, “Dimensional Edge Summary” on page 798, “Edge Summary” on page 799, “Explicit Member Set” on page 799, “Hierarchy Set” on page 802, “Intersection (Tuple)” on page 804, “Level Set” on page 808, “List Summary” on page 813, “Measure” on page 817, “Member” on page 817, “Member Children Set” on page 817, “Member Property” on page 818, “Named Set” on page 819, “Percentaged Measure” on page 823, “Set Expression” on page 835

Name

Specifies the name of the object.

Applies to

"Page Set" on page 822

Name

Specifies the name of the object.

Applies to

"Page" on page 821

Name

Specifies a unique name that allows layout objects to be reused, usually to take advantage of any applied styling.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button" on page 778, "Button Bar" on page 778, "Check Box Group" on page 784, "Combination Chart" on page 785, "Combination Chart" on page 786, "Continuous Values Slider" on page 787, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Container" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Generated Prompt" on page 802, "HTML Item" on page 802, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Interval Prompt" on page 804, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater" on page 831, "Repeater Table" on page 831, "Rich Text Item" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Select & Search Prompt" on page 834, "Singleton" on page 835, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Table" on page 837, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Toggle Button Bar" on page 840, "Tree Prompt" on page 840, "Value Prompt" on page 841, "Visualization" on page 842, "Win-Loss Chart" on page 842

Name

Specifies the name of the object.

Applies to

"Query" on page 828

Name

Specifies the unique name identifier for a query operation.

Applies to

“Query Operation” on page 828

Name

Specifies the unique name identifier for an SQL object.

Applies to

“SQL” on page 835

Name

Specifies the unique name identifier for an MDX object.

Applies to

“MDX” on page 817

Name

Specifies the name of the object.

Applies to

“Dimension” on page 798

Name

Specifies the name of the object.

Applies to

“Level” on page 807

Name

Specifies the name of the object.

Applies to

“Fact” on page 800

Name

Specifies the name of the object.

Applies to

“Member Set” on page 818

Name

Specifies the name of the object.

Applies to

“Variable” on page 842

Name

Specifies a unique name that allows layout objects to be reused, usually to take advantage of any applied formatting.

Applies to

“Calculated Member” on page 779, “Key” on page 806, “Level Hierarchy” on page 807, “Member Hierarchy” on page 817, “Member Property” on page 817

Negative Column Color

Specifies the color, gradient, or pattern to be used for columns in the progressive chart that represent negative values.

Applies to

“Progressive Chart” on page 827

Nested Label Display

Specifies how to display the axis labels for nested categories. Concatenated separates the labels with a comma.

Applies to

“Axis Labels” on page 774

Nesting Order

Specifies the nesting order of extra categories in the query. Change the nesting order of extra categories when items are from the same dimension. For example, a visualization has Year as categories, and Month and Quarter as extra categories. The order of categories must be Year, Quarter, and Month for the query to run.

Applies to

“Data Container” on page 793

No Data Contents

Specifies what appears in a data container when there is no data available from the database. When set to No Content, shows an empty data container, such as a blank list. When set to Content specified in the No data tab, shows the content that you specified in the No data tab. You can insert any object from the Toolbox tab. When set to Specified text (the default), shows the text that you specify.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 785, “Combination Chart” on page 786, “Crosstab” on page 788, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “List” on page 808, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range

Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Table of Contents" on page 837, "Win-Loss Chart" on page 842

No Data Features Size (pt)

Specifies the point size used for map point features that do not have corresponding data.

Applies to

"Map" on page 814

Node Coordinate

Uniquely identifies a node member or spacer on an edge of a crosstab. Used by the Crosstab Intersection object to uniquely identify the intersection of elements from each edge. You cannot modify this value.

Applies to

"Crosstab Node Member" on page 790, "Crosstab Space" on page 791, "Crosstab Summary" on page 791

Note Border

Specifies the properties for the border of a note.

Applies to

"Note" on page 819

Notes

Specifies a block of text that you can position on a chart.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Combination Chart" on page 785, "Gauge Chart" on page 801, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833

Notes

Specifies whether a note is rendered in a chart.

Applies to

"Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 786, "Gauge Chart" on page 800, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Note Text

Specifies the text that appears in a note within a chart. To edit the note text, you must switch to Page Design view (View > Page Design)

Applies to

"Note" on page 819, "Note" on page 819

No Value List Item

Specifies whether to define a default list item. When the default item is selected, sets the value of the data item in the control to null. By default, the no value item is the first item in the list.

Applies to

"Data Drop-Down List" on page 794, "Data List Box" on page 795, "Drop-Down List" on page 799, "List Box" on page 809

Number of Minor Intervals

When minor gridlines are defined for the chart axis, specifies by how many minor intervals to divide the major intervals. The default value is 2, which shows one minor gridline between each major gridline.

Applies to

"Category axis" on page 780, "Gauge Axis" on page 800, "Numeric Axis" on page 820, "X Axis" on page 843, "Y Axis" on page 844

Number of Minor Intervals

When minor gridlines are defined for the chart axis, specifies by how many minor intervals to divide the major intervals. The default value is 2, which shows one minor gridline between each major gridline.

Applies to

"Cumulation Line" on page 792, "Pareto Bars" on page 822, "Primary Axis" on page 826, "Primary Bottom Axis" on page 826, "Secondary Axis" on page 834, "Secondary Bottom Axis" on page 834

Number of Regression Lines

Specifies whether there will be one regression line for all the data or one for each series.

Applies to

"Regression Line" on page 831

Numbers Only

Specifies whether the Text Box Prompt allows numbers only.

Applies to

"Text Box Prompt" on page 838

Number Style

Specifies the style to use for page numbers.

Applies to

“Page Number” on page 821

Number Style

Specifies the number style to use for the iterator number.

Applies to

“Iterator Label Area” on page 805

Numerical Axis

Specifies whether the axis is rendered.

Applies to

“3-D Combination Chart” on page 772

Numerical Axis

Specifies whether the numeric axis of a gauge chart is rendered.

Applies to

“Gauge Chart” on page 801

Numeric Baselines

Adds reference lines on the numeric axis of a chart based on numeric or statistical values, calculations, or layout calculations.

Applies to

“Bubble Chart” on page 777, “Combination Chart” on page 786, “Numeric Baseline” on page 820, “Pareto Chart” on page 822, “Progressive Chart” on page 826, “Scatter Chart” on page 833

Numeric Value

Specifies the numeric position by using a number.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Numeric Value

Specifies the value of the numeric position.

Applies to

“Marker” on page 816

Numeric Value

Specifies the value of the numeric position.

Applies to

“Marker” on page 816

Options Text

Specifies the text for the additional prompt options link in select & search prompts. The default label text is Options.

Applies to

“Select & Search Prompt” on page 834

Orientation

Specifies the orientation of the control.

Applies to

“Button Bar” on page 778, “Check Box Group” on page 784, “Continuous Values Slider” on page 787, “Data Button Bar” on page 793, “Data Check Box Group” on page 793, “Data Discrete Values Slider” on page 794, “Data Iterator” on page 795, “Data Radio Button Group” on page 795, “Data Toggle Button Bar” on page 796, “Discrete Values Slider” on page 798, “Iterator” on page 804, “Radio Button Group” on page 829, “Toggle Button Bar” on page 840

Outer Join Allowed

Specifies whether outer joins are allowed on the object. This property applies to a single query and overrides the setting in IBM® Cognos® Framework Manager, the modeling tool.

Applies to

“Query” on page 828

Output Aggregation Method

Specifies the aggregation method.

Applies to

“Crosstab Summary” on page 791, “List Summary” on page 814

Output Aggregation Method

Specifies the aggregation method.

Applies to

“List Cell” on page 809

Override Dimension Info

Specifies dimension information for a query. Add dimension information when the data source has no dimension information available or when you want to override, extend, or restrict the information.

For more information, see the topic [Add Dimension Information to a Query](#).

Applies to

"Query" on page 828

Overrides

Specifies whether to override child objects. Before you can override child objects, they must have a name.

Applies to

"Layout Component Reference" on page 806

Padding

Specifies the space between the object and the margin. If there is a border then it specifies the space between the object and the border.

Applies to

"3-D Combination Chart" on page 772, *"3-D Scatter Chart"* on page 772, *"Block"* on page 776, *"Bubble Chart"* on page 776, *"Bubble Chart"* on page 777, *"Bullet Chart"* on page 777, *"Caption"* on page 779, *"Combination Chart"* on page 785, *"Combination Chart"* on page 786, *"Conditional Block"* on page 787, *"Conditional Block"* on page 787, *"Context Item Text"* on page 787, *"Crosstab Columns"* on page 788, *"Crosstab Columns"* on page 788, *"Crosstab Corner"* on page 789, *"Crosstab Fact Cells"* on page 789, *"Crosstab Intersection"* on page 789, *"Crosstab Member Fact Cells"* on page 790, *"Crosstab Node Member"* on page 790, *"Crosstab Rows"* on page 790, *"Crosstab Rows"* on page 791, *"Crosstab Space"* on page 791, *"Crosstab Summary"* on page 791, *"Gauge Chart"* on page 800, *"Gauge Chart"* on page 801, *"Hyperlink"* on page 802, *"Hyperlink Button"* on page 803, *"List Cell"* on page 809, *"List Column"* on page 809, *"List Column Body"* on page 810, *"List Columns"* on page 810, *"List Columns"* on page 810, *"List Columns Body Style"* on page 811, *"List Columns Title Style"* on page 811, *"List Column Title"* on page 811, *"List Footer"* on page 811, *"List Header"* on page 812, *"List Row"* on page 813, *"List Row Cells Style"* on page 813, *"List Summary"* on page 814, *"Map"* on page 814, *"Marimekko Chart"* on page 815, *"Metrics Range Chart"* on page 818, *"Page Break Text"* on page 821, *"Pareto Chart"* on page 822, *"Pareto Chart"* on page 823, *"Pie Chart"* on page 823, *"Pie Chart"* on page 824, *"Polar Chart"* on page 825, *"Progressive Chart"* on page 826, *"Progressive Chart"* on page 827, *"Prompt Button"* on page 827, *"Radar Chart"* on page 828, *"Repeater Table Cell"* on page 831, *"Repeater Table Cell"* on page 832, *"Scatter Chart"* on page 833, *"Scatter Chart"* on page 833, *"Table Cell"* on page 837, *"Table of Contents"* on page 837, *"Table of Contents Entry"* on page 838, *"Text Item"* on page 839, *"Variable Text Item"* on page 842, *"Win-Loss Chart"* on page 842

Pagination

Specifies pagination rules, such as page breaks, keep-with properties, page counts, and numbering.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Crosstab Node Member" on page 790, "Crosstab Space" on page 791, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "List" on page 808, "List Column" on page 809, "List Header" on page 812, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page" on page 821, "Page Set" on page 822, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Table" on page 837, "Win-Loss Chart" on page 842

Palette

Specifies the palette to use for the chart. This property applies only to legacy charts.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Combination Chart" on page 785, "Gauge Chart" on page 801, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Polar Chart" on page 825, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833

Palette

Specifies the color palette for a chart.

Applies to

"Area" on page 773, "Bar" on page 774, "Bubble Chart" on page 777, "Gauge Axis" on page 800, "Line" on page 808, "Pareto Chart" on page 822, "Pie Chart" on page 824, "Scatter Chart" on page 833

Palette

Map layers use the numeric palette, in which the color of a region or point is based on its numeric value.

Applies to

"Point Layer" on page 825, "Region Layer" on page 830

Parameter

Specifies the parameter that is satisfied by values chosen in the prompt control.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Generated Prompt" on page 802, "Interval Prompt" on page 804, "Select & Search Prompt" on page 834, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Tree

Prompt” on page 840, “Value Prompt” on page 841

Pareto Axis

Specifies whether the axis is rendered.

Applies to

“Pareto Chart” on page 823

PDF Page Setup

Specifies the orientation and paper size for PDF documents.

Applies to

“Page” on page 821

Percentage Based On

Specifies the information that is used to calculate the percentage values.

Applies to

“Percentaged Measure” on page 823

Percentile

Specifies a position based on a data percentile value. This value must be greater than zero.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Percentile

Specifies a position based on a data percentile value. This value must be greater than zero.

Applies to

“Marker” on page 816

Percentile

Specifies a position based on a data percentile value. This value must be greater than zero.

Applies to

“Marker” on page 816

Percent of Axis

Specifies a position based on a percentage along the numeric axis. This value must be greater than zero.

Applies to

"Baseline" on page 775, "Baseline" on page 775, "Baseline" on page 775, "Baseline" on page 775, "Marker" on page 816

Percent of Axis

Specifies a position based on a percentage along the numeric axis. This value must be greater than zero.

Applies to

"Marker" on page 816

Percent of Axis

Specifies a position based on a percentage along the numeric axis. This value must be greater than zero.

Applies to

"Marker" on page 816

Performance Pattern

Controls what portions of the range markers for tolerance and target ranges are rendered on a metrics chart.

Applies to

"Metrics Range Chart" on page 818

Pie Labels

Specifies whether pie labels are rendered.

Applies to

"Pie Chart" on page 823

Plot Area Fill

Specifies the fill color and effects for the plot area of a chart.

Applies to

"Bubble Chart" on page 777, "Combination Chart" on page 786, "Pareto Chart" on page 822, "Progressive Chart" on page 826, "Scatter Chart" on page 833

Point Shape

Specifies the shape of the markers. If you choose a value of series or category, the marker shape varies accordingly.

Applies to

"3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Polar Chart" on page 825, "Radar Chart" on page 828, "Scatter Chart" on page 833

Polynomial Exponent

Specifies the highest exponential value to use in the regression calculation.

Applies to

“Regression Line” on page 831

Position

Specifies where to position the legend.

Applies to

“Legend” on page 806

Position

Specifies the position of a note in a chart.

Applies to

“Equation Label” on page 799, “Note” on page 819

Position in List

Specifies the position of the no list value item in the list.

Applies to

“No Value List Item” on page 819

Position type

Specifies the source type for the numeric position.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Position type

Specifies the type of numeric position on the X-axis. This property applies only to legacy charts.

Applies to

“Marker” on page 816

Position type

Specifies a type of numeric position.

Applies to

“Marker” on page 816

Positive Column Color

Specifies the color, gradient, or pattern to be used for columns in the progressive chart that represent positive values.

Applies to

“Progressive Chart” on page 827

Pre-populate

Specifies whether to pre-populate the control with values, but only if the parent of this prompt control is optional. This only applies to prompt controls that have a parent in a cascade.

Applies to

“Tree Prompt” on page 840, “Value Prompt” on page 841

Pre-populate Levels

Specifies the number of levels to pre-populate the prompt with. The default value is 1, which will pre-populate the prompt with only the root members.

Applies to

“Tree Prompt” on page 840

Pre-Sort

Sorts the data that is used by the query to produce a temporary cube when needed, such as for a crosstab against a relational data source. This property affects the default order of members of a level populated from the data item.

Applies to

“Data Item” on page 795

Processing

Specifies whether the query engine will pick up a minimal amount of processing. Local processing only occurs if the database cannot handle the load. This property applies only to dimensional, or OLAP, data sources.

Specifies whether the IBM® Cognos® report server picks up a minimal amount of processing. This property overrides the corresponding governor in the model. If unspecified, the value of the governor in the model is used. This property applies only to relational data sources, unless you use the dynamic query mode.

Database only specifies that all query processing is performed on the database, and none is performed and cached by the IBM Cognos report server. The query executes successfully only if all query operations can be performed by the database.

Limited Local specifies that little, or possibly none, of the query processing is performed by the Cognos report server. Local processing only occurs if the database cannot handle the query.

When using the dynamic query mode, this property applies only to SAP BW data sources and the Limited Local option is not supported. Database Only specifies that little, or possibly none, of the query processing is performed and cached by the Cognos report server. Local processing only occurs if the database cannot handle the query. Consider using this option only if your report performance is unacceptable with the default setting, and becomes usable with this setting. Be aware that results may change with this setting; test carefully to confirm that the results are still correct.

Applies to

“Query” on page 828

Progressive Axis

Specifies whether the axis is rendered.

Applies to

“Progressive Chart” on page 827

Progressive Palette

Specifies the color palette in a progressive chart.

Applies to

“Progressive Chart” on page 826

Projection List

Shows the list of projected data items for the set operation. You can automatically generate the list or manually add data items.

Applies to

“Query Operation” on page 828

Properties

Specifies a list of data items from the query in scope to associate to the selected object. This is necessary when you want to reference a data item that is in the associated query, but not used in the layout.

Applies to

“Axis Title” on page 774, “Axis Title” on page 774, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Category Baseline” on page 781, “Chart Footer” on page 781, “Chart Footer” on page 781, “Chart Node Member” on page 782, “Chart Subtitle” on page 782, “Chart Subtitle” on page 782, “Chart Title” on page 783, “Chart Title” on page 783, “Colored Region” on page 785, “Colored Region” on page 785, “Crosstab Node Member” on page 790, “Cumulation Label” on page 792, “Cumulation Line” on page 792, “Label” on page 806, “Legend Title” on page 807, “Legend Title” on page 807, “List” on page 808, “List Footer” on page 811, “List Header” on page 812, “Marker” on page 816, “Marker” on page 816, “Marker” on page 816, “Note” on page 819, “Note Content” on page 819, “Numeric Baseline” on page 820, “Page” on page 821, “Page Set” on page 822, “Point Color Legend Title” on page 824,

"Point Size Legend Title" on page 825, "Region Color Legend Title" on page 830, "Regression Line" on page 831, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Marker" on page 834, "Select & Search Prompt" on page 834, "Singleton" on page 835, "Total Column" on page 840, "Total Column Label" on page 840, "Trendline Label" on page 841, "Value Prompt" on page 841

Property

Specifies a reference to a member property. You cannot modify this value.

Applies to

"Member Property" on page 818

Property Unique Name

Specifies the Member Property Unique Name (MPUN) of the member property.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Member Property" on page 818, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Push To Bottom

Specifies whether to position the footer as low as possible inside the parent object.

Applies to

"List Footer" on page 811, "List Page Footer" on page 813

Query

Specifies a reference to a query.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Axis Title" on page 774, "Axis Title" on page 774, "Baseline" on page 775, "Baseline" on page 775, "Baseline" on page 775, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Category Baseline" on page 781, "Chart Footer" on page 781, "Chart Footer" on page 781, "Chart Subtitle" on page 782, "Chart Subtitle" on page 782, "Chart Title" on page 783, "Chart Title" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Cumulation Label" on page 792, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Container" on page 793,

"Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Label" on page 806, "Legend Title" on page 807, "Legend Title" on page 807, "List" on page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Marker" on page 816, "Marker" on page 816, "Marker" on page 816, "Metrics Range Chart" on page 818, "Note Content" on page 819, "Numeric Baseline" on page 820, "Page Set" on page 822, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Point Color Legend Title" on page 824, "Point Size Legend Title" on page 825, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Region Color Legend Title" on page 830, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Scatter Marker" on page 834, "Singleton" on page 835, "Trendline Label" on page 841, "Win-Loss Chart" on page 842

Query

Specifies a reference to a query.

Applies to

"Page" on page 821, "Select & Search Prompt" on page 834, "Tree Prompt" on page 840, "Value Prompt" on page 841

Radar Type

Specifies how the radar chart is rendered.

Applies to

"Radar Chart" on page 828

Radial Axis

Specifies whether the axis is rendered.

Applies to

"Polar Chart" on page 825, "Radar Chart" on page 828

Radio Buttons Definition

Defines the buttons in the radio button group.

Applies to

"Radio Button Group" on page 829

Range

Specifies whether this control accepts ranges. The setting of the associated parameterized expression for this property will override the setting of this object. If you edit this property but do not get the expected results, check the associated expression for the presence or absence of an `in_range` operator.

For example, if you created this prompt control with the prompt wizard and set up an associated parameterized filter that accepts ranges, changing the value of this property is not sufficient to change this restriction. You must also edit the filter's expression and remove the `in_range` operator.

To edit a filter expression, you must select the filter, which is accessible from the Query view, using the Explorer bar.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Range Label

Specifies whether the label for the Target Range will appear in the legend.

Applies to

"Metrics Range Chart" on page 818

Range Type

Specifies whether to show one or two thumbs and what region of the track to highlight.

Applies to

"Continuous Values Slider" on page 787, "Data Discrete Values Slider" on page 794, "Discrete Values Slider" on page 798

Regression Line

Specifies whether a regression line is rendered. A regression line is a straight or curved line that best approximates the data points in the series.

Applies to

"Bubble Chart" on page 776, "Scatter Chart" on page 833

Regression Type

Specifies the type of regression used.

Applies to

"Regression Line" on page 831

Relative Alignment

Specifies how to vertically align this object, relative to its siblings.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Context

Item Text" on page 787, "Crosstab" on page 788, "Date" on page 796, "Date Prompt" on page 797, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "List" on page 808, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page Break Text" on page 821, "Page Number" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Prompt Button" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Row Number" on page 832, "Row Number" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Table" on page 837, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time" on page 839, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Remove Text

Specifies the label that appears on the button that is used to remove items from the selected items box in all multiple selection prompts. The default label text is Remove.

Applies to

"Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Interval Prompt" on page 804, "Select & Search Prompt" on page 834, "Text Box Prompt" on page 838, "Time Prompt" on page 839, "Value Prompt" on page 841

Render

For list reports, specifies whether to render the column in the report output. Whether set to Yes or No, the query for the column is always executed.

Applies to

"List Column" on page 809

Render Fact Cells

Specifies whether to render values in the fact cells of the spacer on an edge of the crosstab.

Applies to

"Crosstab Space" on page 791

Render Page when Empty

Specifies whether to render a page when data containers on a page contain no data. If all data containers on a page have this property set to No and do not have any data to render, the page is not rendered. If any data container on a page has data or has this property set to Yes, the page is rendered.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "List" on page 808

page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Table of Contents" on page 837, "Win-Loss Chart" on page 842

Render Variable

Specifies a variable based on which the object can be conditionally rendered.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Axis Labels" on page 774, "Axis Title" on page 774, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button" on page 778, "Button Bar" on page 778, "Category Baseline" on page 781, "Chart Footer" on page 781, "Chart Subtitle" on page 782, "Chart Text Item" on page 783, "Chart Title" on page 783, "Check Box Group" on page 784, "Colored Region" on page 785, "Colored Region" on page 785, "Combination Chart" on page 785, "Combination Chart" on page 786, "Context Item Text" on page 787, "Continuous Values Slider" on page 787, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Generated Prompt" on page 802, "HTML Item" on page 802, "Hyperlink" on page 802, "Hyperlink Button" on page 803, "Image" on page 803, "Interval Prompt" on page 804, "Iterator" on page 804, "Label" on page 806, "Legend" on page 807, "Legend Title" on page 807, "List" on page 808, "List Box" on page 809, "List Column" on page 809, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Marker" on page 816, "Metrics Range Chart" on page 818, "Note" on page 819, "Numeric Baseline" on page 820, "Page" on page 821, "Page Break Text" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater" on page 831, "Repeater Table" on page 831, "Repeater Table Cell" on page 831, "Rich Text Item" on page 832, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Scatter Marker" on page 834, "Select & Search Prompt" on page 834, "Singleton" on page 835, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Table" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Toggle Button Bar" on page 840, "Tree Prompt" on page 840, "Trendline" on page 841, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Visualization" on page 842, "Win-Loss Chart" on page 842

Repeater Direction

Specifies the direction in which to populate the rendered repeater cells.

Applies to

“Repeater Table” on page 831, “Static Repeater Table” on page 835

Repeater Table Values Definition

Defines the data values that can appear in the repeater table. Values are organized by data item. In addition to the default data item (Label) and values provided, you can create your own data items and values.

Applies to

“Static Repeater Table” on page 835

Report Expression

Specifies the report expression that defines the text to render.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839, “Total Column” on page 840

Report Expression

Specifies the report expression used to define the HTML to render.

Applies to

“HTML Item” on page 802, “Rich Text Item” on page 832

Report Expression

Specifies the report expression that defines the URL.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Report Expression

Specifies the report expression that defines the bookmark. The value used as the bookmark reference must match this value.

Applies to

“Bookmark” on page 776

Report Expression

Specifies the numeric position by using a report expression.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Report Expression

Specifies the report expression for the member position.

Applies to

“Baseline” on page 775, “Marker” on page 816

Report Expression

Specifies a report expression.

Applies to

“As of Time Expression” on page 773

Report Expression

Specifies the expression to evaluate when determining the value for this variable.

Applies to

“Variable” on page 842

Report Expression

Specifies the numeric position from a report expression.

Applies to

“Marker” on page 816

Report Expression

Specifies the numeric position from a report expression.

Applies to

“Marker” on page 816

Required

Specifies whether the prompt is required or optional. If this property is set to required, the prompt must have a value entered before the report can be run. The Usage setting of the associated parameterized filter for this property will override the setting of this object. If you edit this property, but do not get the expected results, verify the **Usage** setting of the associated filter.

For example, if you created this prompt control with the prompt wizard and set the associated parameterized filter to be optional, changing the value of this property is not sufficient to change this setting. You must also edit the filter's **Required** property to match the setting for this object's **Required** property.

To edit a filter expression, you must select the filter, which is accessible from the Query view, using the Explorer bar

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Generated Prompt” on page 802, “Interval Prompt” on page 804, “Select & Search Prompt” on page 834, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841

Results Deselect All Text

Specifies the text for the link below the results box that deselects all the items in the box. This property applies to all prompts with multiple selections and search, tree prompts, and value prompts. The default link text is Deselect All.

Applies to

“Select & Search Prompt” on page 834, “Tree Prompt” on page 840, “Value Prompt” on page 841

Results Select All Text

Specifies the text for the link below the results box that selects all the items in the box. This property applies to all prompts with multiple selections and search, tree prompts, and value prompts. The default link text is Select All.

Applies to

“Select & Search Prompt” on page 834, “Tree Prompt” on page 840, “Value Prompt” on page 841

Results Text

Specifies the title that appears above the results box in select & search prompts. The default title text is Results.

Applies to

“Select & Search Prompt” on page 834

Reverse Category Order

Specifies whether to change the order of the categories, such as the bars in a bar chart. The default is No, which means that for a horizontal bar chart, bars start from the bottom to the top.

Applies to

“Category axis” on page 780

Right Position

Specifies the position of the right edge of the colored region.

Applies to

“Colored Region” on page 785

Right Position (px)

Specifies the pixel position of the right edge of the legend measured from the left edge of the chart.

Applies to

"Legend" on page 806

Rollup Aggregate Function

Specifies the type of aggregation to apply to summarized values. These values appear at the higher levels of lists and crosstabs. For OLAP data sources, a rollup aggregate function of Count Distinct is supported for only levels and member sets.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Data Item" on page 795, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Rollup Method

Specifies the aggregation method to use to summarize data in the visualization when users select multiple values in an Active Report control, such as a check box control.

Applies to

"Value" on page 841

Rollup Processing

Specifies where to compute aggregates. The Extended setting means that aggregates are computed using an extended aggregate operation. The Database setting means that aggregates are computed by the database software. The Local setting means that aggregates are computed by the data retrieval software in the report server, using a running aggregate.

Applies to

"Query" on page 828

Root Members Only

Specifies whether the set contains the root members or all of the members of the hierarchy.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "Hierarchy Set" on page 802, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Rotate Values

Controls whether or not the values displayed on the chart are rotated when the **Chart Orientation** property is set to **Horizontal**. May help make values easier to read on horizontal charts. This property applies only to legacy charts.

Applies to

"Combination Chart" on page 785, "Pareto Chart" on page 823, "Progressive Chart" on page 827

Row Coordinate

Uniquely identifies the row of a node member or spacer on an edge of the crosstab. You cannot modify this value.

Applies to

"Crosstab Intersection" on page 789

Rows Per Page

Specifies the maximum number of rows to show at one time. For Value and Select & Search prompts, allows you to extend or reduce the maximum number of rows beyond the default of 5000.

Applies to

"Crosstab" on page 788, "List" on page 808, "Repeater" on page 831, "Select & Search Prompt" on page 834, "Tree Prompt" on page 840, "Value Prompt" on page 841

Scale

Specifies whether the numeric scale is logarithmic or linear.

Applies to

"Angular Axis" on page 773, "Gauge Numerical Axis" on page 801, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Z Axis" on page 845, "Z Axis" on page 845

Scale Interval

Specifies the interval between ticks on the numeric scale. If no value is specified, one will be calculated based on the data.

Applies to

"Angular Axis" on page 773, "Cumulation Line Axis" on page 792, "Gauge Numerical Axis" on page 801, "Numerical Axis" on page 820, "Numerical Axis" on page 820, "Radial Axis" on page 829, "X Axis" on page 843, "Y1 Axis" on page 844, "Y2 Axis" on page 844, "Y Axis" on page 844, "Z Axis" on page 845, "Z Axis" on page 845

Scope

Specifies the scope of the filter in terms of the number of levels.

Applies to

"Summary Filter" on page 836

Search Instructions Text

Specifies the instructions that appear above the keyword search box in select & search prompts. The default text is as follows: Type one or more keywords separated by spaces.

Applies to

"Select & Search Prompt" on page 834

Search Text

Specifies the label that appears on the Search button in select & search prompts. The default label text is Search.

Applies to

"Select & Search Prompt" on page 834

Seconds Text

Specifies the title that appears above the seconds box in interval prompts. The default title text is s.

Applies to

"Interval Prompt" on page 804

Select UI

Specifies the user interface to use for the button in the iterator.

Applies to

"Iterator First" on page 805, "Iterator Last" on page 805, "Iterator Next" on page 805, "Iterator Previous" on page 805

Select UI

Specifies the user interface to use for the labels of iterator values.

Applies to

“Iterator Label Area” on page 805

Select UI

Specifies which interface the prompt control renders.

Applies to

“Value Prompt” on page 841

Select UI

Specifies which interface the prompt control renders.

Applies to

“Date Prompt” on page 797

Select UI

Specifies which interface the prompt control renders.

Applies to

“Time Prompt” on page 839

Select UI

Specifies which interface the prompt control renders.

Applies to

“Date & Time Prompt” on page 796

Separator

Specifies the separator to use when showing multiple values.

Applies to

“Context Item Text” on page 787, “Legend” on page 806

Series Color

Specifies whether data marker colors are synchronized between charts when you use the same data series for multiple charts within a combination chart. For example, if you create a line chart and a bar chart using the years data series, and you set this property to Yes, the data marker for 2010 is the same color in both charts. Use this property to eliminate redundant legend entries and help you interpret the data.

Applies to

"3-D Combination Chart" on page 772, "Combination Chart" on page 785,
"Combination Chart" on page 786

Series Type

Specifies how the series will be rendered; for example, absolute, stacked, or stacked 100%.

Applies to

"Area" on page 773, "Bar" on page 774, "Line" on page 808

Set Definition

Specifies a set of members.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Gauge Axis" on page 800, "HTML Item" on page 802, "Image" on page 803, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Set Operation

Specifies the set operation to apply to one or more queries, that results in a projection list on which other queries can be based.

Applies to

"Query Operation" on page 828

Set Sorting

Specifies how the set is sorted. By default, the set is not sorted.

Applies to

"Area" on page 773, "Bar" on page 774, "Category Baseline" on page 781, "Chart Node Member" on page 782, "Chart Text Item" on page 782, "Chart Text Item" on page 783, "Colored Region" on page 785, "Colored Region" on page 785, "Crosstab Corner" on page 789, "Crosstab Fact Cells" on page 789, "Crosstab Intersection" on page 789, "Crosstab Member Fact Cells" on page 790, "Crosstab Node Member" on page 790, "Cumulation Line Label" on page 792, "Explicit Member Set" on page 799, "Gauge Axis" on page 800, "Hierarchy Set" on page 802, "HTML Item" on page 802, "Image" on page 803, "Level Set" on page 808, "Line" on page 808, "List Cell" on page 809, "List Column Body" on page 810, "List Column Title" on page 811

811, "Map Location" on page 814, "Map Location" on page 815, "Map Refinement Location" on page 815, "Map Refinement Location" on page 815, "Marker" on page 816, "Member Children Set" on page 817, "Named Set" on page 819, "Numeric Baseline" on page 820, "Rich Text Item" on page 832, "Scatter Marker" on page 834, "Set Expression" on page 835, "Text Item" on page 839, "Total Column" on page 840, "Win-Loss Measure" on page 843

Set Variable Values

Sets the value of variables when the control or an item in the control is selected.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Button" on page 778, "Button Bar" on page 778, "Check Box Group" on page 784, "Combination Chart" on page 785, "Combination Chart" on page 786, "Continuous Values Slider" on page 787, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Container" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Deck" on page 797, "Discrete Values Slider" on page 798, "Drop-Down List" on page 799, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Iterator" on page 804, "List" on page 808, "List Box" on page 809, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Radio Button Group" on page 829, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835, "Tab Control" on page 836, "Toggle Button Bar" on page 840

Share Result Set

Specifies whether to share an identical query between data containers that use it. To share a query, data containers must be lists, repeaters, or repeater tables and must use the same grouping structure and list of properties. The data containers cannot be part of a master detail relationship. When set to Yes, the query sends only one request to the database and shares the result. When set to No, the query is not shared.

Applies to

"List" on page 808, "Repeater" on page 831, "Repeater Table" on page 831

Sharing

The properties that enable the set to be shared.

Applies to

Show Caption

Specifies whether, or where, to show the caption.

Applies to

"Field Set" on page 800

Show Data Points

Specifies whether to show value markers and how they are formatted.

Applies to

"Line" on page 808

Show Data Range in Legend

Specifies whether to show the full range of data in the legend. If set to No, only the values from the palette will be shown.

Applies to

"Point Layer" on page 825, "Region Layer" on page 830

Show Features with No Data

Indicates whether to show the features of a map that do not have corresponding data.

Applies to

"Point Layer" on page 825, "Region Layer" on page 830

Show Feelers

Specifies whether feeler lines are rendered for each marker.

Applies to

"3-D Scatter Chart" on page 772

Show Hover

Specifies whether to highlight areas in the data container that are clickable.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Data Container" on page 793, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "List" on page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Static Repeater Table" on page 835

Show Icon

When defined, specifies whether to show the icon for each list item in the drop-down list.

Applies to

“Data Drop-Down List” on page 794, “Drop-Down List” on page 799

Show Icon

Specifies whether to show the icon for the current label.

Applies to

“Iterator Label Area” on page 805

Show Labels

Specifies whether labels are rendered for the display layer in a map.

Applies to

“Display Layer” on page 798

Show Legend Values

Specifies whether and how to show legend values.

Applies to

“Legend” on page 806

Show line

Specifies whether a line may be rendered. This allows you to show markers without lines.

Applies to

“Line” on page 808

Show Pointer Cursor

Specifies whether to show the pointer cursor as a hand when hovering over an area that is clickable. You can set the value of this property for multiple objects simultaneously by first control+clicking the items in the report.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Bubble Chart” on page 777, “Bullet Chart” on page 777, “Combination Chart” on page 785, “Combination Chart” on page 786, “Crosstab” on page 788, “Gauge Chart” on page 800, “Gauge Chart” on page 801, “List” on page 808, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 822, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Pie Chart” on page 824, “Polar Chart” on page 825, “Progressive Chart” on page 826, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Repeater Table” on page 831, “Scatter Chart” on page 833, “Scatter

Chart” on page 833, “Static Repeater Table” on page 835

Show Tooltip

Specifies whether to show tooltips of the slider values when the thumb is clicked or moved.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Show Values

Specifies which values to show in a chart legend.

Applies to

“Legend” on page 807

Show Values

Specifies whether values and labels are rendered for the region or point layer in a map.

Applies to

“Point Layer” on page 825, “Region Layer” on page 830

Show Values

Specifies the appearance of data labels in area, bar, line, Pareto, and progressive charts.

Applies to

“Area” on page 773, “Bar” on page 774, “Line” on page 808, “Pareto Chart” on page 822, “Progressive Chart” on page 826

Show Values

Specifies whether to show the labels for the data markers on the cumulation line in a Pareto chart.

Applies to

“Cumulation Line” on page 792

Show Values

Specifies the appearance of data labels in a pie chart.

Applies to

“Pie Chart” on page 824

Show Values

Specifies the appearance of data labels in a scatter chart.

Applies to

“Scatter Chart” on page 833

Show Values

Specifies the appearance of data labels in a bubble chart.

Applies to

“Bubble Chart” on page 777

Size

Specifies the height and width of the control.

Applies to

“Button” on page 778, “Data Deck” on page 794, “Data Drop-Down List” on page 794, “Data List Box” on page 795, “Data Tab Control” on page 796, “Deck” on page 797, “Drop-Down List” on page 799, “List Box” on page 809, “Tab Control” on page 836

Size & Overflow

Specifies the height and width of the object, as well as how overflow content should be treated, using scroll bars and clipping.

Applies to

“Block” on page 776, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab” on page 788, “Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “Field Set” on page 800, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803, “List” on page 808, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “List Summary” on page 814, “Note” on page 819, “Page” on page 821, “Page Body” on page 821, “Page Break Text” on page 821, “Page Footer” on page 821, “Page Header” on page 821, “Prompt Button” on page 827, “Repeater Table” on page 831, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Static Repeater Table” on page 835, “Table” on page 837, “Table Cell” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838, “Text Box Prompt” on page 838, “Text Item” on page 839, “Tree Prompt” on page 840, “Value Prompt” on page 841, “Variable Text Item” on page 842, “Win-Loss Chart” on page 842

Size & Overflow

Specifies the absolute height and width of the object, as well as how overflow content should be treated, using scroll bars and clipping.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833, "Scatter Chart" on page 833

Size Legend Title

Specifies a title within the legend above the palette for the point size. If this object is not defined, no additional title is drawn. If no legend is drawn, this object is ignored. Styling for this object is inherited from the legend title.

Applies to

"Point Layer" on page 825

Slice Direction

Specifies the direction in which slices appear in a pie chart.

Applies to

"Pie Chart" on page 824

Slide Animation Direction

Specifies the direction from which a new card appears. Select Auto Horizontal or Auto Vertical to automatically set the direction based on the order of cards in the deck. For example, when Auto Horizontal is specified, if you view the first card in a deck and you select to view the fourth card, the fourth card appears from the right. If you then select to view the first card, the first card appears from the left.

Applies to

"Data Deck" on page 794, "Deck" on page 797

Slider Values Definition

Defines the values of the slider.

Applies to

"Discrete Values Slider" on page 798

Solve Order

Specifies the solve order in the crosstab. The item with the lowest solve order value is calculated first, followed by the next lowest value, and so on. For identical values, column items are calculated first, then row items, and then the measure.

Applies to

“Crosstab Summary” on page 791

Solve Order

Specifies the solve order in crosstabs and charts. The item with the lowest solve order value is calculated first, followed by the next lowest value, and so on. For identical values, in crosstabs, column items are calculated first, then row items, and then the measure. In charts, x-axis items are calculated first and then legend items.

Applies to

“Calculated Measure” on page 779, “Calculated Member” on page 779, “Data Item” on page 795, “Dimensional Edge Summary” on page 798, “Edge Summary” on page 799

Sorting

Specifies the desired sort sequence.

Applies to

“Chart Node Member” on page 782, “Crosstab Node Member” on page 790, “Data Button Bar” on page 793, “Data Check Box Group” on page 793, “Data Deck” on page 794, “Data Discrete Values Slider” on page 794, “Data Drop-Down List” on page 794, “Data Iterator” on page 795, “Data List Box” on page 795, “Data Radio Button Group” on page 795, “Data Tab Control” on page 796, “Data Toggle Button Bar” on page 796, “Level” on page 807, “Node” on page 819, “Select & Search Prompt” on page 834, “Tree Prompt” on page 840, “Value Prompt” on page 841

Source Type

Specifies the source type of the text.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839

Source Type

Specifies the source type of the HTML text.

Applies to

“HTML Item” on page 802, “Rich Text Item” on page 832

Source Type

Specifies the source type of the URL.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Source Type

Specifies the source type of the bookmark.

Applies to

“Bookmark” on page 776

Spacing & Breaking

Specifies text properties such as line height, letter spacing, and word breaking.

Applies to

“Block” on page 776, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “Hyperlink” on page 802, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “List Summary” on page 814, “Page Break Text” on page 821, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Table Cell” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838, “Text Item” on page 839, “Variable Text Item” on page 842

Spider Effects

Specifies whether the chart is rendered with web-like flat concentric circles. The Radial Axis property must be set to Show for this property to take effect.

Applies to

“Polar Chart” on page 825, “Radar Chart” on page 828

SQL

The text of the typed-in SQL. It is assumed to be appropriate for the type and data source. If it is not the query may fail, or produce unexpected results.

Applies to

“SQL” on page 835

SQL Join Syntax

Controls the syntax to generate for joins. Click Implicit to generate joins in the WHERE clause. Click Explicit to generate INNER JOIN syntax. If unspecified, the value of the corresponding governor in the model is used.

Applies to

“Query” on page 828

SQL Syntax

Specifies the syntax of the SQL in the query. A value of Cognos SQL indicates that IBM® Cognos® extended SQL-92 syntax is used. A value of Native SQL indicates that native database SQL is used. You cannot use IBM Cognos SQL if the Processing property for the query is set to Database Only; it must have a value of Limited Local. A value of Pass-Through indicates that a standalone query text syntax is used. The default value is Native SQL.

Applies to

“SQL” on page 835

Standard Deviations

Specifies a distance from the mean in standard deviations. This value can be positive or negative. A value of zero indicates the mean value.

Applies to

“Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Baseline” on page 775, “Marker” on page 816

Standard Deviations

Specifies a distance from the mean in standard deviations. This value can be positive or negative. A value of zero indicates the mean value.

Applies to

“Marker” on page 816

Standard Deviations

Specifies a distance from the mean in standard deviations. This value can be positive or negative. A value of zero indicates the mean value.

Applies to

“Marker” on page 816

Start Position

Specifies the position of one edge of the colored region along the numeric axis. The region extends from the position defined in this property to the position defined in the End Position property. The value that you specify in this property must be less than the value that is specified in the End Position property.

Applies to

“Colored Region” on page 785

Static Choices

Represents a collection of static choices used by the prompt object.

Applies to

“Select & Search Prompt” on page 834, “Value Prompt” on page 841

Step

Specifies at which intervals the thumb can come to a rest.

Applies to

“Continuous Values Slider” on page 787

Style Variable

Specifies a variable based on which the object can be conditionally styled.

Applies to

“Angular Measure” on page 773, “Axis Title” on page 774, “Block” on page 776, “Bubble Measure” on page 777, “Caption” on page 779, “Chart Body” on page 781, “Chart Footer” on page 781, “Chart Subtitle” on page 782, “Chart Text Item” on page 782, “Chart Title” on page 783, “Conditional Block” on page 787, “Conditional Block” on page 787, “Context Item Text” on page 787, “Crosstab” on page 788, “Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “Cumulation Line Axis” on page 792, “Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Default Measure” on page 797, “Display Layer” on page 798, “Field Set” on page 800, “Gauge Labels” on page 801, “Gauge Numerical Axis” on page 801, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803, “Interval Prompt” on page 804, “Legend” on page 806, “Legend Title” on page 807, “List” on page 808, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “List Summary” on page 814, “Note Content” on page 819, “Page” on page 821, “Page Break Text” on page 821, “Pie Labels” on page 824, “Point Layer” on page 825, “Point Measure” on page 825, “Point Size Measure” on page 825, “Prompt Button” on page 827, “Radial Measure” on page 829, “Region Layer” on page 830, “Region Measure” on page 830, “Repeater Table” on page 831, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Select & Search Prompt” on page 834, “Static Repeater Table” on page 835, “Table” on page 837, “Table Cell” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838, “Table Row” on page 838, “Target Measure” on page 838, “Text Box Prompt” on page 838, “Text Item” on page 839, “Time Prompt” on page 839, “Tolerance Measure” on page 840, “Tree Prompt” on page 840, “Value Prompt” on page 841, “Win-Loss Chart” on page 842, “X Axis Measure” on page 844, “Y Axis Measure” on page 845, “Z Axis Measure” on page 845

Subtitle

Specifies whether a chart subtitle is rendered. This property applies only to legacy charts.

Applies to

“Win-Loss Chart” on page 842

Subtitle

Specifies whether a chart subtitle is rendered.

Applies to

Summarize Small Items

Specifies whether to summarize small items, such as slices, lines, areas, bars, or columns, in the chart and how they are summarized. You cannot summarize small items in charts that have matrix edges or in charts that have multiple numeric axes.

Applies to

“Combination Chart” on page 786, “Pareto Chart” on page 822

Summarize Small Slices

Specifies whether to summarize small items, such as slices, lines, areas, bars, or columns, in the chart and how they are summarized. You cannot summarize small items in charts that have matrix edges or in charts that have multiple numeric axes.

Applies to

“Pie Chart” on page 824

Summary Text

Specifies summary text for table-like objects. Use to make your reports accessible for people who use screen readers. The summary text is never displayed in visual Web browsers. Summary text is used only for screen readers and speech browsers. Set this property only on tables that are used to display data, and not on tables that are used for layout purposes. To have a table object function as a data table, ensure that one or more of its cells have the Table Header property set to Yes.

Applies to

“Crosstab” on page 788, “List” on page 808, “Repeater Table” on page 831, “Table” on page 837

Suppress

Specifies the type of suppression to apply to the query results. This property overrides the corresponding SAP BW governor in the model. If unspecified, the value of the governor in the model is used.

When using compatible query mode, this property applies to Essbase, SAP BW, and MSAS data sources. When using dynamic query mode, this property applies to all OLAP data sources, including OLAP over relational (DMR).

Applies to

“Query” on page 828

Suppression

Specifies zero suppression options for the object.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Crosstab" on page 788, "Data Button Bar" on page 793, "Data Check Box Group" on page 793, "Data Deck" on page 794, "Data Discrete Values Slider" on page 794, "Data Drop-Down List" on page 794, "Data Iterator" on page 795, "Data List Box" on page 795, "Data Radio Button Group" on page 795, "Data Tab Control" on page 796, "Data Toggle Button Bar" on page 796, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "List" on page 808, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater" on page 831, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Win-Loss Chart" on page 842

Table Header

Specifies whether the cell is a table header. Use to make reports accessible for people who use screen readers. When set to Yes, screen readers and speech browsers programmatically create relationships between the table header and table cells.

Applies to

"List Cell" on page 809, "Table Cell" on page 837

Table of Contents

Specifies the name of the table of contents to which the entry belongs.

Applies to

"Table of Contents Entry" on page 838

Table of Contents Name

Specifies the name that uniquely identifies the table of contents.

Applies to

"Table of Contents" on page 837

Table Properties

Specifies the properties for the table object.

Applies to

"Crosstab" on page 788, "List" on page 808, "Repeater Table" on page 831, "Static Repeater Table" on page 835, "Table" on page 837

Tab Orientation

Specifies the orientation of the tabs in the tab control.

Applies to

“Data Tab Control” on page 796, “Tab Control” on page 836

Tabs Definition

Defines the tabs in the tab control.

Applies to

“Tab Control” on page 836

Tab Width

Specifies the width of tabs in the tab control.

Applies to

“Data Tab Control” on page 796, “Tab Control” on page 836

Target Color

Specifies a color for the vertical lines that mark the target ranges for target measure values in a metrics chart.

Applies to

“Metrics Range Chart” on page 818

Target Marker

Specifies whether the status indicators will appear in the legend.

Applies to

“Metrics Range Chart” on page 818

Target Marker Border Color

Specifies a color for the borders around target value markers in a metrics chart.

Applies to

“Metrics Range Chart” on page 818

Target Marker Position

Specifies whether the status indicators will be rendered over the first bar in the cluster or the middle of the cluster. Does not apply to stacked charts.

Applies to

“Metrics Range Chart” on page 818

Target Range (%)

Specifies target ranges centered around target measure values.

Applies to

“Metrics Range Chart” on page 818

Text

Specifies the static text to render.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839, “Total Column” on page 840

Text Color

Specifies the color of the text of each label.

Applies to

“Check Box Group” on page 784, “Data Check Box Group” on page 793, “Data Radio Button Group” on page 795, “Radio Button Group” on page 829

Text Color

Specifies the text color of the button label.

Applies to

“Iterator First” on page 805, “Iterator Label Area” on page 805, “Iterator Last” on page 805, “Iterator Next” on page 805, “Iterator Previous” on page 805

Text Orientation

Specifies the orientation of the text on the gauge axis.

Applies to

“Gauge Axis” on page 800

Text Source Variable

Specifies a variable based on which the text source can be chosen.

Applies to

“Chart Text Item” on page 782, “Chart Text Item” on page 783, “Cumulation Line Label” on page 792, “Hyperlink” on page 802, “Hyperlink Button” on page 803, “Text Item” on page 839

Text Truncation

Specifies whether and how legend items are truncated.

Applies to

“Axis Labels” on page 774, “Legend” on page 807

Tick Interval

Specifies the interval, in slider values, between the appearance of ticks. For example, if you enter 3, a tick will appear for every third value in the slider. To apply this property, a value other than None or No Labels must be specified for the Tick Type property.

Applies to

“Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Tick Interval

Specifies the interval, in slider values, between the appearance of ticks. For example, if you enter 20 in a slider that contains values between 0 and 100, a tick appears at 20, 40, 60, 80, and 100. To apply this property, a value other than None or No Labels must be specified for the Tick Type property.

Applies to

“Continuous Values Slider” on page 787

Tick Label Skip Interval

Specifies the interval, in ticks, between labels. This helps to avoid label collisions in the slider. If there is a collision between two labels, the second label is not shown.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Tick Type

Specifies the type of label to show for the ticks in the slider.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Title

Specifies whether a chart title is rendered. This property applies only to legacy charts.

Applies to

“Win-Loss Chart” on page 842

Title

Specifies whether a chart title is rendered.

Applies to

Title

Specifies whether a chart title is rendered.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Scatter Chart" on page 833, "Scatter Chart" on page 833

Tolerance Color

Specifies a color for the vertical lines that mark the tolerance ranges for target measure values in a metrics chart.

Applies to

"Metrics Range Chart" on page 818

Tolerance Label

Specifies whether the label for the Target Tolerance will appear in the legend.

Applies to

"Metrics Range Chart" on page 818

Tooltips

Specifies whether tooltips are shown in a chart when you hover over data elements. Tooltips are not supported in PDF documents.

Applies to

"Combination Chart" on page 786, "Pareto Chart" on page 822, "Progressive Chart" on page 826

Tooltips

Specifies whether tooltips are shown in a pie chart when you hover over data elements. Tooltips are not supported in PDF documents.

Applies to

"Pie Chart" on page 824

Tooltips

Specifies whether tooltips are shown in a chart when you hover over data elements. Tooltips are not supported in PDF documents.

Applies to

"Bubble Chart" on page 777, "Bullet Chart" on page 777, "Gauge Chart" on page 800, "Scatter Chart" on page 833

Tooltips

Specifies whether tooltips are shown in a visualization when you hover over data elements. Tooltips are not supported in PDF documents.

Applies to

“Data Container” on page 793

Tooltips

Specifies whether tooltips are shown in the chart when you hover over data elements. Tooltips are not supported in PDF documents. This property applies only to legacy charts.

Applies to

“3-D Combination Chart” on page 772, “3-D Scatter Chart” on page 772, “Bubble Chart” on page 776, “Combination Chart” on page 785, “Gauge Chart” on page 801, “Map” on page 814, “Marimekko Chart” on page 815, “Metrics Range Chart” on page 818, “Pareto Chart” on page 823, “Pie Chart” on page 823, “Polar Chart” on page 825, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Scatter Chart” on page 833, “Win-Loss Chart” on page 842

Top Position

Specifies the position of the top edge of the colored region.

Applies to

“Colored Region” on page 785

Top Position (px)

Specifies the pixel position of the top edge of the legend measured from the bottom of the chart.

Applies to

“Legend” on page 806

Total Column

Specifies whether a total column is rendered. This property applies only to legacy charts.

Applies to

“Progressive Chart” on page 827

Total Column

Specifies whether a bar that shows the total cumulative value is rendered.

Applies to

“Progressive Chart” on page 826

Total Column Color

Specifies the color, gradient, or pattern of the total column on the progressive chart.

Applies to

“Total Column” on page 840

To Text

Specifies the label that appears beside the end of a range. This property applies to the following prompt types: date, date & time, time, and interval. The default label text is To.

Applies to

“Date & Time Prompt” on page 796, “Date Prompt” on page 797, “Interval Prompt” on page 804, “Text Box Prompt” on page 838, “Time Prompt” on page 839, “Value Prompt” on page 841

Track Length

Specifies the track length of the slider.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Trendline Label

Specifies whether to show the default label for the trend line. When set to No, you can type your own label text.

Applies to

“Trendline” on page 841

Trendlines

Adds a trend line or curve that indicates the general direction of the data over time.

Applies to

“Bubble Chart” on page 777, “Combination Chart” on page 786, “Scatter Chart” on page 833

Truncation

Specifies whether labels can be truncated.

Applies to

“Category Axis” on page 780, “Gauge Labels” on page 801, “Pie Labels” on page 824, “X Axis” on page 843, “Y Axis” on page 845

Truncation Text

Specifies the text to append when a label is truncated.

Applies to

“Category Axis” on page 780, “Gauge Labels” on page 801, “Legend” on page 806, “Pie Labels” on page 824, “X Axis” on page 843, “Y Axis” on page 845

Type

Specifies the type of variable.

Applies to

“Variable” on page 842

Type

Specifies the type of trend line.

Applies to

“Trendline” on page 841

Type

Specifies the behavior of the prompt button.

Applies to

“Prompt Button” on page 827

Type

Specifies the type of object.

Applies to

“Calculated Measure” on page 779, “Calculated Member” on page 779, “Custom Groups” on page 793, “Dimensional Edge Summary” on page 798, “Edge Summary” on page 799, “Explicit Member Set” on page 799, “Hierarchy Set” on page 802, “Intersection (Tuple)” on page 804, “Level Set” on page 808, “List Summary” on page 813, “Measure” on page 817, “Member” on page 817, “Member Children Set” on page 817, “Member Property” on page 818, “Named Set” on page 819, “Percentaged Measure” on page 823, “Set Expression” on page 835

Update Variables Live

Specifies whether to update variables as the thumb is moved. When set to Yes, the report is updated live when the thumb is moved. When set to No, the report is updated only when the thumb is stopped and released.

Applies to

“Continuous Values Slider” on page 787, “Data Discrete Values Slider” on page 794, “Discrete Values Slider” on page 798

Upper Range Skew (%)

Specifies a percentage that affects the positioning of tolerance bar and range with respect to the target value.

Applies to

“Metrics Range Chart” on page 818

URL

Specifies the URL, using static text.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803

URL

Specifies the URL, using static text.

Applies to

“Image” on page 803

URL Source Variable

Specifies a variable based on which the URL source can be chosen.

Applies to

“Hyperlink” on page 802, “Hyperlink Button” on page 803, “Image” on page 803

Usage

Specifies whether the usage of this object is Optional, Required, or Disabled. When Optional, this condition applies if all parameters referenced by the expression are provided with values. If the expression does not refer to any parameters, then this condition is always applied. When Disabled, this condition is never applied, which is useful for authoring and testing purposes.

Applies to

“Detail Filter” on page 798, “Summary Filter” on page 836

Use 1.x Behavior

Specifies that IBM® Cognos® ReportNet® query semantics are used if they differ from IBM Cognos Business Intelligence query rules.

Applies to

“Query” on page 828

Use Aggregate Cache

For SAP BW data sources, specifies whether to use the aggregation cache. We recommend that you use the default value.

Applies to

“Query” on page 828

Use Detail Value on Page

Specifies whether to render a detail value or an aggregate value for a text item that uses a data item as its source. Use this property only when you want to render the value that appears in the first or last detail row of a list, repeater or repeater table on the same page as the text item.

Applies to

“Text Item” on page 839

Use Embedded Data

Specifies whether to use data that is defined in the visualization definition instead of data that you insert from the package.

Applies to

“Visualization” on page 842

Use for Parameter Info

Specifies whether the query should be given priority when determining parameter information. Queries with this property set to Yes are checked for parameter information first, followed by queries with this property set to Default. Queries with this property set to No will not be checked for parameter information unless it is referenced in a query that will be checked. Setting this property to Yes on parameterized queries can improve performance in displaying prompt pages.

Applies to

“Query” on page 828

Use Local Cache

Specifies whether a query is a candidate for reusing the query results set. If set to Yes, the query engine can reuse the existing SQL results from the cache. If set to No, the query is executed rather than using cached results. This property applies only to relational and dimensionally-modeled relational (DMR) data sources.

Applies to

“Query” on page 828

User SAP Member Cache

Signals to the SAP BW provider whether the query associated with this property is cached to the IBM® Cognos® Business Intelligence member cache. When set to Yes, the member cache is populated with the dimensions in the query, encrypted, and saved for later use.

Applies to

“Query” on page 828

Use Same Range For All Instances

Specifies that all instances of the chart use the same maximum value. When set to No, the axis maximum value is recalculated for each chart instance. It is only relevant if the chart is involved in a master detail relationship.

Applies to

“Angular Axis” on page 773, “Gauge Numerical Axis” on page 801, “Numerical Axis” on page 820, “Numerical Axis” on page 820, “Radial Axis” on page 829, “X Axis” on page 843, “Y1 Axis” on page 844, “Y2 Axis” on page 844, “Y Axis” on page 844, “Z Axis” on page 845, “Z Axis” on page 845

Use SAP MUN as Business Key

Specifies whether to return the full SAP MUN as the value for the business key. Use this query hint to allow a drill-down on a business key for a non-leaf member of an external hierarchy. When set to Yes, the full MUN appears in the report output.

Applies to

“Query” on page 828

Use Set Aggregation

Specifies which aggregation clause is used to calculate the summary. When set to Yes, the aggregation clause within set is used. When set to No, the aggregation clause within detail is used.

For more information, see the topic Summarizing Values in Crosstabs.

Applies to

“Dimensional Edge Summary” on page 798, “Edge Summary” on page 799

Use SQL Parameters

Specifies whether the generated SQL uses parameter markers or literal values. When set to Marker, specifies that the generated SQL uses markers to denote that the value will be provided later. When set to Literal, uses literal values in the generated SQL. If not specified, the server determines the behavior.

Dynamic SQL applications have the ability to prepare statements which include markers in the text which denote that the value will be provided later. This is most efficient when the same query is used many times with different values. The technique reduces the number of times a database has to hard parse an SQL statement and it increases the re-use of cached statements. However, when queries navigate larger amounts of data with more complex statements, they have a lower chance of matching other queries. In this case, the use of literal values instead of markers may result in improved performance.

Applies to

“Query” on page 828

Use SQL With Clause

Specifies whether to send a request to the database using an SQL WITH clause. When set to Yes, and if the database supports WITH clauses, a WITH clause request is generated. When set to No, or if the database does not support WITH clauses, a request using derived tables is generated.

Applies to

“Query” on page 828

Use Thousands Separator

Specifies whether to delimit digit groups with the thousands separator.

Applies to

“Text Box Prompt” on page 838

Use Value

Specifies the values used by the prompt object.

Applies to

“Tree Prompt” on page 840

Use Value

Specifies the values used by the prompt object. These values can be different than the ones that are rendered to the user.

Applies to

“Select & Search Prompt” on page 834, “Value Prompt” on page 841

Value Location:

Specifies where values and labels are to be rendered in the chart.

Applies to

“Area” on page 773, “Bar” on page 774, “Bubble Chart” on page 776, “Combination Chart” on page 785, “Cumulation Line” on page 792, “Line” on page 808, “Metrics Range Chart” on page 818, “Pareto Chart” on page 823, “Polar Chart” on page 825, “Progressive Chart” on page 827, “Radar Chart” on page 828, “Scatter Chart” on page 833

Value Markers

Specifies whether to show special value markers and how they are formatted.

Applies to

“Line” on page 808

Value Range

Controls how the minimum and maximum are calculated for the visualization. When all data is selected, the minimum and maximum are calculated to span all associated Active Report control filters. When filtered data is selected, the minimum and maximum are calculated based on any filter choices that users make in associated Active Report controls. When specified values is selected, you explicitly specify the minimum and maximum.

Applies to

"Value" on page 841

Value Representation

Specifies whether values are rendered as percentages.

Applies to

"Pie Chart" on page 823

Values

Specifies what values to show in the chart and whether to show the corresponding measure, series, or category label.

Applies to

"3-D Scatter Chart" on page 772, "Bubble Chart" on page 776, "Polar Chart" on page 825, "Scatter Chart" on page 833

Values

Specifies whether values are rendered in the chart.

Applies to

"3-D Area" on page 771, "3-D Bar" on page 771, "3-D Line" on page 772, "Area" on page 773, "Bar" on page 774, "Cumulation Line" on page 792, "Line" on page 808, "Pareto Chart" on page 823, "Progressive Chart" on page 827, "Radar Chart" on page 828

Values

Specifies whether values are rendered.

Applies to

"Pie Chart" on page 823

Values

Specifies whether values are rendered in the chart.

Applies to

"Marimekko Chart" on page 815

Value Type

Specifies whether absolute values are rendered rather than cumulative values.

Applies to

“Area” on page 773, “Bar” on page 774, “Line” on page 808

Variable

Specifies the variable associated to the slider.

Applies to

“Continuous Values Slider” on page 787

Variable for Maximum

Specifies the variable to use for the maximum value when the slider range type is Range.

Applies to

“Continuous Values Slider” on page 787

Variable for Minimum

Specifies the variable to use for the minimum value when the slider range type is Range.

Applies to

“Continuous Values Slider” on page 787

Vertical Alignment

Specifies how objects contained in this object are vertically aligned.

Applies to

“Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Table Cell” on page 837, “Table Row” on page 838

Visible

Specifies whether a column or row is visible when the active report is executed. You can set the value of this property for multiple objects simultaneously by first control+clicking the items in the report.

Applies to

"Crosstab Node Member" on page 790, "Crosstab Space" on page 791, "Crosstab Summary" on page 791

Visible

Specifies whether to display the object. When set to No, the object is hidden but a fixed space is reserved in the report.

Applies to

"3-D Combination Chart" on page 772, "3-D Scatter Chart" on page 772, "Block" on page 776, "Bubble Chart" on page 776, "Bubble Chart" on page 777, "Bullet Chart" on page 777, "Combination Chart" on page 785, "Combination Chart" on page 786, "Conditional Block" on page 787, "Conditional Block" on page 787, "Context Item Text" on page 787, "Crosstab" on page 788, "Cumulation Line Axis" on page 792, "Date & Time Prompt" on page 796, "Date Prompt" on page 797, "Field Set" on page 800, "Gauge Chart" on page 800, "Gauge Chart" on page 801, "Gauge Labels" on page 801, "Gauge Numerical Axis" on page 801, "Hyperlink" on page 802, "Image" on page 803, "Interval Prompt" on page 804, "Legend" on page 806, "List" on page 808, "List Summary" on page 814, "Map" on page 814, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Page Break Text" on page 821, "Pareto Chart" on page 822, "Pareto Chart" on page 823, "Pie Chart" on page 823, "Pie Chart" on page 824, "Pie Labels" on page 824, "Polar Chart" on page 825, "Progressive Chart" on page 826, "Progressive Chart" on page 827, "Radar Chart" on page 828, "Repeater Table" on page 831, "Scatter Chart" on page 833, "Scatter Chart" on page 833, "Select & Search Prompt" on page 834, "Static Repeater Table" on page 835, "Table" on page 837, "Table of Contents" on page 837, "Table of Contents Entry" on page 838, "Text Box Prompt" on page 838, "Text Item" on page 839, "Time Prompt" on page 839, "Tree Prompt" on page 840, "Value Prompt" on page 841, "Variable Text Item" on page 842, "Win-Loss Chart" on page 842

Visual Angle

Specifies the angle, in degrees, in which the chart objects will be displayed when the chart has 3-D effects. This property applies only to legacy charts.

Applies to

"Combination Chart" on page 785, "Marimekko Chart" on page 815, "Metrics Range Chart" on page 818, "Pareto Chart" on page 823, "Progressive Chart" on page 827

White Space

Specifies how to handle the white space inside the object and whether text in the object is wrapped or appears all on one line. The term white space refers to the spaces between words, where text can be wrapped.

When set to **Normal**, the default, text will wrap when necessary, such as when space is limited.

When set to **No Wrap**, the text will never wrap to the next line in all report outputs, even if space is limited.

Applies to

“Block” on page 776, “Conditional Block” on page 787, “Conditional Block” on page 787, “Crosstab Columns” on page 788, “Crosstab Columns” on page 788, “Crosstab Corner” on page 789, “Crosstab Fact Cells” on page 789, “Crosstab Intersection” on page 789, “Crosstab Member Fact Cells” on page 790, “Crosstab Node Member” on page 790, “Crosstab Rows” on page 790, “Crosstab Rows” on page 791, “Crosstab Space” on page 791, “Crosstab Summary” on page 791, “List Cell” on page 809, “List Column” on page 809, “List Column Body” on page 810, “List Columns” on page 810, “List Columns” on page 810, “List Columns Body Style” on page 811, “List Columns Title Style” on page 811, “List Column Title” on page 811, “List Footer” on page 811, “List Header” on page 812, “List Row” on page 813, “List Row Cells Style” on page 813, “Repeater Table Cell” on page 831, “Repeater Table Cell” on page 832, “Table Cell” on page 837, “Table of Contents” on page 837, “Table of Contents Entry” on page 838

Width

Specifies the width of the visualization, in pixels.

Applies to

“Visualization” on page 842

Width (px)

Specifies the width of the note, in pixels.

Applies to

“Note” on page 819

Win Color

Specifies a color, color gradient, or pattern to apply to the win values.

Applies to

“Win-Loss Chart” on page 842

Win-Loss Threshold

Specifies the win-loss value in a win-loss chart. It represents values that are ties, which are mapped on the zero line.

Applies to

“Win-Loss Chart” on page 842

X Axis

Specifies whether the axis is rendered.

Applies to

“3-D Combination Chart” on page 772

X Axis

Specifies whether the axis is rendered.

Applies to

“Bubble Chart” on page 776, “Scatter Chart” on page 833

X-Axis Data Item Value

Specifies the scatter marker position on the X-axis.

Applies to

“Scatter Marker” on page 834

Y1 Axis

Specifies whether the axis is rendered.

Applies to

“Combination Chart” on page 785, “Metrics Range Chart” on page 818

Y2 Axis

Specifies whether the axis is rendered.

Applies to

“Combination Chart” on page 785

Y2 Axis Position

Specifies how the second Y axis is rendered. When Y2 Axis Position is set to Dual, the Y2 axis appears across from the Y1 numeric axis. When Y2 Axis Position is set to Bipolar, the Y2 axis appears below the Y1 axis. For example, in a combination chart showing Revenue and Quantity sold by Retailer type, with the Y2 Axis Position set to Dual, the Revenue columns and the Quantity sold line overlap because the Revenue axis (Y1) and the Quantity sold axis (Y2) are across from each other. However, with the Y2 Axis Position set to Bipolar, the Revenue columns appear above the Quantity sold line, and the data does not overlap. This property applies only to legacy charts.

Applies to

“Combination Chart” on page 785

Y Axis

Specifies whether the axis is rendered.

Applies to

“3-D Combination Chart” on page 772

Y Axis

Specifies whether the axis is rendered.

Applies to

"Bubble Chart" on page 776, "Marimekko Chart" on page 815, "Scatter Chart" on page 833

Y-Axis Data Item Value

Specifies the scatter marker position on the Y-axis.

Applies to

"Scatter Marker" on page 834

Data Formatting Properties

The following is a list of properties available in the data formatting dialog.

"Not Applicable" Characters

Specifies the characters to be displayed when the value to be formatted was not applicable. The default value is two dashes (--). Note that the format will be applied only if the data source supports this error condition.

Any Error Characters

Specifies the characters to be displayed when the value to be formatted was not available because of an error. This property is overridden by the more specific formatting error conditions, such as Security Error Characters. The default value is two dashes (--). Note that the format will be applied only if the data source supports this error condition.

Calendar Type

Specifies the type of calendar to be displayed. The date values will be mapped to the selected calendar before being formatted. The default value is inherited from the user's content language. Note that the Japanese Imperial setting is only applicable for Japanese languages.

Clock

Specifies whether to display the time in 12-hour or 24-hour format. The default value is inherited from the user's content language.

Currency

Specifies the currency to be used. The default currency symbol will be displayed unless the values of the Currency Display and Currency Symbol properties are changed. The default value is inherited from the model.

Currency Display

Specifies whether to display the international or local currency symbol. By default, the local currency symbol is displayed.

Currency Symbol

Specifies a character or characters to use as the symbol to identify the local currency. This symbol will precede the number and any sign, even if it is a leading

sign. A space between the symbol and the numeric value can be specified by entering it in this property, after the symbol. The default value is inherited from the user's content language.

Currency Symbol Position

Specifies where the currency symbol will appear. If End is selected, any spaces that follow the character or characters in the Currency Symbol or International Currency Symbol properties will be rendered between the number and the symbol. The default value is inherited from the user's content language.

Date Ordering

Specifies the order in which to display the day, month, and year. The default value is inherited from the user's content language.

Date Separator

Specifies the character to be displayed between the year, month, and day. The default value is inherited from the user's content language.

Date Style

Specifies the date style. The results rendered are determined by the language. Generally, Short uses only numbers, Medium uses some abbreviated words, Long uses complete words, and Full includes all available details.

Decimal Separator

Specifies the character that will separate non-decimal numbers from decimals. This property is ignored if no decimals are displayed. The default value is inherited from the user's content language.

Digit Shaping

Specifies the digit shaping option to apply. When National is selected, digit shapes are determined from the user's content language. When Contextual is selected, digit shapes are determined from adjoining characters in the value. For example, if the most recent strongly directional character before the numerical character is left-to-right, the number is displayed as a European number. If the most recent strongly directional character before the numerical character is right-to-left, the number is displayed in Arabic-Indic format. If there are no strongly directional characters before the numerical character, the number is displayed according to the base text direction of the field. When None is selected, no shaping is performed, and the value as it appears in the data source is shown. The default depends on the type of value. When the value is a string, the default is None.

Digit Shaping

Specifies the digit shaping option to apply. When National is selected, digit shapes are determined from the user's content language. When None is selected, no shaping is performed, and the value as it appears in the data source is shown. The default depends on the type of value. When the value is a number, the default is the ICU default for the language.

Display AM / PM Symbols

Specifies whether to display the AM or PM symbols. The default value is inherited from the user's content language.

Display As Exponent

Specifies whether to render values in scientific notation, using exponents. If this property is set to No, scientific notation will not be used. If this property is not specified, scientific notation will be used only when values exceed the maximum number of digits. The default value is inherited from the user's content language.

Display Days

Specifies whether to display the day. The format of the day can be controlled by selecting one of the specific formats. Selecting Julian means that the 3-digit day of the year will be displayed. The default value is inherited from the user's content language.

Display Eras

Specifies whether to display the era. The default value is inherited from the user's content language.

Display Hours

Specifies whether to display the hours. The default value is inherited from the user's content language.

Display Milliseconds

Specifies whether to display the milliseconds. The format of the milliseconds can be controlled by selecting one of the specific formats. This property is ignored if seconds are not displayed. The default value is inherited from the user's content language.

Display Minutes

Specifies whether to display the minutes. The format of the minutes can be controlled by selecting one of the specific formats. The default value is inherited from the user's content language.

Display Months

Specifies whether to display the month. The format of the month can be controlled by selecting one of the specific formats. The default value is inherited from the user's content language.

Display Months

Specifies whether to display the month.

Display Seconds

Specifies whether to display the seconds. The format of the seconds can be controlled by selecting one of the specific formats. The default value is inherited from the user's content language.

Display Time Zone

Specifies whether to display the time zone. The default value is inherited from the user's content language.

Display Weekdays

Specifies whether to display the weekday. The format of the weekday can be controlled by selecting one of the specific formats. The default value is inherited from the user's content language.

Display Years

Specifies whether to display the year. The first two digits of the year, which indicate the century, can be controlled by selecting one of the associated property values. The default value is inherited from the user's content language.

Display Years

Specifies whether to display the year.

Divide By Zero Characters

Specifies the characters to be displayed when a numeric value is the result of a division by zero. The default value is /0. Note that the format will be applied only if the data source supports this error condition.

Exponent Symbol

Specifies the character to be displayed to identify exponents if the scientific notation is used. The symbol will be rendered after the number, separated by a space. The default value is inherited from the user's content language.

Group Size (digits)

Specifies the primary grouping size. If a value is specified it represents the number of digits to the left of the decimal point to be grouped together and separated by the thousands separator. The default value is inherited from the user's content language.

International Currency Symbol

Specifies a character or characters to use as a symbol to identify the international currency. This symbol will replace the currency symbol. A space between the symbol and the numeric value can be specified by entering it in this property, after the symbol. The default value is inherited from the user's content language.

Mantissa (digits)

Specifies the number of digits to be displayed following the exponent symbol if the scientific notation is used.

Maximum No. of Digits

Specifies the maximum number of digits that can be displayed. If the maximum number of digits is not sufficient to display the value, a scientific notation will be used. The default value is inherited from the user's content language.

Minimum No. of Digits

Specifies the minimum number of digits that can be displayed. If the minimum number of digits is too high to display a value, the padding character will be used. The default value is inherited from the user's content language.

Missing Value Characters

Specifies the character or characters to be displayed when the value is missing. If no value is entered for this property, an empty string will be displayed.

Negative Pattern

Specifies a presentation format, based on patterns, for negative numbers. Some restrictions exist. The numerical part of the negative pattern is ignored. Only the suffix and the prefix are used. For example, in the pattern ABC###EFG, ABC is the prefix, EFG is the suffix and ### is the numerical part of the pattern.

Negative Sign Position

Specifies where the negative sign will appear. The default value is inherited from the user's content language.

Negative Sign Symbol

Specifies how to display negative numbers. The default value is inherited from the user's content language.

No. of Decimal Places

Specifies the number of digits to be displayed to the right of the decimal point. If this property is not set, the number of decimal places will vary depending on the number rendered.

Numeric Overflow Characters

Specifies the characters to be displayed when a numeric value is the result of a numeric overflow. The default value is two dashes (--). Note that the format will be applied only if the data source supports this error condition.

Padding Character

Specifies the character that will be used to pad values that have fewer digits than the minimum number of digits. The default value is inherited from the user's content language.

Pattern

Specifies a presentation format that is based on patterns. The pattern format overrides formats specified in other properties. For example, to format the date as 2009/12/31 23:59:59 PM, use the pattern yyyy/MM/dd hh:mm:ss aa. For example, to format thousands using the letter K, set the Format Type to Number, set the Scale to -3 (to remove 000), and then use the pattern to ####K.

Percentage Symbol

Specifies whether to display the values per hundred (percent) or per thousand. The symbol will be appended to the number and any trailing sign. A space between the numeric value and the symbol can be specified by entering it in this property, after the symbol. The default value is inherited from the user's content language.

Percent Scale (integer)

Scale to be applied to value after formatting. If omitted, no percent scale will be applied and the value will be formatted according to the normal decimal positioning associated with the percent (or per mille) symbol.

Scale

Specifies how many digits to move the decimal delimiter for formatting purposes. For example, move the decimal three spaces to present values in thousands. The default value is inherited from the database field.

Secondary Group Size (digits)

Specifies the secondary grouping size. If a value is specified it represents the number of digits to the left of the primary group that will be grouped together and separated by the thousands separator. If this property is left blank, the secondary grouping of digits is the same number as the primary group size, as specified by the Group Size (digits) property. The default value is inherited from the user's content language.

Security Error Characters

Specifies the characters to be displayed when the value to be formatted was not available for security reasons. The default value is #!Security. Note that the format will be applied only if the data source supports this error condition.

Thousands Separator

Specifies how to delimit digit groups, such as thousands. This property is only used if the Use Thousands Separator property is set to Yes. The default value is inherited from the user's content language.

Time Separator

Specifies the character to be displayed between the hour, minute, and second. The default value is inherited from the user's content language.

Time Style

Specifies the time style to be displayed. The exact results that will be rendered are determined by the language. Generally, Short means that the minimum details will be displayed, Long adds seconds, and Full means that all details are displayed, including the time zone. The default value is inherited from the user's content language.

Time Unit

Specifies the unit of measure of the value. This property will be ignored if any day or time components are shown. The default value is inherited from the user's content language.

Use Thousands Separator

Specifies whether the grouping delimiter will be applied as defined by the Group Size property. The default value is inherited from the user's content language.

Zero Value Characters

Specifies the character or characters to be displayed when the value is zero (0). If no value is entered for this property, the Maximum No. of Digits property determines how many zero digits are displayed.

Appendix H. Prompt API for IBM Cognos BI

The JavaScript Prompt API provides report authors with a method of customizing prompt interaction in the reports they author.

With the prompt API, JavaScript applications can interact with IBM Cognos Business Intelligence report prompts for the purposes of validation or custom interaction. The prompt API can query and set user selections, validate typed-in values using patterns, set default values using expressions or query data, and more. Examples are provided to show various usage scenarios of the prompt API.

Related concepts:

“Prompt API samples” on page 528

The following reports are some of the reports found in the Samples_Prompt_API folder.

cognos.Prompt object

Defines the class that contains a prompt object from a report.

This object should only be accessed through an instance of cognos.Report.

cognos.Prompt.getControlByName method

Returns the control object associated with a name.

Syntax

```
(cognos.Prompt.Control) getControlByName(String sName)
```

Parameters

{String} sName

Specifies the prompt name property set for the control in IBM Cognos Report Studio.

Returns

{cognos.Prompt.Control}

Object associated to the specified sName control. Returns null if the control does not exist.

Example

The following is an example of the clearMyPrompt() function.

```
<script type="text/javascript">  
function clearMyPrompt() {  
    var oCR = cognos.Report.getReport("_THIS_");  
    var myPrompt = oCR.prompt.getControlByName("myPrompt");  
    myPrompt.clearValues();  
}  
</script>
```

cognos.Prompt.getControls method

Returns an array of all controls associated with the report.

Syntax

```
(cognos.Prompt.Control[]) getControls()
```

Parameters

None.

Returns

```
{cognos.Prompt.Control[]}
```

An array of controls associated with the report.

Example

This example implements a function, `clearAllValues()`, that resets (clears the selection of) all prompt controls for a page.

```
<script type="text/javascript">
function clearAllValues() {
    var oCR = cognos.Report.getReport("_THIS_");
    var aControls = oCR.prompt.getControls();
    for (var i = 0; i < aControls.length; i++) {
        aControls[i].clearValues();
    }
}
</script>
```

cognos.Prompt.Control object

A control is a visual element in the prompt page, such as a text prompt or a value prompt.

cognos.Prompt.Control.addValue method

Add an array of values to a control.

If the control does not support multiple values, only the first one provided is used.

Syntax

```
{void} addValues(aValues)
```

Parameters

```
{cognos.Value[]} aValues
```

The new values to use for this control.

Returns

```
{void}
```

Example

This example adds an array of two values (use and display) to a prompt.

```
var oCR = cognos.Report.getReport("_THIS_");
function setPromptValue( promptName, useValue, displayValue ) {
    var oP = oCR.prompt. getControlByName( promptName );
    var oValue = { 'use': useValue, 'display': displayValue };
}
```



```
oP.addValue( [oValues] );
}
setPromptValue ( 'country', 'ca', 'Canada');
```

cognos.Prompt.Control.clearValues method

Clear (or deselect) all values for this control.

Syntax

For a text prompt, the text is set to empty. For a value prompt, all the selections are removed.

```
{void} clearValues()
```

Parameters

None.

Returns

```
{void}
```

Example

This example resets all the controls of a page.

```
function clearAllValues() {
  var oCR = cognos.Report.getReport("_THIS_");
  var aControls = oCR.prompt.getControls();
  for (var i = 0; i < aControls.length; i++) {
    aControls[i].clearValues();
  }
}
```

cognos.Prompt.Control.getName method

Returns the name of the control.

The name is set in IBM Cognos Report Studio in the name property set for the control.

Syntax

```
{String} getName()
```

Parameters

None.

Returns

```
{String}
```

The value specified by the name property set for the control.

cognos.Prompt.Control.getValues method

Returns the current value for the control.

This method always returns an array, even if there is only one value selected.

- The following is an example for a text box prompt (single):

```
[ {use: "Smith", display: "Smith"} ]
```

- The following is an example for a select prompt (multiple):

```
[ {use: "CAN", display: "Canada"}, {use: "JPN", display: "Japan"} ]
```

- The following are examples of range prompts:

A range is an array of two elements, with the mandatory names start and end.

The value of each element is a regular array as in earlier examples. When the range values are equal, this method returns a normal value instead of a range:

```
[ {use: useValue, display:displayValue} ]
```

When the range values are different, this method returns a range:

```
[ start:{use: useValue, display:displayValue}, end:{use: useValue, display:displayValue} ]
```

Syntax

```
{cognos.Value[]} getValues(boolean v_allOptions)
```

Parameters

{Boolean} v_allOptions

This optional parameter is applicable only to value prompts. The parameter specifies whether to retrieve all values or only selected values.

If the parameter is true, then all options are returned. If the parameter is false or missing, then only the selected options are returned.

The default value of this parameter is false.

Returns

```
{cognos.Value[]}
```

An array of values for the control.

Example

This example demonstrates how to adjust your code based on whether the result is a single value or a range.

```
function isRangeOutOfLimits(datePrompt, rangeLimit) {
  var result = false;
  var v = datePrompt.getValues();
  var rangeValue = v[0];
  var rangeDaysDiff = 0;
  if (rangeValue.start) {
    rangeDaysDiff = 0;
    var startDate = rangeValue.start.use;
    var endDate = rangeValue.end.use;
    rangeDaysDiff = dateUtils.substractDate(endDate,startDate);
  }
  if (rangeDaysDiff > 0 && rangeDaysDiff <= rangeLimit) {
    result = true;
  }
  return result;
}
```

This example demonstrates the use of the parameter v_allOptions.

```
var allValues = valueControl.getValues(true);
var selectedValues = valueControl.getValues();
```

cognos.Prompt.Control.setValidator method

Changes the default validation function for a control to one defined by the user.

When the specified function returns false, the UI element associated with the control indicates that a validation error occurred. When used in a multi-select control, the **Insert** button is disabled.

Syntax

```
{void} setValidator(oFct)
```

Parameters

{function} oFct

A user-defined function that takes the user input as a parameter and returns a Boolean value.

Returns

```
{void}
```

Example

This example demonstrates how to ensure that a valid postal code is provided in the form A1A 1A1.

```
textBox.setValidator(  
  function (values) {  
    var result = false;  
    if (values && values.length > 0) {  
      var sValue = values[0]['use'];  
      var rePostalCodeFormat = new RegExp( "[a-z][0-9][a-z] ?[0-9][a-z][0-9]", "gi" );  
      if ( rePostalCodeFormat.test(sValue) ) {  
        result=true;  
      }  
    }  
    return result;  
  }  
);
```

cognos.Prompt.Control.setValues method

Resets the control and adds an array of values to a control.

If the control doesn't support multiple values, only the first value provided is used. This is a convenience method that issues consecutive calls to `clearValues()` and `addValues()`.

Syntax

```
{cognos.Value[]} aValues
```

Parameters

{cognos.Value[]} aValues

New values to use for this control.

Returns

```
{void}
```

Example

```
function setPromptValue( promptName, value ) {  
  var oCR = cognos.Report.getReport("_THIS_");  
  var oP = oCR.prompt. getControlByName( promptName );
```

```
oP.setValues( oValues );
}
oValues = [{ 'use': 'ca', 'display': 'Canada' },
  { 'use': 'us', 'display': 'USA' }];
setPromptValue( 'countries', oValues );
```

cognos.Report object

Represents a report object in the content store.

Properties

prompt

References a cognos.Prompt object for this instance.

Example

This example creates a new cognos.Report object from the current instance.

```
var ocr= cognos.Report.getReport("_THIS_");
```

The new ocr object is specific to the cognos.Report namespace and avoids collisions with other objects in your scripts. The keyword `_THIS_` should always be used. The Report Server will replace it with a unique namespace during report execution.

cognos.Report.getReport method

Getter method for a cognos.Report object.

Namespaces are used to support HTML fragments. Always use a proper namespace when using this method to retrieve a cognos.Report object.

Syntax

```
<static> {cognos.Report} cognos.Report.getReport(sNamespace)
```

Parameters

{String} sNamespace *Optional*

Returns

{cognos.Report}

The cognos.Report instance for this namespace.

Example

```
var oCR = cognos.Report.getReport( "_THIS_" );
```

cognos.Report.sendRequest method

Sends a requests with the current parameters and values.

Syntax

```
{void} sendRequest(eAction)
```

Parameters

{cognos.Report.Action} eAction

Specifies one of the cognos.Report.Action enumeration values. No other values are allowed.

Returns

{void}

Example

```
function customButton( eAction )
{
    var oCR = cognos.Report.getReport("_THIS_");
    oCR.sendRequest( eAction );
}
```

cognos.Report.Action object

Defines constants for report navigation.

cognos.Report.Action.BACK

Go back one prompt page.

Syntax

<static> <constant> cognos.Report.Action.BACK

cognos.Report.Action.CANCEL

Cancel report execution and navigate to the previous page.

Syntax

<static> <constant> cognos.Report.Action.CANCEL

cognos.Report.Action.FINISH

Submit parameter values and skip all remaining optional prompts and prompt pages.

Syntax

<static> <constant> cognos.Report.Action.FINISH

cognos.Report.Action.NEXT

Submit parameter values and go to the next prompt page.

Syntax

<static> <constant> cognos.Report.Action.NEXT

cognos.Report.Action.REPROMPT

If the report contains prompt pages, the first prompt page is displayed. Otherwise, if the report doesn't contain prompt pages, this constant will re-prompt for values.

Syntax

<static> <constant> cognos.Report.Action.REPROMPT

cognos.Value class

JSON structure to represent parameter values.

This object includes the following valid attributes:

- display
- end
- start
- use

Simple values

```
{ 'use': '[a].[b].[c]', 'display': 'Canada' }
```

Range values

```
{  
  'start': { 'use': '2007-01-01', 'display': 'January 1, 2007' },  
  'end': { 'use': '2007-12-31', 'display': 'December 31, 2007' }  
}
```

Multiple values

```
[  
  { 'use': '12', 'display': 'Canada' },  
  { 'use': '41', 'display': 'Germany' },  
  { 'use': '76', 'display': 'Japan' }  
]
```

Notices

This information was developed for products and services offered worldwide.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service. This document may describe products, services, or features that are not included in the Program or license entitlement that you have purchased.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Software Group
Attention: Licensing
3755 Riverside Dr
Ottawa, ON K1V 1B7
Canada

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

Trademarks

IBM, the IBM logo and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at “ Copyright and trademark information ” at www.ibm.com/legal/copytrade.shtml.

The following terms are trademarks or registered trademarks of other companies:

- Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.
- Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.
- Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.
- Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Glossary

This glossary includes terms and definitions for IBM Cognos Business Intelligence and IBM Cognos Framework Manager.

The following cross-references are used in this glossary:

- See refers you from a term to a preferred synonym, or from an acronym or abbreviation to the defined full form.
- See also refers you to a related or contrasting term.

To view glossaries for other IBM products, go to www.ibm.com/software/globalization/terminology (opens in new window).

“A” “B” “C” on page 988 “D” on page 989 “E” on page 989 “F” on page 990 “G” on page 990 “H” on page 990 “I” on page 990 “J” on page 990 “L” on page 990 “M” on page 990 “N” on page 991 “O” on page 991 “P” on page 992 “Q” on page 992 “R” on page 992 “S” on page 993 “T” on page 993 “U” on page 994 “W” on page 994

A

access permission

A privilege that permits the access or use of an object.

accountability scorecard

A scorecard that Metric Studio automatically builds for each user which contains the metrics and projects they own.

agent A process that performs an action on behalf of a user or other program without user intervention or on a regular schedule, and reports the results back to the user or program.

alias An alternative name used instead of a primary name.

anonymous access

A type of access that allows users and servers to access a server without first authenticating with it.

application tier component

For installation, the set of processors that access the query databases to gather

information and then render the results as PDF and HTML reports and metrics.

Application tier components also pass requests to Content Manager and render the results that Content Manager retrieves from the content store.

attribute

1. In dimensional models, a property that provides qualitative information about members of a level in a dimension. For example, the Store level within the Retailer dimension might have properties such as address or retail space. In general, dimensional attributes do not have measure values or rollups associated with them, but are used to locate or filter members.
2. In relational models, a query item that is not a measure or identifier. When a query item is an attribute, it is not intended to be aggregated, or used for grouping or generating prompt pick lists.
3. In BI Modeling, a characteristic of an entity which is descriptive rather than a unique identifier or an aggregative measure.

authentication

The process of validating the identity of a user or server.

authentication provider

The communication mechanism to an external authentication source. Functionalities, such as user authentication, group membership, and namespace searches, are made available through authentication providers.

B

burst To create several report results by running a single report once. For example, the user can create a report that shows sales for each employee, and run it once, sending different results to regional managers by bursting on region.

burst key

The dimension or level of a query in the

report specification that is used to create, or burst, a set of report results.

C

CA See certificate authority.

calculated member

A member of a dimension whose measure values are not stored but are calculated at run time using an expression.

canvas

An area within a dashboard or workspace that users interact with to create, view, and manipulate content and data.

capability

A group of functions and features that can be hidden or revealed to simplify the user interface. Capabilities can be enabled or disabled by changing preference settings, or they can be controlled through an administration interface.

cardinality

1. For relational data sources, a numerical indication of the relationship between two query subjects, query items, or other model objects.
2. For OLAP data sources, the number of members in a hierarchy. The cardinality property for a hierarchy is used to assign solve orders to expressions.

cascading prompt

A prompt that uses values from a previous prompt to filter the values in the current prompt or pick list.

certificate

In computer security, a digital document that binds a public key to the identity of the certificate owner, thereby enabling the certificate owner to be authenticated. A certificate is issued by a certificate authority and is digitally signed by that authority. See also certificate authority.

certificate authority (CA)

A component that issues certificates to each computer on which components are installed.

CGI See Common Gateway Interface.

cipher suite

The combination of authentication, key

exchange algorithm, and the Secure Sockets Layer (SSL) cipher specification used for the secure exchange of data.

class style

A combination of formatting characteristics, such as font, font size, and border, that the user names and stores as a set.

CM See Content Manager.

Common Gateway Interface (CGI)

An Internet standard for defining scripts that pass information from a web server to an application program, through an HTTP request, and vice versa.

condition

An expression that can be evaluated as true, false, or unknown. It can be expressed in natural language text, in mathematically formal notation, or in a machine-readable language.

conformed dimension

A dimension with a single definition that can be reused or shared across multiple coordinated data marts.

constraint

1. A security specification that denies one or more users the ability to access a model component or to perform a modeling or authoring task.
2. A restriction on the possible values that users can enter in a field.

contact

A named email address to which reports and agent e-mails can be sent. Contacts are never authenticated.

content locale

A code that is used to set the language or dialect used for browsers and report text, and the regional preferences, such as formats for time, date, money, money expressions, and time of day.

Content Manager (CM)

The service that retrieves information from the content store, and saves information to the content store.

content store

The database that contains the data needed to operate, such as report specifications, published models, and security rights.

credential

A set of information that grants a user or process certain access rights.

cube A multidimensional representation of data needed for online analytical processing, multidimensional reporting, or multidimensional planning applications.

custom set

In Analysis Studio, a named object which can include filter rules, calculations, and sort rules. Custom sets can define a set of members that is different from any set originally defined in the cube model. See also predefined set, set.

D**dashboard**

A web page that can contain one or more widgets that graphically represent business data.

data source

The source of data itself, such as a database or XML file, and the connection information necessary for accessing the data.

data source connection

The named information that defines the type of data source, its physical location, and any sign-on requirements. A data source can have more than one connection.

data tree

Within a studio, a structure that contains objects such as query subjects, query items, dimensions, levels, and members. A data tree is used as a palette of the available data that can be inserted into calculations, filters, display areas, and other authoring gestures.

deployment

The process of moving an application (such as a report or model) to a different instance. For example, reports are often created in a test environment and then deployed to production. When an application is deployed, it is exported, transferred, and imported.

deployment archive

A file used for deployment. A deployment archive contains the data from the content store that is being moved.

deployment specification

A definition of what packages to move (deploy) between source and target environments, the deployment preferences, and the archive name. Deployment specifications are used for import and export.

derived index

A calculated metric that provides a status and a score based on other metrics.

details-based set

A set based on an item and its immediate details. See also set.

dimension

A broad grouping of descriptive data about a major aspect of a business, such as products, dates, or locations. Each dimension includes different levels of members in one or more hierarchies and an optional set of calculated members or special categories.

dimensional data source

A data source containing data modeled using OLAP concepts, including dimensions, hierarchies, and measures.

drill down

In a multidimensional representation of data, to access information by starting with a general category and moving downwards through the hierarchy of information, for example from Years to Quarters to Months.

E

event A change to a state, such as the completion or failure of an operation, business process, or human task, that can trigger a subsequent action, such as persisting the event data to a data repository or invoking another business process.

event key

A combination of data items that uniquely defines an event instance. Identifying an event instance enables the agent to determine if it is new, ongoing or stopped.

event list

The set of detected event instances

evaluated by the task execution rules to determine which agent tasks should be performed.

F

fact See measure.

G

gateway

An extension of a web server program that transfers information from the web server to another server. Gateways are often CGI programs, but may follow other standards such as ISAPI and Apache modules.

glyph The actual shape (bit pattern, outline) of a character image. For example, italic A and roman A are two different glyphs representing the same underlying character. Strictly speaking, any two images which differ in shape constitute different glyphs. In this usage, glyph is a synonym for character image, or simply image (The Unicode Standard – Version 1.0).

governor

A set of rules to limit user activities, such as the execution of reports, that either take too long or consume too many resources.

group A collection of users who can share access authorities for protected resources.

grouping

In reporting, the process of organizing common values of query items together and only displaying the value once.

H

hierarchy

The organization of a set of entities into a tree structure, with each entity (except the root) having one or more parent entities and an arbitrary number of child entities.

I

information card

A display of high-level information about dashboard, workspace, or report content, such as owner, contact information, date

modified, and an optional thumbnail view of the dashboard, workspace, or report.

information pane

In Analysis Studio, a pane that helps the user to confirm their selection in the data tree by displaying related information, such as the level and attributes.

initiative

A task developed to achieve objectives or close the gap between performance and targets. Initiatives are associated with individual objectives and often known as projects, actions, or activities.

item See member.

J

job A group of runnable objects, such as reports, agents, and other jobs that the user runs and schedules as a batch.

job step

The smallest part of a job that can be run separately. A job step can be a report or it can be another job.

L

layout The arrangement of printed matter on a screen or page, including margins, line spacing, type specification, header and footer information, indents, and more.

level A set of entities or members that form one section of a hierarchy in a dimension and represent the same type of object. For example, a geographical dimension might contain levels for region, state, and city.

locale A setting that identifies language or geography and determines formatting conventions such as collation, case conversion, character classification, the language of messages, date and time representation, and numeric representation.

M

MDX See Multidimensional Expression Language.

measure

A performance indicator that is quantifiable and used to determine how well a business is operating. For example,

measures can be Revenue, Revenue/Employee, and Profit Margin percent.

member

A unique item within a hierarchy. For example, Camping Equipment and 4 Man tent are members of the Products hierarchy.

metric A measure to assess performance in a key area of a business.

metric extract

A set of mappings between an existing Cognos data source and a Metric Studio object or value. For example, a cube measure named Revenue is mapped to a Metric Studio metric named Revenue Actual Value.

metric package

In Cognos Connection, a representation of a Metric Studio application. A metric package contains connection information, reports, and metric management tasks for that application. See also package.

metric store

A database that contains content for metric packages. A metric store also contains Metric Studio settings, such as user preferences.

metric type

A category of metrics that defines the business rules such as performance pattern, units, and meaning of a group of metrics. For example, Revenue can be a metric type, and European Revenue and North American Revenue would be metrics of this type.

model A physical or business representation of the structure of the data from one or more data sources. A model describes data objects, structure, and grouping, as well as relationships and security. In Cognos BI, a model is created and maintained in Framework Manager. The model or a subset of the model must be published to the Cognos server as a package for users to create and run reports.

model segment

A part of a Framework Manager project, such as a parameter map, a data source, a namespace, or a folder, that is a shortcut to a second project. Segments are used to

simplify model maintenance or to facilitate multi-user modeling.

multidimensional data source

See dimensional data source.

Multidimensional Expression Language (MDX)

The multidimensional equivalent of Structured Query Language (SQL).

N

named set

See predefined set.

namespace

A part of the model in which the names may be defined and used. Within a namespace, each name has a unique meaning.

news item

A single entry in a Really Simple Syndication (RSS) compatible format. It can include a headline, text, and a link to more information. A news item task in an agent can be used to create news items for display in a Cognos Connection portlet.

normalization

The process of restructuring a data model by reducing its relations to their simplest forms. It is a key step in the task of building a logical relational database design. Normalization helps avoid redundancies and inconsistencies in data. An entity is normalized if it meets a set of constraints for a particular normal form (first normal form, second normal form, and so on).

O

object In Report Studio, an empty information container that can be dragged to a report from the Toolbox tab and then filled with data. Reports are made up of objects, which include crosstabs, text items, calculations, graphics, and tables.

object extract

An extract that defines the metadata for a Metric Studio object, such as a user defined column, a scorecard, or a data source.

P

package

A subset of a model, which can be the whole model, to be made available to the Cognos server. See also metric package.

page set

In Report Studio, a set of one or more designed pages which repeat in the report output for each instance of a chosen query item. See also set.

passport

Session-based information, stored and encrypted in Content Manager memory, regarding authenticated users. A passport is created the first time a user accesses Cognos 8, and it is retained until a session ends, either when the user logs off or after a specified period of inactivity.

portlet

A reusable component that is part of a web application that provides specific information or services to be presented in the context of a portal.

predefined set

A set of members defined inside an OLAP data source as a list or by an expression. Predefined sets can be used in analysis and report authoring. See also custom set, set.

product locale

The code or setting that specifies which language, regional settings, or both to use for parts of the product interface, such as menu commands.

project

1. In Metric Studio, a task or set of tasks undertaken by a team and monitored on a scorecard. A project tracks dates, resources, and status.
2. In Framework Manager, a set of models, packages, and related information for administration, and for sharing model information.
3. In Metric Designer, a group of extracts. Each extract contains the metadata that is used to populate the Metric Studio data store or to create applications.

prompt

A report element that asks for parameter values before the report is run.

properties pane

Within a studio, a pane that provides an overview of the properties for selected data. The properties pane can also be used to make several changes and apply them at the same time, instead of repeating several different commands.

publish

In Cognos BI, to expose all or part of a Framework Manager model or Transformer PowerCube, through a package, to the Cognos server, so that the data can be used to create reports and other content.

Q

query The simple report specifications created and edited by Query Studio.

query item

A representation of a column of data in a data source. Query items may appear in a model or in a report and contain a reference to a database column, a reference to another query item, or a calculation.

query subject

A named collection of query items that are closely functionally related. Query subjects are defined using Framework Manager to represent relational data and form the set of available data for authoring reports in Query Studio and Report Studio. A query subject is similar to a relational view in that it can be treated as a table but does not necessarily reflect the data storage.

R

Really Simple Syndication (RSS)

An XML file format for syndicated web content that is based on the Really Simple Syndication specification (RSS 2.0). The RSS XML file formats are used by Internet users to subscribe to websites that have provided RSS feeds. See also Rich Site Summary.

repeater

In Report Studio, a cell container that repeats values within itself with no predefined internal structure.

repeater table

In Report Studio, a table-like container that repeats cells across and down the page or row in the associated query.

report A set of data deliberately laid out to communicate business information.

report output

The output produced as a result of executing a report specification against a data set.

report specification

An executable definition of a report, including query and layout rules, which can be combined with data to produce a report output.

report view

A reference to another report that has its own properties, such as prompt values, schedules, and results. Report views can be used to share a report specification instead of making copies of it.

response file

An ASCII file that can be customized with the setup and configuration data that automates an installation. During an interactive installation, the setup and configuration data must be entered, but with a response file, the installation can proceed without any intervention.

Rich Site Summary (RSS)

An XML-based format for syndicated web content that is based on the RSS 0.91 specification. The RSS XML file formats are used by Internet users to subscribe to websites that have provided RSS feeds. See also Really Simple Syndication.

RSS

1. See Really Simple Syndication.
2. See Rich Site Summary.

S

score A number or ranking that expresses applicability in relation to a standard.

scorecard

A collection of metrics representing the performance of one unit or aspect of an organization.

scorecard structure

The hierarchy of scorecards that reflects how an enterprise organizes its metrics.

security provider

See authentication provider.

selection-based set

A collection of individual items that the user has explicitly selected. The items or members may be selected from one or more levels of the same hierarchy. See also set.

session

The time during which an authenticated user is logged on.

set

A collection of related items or members. Members in a set may be specifically chosen, or selected by one or more filter rules. See also custom set, details-based set, page set, predefined set, selection-based set, stacked set.

stacked set

Two or more sets arranged one above another in rows or side-by-side in columns. See also set.

strategy

The overall plan of action (such as for a brand unit, business unit, channel, or company) to achieve a stated goal. Strategies normally cover a period of more than one year.

strategy map

In Metric Studio, a visual representation of the strategy and the objectives of that strategy for an organization. For example, a strategy map may show employees how their jobs are aligned to the overall objectives of the organization.

summary

In reporting and analysis, an aggregate value that is calculated for all the values of a particular level or dimension. Examples of summaries include total, minimum, maximum, average, and count.

T

task An action performed by an agent if the event status meets the task execution rules. For example, an agent can send an email, publish a news item, or run a report.

task execution rule

A user-specified option within an agent that determines which statuses and values

cause a task to be run. It determines which tasks to execute for each event instance.

template

In report authoring, a reusable report layout or style that can be used to set the presentation of a query or report.

thumbnail

An icon-sized rendering of a larger graphic image that permits a user to preview the image without opening a view or graphical editor.

tuple

An ordered collection of two or more members from different dimensions. For example, the tuple (2007, Camping Equipment, Japan) returns the value for the intersection of the three members: 2007, Camping Equipment, and Japan. Tuples can be used to filter and sort data, and to create calculations.

U**union set**

See stacked set.

user

Any individual, organization, process, device, program, protocol, or system that uses the services of a computing system.

user-defined column

In metric management, a column used to represent a value other than the actual or target. It may be an industry benchmark or any other useful additional numerical information for a period, including a calculation based on the other values of the metric. User-defined columns may be different for each metric type.

W**watch list**

A list of metrics that each user has chosen to monitor closely. If notification is enabled in Metric Studio, the user will receive email notification of changes to these metrics. Users can also choose to display their watch list as a portlet within Cognos Connection.

watch rule

A user-defined condition that determines whether a report is delivered to the user. When the rule is run, the output is evaluated and, if it satisfies the condition

or rule, the report is delivered by email or news item. Watch rules limit report delivery to those reports containing data of significance to the user.

Web Services for Remote Portlets

A standard for creating presentation-oriented web services so that they can be easily integrated within other applications, such as web portals.

widget

A portable, reusable application or piece of dynamic content that can be placed into a web page, receive input, and communicate with an application or with another widget.

work area

The area within a studio that contains the report, analysis, query, or agent currently being used.

workspace

See dashboard.

Index

Special characters

- characters
 - errors when filtering 535
 - marking special cells 387
 - troubleshooting in reports 481
- ! characters 533
- * characters 387
- % calculations
 - in dimensional reporting 303
 - in relational reporting 250

Numerics

- 100% stacked charts 101
- 3-D charts 102

A

- absolute charts 100
- access code
 - setting for active report 173
- accessibility features 467
 - keyboard shortcuts 467
- accessible reports 468
 - adding alternate text 470
 - adding summary text 471
 - associating labels to prompt controls 472
 - conditional blocks 473
 - emphasizing text 471
 - headings 471
 - report output options 469
 - specifying cell headers in tables 471
- active reports 171
 - adding controls 186
 - adding interactivity 184
 - controls 171
 - converting existing reports 172
 - creating and managing active report variables 184
 - defining connections between controls 192
 - drill-through links do not work 506
 - example 199, 203
 - in workspaces in IBM Cognos Workspace 4
 - integrating with IBM Cognos Workspace 184
 - running 199
 - saving in MHT format 199
 - setting access code 173
 - setting properties 173
 - specifying maximum number of rows that can appear 173
 - specifying reaction behavior of controls 195
 - specifying selection behavior of controls 194
 - summarizing data 198
 - unable to add to Cognos Workspace 498
 - unable to view in Firefox 498
 - unable to view in Firefox 8 or later 498
 - using master detail relationships when authoring
 - decks 197
 - variables 172
- adding
 - data 41

- aggregating
 - limitations with measures 534
 - mapping functions from data sources 228
 - member sets 272
 - samples and time dimensions 509
 - specifying aggregation properties in models 222
 - troubleshooting running totals 496
 - using a simple summary in dimensional reporting 268
 - using simple summaries in relational reporting 221
 - values in crosstabs and charts 269
- aliases in maps 166
- aligning objects 339
- alternate text
 - accessibility 470
- Analysis Studio
 - creating templates in Report Studio 451
- annotations
 - chart baselines 128
 - notes in charts 127
- area charts 88
- arithmetic overflow errors 497
- Auto Group & Summarize 221
- automating IBM Cognos BI using the IBM Cognos Software Development Kit 37
- averages
 - moving and rolling 272
- axes 14
 - in charts 80
 - titles in maps 164
- axis scales 122

B

- backgrounds
 - adding background effects to charts 334
 - adding colors to objects 353
 - changing in current default charts 115
 - changing in legacy charts 115
 - colors not appearing in templates 478
 - inserting background images 334
 - troubleshooting in charts 479
- bar charts 87
- base text direction 56
- baselines
 - adding to charts 128
- bevels
 - adding to legacy charts 116
- bidirectional support 56
 - digit shaping 389
 - enabling 45
 - reports 5
- binary round-off errors 486
- BlackBerry devices
 - creating mobile reports for 61
- block objects 31
- blocks
 - inserting 336
 - resizing 349
- bookmarks
 - adding 442
 - creating for drill-through access 418

- borders
 - adding to charts 334
 - adding to legacy charts 116
 - adding to objects 332
- bottom filtering 262
- broadcasting same report to different users
 - See* burst reports
- bubble charts 91
 - specifying bubble size in current default charts 148
- bubble size 15
- Build Prompt Page tool 314
- bullet charts 13, 93
 - customizing current default charts 152
- burst reports 379
 - creating against cubes 384
 - creating against dimensional data sources 384
 - creating calculated fields to define recipients 379
 - defining groups 381
 - defining recipients 379
 - denial of service errors in dimensional reporting 499
 - denial of service errors in relational reporting 245
 - enabling in IBM Cognos Connection 383
 - Microsoft Excel format 553
 - setting options 382
 - troubleshooting 495
- business keys
 - using for drill-through 421
- button bars 187

C

- calculated fields in burst reports 379
- Calculation Intersection 542
- calculations
 - adding in dimensional reporting 302
 - adding in relational reporting 248
 - building in dimensional reporting 304
 - building query calculations in relational reporting 251
 - creating simple in dimensional reporting 303
 - creating simple in relational reporting 250
 - function quality of service indicators in dimensional reporting 537
 - function quality of service indicators in relational reporting 251
 - intersecting in crosstabs and charts 539
 - limitations in dimensional reporting 538
 - limitations in relational reporting 249
 - limitations with units of measure in dimensional reporting 538
 - limitations with units of measure in relational reporting 248
 - null values 542
 - resolving in dimensional data sources 542
 - solve order in dimensional reporting 537
 - solve order in relational reporting 248
 - unexplained number discrepancies 486
 - using quotation marks in dimensional reporting 538
 - using quotation marks in relational reporting 251
- calculations do not appear in target report
 - troubleshooting drilling through 505
- CAMID,
 - See* IBM Cognos Access Manager ID
- cascading prompts
 - adding 325
- cascading style sheets 351
- cast_Date functions
 - troubleshooting 493

- changed features
 - version 10.1.1 10
 - version 10.2.0 7
- chart configurations
 - 100% stacked 101
 - 3-D 102
 - stacked 100
 - standard 100
- chart properties
 - specifying 81
- chart types 83
 - area charts 88
 - bar charts 87
 - bubble charts 91
 - bullet charts 93
 - column charts 84
 - combination charts 90
 - gauge charts 94
 - line charts 85
 - Marimekko charts 97
 - metrics range charts 99
 - microcharts 96
 - Pareto charts 95
 - pie charts 86
 - point charts 89
 - polar charts 98
 - progressive column charts 96
 - quadrant charts 92
 - radar charts 98
 - scatter charts 90
 - win-loss charts 96
- charts 12, 79
 - accessible reports 473
 - adding alternate text 470
 - aggregating values 269
 - axes 14
 - background effects 334
 - background effects in legacy charts 116
 - backgrounds in current default charts 115
 - backgrounds in legacy charts 115
 - bands of color in the background 123
 - baselines 128
 - borders 334
 - bubble size 15
 - bullet 13
 - changing backgrounds in current default charts 115
 - changing backgrounds in legacy charts 115
 - changing colors 108
 - changing lines 119
 - changing scales 119
 - color by value 15
 - colored regions in current default charts 118
 - configurations 83
 - converting current default charts to a matrix 143
 - converting types 103
 - creating 79
 - cumulation line in current default Pareto charts 151
 - cumulation line in legacy Pareto charts 151
 - current default 79
 - current default in Report Studio 12
 - customizing current default combination charts 141
 - customizing labels 119
 - customizing legend items in current default charts 125
 - customizing legend items in legacy charts 126
 - customizing palettes 108
 - defining colors by values in current default charts 147
 - defining query contexts 138

- charts (*continued*)
 - displaying every second label 479
 - drilling through 155
 - drilling up and down 154
 - drop shadows 334
 - elements 80
 - enhanced styles 14
 - fills 334
 - gridlines 123
 - inserting microcharts into crosstabs 152
 - legacy 79
 - legacy and current default 462
 - legacy in Report Studio 12
 - limitations 501
 - markers 131
 - matrices 13
 - metrics range 156
 - notes 15, 127
 - pie 14
 - positioning legends in current default charts 124
 - properties not supported in Microsoft Excel 553
 - regression lines in current default charts 135
 - regression lines in legacy charts 136
 - resizing 349
 - resizing current default 108
 - resizing legacy 108
 - resolving multiple calculations 539
 - series colors in current default combination charts 141
 - setting properties 104
 - showing data labels 136
 - showing data labels in current default charts 138
 - showing data labels in current default pie and donut charts 137
 - showing data points 140
 - showing value markers 140
 - specifying bubble size in current default bubble charts 148
 - specifying default measures 74
 - summarizing small slices or items in current default charts 139
 - tooltips 104
 - troubleshooting axis labels 478
 - troubleshooting differences in appearance when run in different formats or on different operating systems 499
 - troubleshooting gray gradient backgrounds 479
 - types 83
 - types not supported in Microsoft Excel 553
- checkbox groups 188
- classes
 - changing the default for a report 351
- clipboards
 - copying reports 453
 - opening reports 454
- Cognos Business Insight
 - changed name 7
- Cognos Business Insight Advanced
 - changed name 7
- Cognos SQL
 - in dimensional reporting 295
 - in relational reporting 246
- Cognos Statistics
 - object missing from a report 502
 - removal in version 10.2.1 3
- Cognos Workspace
 - creating reports for workspaces 57
 - filters in workspaces 59
- color by value 15
- colored regions
 - adding to current default charts 118
- colors
 - adding to current default charts 147
 - adding to objects 353
 - changing in charts 108
 - not appearing in templates 478
- column charts 84
- columns 41
 - adding multiple items in a single column 342
 - calculated in dimensional reporting 302
 - calculated in relational reporting 248
 - grouping in relational reporting 214
 - hiding or showing in list controls 197
 - setting the group span 216
 - sorting in dimensional reporting 283
 - sorting in relational reporting 235
 - swapping with rows 74
 - width limitations in Microsoft Excel 551
- combination charts 90
- concatenating strings 539
- Condition Explorer 26
- conditional block lists
 - inserting 337
- conditional blocks
 - accessible reports 473
- conditional palettes
 - creating 111
- conditional rendering 370
 - adding multiple layouts 375
 - adding variables 370, 371
 - example 373
 - hiding and showing objects 372
- conditional styles
 - creating 365
 - using variables 369
- container direction 56
- context filters
 - creating 279
 - prompting with 281
- continuous values sliders 189
- control data items
 - referencing 192
- controls
 - active reports 171
 - adding data 190
 - adding to an active report 186
 - button bars 187
 - buttons 189
 - checkbox groups 188
 - continuous values sliders 189
 - data button bars 187
 - data checkbox groups 188
 - data decks 186
 - data discrete values sliders 189
 - data drop down lists 188
 - data iterators 189
 - data list boxes 188
 - data radio button groups 188
 - data repeater tables 186
 - data tab controls 187
 - data toggle button bars 187
 - decks 186
 - defining connections 192
 - discrete values sliders 189
 - drop down lists 188
 - iterators 189

- controls (*continued*)
 - list boxes 188
 - radio button groups 188
 - referencing data items defined in static controls 192
 - repeater tables 186
 - row numbers 186
 - specifying reaction behavior 195
 - specifying selection behavior 194
 - tab 187
 - toggle button bars 187
 - variable text items 186
- converting
 - lists to crosstabs 75
 - lists to repeaters 65
 - reports to templates 451
 - to MDX in dimensional reporting 297
 - to SQL in dimensional reporting 297
 - to SQL in relational reporting 247
- copying
 - reports to the clipboard 453
- copying reports 454
- Count
 - changes between IBM Cognos ReportNet and IBM Cognos BI 465
- Count Distinct 465
- crosstab node members 67
- crosstab nodes 67
- crosstabs 67
 - aggregating values 269
 - allow sorting 197
 - applying table styles 340
 - creating single-edge 70
 - crosstab node members 67
 - crosstab nodes 67
 - default measures 74
 - defining independent drill-through definitions 427
 - discontinuous 76
 - formatting 69
 - indenting data 74
 - inherited table styles 5
 - intersections 69
 - nesting data 71
 - order of styles 69
 - overflow errors 493
 - resolving multiple calculations 539
 - showing values as percentages 72
- CRX-API-0018 errors 537
- CSV format
 - importing your own files 355
 - producing reports in 48
- cubes
 - troubleshooting drilling through to relational data 503
- cumulation lines
 - in current default charts 151
 - in legacy charts 151
- currencies
 - data format limitations in Microsoft Excel output 552
 - formatting 387
 - formatting disappearing in SSAS 2005 495
- current default charts 79, 462
- custom groups
 - creating 215, 265

D

- dashboards
 - creating 311

- dashboards (*continued*)
 - using bullet charts 93
 - using gauge charts 94
 - using global filters 313
- data
 - adding 41
- data button bars 187
- data checkbox groups 188
- data containers
 - inserting from the Toolbox tab 41
- data decks 186
- data discrete values sliders 189
- data does not appear in target report
 - troubleshooting drilling through 496
- data drop down lists 188
- data formats 387
 - date and time symbols 394
 - decimal format symbols 401
 - locale-sensitive 390
 - Microsoft Excel limitations 552
 - specifying default 387
 - specifying for objects 388
 - using patterns 393
- data is not filtered in target report
 - troubleshooting drilling through 505
- data items tab 25
- data iterators 189
- data list boxes 188
- data packages
 - refreshing 40
 - specifying 39
- data points
 - showing in charts 140
- data radio button groups 188
- data repeater tables 186
- data series in charts 80
- data sources 253
- data stores
 - conformed dimensions 420
- data tab controls 187
- data toggle button bars 187
- data trees
 - customizing 255
- date & time prompts 316
- date prompts 316
- dates
 - filtering 234
 - using for drill-through access 423
- decimals
 - rounding 388
- decks 186
 - using master detail relationships 197
- denial of service errors
 - in dimensional reporting 499
 - in relational reporting 245
- depth
 - charts 104
- derived columns 234
- detail filters 229
- diagrams
 - Metric Studio 158
- dial charts 94
- dictionary properties in maps 166
- digit shaping 56
 - in charts and maps 389
- dimensional 265
- dimensional coercion rules 544

- dimensional data sources
 - creating burst reports 384
 - creating master detail relationships 295
 - report limitations 531
 - resolving calculations 542
 - running reports against 531
 - using with queries 285
 - dimensional reporting 253
 - adding data 253
 - best practices 22
 - drilling up and down 307
 - filtering data 278
 - sorting data 281
 - summarizing data 266
 - using calculations 302
 - working with queries 283
 - dimensionally-modeled relational data sources
 - adding dimensional data 253
 - limitations when aggregating measures 534
 - dimensions 41, 253
 - conformed 285
 - conformed for drill-through access 420
 - non-conformed 285
 - overlapping named set levels 479
 - searching 256
 - discontinuous crosstabs
 - creating 76
 - discrete values sliders 189
 - distributing reports,
 - See* burst reports
 - dividing by zero
 - troubleshooting 477
 - Don't Print class 352
 - double counting 465
 - drilling down 307
 - creating drill-up/drill-down reports 308
 - in charts 154
 - using member sets 307
 - drilling through 415
 - business keys 421
 - calculations do not appear in target report 505
 - charts 155
 - concepts 416
 - creating drill-through reports 423
 - cubes to relational data 503
 - data does not appear in target report 496
 - data is not filtered in target report 505
 - defining different drill-through definitions for crosstabs 427
 - IBM Cognos Visualizer reports 434
 - in maps 169
 - links not active in Safari Web browsers 496
 - members and values 418
 - Microsoft Excel limitations 552
 - model-based access 416
 - multiple values 425
 - nested crosstab only filters on some items 505
 - packages 418
 - paths 416
 - PowerCubes and packages 423
 - PowerPlay reports 434
 - problems with active reports 506
 - relational data to cubes 504
 - report formats 417
 - report-based access 416
 - selection contexts 417
 - specifying drill-through text 428
 - drilling through (*continued*)
 - troubleshooting PowerCubes 503
 - using bookmarks 418
 - using dates 423
 - using member unique names 419
 - using scope in model-based reporting 422
 - using URLs 418
 - with conformed dimensions 420
 - wrong data appears in target report 496
 - drilling up 307
 - creating drill-up/drill-down reports 308
 - in charts 154
 - using member sets 307
 - drop down lists 188
 - defining no list value item 196
 - drop shadows
 - adding to legacy chart elements 116
 - drop shadows in charts 334
 - Dynamic Query Migration validation option 43
- ## E
- emailing reports,
 - See* burst reports
 - empty cells
 - specifying what appears for empty data containers 393
 - suppressing 391
 - error messages
 - CRX-API-0018 537
 - denial of service in dimensional reporting 499
 - denial of service in relational reporting 245
 - HRESULT 488
 - missing items 494
 - MSR-PD-0001 359
 - MSR-PD-0012 483
 - MSR-PD-0013 483
 - OP-ERR-0199 214, 478
 - OP-ERR-0201 479
 - OP-ERR-0209 535
 - OP-ERR-0210 535
 - OP-ERR-0212 535
 - OP-ERR-0213 535
 - ORA-00907 494
 - overflow errors in crosstabs 493
 - PCA-ERR-0057 497
 - PCA-ERR-0087 499
 - QE-DEF-0288 493
 - QE-DEF-0478 544
 - ReferenceError: HTMLIsIndexElement is not defined 498
 - RQP-DEF-0177 497
 - RSV-SRV-0025 488
 - RSV-SRV-0040 477
 - TypeError: _JS1 is undefined 498
 - UDA-SQL-0114 488, 497
 - UDA-SQL-0206 488
 - UDA-SQL-0564 497
 - errors
 - application errors upgrading a report 477
 - filtering results in error characters 535
 - null values in count summaries 480
 - out of memory 310, 500
 - parse errors with upgraded reports 493
 - recursive evaluation 497
 - troubleshooting error cells in reports 534
 - escape characters
 - in calculations in dimensional reporting 538
 - in calculations in relational reporting 251

- examples for relational metadata
 - prompts 408
 - Excel 2000 format
 - deprecation notices 21
 - Explorer Bar 26
 - expression editor
 - Aster Data 593
 - Aster Data Data Type Formatting 595
 - Aster Data Math 595
 - Aster Data String 593
 - Aster Data Trigonometry 596
 - Block Functions 592
 - browsing data 233
 - Business Date/Time Functions 587
 - Common Functions 713
 - Constants 584
 - Constructs 586
 - creating filters in dimensional reporting 278
 - creating filters in relational reporting 228
 - creating parameters to create prompts 319
 - Date Functions 667
 - DB2 598
 - DB2 Math 598
 - DB2 Trigonometry 598
 - dimensional coercion rules 544
 - Dimensional Functions 725
 - Greenplum 616
 - Greenplum Data type formatting 617
 - Greenplum Math 618
 - Greenplum String 616
 - Greenplum Trigonometry 618
 - Informix 621
 - Informix Math 621
 - Informix Trigonometry 621
 - Macro Functions 699
 - Member Summaries 581
 - MS Access 626
 - MS Access Cast 626
 - MS Access Math 627
 - MS Access Trigonometry 628
 - MySQL 634
 - MySQL Math 635
 - MySQL String 634
 - MySQL Trigonometry 636
 - Netezza 638
 - Netezza Fuzzy 639
 - Netezza Math 638
 - Netezza Phonetic 640
 - Netezza Trigonometry 638
 - Operators 555
 - Oracle 644
 - Oracle Math 644
 - Oracle Trigonometry 644
 - Paraccel 653
 - Paraccel Data type formatting 654
 - Paraccel Math 654
 - Paraccel String 653
 - Postgres 655
 - Postgres Data type formatting 657
 - Postgres Math 657
 - Postgres String 655
 - Postgres Trigonometry 658
 - Red Brick 660
 - Report Functions 751
 - Salesforce.com 667
 - SAP BW 666
 - SAP BW Math 667
 - expression editor (*continued*)
 - SAP BW Trigonometry 666
 - searching for values 482
 - SQL Server 671
 - SQL Server Math 671
 - SQL Server Trigonometry 671
 - Statistical functions 563
 - Summaries 563
 - Sybase 678
 - Sybase Math 678
 - Sybase Trigonometry 679
 - Teradata 686
 - Teradata Trigonometry 686
 - Trigonometric functions 723
 - Vectorwise 692
 - Vectorwise Math 693
 - Vectorwise String 692
 - Vectorwise Trigonometry 693
 - Vertica 694
 - Vertica Data type formatting 696
 - Vertica Math 696
 - Vertica String 694
 - Vertica Trigonometry 697
 - expressions
 - length 537
 - using summary functions in relational reporting 224
 - extended data items 264
 - enabling for new reports 350
 - report option 34
 - extensible visualizations 174
 - external data
 - MSR-PD-0012 error when importing 483
 - MSR-PD-0013 error when importing 483
 - supported data sources 10
- ## F
- facts 41
 - field sets
 - inserting 336
 - fills
 - adding to charts 334
 - adding to legacy charts 116
 - filtering
 - error characters 535
 - creating detail filters 229
 - creating global prompts in dashboards 313
 - creating summary filters 229
 - data from SAP BW data sources 536
 - data in dimensional reporting 278
 - data in relational reporting 228
 - date columns 234
 - drilling through from IBM Cognos Series 7 to IBM Cognos BI 435
 - limitations when specifying the scope 535
 - limitations with dimensional data sources 534
 - members in a set 263
 - multiple-fact queries 285
 - removing or editing 233
 - removing or editing detail filters 233
 - removing or editing summary filters 233
 - suppressing null values 391
 - to top or bottom values 262
 - troubleshooting `_make_timestamp` columns 488
 - using context filters 279
 - using slicers 279
 - workspaces in Cognos Workspace 59

- filters
 - in_range 326
- first-rows optimization
 - in dimensional reporting 297
 - in relational reporting 248
- floating objects 349
- fonts
 - setting in maps 164
 - specifying colors 353
 - specifying for reports 333
- footers
 - adding to maps 164
 - adding to reports and lists 331
- for clauses 224
- FOR clauses
 - incorrect results for OLAP 485
 - limitations when using in summary functions 533
- foregrounds
 - adding colors to objects 353
- formatting
 - disappearing in SSAS 2005 495
- functions
 - quality of service indicators in dimensional reporting 537
 - quality of service indicators in relational reporting 251

G

- gauge charts 94
- generated prompts 316
- global filters in dashboards 313
- glossaries
 - accessing the IBM WebSphere Business Glossary 55
- glossary 987
- gridlines
 - adding to charts 123
 - in charts 80
 - major and minor 119
- grouping
 - data in relational reporting 214
 - setting group spans 216
 - troubleshooting incorrect running totals 496
 - troubleshooting nested list reports 478
 - troubleshooting subtotals in grouped lists 478
- groups
 - custom 215, 265

H

- headers
 - adding to reports and lists 331
 - creating for sets 72
- heatmap visualizations 177
- heights
 - specifying for objects 349
- hiding columns
 - list reports 64
- hiding objects 372
- hierarchies 41
 - inserting 258
- highlighting
 - adding colors to objects 353
 - using conditional styles 365
- horizontal pagination 449
- hotspots 153
- HRESULT errors 488

- HTML format
 - producing reports in 45
- HTML items
 - inserting 337
- hyperlinks
 - buttons are not supported for Microsoft Excel 553
 - inserting 337

I

- IBM Cognos for Microsoft Office
 - creating reports for 59
- IBM Cognos Software Development Kit 37
- IBM Cognos Visualizer reports
 - setting up drill-through access to IBM Cognos BI 434
- IBM WebSphere Business Glossary 55
- icons 41
- images
 - adding alternate text 470
 - adding to chart backgrounds 334
 - inserting in backgrounds 334
 - inserting in reports 333
 - Microsoft Excel limitations 549
- in_range filters 326
- indenting
 - data in crosstabs 74
 - objects 341
- inline objects 31
- Insertable Objects pane 25, 27
- intersections of members
 - in dimensional reporting 306
- interval prompts 316
- iPhone devices
 - creating mobile reports for 61
- iterators 189

J

- Japanese
 - Microsoft Excel limitations 552
- join relationships
 - creating in relational reporting 242
- justification
 - setting for objects 347

L

- labels
 - customizing in charts 119
 - gauge charts
 - customizing 144
 - specifying in current default gauge charts 144
 - specifying in legacy gauge charts 145
- layout
 - using tables 340
- layout component caches 346
- layout component references
 - inserting 338
- layouts 29
 - adding 375
 - choosing 40
 - pages 29
 - relating to queries in dimensional reporting 284
 - relating to queries in relational reporting 237
 - report objects 30
 - report recommendations 329

layouts (*continued*)
 using the page structure view 329

legacy charts 79, 462

legends 13

 adding titles in maps 168

 hiding or showing in maps 164

 in charts 80

 in maps 167

 positioning in current default charts 124

level hierarchies 253

levels 41, 253

 member unique names 419

limitations

 aggregating measures in dimensionally-modeled relational
 or relational data sources 534

line breaks 348

line charts 85

line spacing 348

lineage information 54

linear scales

 showing 119

lines

 adding regression lines to charts 135

 adding regression lines to legacy charts 136

 changing in charts 119

linking data items for drilling 308

list boxes 188

list reports

 hiding columns 64

lists 63

 adding headers and footers 331

 allow sorting 197

 applying table styles 340

 converting to crosstabs 75

 converting to repeaters 65

 formatting 64

 grouping data 214

 hiding or showing columns 197

 inherited table styles 5

 limitations 532

 single-edge crosstabs 70

 subtotals in grouped lists 478

literal strings

 in calculations in dimensional reporting 538

 in calculations in relational reporting 251

locales

 locale-sensitive properties 390

location-aware reports

 creating 61

locking objects 31

logarithmic scales 122

 showing 119

M

macros

 adding to expressions 5

mailing labels

 creating 65

maps 161

 aliases 166

 creating 162

 customizing 165

 dictionary property 166

 drilling through 169

 ignoring data with no features 164

 legends 167

maps (*continued*)

 matching data values 166

 Microsoft Excel limitations 552

 notes 168

 parts of a map report 162

 point layers 167

 region layers 165

 resizing 349

 showing or hiding properties 165

 updated 4, 9

 using from previous versions 9

margins

 setting for objects 342

Marimekko charts 97

markers

 adding to charts 131

master detail relationships

 creating in dimensional reporting 293

 creating in relational reporting 244

 creating when authoring active reports 197

 denial of service errors in dimensional reporting 499

 denial of service errors in relational reporting 245

 linking members from two dimensional data sources 295

 using to join page sets 439

matrices 13

matrix

 charts 143

matrix reports 67

MDX

 adding your own in dimensional reporting 296

 converting to in dimensional reporting 297

 working with in dimensional reporting 295

measures 41

 specifying defaults 74

member properties 253

 inserting 258

member sets

 aggregating 272

 creating 258, 307

member unique names 547

 relational metadata 419

troubleshooting running reports with 548

members 41

 drill-through access 418

 excluding 261

 expanding and collapsing 263

 folder 253

 inserting properties 258

 intersections in dimensional reporting 306

 moving 261

Metric Studio diagrams 158

metrics range charts 99

 examples 156

MHT

 saving active reports 199

microcharts 96

 inserting 152

Microsoft Excel

 grouping and ungrouping repeating cells 50

 limitations of nested report objects 552

 producing reports in 49

 report limitations 549

missing items

 troubleshooting 494

missing values 542

 suppressing 391

- mobile devices
 - creating reports for 61
 - inline prompts 7
- models 41
 - aggregation properties 222
 - sample models and packages 510
 - using design filters 45
- moving averages 272
- MSR-PD-0001 errors 359
- MSR-PD-0012 errors 483
- MSR-PD-0013 errors 483
- multilingual reports 376
- MUNs,
 - See* member unique names

N

- named sets
 - limitations when summarizing 268
 - nested or parallel sets overlapping 479
- names
 - updating references 459
- native SQL
 - in dimensional reporting 295
 - in relational reporting 246
- nested crosstab only filters on some items
 - troubleshooting drilling through 505
- nested list reports
 - not running after upgrading 478
- nested report objects
 - Microsoft Excel limitations 552
- nested sets
 - unexpected summary values 483
- nesting
 - data in crosstabs 71
- new features
 - version 10.1.0 11
 - version 10.1.1 8
 - version 10.2.0 4
 - version 10.2.1 1
- no data
 - specify not to render pages 47
 - specifying what appears 393
- No Data Contents 393
- notes 15
 - adding to charts 127
 - adding to maps 168
- null values 542
 - calculations with SAP BW data sources 484
 - suppressing 391
 - suppressing with filters 391
 - troubleshooting in count summaries 480
- number data formats
 - Microsoft Excel limitations 552
- numeric shaping
 - See* digit shaping

O

- objects 31
 - adding 30
 - aligning 339
 - as containers 31
 - finding in reports 32
 - hiding and showing 372
 - hierarchies 32
- objects (*continued*)
 - indenting 341
 - inheriting formatting from parents 32
 - inline or block 31
 - inserting formatting objects 338
 - locking and unlocking 31
 - reusing for layouts 344
 - specifying data format 388
 - updating reused 346
- OLAP data sources
 - inserting data 253
 - limitations with relational functions 533
- OP-ERR-0199 errors 214, 478
- OP-ERR-0201 errors 479
- OP-ERR-0209 errors 535
- OP-ERR-0210 errors 535
- OP-ERR-0212 errors 535
- OP-ERR-0213 errors 535
- opening reports
 - from other studios 454
- ORA-00907 errors 494
- Oracle data sources
 - troubleshooting 494
- Oracle Essbase
 - changes 479
- out of memory errors 310
- overflow errors in crosstabs 493

P

- packages 41, 253
 - changing 459
 - drilling through 418
 - referencing items in child queries 243
 - refreshing 40
 - selecting for your report 39
- packed bubble visualizations 179
- padding
 - applying to objects 341
- page breaks 449
 - controlling 350
 - creating 437
 - creating with page layers 449
- Page Explorer 26
- page layers 449
- page numbers
 - adding 446
 - modifying with options 449
- page sets
 - creating 437
 - joining nested page sets 439
- pages 29
 - adding 437
 - associating queries with 437
 - not rendering when there is no data 47
- pagination
 - horizontal in PDF output 449
 - specifying for HTML output 350
- palettes 14
 - conditional 111
 - customizing in charts 108
- parameter values
 - clearing 45
- parameters
 - for prompts 319
 - using in master detail relationships in dimensional reporting 293

- parameters (*continued*)
 - using in master detail relationships in relational reporting 244
- Pareto charts 95
 - cumulation lines in current default charts 151
 - cumulation lines in legacy charts 151
- PCA-ERR-0057 errors 497
- PCA-ERR-0087 499
- PDF format
 - producing reports 45
 - setting page options 53
- PDF problems
 - charts 501
- percent calculations
 - in dimensional reporting 303
 - in relational reporting 250
- personal data
 - importing your own files 355
- pie charts 14, 86
 - converting to current default donut charts 149
 - exploding slices in current default charts 150
 - limitations for Microsoft Excel outputs 550
 - setting the first slice angle in current default charts 149
- point charts 89
- point layers 167
- polar charts 98
- PowerCubes
 - incorrect results 485
 - troubleshooting drilling through 503
- PowerPlay reports
 - setting up drill-through access to IBM Cognos BI 434
- printing
 - not printing objects 352
- progressive column charts 96
- prompt pages
 - creating your own 315
- prompt texts
 - customizing 323
- prompts 313
 - adding prompt buttons 325
 - associating labels to create accessible prompts 472
 - associating text items 472
 - changing prompt control interfaces 321
 - creating cascading 325
 - creating in a report page 321
 - creating using query macros 406
 - date 316
 - date & time 316
 - examples 408
 - generated 316
 - in_range 326
 - inline 7
 - interval 316
 - modifying 321
 - pages 314
 - parameters 319
 - requiring user input 322
 - select & search 315
 - selecting multiple values 322
 - showing and hiding 323
 - showing values in generated SQL or MDX 326
 - specifying default selections 323
 - specifying default values 324
 - text box 315
 - time 316
 - tree 326
 - upgrading SAP BW variables 462

- prompts (*continued*)
 - using context filters 281
 - using slicer filters 281
 - using the Build Prompt Page tool 314
 - using the expression editor 319
 - value 315
 - workspaces in Cognos Workspace 58
- Properties 237
- Properties pane 26
- public variables
 - defining in active reports 4, 184

Q

- QE-DEF-0288 errors 493
- QE-DEF-0478 errors 544
- quadrant charts 92
- quadrants
 - adding to current default charts 118
- queries 31
 - associating with pages 437
 - connecting between data sources in dimensional reporting 285
 - connecting between data sources in relational reporting 237
 - in dimensional reporting 283
 - in relational reporting 236
 - multiple-fact 285
 - referencing data items in relational reporting 237, 284
 - referencing package items in child queries 243
 - relating to layouts in dimensional reporting 284
 - relating to layouts in relational reporting 237
 - result set of multi-fact query contains blanks 501
 - using with dimensional data sources 285
 - working with MDX in dimensional reporting 295
 - working with SQL in dimensional reporting 295
 - working with SQL in relational reporting 246
- query calculations
 - creating in dimensional reporting 304
 - creating in relational reporting 251
 - null values in count summaries 480
- query context
 - defining in charts 138
- Query Explorer 26
 - using in dimensional reporting 283
 - using in relational reporting 236
- query macros 403
 - adding 405
 - using to create prompts 406
- Query Studio
 - creating templates in Report Studio 451
- quotation marks
 - in calculations in dimensional reporting 538
 - in calculations in relational reporting 251

R

- radar charts 98
- radio button groups 188
- ragged hierarchies 264
- referenced objects
 - changing 345
 - updating 346
- refreshing packages 40
- region layers 165
- regression lines 119

- regression lines (*continued*)
 - in current default charts 135
 - in legacy charts 136
 - relational functions
 - limitations when used with OLAP data sources 533
 - relational reporting 213
 - adding data 213
 - best practices 22
 - filtering data 228
 - grouping data 214
 - sorting data 235
 - summarizing data 219
 - troubleshooting drilling through to cubes 504
 - using calculations 248
 - working with queries 236
 - Render Page when Empty 47
 - repeater tables 186
 - adding interactive behavior 4
 - repeaters
 - converting from lists 65
 - formatting 340
 - repeating cells
 - grouping and ungrouping in Excel 2007 output 50
 - report formats
 - CSV 48
 - Excel 49
 - HTML 45
 - PDF 45
 - specifying 45
 - XML 52
 - report outputs
 - accessibility options 469
 - Microsoft Excel 2007 10
 - report properties 350
 - report samples 507
 - report specifications 37
 - Report Studio
 - bubble charts 15
 - bullet charts 13
 - chart axes 14
 - chart enhancements 12
 - chart formatting 14
 - chart legends 13
 - color by value 15
 - matrix charts 13
 - new chart technology 12
 - notes 15
 - pie charts 14
 - setting options 33
 - ReportNet reports
 - formatting changes when upgrading 495
 - reports
 - active 171
 - adding interactivity 184
 - changing the maximum number of tuples allowed 499
 - converting to active reports 172
 - multilingual 376
 - out of memory errors in interactive HTML output 500
 - supporting bidirectional languages 56
 - validating 43
 - validation options 43
 - resizing
 - current default charts 108
 - legacy charts 108
 - objects 349
 - reusing
 - styles 330
 - rich text items
 - inserting 337
 - supported elements 338
 - rolling averages 272
 - rollup calculations
 - in dimensional reporting 303
 - in relational reporting 250
 - round-off errors 486
 - rounding numbers 388
 - row numbers 186
 - inserting 338
 - rows
 - swapping with columns 74
 - rows per page
 - controlling for multiple containers in HTML and PDF 48
 - setting 45
 - RQP-DEF-0177 errors 464, 497
 - RSV-SRV-0025 errors 488
 - RSV-SRV-0040 errors 477
 - run options
 - accessibility options 469
 - running and moving summaries
 - limitations with dimensional functions 538
 - running reports 45
 - against dimensional data sources 531
 - against SAP BW 531
 - cannot find database errors 493
 - ORA-00907 errors 494
 - Report Studio is slow 488
 - running totals
 - dimensional functions 302
 - troubleshooting 496
- ## S
- Safari Web browsers
 - drill-through links not active 496
 - Sample Outdoors Company
 - databases, models, and packages 510
 - samples 507
 - Sample Outdoors Company samples 507
 - samples 507
 - cubes 511
 - database, models, and packages 510
 - employees 509
 - GO data warehouse 510
 - GO Data Warehouse (analysis) package 514
 - GO Data Warehouse (query) package 522
 - GO Sales (analysis) package 523
 - GO Sales (query) package 524
 - GO Sales transactional database 511
 - interactive 526
 - packages 512
 - Prompt API folder 528
 - Sales and Marketing (Cube) package 512
 - sales and marketing data 509
 - Sample Outdoors Sales (cube) package 512
 - The Sample Outdoors Company 508
 - SAP BW data sources
 - creating burst reports 384
 - creating expression 539
 - large queries 498
 - limitations when calculating data 248
 - limitations when sorting data 281
 - null results 484
 - query calculations 480
 - running reports against 531

- SAP BW data sources *(continued)*
 - sectioning reports 480
 - units of measure notation 531
- SAP variable properties
 - unsupported 531
- scales
 - changing for chart axes 122
 - changing intervals 119
 - linear 119
 - logarithmic 119
- scatter charts 90
- scope
 - filtering 229
 - using in drill-through access 422
- screen resolution requirements 25
- scrollbars
 - adding to block objects 349
- search tab 25
- searching
 - dimensions 256
- section headings 219
- sections
 - creating for dimensional data 449
 - creating on reports with SAP BW data sources 480
 - removing 219
- Secure Socket Layer
 - Microsoft Excel limitations 552
- select & search prompts 315
- set definitions 261
- set expressions
 - building in dimensional reporting 304
 - limitations in list reports 532
- sets
 - editing 261
 - filtering 263
 - reusing 259, 260
 - sharing 2, 259, 260
- sets of members
 - creating 258
 - nested or parallel sets overlapping 479
- shared sets
 - copying 260
 - creating 259
 - managing 260
- sharing
 - sets 259, 260
- showing objects 372
- single-edge crosstabs 70
- singletons 43
- sizes
 - specifying for objects 349
- slicer filters
 - prompting with 281
- slicers
 - creating 279
- solve order 539
 - combined with calculated rollup aggregate function 541
 - dimensional data sources 542
- sorting
 - crosstabs 197
 - data in dimensional reporting 281
 - data in relational reporting 235
 - limitations with SAP BW data sources 281
 - lists 197
 - multiple columns in dimensional reporting 283
 - multiple columns in relational reporting 235
- source tab 25
- source trees
 - customizing 255
- spaces
 - adding around objects 341
- Specifying chart properties 81
- spider charts 98
- SQL
 - adding your own in dimensional reporting 296
 - adding your own in relational reporting 247
 - Cognos in dimensional reporting 295
 - Cognos in relational reporting 246
 - converting to in dimensional reporting 297
 - converting to in relational reporting 247
 - first-rows optimization in dimensional reporting 297
 - first-rows optimization in relational reporting 248
 - native in dimensional reporting 295
 - native in relational reporting 246
 - working with in dimensional reporting 295
 - working with in relational reporting 246
- SSAS 2005 cubes
 - troubleshooting 481
- SSAS 2005 data sources
 - creating expression 539
 - disappearing data formats 495
- SSAS cubes
 - problems when very large 310
- stacked charts 100
- standard charts 100
- star charts 98
- strings
 - concatenating 539
- studios
 - Oracle Essbase changes 479
- styles
 - conditional 365
 - reusing 330
- subtotals
 - troubleshooting in grouped lists 478
- summaries
 - adding simple in dimensional reporting 268
 - adding simple in relational reporting 221
 - adding to active reports 198
 - aggregate in dimensional reporting 273
 - aggregate in relational reporting 224
 - automatic in dimensional reporting 273
 - automatic in relational reporting 224
 - average in dimensional reporting 274
 - average in relational reporting 225
 - calculated 541
 - calculated in dimensional reporting 274
 - calculated in relational reporting 225
 - count distinct in dimensional reporting 275
 - count distinct in relational reporting 226
 - count in dimensional reporting 274
 - count in relational reporting 225
 - custom in dimensional reporting 275
 - custom in relational reporting 226
 - FOR clauses 485
 - maximum in dimensional reporting 275
 - maximum in relational reporting 226
 - median in dimensional reporting 276
 - median in relational reporting 226
 - minimum in dimensional reporting 276
 - minimum in relational reporting 226
 - none in dimensional reporting 276
 - none in relational reporting 226
 - not applicable in dimensional reporting 276

- summaries (*continued*)
 - not applicable in relational reporting 226
 - null values 542
 - rolling and moving averages 272
 - standard deviation in dimensional reporting 276
 - standard deviation in relational reporting 227
 - summarize in dimensional reporting 276
 - summarize in relational reporting 227
 - total in dimensional reporting 277
 - total in relational reporting 227
 - troubleshooting 490
 - variance in dimensional reporting 277
 - variance in relational reporting 227
- summarizing data
 - in dimensional reporting 266
 - in relational reporting 219
- summary filters 229
- summary functions
 - in dimensional reporting 273
 - in relational reporting 224
 - limitations when using FOR clauses 533
 - using in expressions in relational reporting 224
- summary text
 - adding to tables 471
- summary values
 - unexpected when using nested sets 483
- supporting bidirectional languages 5
- suppressing
 - data 391
- Symbian devices
 - creating mobile reports for 61

T

- tab controls 187
- table styles
 - inherited 5
- tables
 - adding summary text 471
 - applying styles 340
 - inserting 340
 - Microsoft Excel width limitations 551
 - specifying cell headers 471
 - using for layout 340
- tables of contents
 - creating 443
- tabular data
 - viewing 45
- target reports
 - creating for drilling through from IBM Cognos Series 7 435
- templates
 - background colors not appearing 478
 - converting from reports 451
 - creating 451
- text
 - adding to reports 333
 - creating labels for prompts 472
 - specifying flow in objects 347
- text box prompts 315
- textures
 - adding to legacy charts 116
- time periods
 - showing data only for specific 273
- time prompts 316
- TM1 data sources
 - order of metadata tree 483

- TM1 data sources (*continued*)
 - report differences 482
- toggle button bars 187
- toolbox tab 25
- tooltips
 - adding to charts 104
 - hiding or showing in maps 164
- top filtering 262
- totals
 - troubleshooting running totals 496
- tree prompts
 - adding 316
 - controlling the data that appears 326
- treemap visualizations 176
- trend lines 119
 - in current default charts 135
 - in legacy charts 136
- troubleshooting
 - differences in the appearance of charts run in different formats or on different operating systems 499
 - out of memory errors with reports run in interactive HTML 500
 - result set of multi-fact query contains blanks 501
 - unable to open saved Active Report output in Firefox 8 or later 498
- tuples
 - changing the maximum allowed in reports 499
 - in dimensional reporting 306
- TXT data
 - importing your own files 355

U

- UDA-SQL-0043 errors 497
- UDA-SQL-0114 errors 488, 497
- UDA-SQL-0206 errors 488
- UDA-SQL-0458 errors 464
- UDA-SQL-0564 errors 497
- unbalanced hierarchies 264
- unexplained number calculations 486
- union query
 - creating 239
- units of measure 387
 - notation for SAP BW data sources 531
- unlocking objects 31
- upgrading
 - SAP BW prompt variables 462
- upgrading reports
 - applications errors 477
 - errors 464
 - formatting not retained 495
 - members not suppressed for SAP BW 463
 - overview 461
 - reports will not open 493
 - thousands separators missing 463
- user interface 25

V

- validating reports 43
- value markers
 - showing in charts 140
- value prompts 315
- values
 - showing crosstab values as percentages 72
 - specifying defaults in prompts 324

- variable text items 186
- variables
 - active reports 4, 172, 184
 - adding 370, 371
 - conditional styles 369
- viewing reports
 - troubleshooting 495
- views
 - page design view 28
 - page structure view 28
- visual aids 27
- visualizations
 - adding 174
 - changing the nesting order 182
 - example 209
 - extensible 174
 - resizing 181
 - specifying the categorical data to display 182
 - specifying the range of values to display 182
 - updating 183
 - using embedded data 182

W

- waterfall charts 96
- Web browser settings 36
- Web-safe color palettes 353
- white spaces
 - adding padding to objects 341
 - margins 342

- widths
 - Microsoft Excel limitations 551
 - specifying for objects 349
- win-loss charts 96
- Windows Mobile devices
 - creating mobile reports for 61
- word breaks 348
- workspaces
 - Cognos Workspace 57
 - prompts in Cognos Workspace 58
- wrong data appears in target report
 - troubleshooting drilling through 496

X

- XLS format
 - importing your own files 355
 - limitations 549
- XML
 - importing your own files 355
 - producing a report 52
 - report specifications 37
- XQE-CON-0007 errors 498

Z

- zeros
 - suppressing 391